Factory-hole color rims

Print at Actual Size. Face across the table from the arm-mounted long edge.

Use the colors on the real upper flange face. Keep the bore open and dark.

LEFT BASE

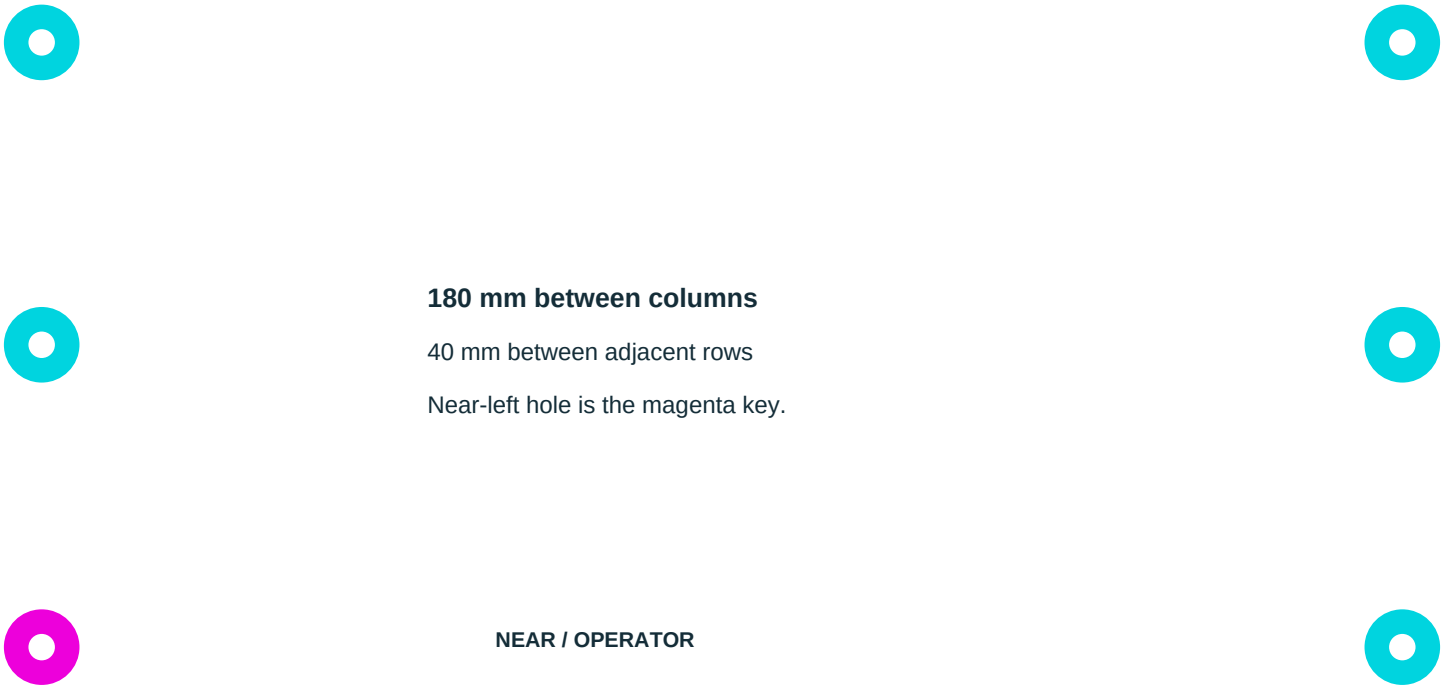

RIGHT BASE

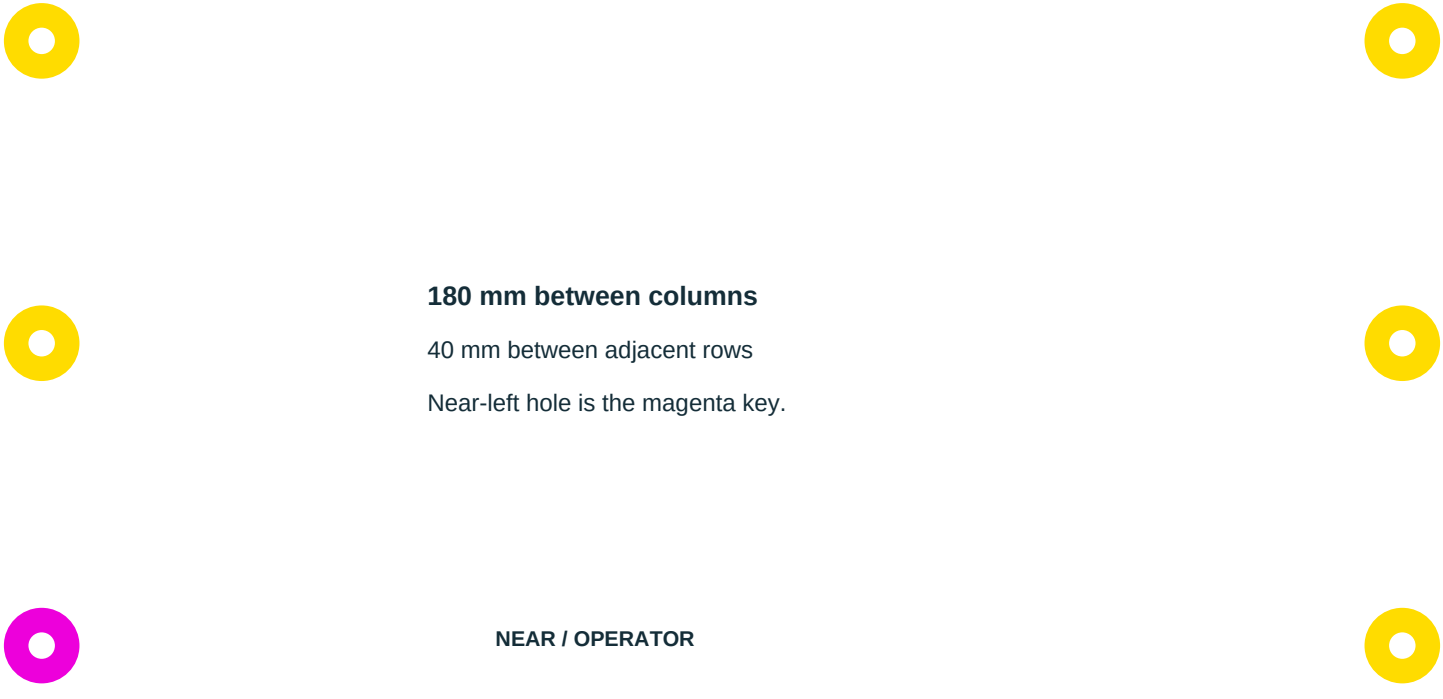

Cut the 10 mm outside diameter and clear the 3.5 mm opening, or use a matte paint pen.

Seat each ring concentrically. Leave the page itself off the station. Confirm contrast in OXRSys.

100 mm print check