


Linux File System Hierarchy

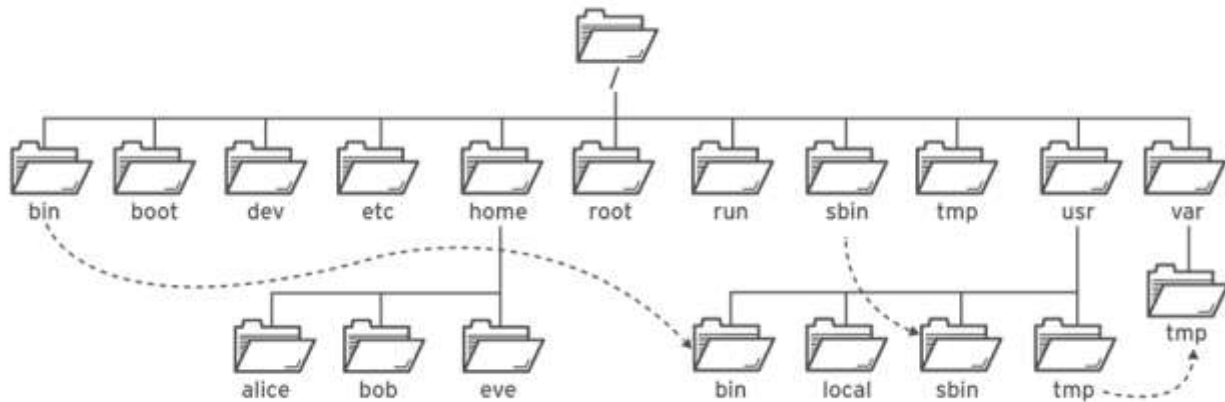

Directory	Description
/	Top level directory or parent directory or root directory
/root	Home directory for root user, It will provide a work environment for root user
/home	Home directory for normal user, It will provide a work environment for normal user
/boot	It contains bootable files and boot loader like grub2, grub, LILO
/etc	It contains configuration files (editable text configurations)
/bin	Normal user executable commands (normal user binary's)
/sbin	Root user executable commands (root user binary's)
/usr	Unix Shareable Resources, It contain program files
/opt	Optional for /usr it contain third-party program files
/dev	Device files, Example in Windows device manager
/proc	It contain background running processes (virtual directories), cpu information, memory and swap information
/var	It contain variable data, log files
/run	It stores temporary runtime data created after the system boots, Runtime data for processes started since the last boot. It is usually stored in RAM (tmpfs), cleared automatically on reboot , it contain removable media
/mnt	It is a empty directory to create a mount point with any partition
/afs	It is a empty directory to create a mount point with Andro-file system servers
/tmp	It contain temporary files
/sys	It contains CPU, memory, devices info
/srv	It contain data provided by system services to users or other system

- /bin and /usr/bin
- /sbin and /usr/sbin
- /lib and /usr/lib
- /lib64 and /usr/lib64

In Red Hat Enterprise Linux 7 and later, the directories in / are symbolic links to the matching directories in /usr.