
Visual Object Networks: Image Generation with Disentangled 3D Representation

Jun-Yan Zhu
MIT CSAIL

Zhoutong Zhang
MIT CSAIL

Chengkai Zhang
MIT CSAIL

Jiajun Wu
MIT CSAIL

Antonio Torralba
MIT CSAIL

Joshua B. Tenenbaum
MIT CSAIL

William T. Freeman
MIT CSAIL, Google

Abstract

Recent progress in deep generative models has led to tremendous breakthroughs in image generation. While being able to synthesize photorealistic images, existing models lack an understanding of our underlying 3D world. Different from previous works built on 2D datasets and models, we present a new generative model, *Visual Object Networks (VON)*, synthesizing natural images of objects with a disentangled 3D representation. Inspired by classic graphics rendering pipelines, we unravel the image formation process into three conditionally independent factors—viewpoint, shape, and texture—and present an end-to-end adversarial learning framework that jointly models 3D shape and 2D texture. Our model first learns to synthesize 3D shapes that are indistinguishable from real shapes. It then renders the object’s 2.5D sketches (*i.e.* silhouette and depth map) from its shape under a sampled viewpoint. Finally, it learns to add realistic textures to these 2.5D sketches to generate realistic images. The VON not only generates images that are more realistic than the state-of-the-art 2D image synthesis methods but also enables many 3D operations such as changing the viewpoint of a generated image, shape and texture editing, and linear interpolation in texture and shape space.

1 Introduction

Modern deep generative models learn to synthesize realistic images. Figure 1a shows a car generated by a recent deep generative model (WGAN-GP) [Gulrajani et al., 2017]. From this, we humans can effortlessly answer a wide range of questions via mental simulation: What will this sedan look like from a different viewpoint? What if we apply the texture to a van? Can we apply different designs?

Most computational models have only focused on generating a 2D image, ignoring the 3D nature of the world. As a result, they are unable to answer these types of questions. This 2D-only perspective inevitably limits their practical usages in many fields, such as synthetic data generation, robotic learning, visual reality, and gaming industry.

In this paper, we present an end-to-end generative model that jointly synthesizes 3D shapes and 2D images via a disentangled object representation. Specifically, we decompose our image generation model into three conditionally independent factors: shape, viewpoint, and texture, borrowing ideas from classic graphics rendering engines. Our model first learns to synthesize 3D shapes that are indistinguishable from real shapes. It then computes its 2.5D sketches [Barrow and Tenenbaum, 1978, Marr, 1982] with a differentiable projection module from a sampled viewpoint. Finally, it learns to add diverse, realistic texture to 2.5D sketches, producing 2D images that are indistinguishable from real photos. We call our model Visual Object Networks (VON).

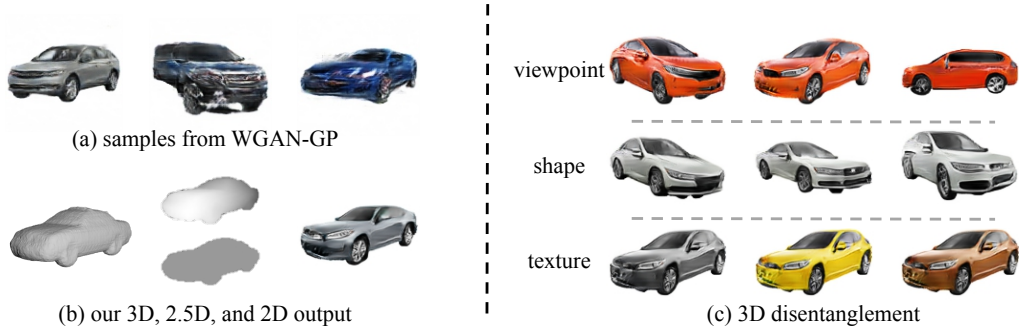


Figure 1: Previous 2D GANs vs. Visual Object Networks (VON). (a) Typical examples produced by a recent GAN model [Gulrajani et al., 2017]. (b) Our model produces three outputs: a 3D shape, its 2.5D projection given a viewpoint, and a final image with realistic texture. (c) Given this 3D disentangled representation, our method allows many 3D applications including changing viewpoint and editing shape or texture independently. Please see our [code](#) and [website](#) for more details.

Wiring in conditional independence reduces our need of densely annotated data: different from classic morphable face models [Blanz and Vetter, 1999], our training does not require paired data between 2D images and 3D shapes, nor the dense correspondence annotations within 3D data. This advantage enables us to leverage large-scale 2D image datasets and 3D shape collections [Chang et al., 2015] to synthesize objects of diverse shapes and texture.

Through extensive experiments, we show that VON produce more realistic image samples compared with recent 2D deep generative models. Many 3D applications also become possible with our disentangled representation, including rotating an object, adjusting object shape and texture, and interpolating two objects in texture and shape space independently.

2 Related Work

GANs for 2D Image Synthesis Since the invention of Generative Adversarial Nets (GANs) [Goodfellow et al., 2014], many researchers have adopted adversarial learning for various image synthesis tasks, ranging from image generation [Radford et al., 2016, Arjovsky et al., 2017, Karras et al., 2018], image-to-image translation [Isola et al., 2017, Zhu et al., 2017a], text-to-image synthesis [Zhang et al., 2017, Reed et al., 2016], and interactive image editing [Zhu et al., 2016, Wang et al., 2018], to classic vision and graphics tasks such as inpainting [Pathak et al., 2016] and super-resolution [Ledig et al., 2017]. Despite tremendous progress made on 2D image synthesis, most of the above methods operate on 2D space, ignoring the 3D nature of our physical world. As a result, the lack of 3D structure inevitably limits the practical usages of these generative models. In contrast, we present an image synthesis method powered by a disentangled 3D representation, allowing a user to change the viewpoint easily, as well as to edit the object’s shape or texture independently. Dosovitskiy et al. [2015] used supervised CNNs for generating synthetic images given object style, viewpoint, and color. We differ in that our aim is to produce objects with 3D geometry and natural texture, without using labelled data.

3D Shape Generation There has been an increasing interest in synthesizing 3D shapes with deep generative models, especially GANs. Popular representations include voxels [Wu et al., 2016], point clouds [Gadelha et al., 2017b, Achlioptas et al., 2018], and octave trees [Tatarchenko et al., 2017]. Other methods learn 3D shape priors from 2D images [Rezende et al., 2016, Gadelha et al., 2017a]. Recent work also explored 3D shape completion from partial scans with deep generative models [Dai et al., 2017, Wang et al., 2017, Wu et al., 2018], including generalization to unseen object categories [Zhang et al., 2018]. Unlike prior methods that only synthesize untextured 3D shapes, our method learns to produce both realistic shapes and images. Recent and concurrent work has learned to infer both texture and 3D shapes from 2D images, represented as parametrized meshes [Kanazawa et al., 2018], point clouds [Tatarchenko et al., 2016], or colored voxels [Tulsiani et al., 2017, Sun et al., 2018b]. While they focus on 3D reconstruction, we aim to learn an unconditional generative model of shapes and images with disentangled representations of object texture, shape and pose.

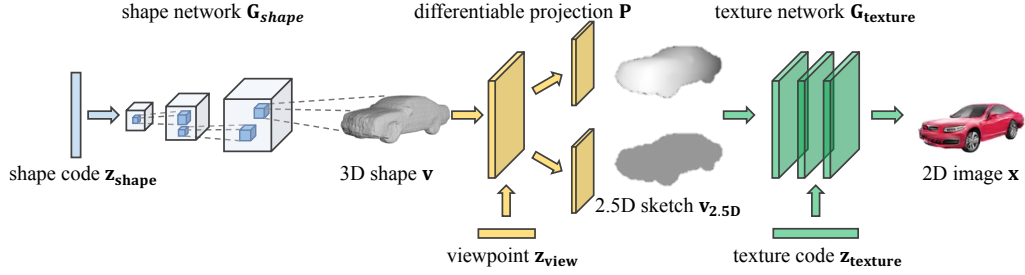


Figure 2: **Overview:** We first learn a shape generative adversarial network G_{shape} that maps a randomly sampled shape code $\mathbf{z}_{\text{shape}}$ to a voxel grid \mathbf{v} . Given a sampled viewpoint \mathbf{z}_{view} , we project \mathbf{v} to 2.5D sketches $\mathbf{v}_{2.5D}$ with our differentiable projection module \mathcal{P} . The 2.5D sketches $\mathbf{v}_{2.5D}$ include both the object’s depth and silhouette, which help to bridge 3D and 2D data. Finally, we learn a texture network $\mathbf{x} = G_{\text{texture}}(\mathbf{v}_{2.5D}, \mathbf{z}_{\text{texture}})$ to add a realistic, diverse texture to these 2.5D sketches, so that the final 2D image \mathbf{x} cannot be distinguished from real images by an image discriminator. The model is fully differentiable and end-to-end trained on both 2D and 3D data.

Inverse Graphics Motivated by the philosophy of “vision as inverse graphics” [Yuille and Kersten, 2006, Bever and Poeppel, 2010], researchers have made much progress in recent years on learning to invert graphics engines, many with deep neural networks [Kulkarni et al., 2015b, Yang et al., 2015, Kulkarni et al., 2015a, Tung et al., 2017, Shu et al., 2017]. In particular, Kulkarni et al. [2015b] proposed a convolutional inverse graphics network. Given an image of a face, the network learns to infer properties such as pose and lighting. Tung et al. [2017] extended inverse graphics networks with adversarial learning. Wu et al. [2017, 2018] inferred 3D shapes from a 2D image via 2.5D sketches and learned shape priors. Here we focus on a complementary problem—learning generative graphics networks via the idea of “graphics as inverse vision”. In particular, we improve our generative model with visual recognition models that recover 2.5D sketches from generated images.

3 Formulation

Our goal is to learn an (implicit) generative model that can sample an image $x \in \mathbb{R}^{H \times W \times 3}$ from three factors: a shape code $\mathbf{z}_{\text{shape}}$, a viewpoint code \mathbf{z}_{view} , and a texture code $\mathbf{z}_{\text{texture}}$. The texture code encodes the object’s appearance, which accounts for the object’s albedo, reflectance, and environment illumination. These three factors are disentangled, conditionally independent from each other. Our model is category-specific as the visual appearance of an object depends on the class. We further assume that all the codes lie in their own low-dimensional spaces. During training, we are given a 3D shape collection $\{\mathbf{v}_i\}_i^N$, where $\mathbf{v}_i \in \mathbb{R}^{W \times W \times W}$ is a binary voxel grid, and a 2D image collection $\{\mathbf{x}_j\}_j^M$, where $\mathbf{x}_j \in \mathbb{R}^{H \times W \times 3}$. Our model training requires *no* alignment between 3D and 2D data. We assume that every training image has a clean background and only contains the object of interest. This makes our model focuses on generating realistic images of the objects instead of complex backgrounds.

Figure 2 illustrates our model. First, we learn a 3D shape generation network that produces realistic voxels $\mathbf{v} = G_{\text{shape}}(\mathbf{z}_{\text{shape}})$ given a shape code $\mathbf{z}_{\text{shape}}$ (Section 3.1). We then develop a differentiable projection module \mathcal{P} that projects a 3D voxel grid \mathbf{v} into 2.5D sketches via $\mathbf{v}_{2.5D} = \mathcal{P}(\mathbf{v}, \mathbf{z}_{\text{view}})$, given a particular viewpoint \mathbf{z}_{view} (Section 3.2). Next, we learn to produce a final image given the 2.5D sketches $\mathbf{v}_{2.5D}$ and a randomly sampled texture code $\mathbf{z}_{\text{texture}}$, using our texture synthesis network $\mathbf{x} = G_{\text{texture}}(\mathbf{v}_{2.5D}, \mathbf{z}_{\text{texture}})$ in Section 3.3. Section 3.4 summarizes our full model and Section 3.5 includes implementation details. Our entire model is differentiable and can be trained end-to-end.

During testing, we sample an image $x = G_{\text{texture}}(\mathcal{P}(G_{\text{shape}}(\mathbf{z}_{\text{shape}}), \mathbf{z}_{\text{view}}), \mathbf{z}_{\text{texture}})$ from latent codes $(\mathbf{z}_{\text{shape}}, \mathbf{z}_{\text{view}}, \mathbf{z}_{\text{texture}})$ via our shape network G_{shape} , texture network G_{texture} , and projection module \mathcal{P} .

3.1 Learning 3D Shape Priors

Our first step is to learn a category-specific 3D shape prior from large shape collections [Chang et al., 2015]. This prior depends on the object class but is conditionally independent of other factors such

as viewpoint and texture. To model the 3D shape prior and generate realistic shapes, we adopt the recently proposed 3D Generative Adversarial Networks [Wu et al., 2016].

Consider a voxelized 3D object collection $\{\mathbf{v}_i\}_i^N$, where $\mathbf{v}_i \in \mathbb{R}^{W \times W \times W}$, we learn a generator G_{shape} to map a shape code $\mathbf{z}_{\text{shape}}$, randomly sampled from a Gaussian distribution, to a $W \times W \times W$ voxel grid. Meantime, we train a 3D discriminator D_{shape} to classify if a shape is real or generated. Both discriminator and generator contain fully volumetric convolutional and deconvolutional layers. We find that the original 3D-GAN [Wu et al., 2016] sometimes suffers from mode collapse. To improve the quality and diversity of the results, we use the Wasserstein distance in WGAN-GP [Arjovsky et al., 2017, Gulrajani et al., 2017]. Formally, we play the following minimax two-player game between G_{shape} and D_{shape} : $\min_{G_{\text{shape}}} \max_{D_{\text{shape}}} \mathcal{L}_{\text{shape}}^{\text{GAN}*}$, where

$$\mathcal{L}_{\text{shape}} = \mathbb{E}_{\mathbf{v}}[D_{\text{shape}}(\mathbf{v})] - \mathbb{E}_{\mathbf{z}_{\text{shape}}}[D_{\text{shape}}(G_{\text{shape}}(\mathbf{z}_{\text{shape}}))]. \quad (1)$$

To enforce the Lipschitz constraint in Wasserstein GANs [Arjovsky et al., 2017], we add a gradient-penalty loss $\lambda_{\text{GP}} \mathbb{E}_{\tilde{\mathbf{v}}}[(\nabla_{\tilde{\mathbf{v}}} D_{\text{shape}}(\tilde{\mathbf{v}}) - 1)^2]$ to Eqn. 1, where $\tilde{\mathbf{v}}$ is a randomly sampled point along the straight line between a real shape and a generated shape, and λ_{GP} controls the capacity of D_{shape} .

Since binary data is hard to model using classic GAN architectures, we also experimented with distance function (DF) representation [Curless and Levoy, 1996], which is continuous on the 3D voxel space. As discrete data is often challenging for GANs to produce [Goodfellow, 2016], continuous DF can further stabilize the training. See Section 4.2 for quantitative evaluations.

3.2 Generating 2.5D Sketches

Given a synthesized voxelized shape $v = G_{\text{shape}}(\mathbf{z}_{\text{shape}})$, how can we connect it to a 2D image? Inspired by recent work on 3D reconstruction [Wu et al., 2017], we use 2.5D sketches [Barrow and Tenenbaum, 1978, Marr, 1982] to bridge the gap between 3D and 2D. This intermediate representation provides three main advantages. First, generating 2.5D sketches from a 3D voxel grid is straightforward, as the projection is differentiable with respect to both the input shape and the viewpoint. Second, 2D image synthesis from a 2.5D sketch can be cast as an image-to-image translation problem [Isola et al., 2017], where existing methods have achieved successes even without paired data [Zhu et al., 2017a]. Third, compared with alternative approaches such as colored voxels, our method enables generating images at a higher resolution.

Here we describe our differentiable module for projecting voxels into 2.5D sketches. The input to this module is camera parameters and a voxel grid, whose value indicates the probability of each voxel’s presence. To render 2.5D sketches from voxels in a differentiable manner, we first generate 3D perspective projection grids that align with camera rays. Each ray originates from the camera center and goes through a pixel’s center in the image plane. We sample grid points at evenly spaced depth along each ray. Next we calculate the probability of presence at each grid point using differentiable bilinear interpolation [Jaderberg et al., 2015] of the input voxels. Similar to Tulsiani et al. [2017], we then calculate the expectation of visibility and depth along each ray. Given a ray R with N samples R_1, R_2, \dots, R_N along its path, we calculate the visibility (silhouette) as the expectation of the ray hitting the object: $\sum_{j=1}^N \prod_{k=1}^{j-1} (1 - R_k) R_j$. Similarly, the depth can be calculated as $\sum_{j=1}^N d_j \prod_{k=1}^{j-1} (1 - R_k) R_j$, where d_j is the depth of the sample R_j . This process is fully differentiable since the gradients can be back-propagated through both expectation calculation and bilinear interpolation.

Viewpoint Estimation Our two-dimensional viewpoint code \mathbf{z}_{view} encodes camera elevation and azimuth. We sample \mathbf{z}_{view} from an empirical distribution $p_{\text{data}}(\mathbf{z}_{\text{view}})$ of the camera poses from the training images. To estimate $p_{\text{data}}(\mathbf{z}_{\text{view}})$, we first render the silhouettes of several candidate 3D models under uniformly sampled camera poses. For each input image, we compare its silhouette to the rendered 2D views and choose the pose with the largest Intersection-over-Union value. More details can be found in the supplement.

3.3 Learning 2D Texture Priors

Given the projected 2.5D sketches, which encode both the viewpoint and the object shape, we learn to synthesize realistic 2D images. In particular, we learn a texture network G_{texture} that takes a

*For notation simplicity, we denote $\mathbb{E}_{\mathbf{v}} \triangleq \mathbb{E}_{\mathbf{v} \sim p_{\text{data}}(\mathbf{v})}$ and $\mathbb{E}_{\mathbf{z}_{\text{shape}}} \triangleq \mathbb{E}_{\mathbf{z}_{\text{shape}} \sim p_{\text{data}}(\mathbf{z}_{\text{shape}})}$.

randomly sampled texture code $\mathbf{z}_{\text{texture}}$ and the projected 2.5D sketches $\mathbf{v}_{2.5D}$ as input, and produces a 2D image $\mathbf{x} = G_{\text{texture}}(\mathbf{v}_{2.5D}, \mathbf{z}_{\text{texture}})$. This texture network needs to model both object texture and environment illumination, as well as the differentiable rendering equation [Kajiya, 1986]. Fortunately, this mapping problem can be cast as an unpaired image-to-image translation problem [Zhu et al., 2017a, Yi et al., 2017, Liu et al., 2017]. We adopt recently proposed cycle-consistent adversarial networks (CycleGAN) [Zhu et al., 2017a] as our baseline. Later, we relax the one-to-one mapping restriction in CycleGAN to handle one-to-many mapping from 2.5D sketches to 2D images.

Here we introduce two encoders E_{texture} and $E_{2.5D}$ to estimate a texture code $\mathbf{z}_{\text{texture}}$ and 2.5D sketches $\mathbf{v}_{2.5D}$ from a real image \mathbf{x} . We train G_{texture} , E_{texture} , and $E_{2.5D}$ jointly with adversarial losses [Goodfellow et al., 2014] and cycle-consistency losses [Zhu et al., 2017a, Yi et al., 2017]. We use an adversarial loss on the final generated image as

$$\mathcal{L}_{\text{image}}^{\text{GAN}} = \mathbb{E}_{\mathbf{x}}[\log D_{\text{image}}(\mathbf{x})] + \mathbb{E}_{(\mathbf{v}_{2.5D}, \mathbf{z}_{\text{texture}})}[\log(1 - D_{\text{image}}(G_{\text{texture}}(\mathbf{v}_{2.5D}, \mathbf{z}_{\text{texture}})))] \quad (2)$$

where D_{image} learns to classify real and generated images. We apply the same adversarial loss for 2.5D sketches $\mathbf{v}_{2.5D}$:

$$\mathcal{L}_{2.5D}^{\text{GAN}} = \mathbb{E}_{\mathbf{v}_{2.5D}}[\log D_{2.5D}(\mathbf{v}_{2.5D})] + \mathbb{E}_{\mathbf{x}}[\log(1 - D_{2.5D}(E_{2.5D}(\mathbf{x})))] \quad (3)$$

where $D_{2.5D}$ aims to distinguish between 2.5D sketches $\mathbf{v}_{2.5D}$ and estimated 2.5D sketches $E_{2.5D}(\mathbf{x})$ from a real 2D image. We further use cycle-consistency losses [Zhu et al., 2017a] to enforce the bijective relationship between the two domains as

$$\begin{aligned} \mathcal{L}_{2.5D}^{\text{cyc}} &= \lambda_{2.5D}^{\text{cyc}} \mathbb{E}_{(\mathbf{v}_{2.5D}, \mathbf{z}_{\text{texture}})} [\|E_{2.5D}(G_{\text{texture}}(\mathbf{v}_{2.5D}, \mathbf{z}_{\text{texture}})) - \mathbf{v}_{2.5D}\|_1] \\ \text{and } \mathcal{L}_{\text{image}}^{\text{cyc}} &= \lambda_{\text{image}}^{\text{cyc}} \mathbb{E}_{\mathbf{x}} [\|G_{\text{texture}}(E_{2.5D}(\mathbf{x}), E_{\text{texture}}(\mathbf{x})) - \mathbf{x}\|_1], \end{aligned} \quad (4)$$

where $\lambda_{\text{image}}^{\text{cyc}}$ and $\lambda_{2.5D}^{\text{cyc}}$ control the importance of each cycle loss. The texture encoder E_{texture} and 2.5D sketches encoder $E_{2.5D}$ essentially serve as recognition models that recover the texture property and 2.5D representation from a 2D image. Prior studies [Isola et al., 2016, Mathieu et al., 2016] have shown that latent codes often get ignored in the conditional image generation due to the one-to-one mapping assumption; vanilla CycleGAN also suffers from this problem based on our initial experiments. To address this, we introduce a latent space cycle-consistency loss to encourage G_{texture} to use the texture code $\mathbf{z}_{\text{texture}}$.

$$\mathcal{L}_{\text{texture}}^{\text{cyc}} = \lambda_{\text{texture}}^{\text{cyc}} \mathbb{E}_{(\mathbf{v}_{2.5D}, \mathbf{z}_{\text{texture}})} [\|E_{\text{texture}}(G_{\text{texture}}(\mathbf{v}_{2.5D}, \mathbf{z}_{\text{texture}})) - \mathbf{z}_{\text{texture}}\|_1], \quad (5)$$

where $\lambda_{\text{texture}}^{\text{cyc}}$ controls its importance. Finally, to allow sampling at test time, we add a Kullback–Leibler (KL) loss on the z space to force $E_{\text{texture}}(\mathbf{x})$ to be close to a Gaussian distribution:

$$\mathcal{L}_{\text{KL}} = \lambda_{\text{KL}} \mathbb{E}_{\mathbf{x}} [\mathcal{D}_{\text{KL}}(E_{\text{texture}}(\mathbf{x}) || \mathcal{N}(0, I))], \quad (6)$$

where $\mathcal{D}_{\text{KL}}(p||q) = -\int_{\mathbf{z}} p(\mathbf{z}) \log \frac{p(\mathbf{z})}{q(\mathbf{z})} d\mathbf{z}$ and λ_{KL} is its weight. We write the final texture loss as

$$\mathcal{L}_{\text{texture}} = \underbrace{\mathcal{L}_{\text{image}}^{\text{GAN}} + \mathcal{L}_{2.5D}^{\text{GAN}}}_{\text{Adversarial losses}} + \underbrace{\mathcal{L}_{\text{image}}^{\text{cyc}} + \mathcal{L}_{2.5D}^{\text{cyc}} + \mathcal{L}_{\text{texture}}^{\text{cyc}}}_{\text{Cycle-consistency losses}} + \underbrace{\mathcal{L}_{\text{KL}}}_{\text{KL loss}}. \quad (7)$$

Note that the latent space reconstruction loss $\mathcal{L}_{\text{texture}}^{\text{cyc}}$ has been explored in unconditional GANs [Chen et al., 2016] and image-to-image translation [Zhu et al., 2017b, Almahairi et al., 2018]. Here we use this loss to learn one-to-many mappings from unpaired data.

3.4 Our Full Model

Our full objective is

$$\arg \min_{(G_{\text{shape}}, G_{\text{texture}}, E_{2.5D}, E_{\text{texture}})} \arg \max_{(D_{\text{shape}}, D_{\text{texture}}, D_{2.5D})} \lambda_{\text{shape}} \mathcal{L}_{\text{shape}} + \mathcal{L}_{\text{texture}}, \quad (8)$$

where λ_{shape} controls the relative weight of shape and texture loss functions. We compare our visual object networks against 2D deep generative models in Section 4.1. We also perform ablation studies on both the shape generation loss $\mathcal{L}_{\text{shape}}$ and the texture synthesis loss $\mathcal{L}_{\text{texture}}$ in Section 4.2.

3.5 Implementation Details

Shape Networks For shape generation, we adopt the architecture from 3D-GAN [Wu et al., 2016]. In particular, the discriminator D_{shape} contains 6 volumetric convolutional layers and the generator G_{shape} contains 6 strided-convolutional layers. We remove the batch normalization layers [Ioffe and Szegedy, 2015] in the G_{shape} as suggested by the WGAN-GP paper [Gulrajani et al., 2017].

Texture Networks For texture generation, we use the AdaIN encoder [Huang and Belongie, 2017, Huang et al., 2018] with adaptive instance normalization layers. For discriminator, we use a PatchGAN classifier [Isola et al., 2017, Zhu et al., 2017a] to classify overlapping image patches as real or fake. We use a least square objective as in LS-GAN [Mao et al., 2017] for stable training. We use ResNet encoders [He et al., 2015] for our E_{texture} and $E_{2.5D}$.

Differentiable Projection Module We assume the camera is at a fixed distance of 2m to the object’s center and use a focal length of 50mm (35mm film equivalent). The resolution of the rendered sketches are 128×128 , and we sample 128 points evenly along each camera ray. Besides, we also assume no in-plane rotation, that is, no tilting in the image plane. We implement a custom CUDA kernel for sampling along the projection rays and calculating the stop probability.

Training Details We train our models on $128 \times 128 \times 128$ shapes (voxels or distance function) and $128 \times 128 \times 3$ images. During training, we first train the shape generator G_{shape} on 3D shape collections and then train the texture generator G_{texture} given ground truth 3D shape data and image data. Finally, we fine-tune both modules together. We sample the shape code $\mathbf{z}_{\text{shape}}$ and texture code $\mathbf{z}_{\text{texture}}$ from the standard Gaussian distribution $N(0, I)$, with the code length $|\mathbf{z}_{\text{shape}}| = 200$ and $|\mathbf{z}_{\text{texture}}| = 8$. The entire training usually takes 2 ~ 3 days. For hyperparameters, we set $\lambda_{\text{KL}} = 0.05$, $\lambda_{\text{GP}} = 10$, $\lambda_{\text{image}}^{\text{cyc}} = 10$, $\lambda_{2.5D}^{\text{cyc}} = 25$, $\lambda_{\text{texture}}^{\text{cyc}} = 1$, and $\lambda_{\text{shape}} = 0.05$. We use the Adam solver [Kingma and Ba, 2015] with a learning rate of 0.0002 for shape generation and 0.0001 for texture generation.

We observe that the texture generator G_{texture} sometimes undesirably changes the shape of the input 2.5D sketches $\mathbf{v}_{2.5D}$ (*i.e.*, depth and mask). To address this issue, we explicitly mask the generated images with the silhouette from $\mathbf{v}_{2.5D}$: *i.e.*, $G_{\text{texture}}(\mathbf{v}_{2.5D}, \mathbf{z}_{\text{texture}}) = \text{mask} \cdot g_{\text{texture}}(\text{depth}) + (1 - \text{mask}) \cdot 1$, where 1 is the background white color and the generator g_{texture} synthesizes an image given a depth map. Similarly, we reformulate $E_{2.5D}(x) = (e_{2.5D}(\mathbf{x}) \cdot \text{mask}_{\text{gt}}, \text{mask}_{\text{gt}})$, where the encoder $e_{2.5D}$ only predicts depth, and the input object mask is used. Besides, we add a small mask consistency loss $\|e_{2.5D}(\mathbf{x}) - \text{mask}_{\text{gt}}\|_1$ to encourage the predicted depth map to be consistent with the the object mask. As our training images have clean background, we can estimate the object mask with simple thresholding.

4 Experiments

We first compare our visual object networks (VON) against recent 2D GAN variants on two datasets. We evaluate the results using both a quantitative metric and a qualitative human perception study. We then perform an ablation study on the objective functions of both the shape network and the texture network. Finally, we demonstrate several applications enabled by our disentangled 3D representation. The full results and datasets can be found at our [website](#).

4.1 Evaluations

Datasets We use ShapeNet [Chang et al., 2015] for learning to generate 3D shapes. ShapeNet is a large shape repository of 55 object categories. Here we use the chair and car categories, which has 6777 and 3513 CAD models respectively. For 2D datasets, we use the recently released Pix3D dataset to obtain 1515 RGB images of chairs alongside with their silhouettes [Sun et al., 2018a], with an addition of 448 clean background images crawled from Google image search. We also crawled 2605 images of cars.

Baselines We compare with three popular GAN variants commonly used in the literature: DCGAN with the standard cross-entropy loss [Goodfellow et al., 2014, Radford et al., 2016], LSGAN [Mao et al., 2017], and WGAN-GP [Gulrajani et al., 2017]. We use the same DCGAN-like generator and discriminator architectures for all three GAN models. For WGAN-GP, we replace the BatchNorm by



Figure 3: Samples from DCGAN [Radford et al., 2016], LSGAN [Mao et al., 2017], WGAN-GP [Gulrajani et al., 2017], and our VON. For our method, we show both 3D shapes and 2D images. Note that VON is trained on unpaired 3D shapes and 2D images, while DCGAN, LSGAN and WGAN-GP are trained only on 2D images. Top: results on cars; Bottom: results on chairs.

InstanceNorm [Ulyanov et al., 2016] in the discriminator, and we train the discriminator 5 times per generator iteration.

Metrics To evaluate the image generation models, we calculate the Fréchet Inception Distance between generated images and real images, a metric highly correlated to human perception [Heusel et al., 2017, Lucic et al., 2018]. Each set of images are fed to the Inception network [Szegedy et al., 2015] trained on ImageNet [Deng et al., 2009], and the features from the layer before the last fully-connected layer are used to calculate the Fréchet Inception Distance.

Second, we sample 200 pairs of generated images from the VON and the state-of-the-art models (DCGAN, LSGAN, and WGAN-GP), and show each pair to five subjects on Amazon MTurk. The subjects are asked to choose a more realistic result within the pair.

Results Our VON consistently outperforms the 2D generative models. In particular, Table 1 shows that our results have the smallest Fréchet Inception Distance; in Table 2, 74% – 85% of the responses preferred our results. This performance gain shows that the learned 3D prior helps our model synthesize more realistic images. See Figure 3 for a qualitative comparison between these methods.

	Car	Chair
DCGAN	131.3	227.0
LSGAN	172.2	227.2
WGAN-GP	124.2	186.9
VON (voxels)	90.0	60.5
VON (DF)	88.8	57.0

Table 1: Fréchet Inception Distances [Heusel et al., 2017] between real images and images generated by DCGAN, LSGAN, WGAN-GP, our VON (voxels), and our VON (DF). DF denotes distance function representations.

	Car	Chair
DCGAN	75.9%	84.4%
LSGAN	77.8%	85.8%
WGAN-GP	74.6%	80.9%

Table 2: Human preferences on images generated by DCGAN [Radford et al., 2016], LSGAN Mao et al. [2017], WGAN-GP [Gulrajani et al., 2017] vs. our VON. Each number shows the percentage of humans that preferred our model to the one on the left.

4.2 Ablation Study

We perform ablation studies on the shape generation loss $\mathcal{L}_{\text{shape}}$ and the texture synthesis loss $\mathcal{L}_{\text{texture}}$.

Shape Generation For shape generation, we compare our method against prior work 3D-GAN [Wu et al., 2016] on both voxel grids and distance function representation. 3D-GAN uses the same architecture but trained with a cross-entropy loss. We evaluate the quality of generated shapes using the Fréchet Inception Distance (FID) between generated and real shapes. To extract statistics for each set of generated/real shapes, we train ResNet-based 3D shape classifiers [He et al., 2015] on all 55 classes of shapes from ShapeNet, separately on voxels and distance function representation. We extract the features from the layer before the last fully-connected layer. Table 3 shows that our method achieves better results regarding the FID. Figure 4a shows that the Wasserstein distance increases the quality of the results. As we use different classifiers for voxels and distance functions, the Fréchet Inception Distance is not comparable across representations.

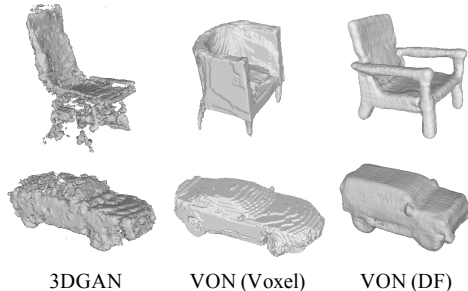


Figure 4: 3D shape generation comparison. From left to right: shape generated by 3D-GAN [Wu et al., 2016], shape generated by VON on voxels, and shape generated by VON on distance functions (DF). Our model produce more natural shapes.

	3D-GAN (voxels)	VON (voxels)
Cars	3.021	0.021
Chairs	2.598	0.082
	3D-GAN (DF)	VON (DF)
Cars	3.896	0.002
Chairs	1.790	0.006

Table 3: Results on shape generation: Fréchet Inception Distances (FID) between real shapes and shapes generated by 3D-GAN [Wu et al., 2016] and our shape network both on voxels and distance function representation (DF). Our model achieves the best results regarding FID.

Texture Generation For texture generation, we also compare with a variant only trained with the $\mathcal{L}_{\text{image}}^{\text{GAN}}$ loss (Eqn. 2), but without cycle-consistency losses. We follow Section 4.1 and perform the same Fréchet Inception Distance evaluation and human user studies on cars and chairs. We observe that removing cycle losses increases the average Fréchet Inception Distance from 72.9 to 162.5. Meanwhile, 81.5% of human subjects preferred results from our full method. The model without cycle loss suffers from mode collapse, often producing less realistic results. This comparison indicates the importance of our full objective.

4.3 Applications

We apply our visual object networks to several 3D manipulation applications, none of which can be achieved by existing 2D generative models [Goodfellow et al., 2014, Kingma and Welling, 2014].

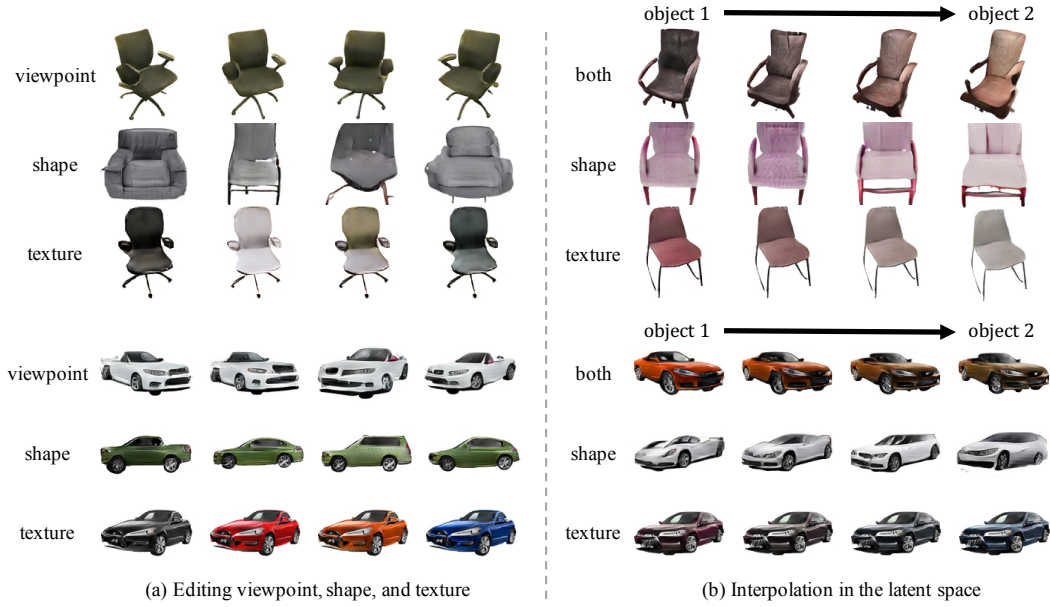


Figure 5: Our visual object networks (VON) allow many 3D applications such as (a) changing the viewpoint, texture, or shape independently, and (b) interpolating between two objects in shape space, texture space, or both. None of them can be achieved by prior 2D GANs.

Changing Viewpoint We can sample different viewpoints \mathbf{z}_{view} while keeping the same shape and texture code. Figure 1c and Figure 5a show a few examples.

Shape and Texture Editing We can change only the shape code or texture code, which allows us to edit the shape and texture separately. See Figure 1c and Figure 5a for a few examples.

Disentangled Interpolation Given our disentangled representation, we can choose to interpolate between two objects only in shape space $\alpha \mathbf{z}_{\text{shape}}^1 + (1 - \alpha) \mathbf{z}_{\text{shape}}^2$ or in the texture space $\alpha \mathbf{z}_{\text{texture}}^1 + (1 - \alpha) \mathbf{z}_{\text{texture}}^2$, or both, where $\alpha \in [0, 1]$. Figure 5c shows linear interpolations in the latent space.

5 Discussion

In this paper, we present visual object networks (VON), a fully differentiable 3D-aware generative model for image and shape synthesis. Our key idea is to disentangle the image generation process into three factors: shape, viewpoint, and texture. This disentangled 3D representation allows us to learn the model from both 3D and 2D visual data collections under an adversarial learning framework. Our model synthesizes more photorealistic images compared to existing 2D generative models; it also allows various 3D manipulations that are not possible with prior 2D methods.

In the future, we are interested in incorporating coarse-to-fine modeling [Karras et al., 2017] for producing shapes and images at a higher resolution. Another interesting direction to explore is to disentangle texture into lighting and appearance (e.g., albedo), which can further improve the appearance consistency across different viewpoints and lighting conditions. Finally, Our current method only works for visual objects, not scenes, as we do not have large-scale 3D geometric data for the entire scene. Synthesizing natural scenes is also a meaningful next step.

Acknowledgements This work is supported by NSF #1231216, NSF #1524817, ONR MURI N00014-16-1-2007, Toyota Research Institute, Shell, and Facebook. We thank Xiuming Zhang, Richard Zhang, and Zhuang Liu for valuable discussions.

References

- Panos Achlioptas, Olga Diamanti, Ioannis Mitliagkas, and Leonidas Guibas. Learning representations and generative models for 3d point clouds. In *ICLR Workshop*, 2018. 2
- Amjad Almahairi, Sai Rajeswar, Alessandro Sordoni, Philip Bachman, and Aaron Courville. Augmented cyclegan: Learning many-to-many mappings from unpaired data. In *ICML*, 2018. 5
- Martín Arjovsky, Soumith Chintala, and Léon Bottou. Wasserstein generative adversarial networks. In *ICML*, 2017. 2, 4
- Harry G Barrow and Jay M Tenenbaum. Recovering intrinsic scene characteristics from images. *Computer Vision Systems*, 1978. 1, 4
- Thomas G Bever and David Poeppel. Analysis by synthesis: a (re-) emerging program of research for language and vision. *Biolinguistics*, 4(2-3):174–200, 2010. 3
- Volker Blanz and Thomas Vetter. A morphable model for the synthesis of 3d faces. In *SIGGRAPH*, 1999. 2
- Angel X Chang, Thomas Funkhouser, Leonidas Guibas, Pat Hanrahan, Qixing Huang, Zimo Li, Silvio Savarese, Manolis Savva, Shuran Song, Hao Su, Jianxiong Xiao, Li Yi, and Fisher Yu. Shapenet: An information-rich 3d model repository. *arXiv:1512.03012*, 2015. 2, 3, 6
- Xi Chen, Yan Duan, Rein Houthoofd, John Schulman, Ilya Sutskever, and Pieter Abbeel. Infogan: Interpretable representation learning by information maximizing generative adversarial nets. In *NIPS*, 2016. 5
- Brian Curless and Marc Levoy. A volumetric method for building complex models from range images. In *SIGGRAPH*, 1996. 4
- Angela Dai, Charles Ruizhongtai Qi, and Matthias Nießner. Shape completion using 3d-encoder-predictor cnns and shape synthesis. In *CVPR*, 2017. 2
- Jia Deng, Wei Dong, Richard Socher, Li-Jia Li, Kai Li, and Li Fei-Fei. Imagenet: A large-scale hierarchical image database. In *CVPR*, 2009. 7
- Alexey Dosovitskiy, Jost Tobias Springenberg, and Thomas Brox. Learning to generate chairs with convolutional neural networks. In *CVPR*, 2015. 2
- Matheus Gadelha, Subhransu Maji, and Rui Wang. 3d shape induction from 2d views of multiple objects. In *3D Vision (3DV)*, pages 402–411. IEEE, 2017a. 2
- Matheus Gadelha, Subhransu Maji, and Rui Wang. Shape generation using spatially partitioned point clouds. In *BMVC*, 2017b. 2
- Ian Goodfellow. Nips 2016 tutorial: Generative adversarial networks. *arXiv preprint arXiv:1701.00160*, 2016. 4
- Ian Goodfellow, Jean Pouget-Abadie, Mehdi Mirza, Bing Xu, David Warde-Farley, Sherjil Ozair, Aaron Courville, and Yoshua Bengio. Generative adversarial nets. In *NIPS*, 2014. 2, 5, 6, 8
- Ishaan Gulrajani, Faruk Ahmed, Martin Arjovsky, Vincent Dumoulin, and Aaron Courville. Improved training of wasserstein gans. In *NIPS*, 2017. 1, 2, 4, 6, 7, 8
- Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. In *CVPR*, 2015. 6, 8
- Martin Heusel, Hubert Ramsauer, Thomas Unterthiner, Bernhard Nessler, Günter Klambauer, and Sepp Hochreiter. Gans trained by a two time-scale update rule converge to a nash equilibrium. *NIPS1706.08500*, 2017. 7, 8
- Xun Huang and Serge J Belongie. Arbitrary style transfer in real-time with adaptive instance normalization. In *ICCV*, 2017. 6
- Xun Huang, Ming-Yu Liu, Serge Belongie, and Jan Kautz. Multimodal unsupervised image-to-image translation. *ECCV1804.04732*, 2018. 6
- Sergey Ioffe and Christian Szegedy. Batch normalization: Accelerating deep network training by reducing internal covariate shift. In *ICML*, 2015. 6
- Phillip Isola, Daniel Zoran, Dilip Krishnan, and Edward H Adelson. Learning visual groups from co-occurrences in space and time. In *ICLR Workshop*, 2016. 5

- Phillip Isola, Jun-Yan Zhu, Tinghui Zhou, and Alexei A Efros. Image-to-image translation with conditional adversarial networks. In *CVPR*, 2017. 2, 4, 6
- Max Jaderberg, Karen Simonyan, and Andrew Zisserman. Spatial transformer networks. In *NIPS*, 2015. 4
- James T Kajiya. The rendering equation. In *SIGGRAPH*, 1986. 5
- Angjoo Kanazawa, Shubham Tulsiani, Alexei A Efros, and Jitendra Malik. Learning category-specific mesh reconstruction from image collections. *ECCV1803.07549*, 2018. 2
- Tero Karras, Timo Aila, Samuli Laine, and Jaakko Lehtinen. Progressive growing of gans for improved quality, stability, and variation. In *ICLR*, 2017. 9
- Tero Karras, Timo Aila, Samuli Laine, and Jaakko Lehtinen. Progressive growing of gans for improved quality, stability, and variation. *ICLR*, 2018. 2
- Diederik P. Kingma and Jimmy Ba. Adam: A method for stochastic optimization. In *ICLR*, 2015. 6
- Diederik P. Kingma and Max Welling. Auto-encoding variational bayes. In *ICLR*, 2014. 8
- Tejas D Kulkarni, Pushmeet Kohli, Joshua B Tenenbaum, and Vikash Mansinghka. Picture: A probabilistic programming language for scene perception. In *CVPR*, 2015a. 3
- Tejas D Kulkarni, William F Whitney, Pushmeet Kohli, and Josh Tenenbaum. Deep convolutional inverse graphics network. In *NIPS*, 2015b. 3
- Christian Ledig, Lucas Theis, Ferenc Huszár, Jose Caballero, Andrew Cunningham, Alejandro Acosta, Andrew Aitken, Alykhan Tejani, Johannes Totz, Zehan Wang, and Wenzhe Shi. Photo-realistic single image super-resolution using a generative adversarial network. In *CVPR*, 2017. 2
- Ming-Yu Liu, Thomas Breuel, and Jan Kautz. Unsupervised image-to-image translation networks. In *NIPS*, 2017. 5
- Mario Lucic, Karol Kurach, Marcin Michalski, Sylvain Gelly, and Olivier Bousquet. Are gans created equal? a large-scale study. *NIPS*, 2018. 7
- Xudong Mao, Qing Li, Haoran Xie, Raymond YK Lau, Zhen Wang, and Stephen Paul Smolley. Least squares generative adversarial networks. In *ICCV*, 2017. 6, 7, 8
- David Marr. *Vision: A computational investigation into the human representation and processing of visual information*, volume 2. W. H. Freeman and Company, 1982. 1, 4
- Michael Mathieu, Camille Couprie, and Yann LeCun. Deep multi-scale video prediction beyond mean square error. In *ICLR*, 2016. 5
- Deepak Pathak, Philipp Krahenbuhl, Jeff Donahue, Trevor Darrell, and Alexei A Efros. Context encoders: Feature learning by inpainting. In *CVPR*, 2016. 2
- Alec Radford, Luke Metz, and Soumith Chintala. Unsupervised representation learning with deep convolutional generative adversarial networks. In *ICLR*, 2016. 2, 6, 7, 8
- Scott Reed, Zeynep Akata, Xinchun Yan, Lajanugen Logeswaran, Bernt Schiele, and Honglak Lee. Generative adversarial text-to-image synthesis. In *ICML*, 2016. 2
- Danilo Jimenez Rezende, SM Eslami, Shakir Mohamed, Peter Battaglia, Max Jaderberg, and Nicolas Heess. Unsupervised learning of 3d structure from images. In *NIPS*, 2016. 2
- Zhixin Shu, Ersin Yumer, Sunil Hadap, Kalyan Sunkavalli, Eli Shechtman, and Dimitris Samaras. Neural face editing with intrinsic image disentangling. In *CVPR*, 2017. 3
- Xingyuan Sun, Jiajun Wu, Xiuming Zhang, Zhoutong Zhang, Chengkai Zhang, Tianfan Xue, Joshua B Tenenbaum, and William T Freeman. Pix3d: Dataset and methods for single-image 3d shape modeling. In *CVPR*, 2018a. 6
- Yongbin Sun, Ziwei Liu, Yue Wang, and Sanjay E Sarma. Im2avatar: Colorful 3d reconstruction from a single image. *arXiv:1804.06375*, 2018b. 2
- Christian Szegedy, Wei Liu, Yangqing Jia, Pierre Sermanet, Scott Reed, Dragomir Anguelov, Dumitru Erhan, Vincent Vanhoucke, and Andrew Rabinovich. Going deeper with convolutions. In *CVPR*, 2015. 7

- Maxim Tatarchenko, Alexey Dosovitskiy, and Thomas Brox. Multi-view 3d models from single images with a convolutional network. In *ECCV*, 2016. 2
- Maxim Tatarchenko, Alexey Dosovitskiy, and Thomas Brox. Octree generating networks: Efficient convolutional architectures for high-resolution 3d outputs. In *ICCV*, 2017. 2
- Shubham Tulsiani, Hao Su, Leonidas J Guibas, Alexei A Efros, and Jitendra Malik. Learning shape abstractions by assembling volumetric primitives. In *CVPR*, 2017. 2, 4
- Hsiao-Yu Fish Tung, Adam W Harley, William Seto, and Katerina Fragkiadaki. Adversarial inverse graphics networks: Learning 2d-to-3d lifting and image-to-image translation from unpaired supervision. In *ICCV*, 2017. 3
- Dmitry Ulyanov, Andrea Vedaldi, and Victor S. Lempitsky. Instance normalization: The missing ingredient for fast stylization. *arXiv:1607.08022*, 2016. 7
- Ting-Chun Wang, Ming-Yu Liu, Jun-Yan Zhu, Andrew Tao, Jan Kautz, and Bryan Catanzaro. High-resolution image synthesis and semantic manipulation with conditional gans. In *CVPR*, 2018. 2
- Weiyue Wang, Qiangui Huang, Suyu You, Chao Yang, and Ulrich Neumann. Shape inpainting using 3d generative adversarial network and recurrent convolutional networks. In *ICCV*, 2017. 2
- Jiajun Wu, Chengkai Zhang, Tianfan Xue, William T Freeman, and Joshua B Tenenbaum. Learning a Probabilistic Latent Space of Object Shapes via 3D Generative-Adversarial Modeling. In *NIPS*, 2016. 2, 4, 6, 8
- Jiajun Wu, Yifan Wang, Tianfan Xue, Xingyuan Sun, William T Freeman, and Joshua B Tenenbaum. MarrNet: 3D Shape Reconstruction via 2.5D Sketches. In *NIPS*, 2017. 3, 4
- Jiajun Wu, Chengkai Zhang, Xiuming Zhang, Zhoutong Zhang, William T Freeman, and Joshua B Tenenbaum. Learning 3d shape priors for shape completion and reconstruction. In *ECCV*, 2018. 2, 3
- Jimei Yang, Scott E Reed, Ming-Hsuan Yang, and Honglak Lee. Weakly-supervised disentangling with recurrent transformations for 3d view synthesis. In *NIPS*, 2015. 3
- Zili Yi, Hao (Richard) Zhang, Ping Tan, and Minglun Gong. Dualgan: Unsupervised dual learning for image-to-image translation. In *ICCV*, 2017. 5
- Alan Yuille and Daniel Kersten. Vision as bayesian inference: analysis by synthesis? *TICS*, 10(7):301–308, 2006. 3
- Han Zhang, Tao Xu, Hongsheng Li, Shaoting Zhang, Xiaogang Wang, Xiaolei Huang, and Dimitris Metaxas. Stackgan: Text to photo-realistic image synthesis with stacked generative adversarial networks. In *ICCV*, 2017. 2
- Xiuming Zhang, Zhoutong Zhang, Chengkai Zhang, Joshua B Tenenbaum, William T Freeman, and Jiajun Wu. Learning to reconstruct shapes from unseen categories. In *NIPS*, 2018. 2
- Jun-Yan Zhu, Philipp Krähenbühl, Eli Shechtman, and Alexei A Efros. Generative visual manipulation on the natural image manifold. In *ECCV*, 2016. 2
- Jun-Yan Zhu, Taesung Park, Phillip Isola, and Alexei A Efros. Unpaired image-to-image translation using cycle-consistent adversarial networks. In *ICCV*, 2017a. 2, 4, 5, 6
- Jun-Yan Zhu, Richard Zhang, Deepak Pathak, Trevor Darrell, Alexei A Efros, Oliver Wang, and Eli Shechtman. Toward multimodal image-to-image translation. In *NIPS*, 2017b. 5