



A day without new knowledge is a lost day.

Database Technologies – MySQL

In this module we are going to learn SQL, PL/SQL and NoSQL(MongoDB)

- `sudo apt install build-essential`

MySQL is case-insensitive

Case Sensitivity in Table Names: By default, MySQL's case sensitivity for table names depends on the operating system. On Linux, table names are case-sensitive, whereas on Windows, they are case-insensitive.

Case Sensitivity in Column Names: Column names in MySQL are case-insensitive by default.

Case Sensitivity in Data: By default, string comparisons are case-insensitive because MySQL uses the utf8_general_ci collation (Unicode Transformation Format where "ci" stands for case-insensitive).

If A and a, B and b, are treated in the same way then it is case-insensitive.

MySQL is case-insensitive

Introduction



- If anyone who wants to develop a good application then he should have the knowledge three major components.

They are

- Presentation Layer [UI]
- Application Layer [Server Application and Client Application]
- Data Layer [Data Access Object (DAO) / Data Access Layer (DAL)] { Flat Files | RDBMS | NoSQL }



Single Tier Architecture

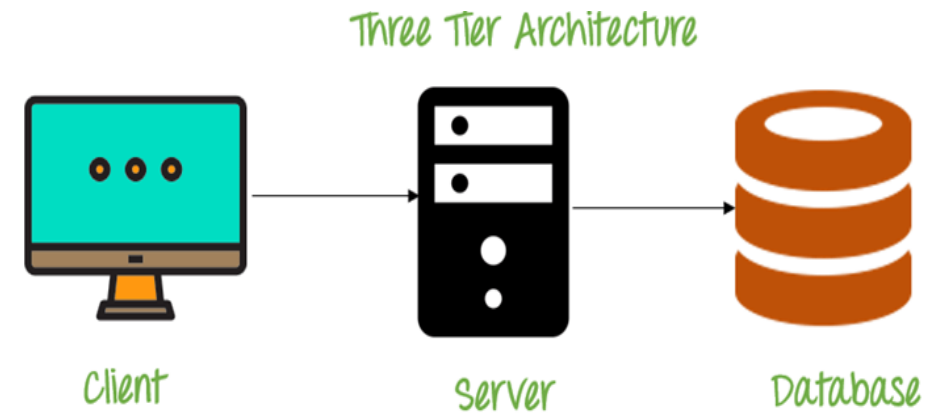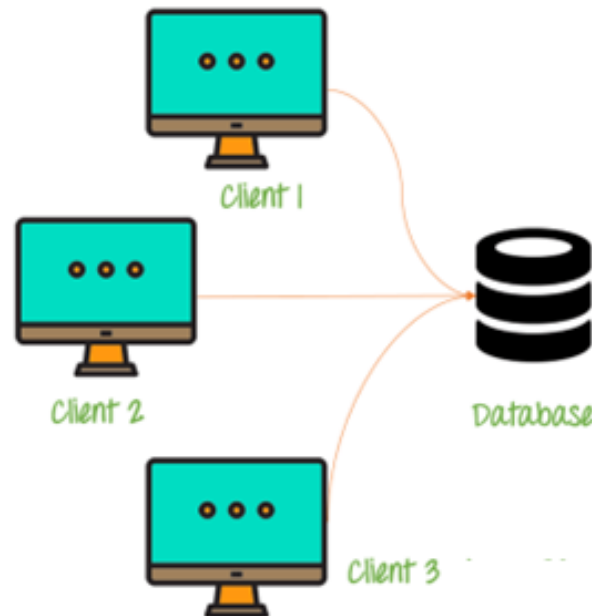

Three Tier Architecture

Types of Database Architecture

Single-Tier Architecture

1. The database and application reside on the same system.
2. No network communication is required since everything runs locally.
3. Used for small-scale applications.

Two-Tier Architecture (Client-Server)

1. The application (client) communicates with the database server.
2. The client sends queries, and the server processes them and returns results.
3. Used in medium-scale applications.

Three-Tier Architecture

1. Introduces a middle layer (Application Server) between the client and database.
2. The middle layer handles business logic, security, and processing before accessing the database.
3. Used in large-scale web applications.

Introduction

Why do we need databases (Use Case)?

We **need databases** because they organize data in a manner which allows us to **store**, **query**, **sort**, and **manipulate** data in various ways. **Databases allow us to do all these things.**

Many companies collect data from different resources (like Weather data, Geographical data, Finance data, Scientific data, Transport data, Cultural data (the ideas, customs, and social behaviour of a particular people or society), etc.)

A foreign key constraint is also known as a **referential constraint or **referential integrity constraint**.** A foreign key is a column or group of columns in a relational database table that establishes and enforces a link between data in two tables. It references a primary key in another table and can cascade changes or delete related data if the primary key is updated or deleted.

What is Relation and Relationship?

Reference / Referential key

Remember:

- A **reference** is a relationship between two tables where the values in one table refer to the values in another table. This is usually enforced using a foreign key constraint to maintain referential integrity.
- A **referential key** is a column or set of columns in a table that refers to the primary key of another table. It establishes a relationship between two tables, where one table is called the parent table, and the other is called the child table.

relation and relationship?

Relation (*in Relational Algebra "R" stands for relation*): In Database, a relation represents a **table** or an **entity** than contain attributes. In Relational Algebra, a relation is a table with rows and columns, just like in a Relational Database Management System (RDBMS). It represents a set of tuples (records) that share the same structure. Relation is a Logical Instantiation/Model of a TABLE.


Relationship: In database, relationship is that how the two entities are **connected** to each other, i.e. what kind of **relationship type** they hold between them.

Primary/Foreign key is used to specify this relationship.

Remember:

Foreign Key is also known as

- referential constraint
- referential integrity constraint. (Ensures that a foreign key value in one table must always reference an existing primary key value in another table.)

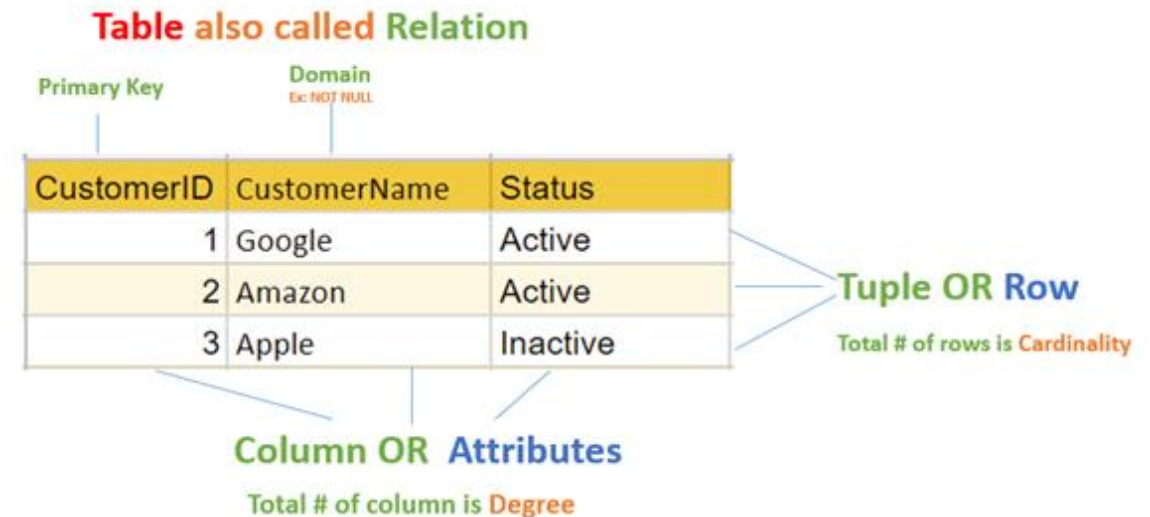

Note:

- **Table** - The physical instantiation of a relation in the database schema.
- **Relation** - A logical construct that organizes data into rows and columns.

File Systems is the traditional way to keep your data organized.

File System VS DBMS


```
struct Employee {  
    int emp_no;  
    char emp_name[50];  
    int salary;  
} emp[1000];
```

```
struct Employee {  
    int emp_no;  
    char emp_name[50];  
    int salary;  
};  
struct Employee emp[1000];
```

file-oriented system

File Anomalies

c:\employee.txt

```
1 suraj 4000  
2 ramesh 6000  
3 rajan 4500  
.  
.  
.  
500 sam 3500  
.  
.  
.  
1000 amit 2300
```

c:\employee.txt

```
1 suraj 4000  
2 ramesh 6000  
3 rajan 4500  
.  
.  
.  
500 sam 3500  
.  
.  
.  
1000 amit 2300  
.  
.  
2000 jerry 4500  
.  
.
```

c:\employee.txt

```
1 suraj 4000  
2 ramesh 6000  
3 rajan 4500  
.  
.  
500 sam 3500  
.  
3 rajan 4500  
.  
500 sam 3500  
.  
.  
1000 amit 2300
```

c:\employee.txt

```
1 suraj 4000  
2 ramesh 6000  
3 rajan 4500  
.  
.  
sam 500 3500  
.  
ram 550 5000  
.  
1000 amit 2300
```

c:\employee.txt

```
1 suraj 4000  
2 ramesh 6000  
3 rajan 4500  
.  
500 sam 3500  
.  
600 neel 4500
```

- Create/Open an existing file
- Reading from file
- Writing to a file
- Closing a file

file-oriented system

File Anomalies

c:\employee.txt

```
1 suraj 4000
2 ramesh 6000
3 rajan 4500
.
.
.
500 sam 3500
.
.
.
1000 amit 2300
```

file attributes

- File Name
- Type
- Location

file permissions

- File permissions
- Share permissions

search empl ID=1

```
1 suraj 4000
2 ramesh 6000
3 rajan 4500
.
.
.
500 sam 3500
.
.
.
1000 amit 2300
```

search emp_name

```
1 suraj 4000
2 ramesh 6000
3 rajan 4500
.
.
.
500 sam 3500
.
.
.
1000 amit 2300
```

advantages & disadvantage of
file-oriented system

The biggest advantage of file-based storage is as follows.

advantages of file-oriented system

- **Backup:** It is possible to take faster and automatic back-up of database stored in files of computer-based systems.
- **Data retrieval:** It is possible to retrieve data stored in files in easy and efficient way.
- **Flexibility:** File systems provide flexibility in storing various types of data, including text documents, images, audio, video, and more
- **Cost-Effectiveness:** File systems often do not incur licensing costs, making them cost-effective for basic data storage needs.
- **Editing:** It is easy to edit any information stored in computers in form of files.
- **Remote access:** It is possible to access data from remote location.
- **Sharing:** The files stored in systems can be shared among multiple users at a same time.

The biggest disadvantage of file-based storage is as follows.

disadvantage of file-oriented system

- **Data redundancy:** It is possible that the same information may be duplicated in different files. This leads to data redundancy results in memory wastage.
(Suppose a customer having both kind of accounts - **saving** and **current** account. In such a situation a customer detail are stored in both the file, saving.txt- file and current.txt- file , which leads to Data Redundancy.)
- **Data inconsistency:** Because of data redundancy, it is possible that data may not be in consistent state.
(Suppose customer changed his/her address. There might be a possibility that address is changed in only one file (saving.txt) and other (current.txt) remain unchanged.)
- **Limited data sharing:** Data are scattered in various files and also different files may have different formats (for example: .txt, .csv, .tsv and .xml) and these files may be stored in different folders so, due to this it is difficult to share data among different applications also if the saving account department wants to share data with loan department, they need to manually copy files, leading to delays because File Systems do not support multi-user environments.
- **Data Isolation:** Because data are scattered in various files, and files may be in different formats (for example: .txt, .csv, .tsv and .xml), writing new application programs to retrieve the appropriate data is difficult.
- (Suppose a loan data is in one file and account holder data in another, there is no easy way to analyze account holder data with his loan status.)
- **Data security:** Data should be secured from unauthorized access, for example a account holder in a bank should not be able to see the account details of another account holder, such kind of security constraints are difficult to apply in file processing systems.

The biggest disadvantage of file-based storage is as follows.

disadvantage of file-oriented system

- **Data Integrity:** Data integrity refers to the accuracy and consistency of data. In a file-oriented system, enforcing data integrity is difficult because there are no built-in mechanisms to ensure that data is valid or consistent across multiple files.
(the balance field value must be greater than 5000.)
- **Concurrency Issues:** When multiple users or applications try to access and modify a file at the same time, concurrency problems can arise.
(if two users attempt to update the same file simultaneously, it can lead to data corruption or loss of data.)
- **Lack of Flexibility:** Modifying the structure of files, such as adding new fields or changing data formats, can be difficult and time-consuming. Changes might require manual updates to each file or even rewriting entire applications that interact with the files.
- **Poor Scalability:** As the amount of data grows, file-based systems become less efficient and more difficult to manage. Searching through large files can be slow, and as more files are added, the complexity of managing the system increases.

Relation Schema: A relation schema represents name of the relation with its attributes, every attribute would have an associated domain.

e.g.

- **Student**(rollNo:INT, name:VARCHAR(20), address:VARCHAR(50), phone:VARCHAR(12), age:INT, PRIMARY KEY(rollNo)) is relation schema for STUDENT
- **Customers**(CustomerID:INT, Name:VARCHAR(50), Email:VARCHAR(100), City:VARCHAR(50), PRIMARY KEY(CustomerID)) is relation schema for CUSTOMERS

DBMS

- **database:** Is the collection of **related data** which is **organized**, database can store and retrieve large amount of data easily, which is stored in one or more data files by one or more users, it is called as **structured data**.
- **management system:** it is a software, designed to **define, manipulate, retrieve** and **manage** data in a database.



ORACLE®



SYBASE®




relational database management system?

A RDBMS is a database management system (DBMS) that is based on the **relational model** introduced by Edgar Frank Codd at IBM in 1970.

RDBMS supports

- *client/server Technology*
- *Highly Secured*
- *Relationship (PK/FK)*

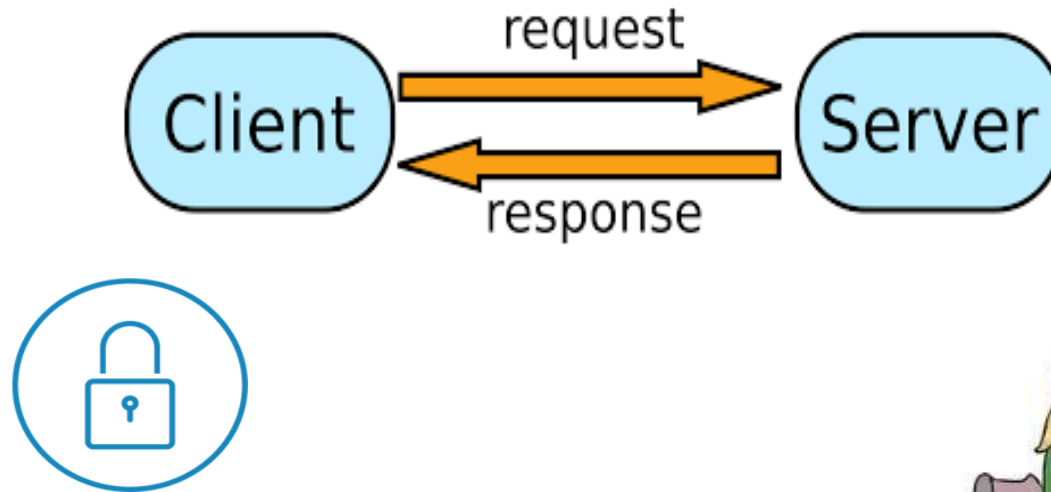

- **A server** is a computer program or a device that provides service to another computer program, also known as the client.
- In the **client/server programming** model, a server program awaits and fulfills requests from client programs, which might be running in the same, or other computers.

object relational database management system?

An object database is a database management system in which information is represented in the form of objects.

PostgreSQL is the most popular pure ORDBMS. Some popular databases including Microsoft SQL Server, Oracle, and IBM DB2 also support objects and can be considered as ORDBMS.

Advantage of ORDBMS

- Function/Procedure overloading.
- Extending server functionality with external functions written in C or Java.
- User defined data types.
- Inheritance of tables under other tables.

- `CREATE` or `REPLACE TYPE` **city** `AS` `VARRAY`(3) `OF` `VARCHAR`(10);
- `CREATE TABLE` x (id `INT`, ename `VARCHAR`(10), c **city**);
- `INSERT INTO` x values(1, 'saleel', **city**('baroda', 'surat', 'bharuch'));
- `SELECT` n.id, n.ename, nn.`column_value` `FROM` x n, `TABLE`(n.c) nn;

relational model concepts and properties of relational table

relational model concepts

Relational model organizes data into one or more **tables** (or "relations") of **columns** and **rows**. Rows are also called **records** or **tuples**. Columns are also called **attributes**.

- **Relation (Table)** – In relational model, relations are saved in the form of Tables. A table has rows and columns.
- **Attribute (Column)** – Attributes are the properties that define a relation. **e.g.** (roll_no, name, address, age, . . .)
- **Tuple (Row/Record)** – A single row of a table, which contains a single record for that relation is called a tuple.
- **Relation schema** – A relation schema describes the Relation Name (Table Name), Attributes (Column Names), Domain of Attributes (Data Types & Allowed values), Constraints (Primary Key, Foreign Key, etc.).
e.g. **Customers**(CustomerID:INT, Name:VARCHAR(50), Email:VARCHAR(100), City:VARCHAR(50), PRIMARY KEY(CustomerID)) is relation schema for CUSTOMERS
- **Attribute domain** – An attribute domain in a relational database refers to the set of allowed values for an attribute (column). It defines the data type and constraints that restrict the values an attribute can take.

Remember:

- In database management systems, **NULL (absence of a value)** is used to **represent MISSING** or **UNKNOWN** data in a table column.

properties of relational table

ID	job	firstName	DoB	salary
1	manager	Saleel Bagde	yyyy-mm-dd	••••••
3	salesman	Sharmin	yyyy-mm-dd	••••••
4	accountant	Vrushali	yyyy-mm-dd	••••••
2	salesman	Ruhan	yyyy-mm-dd	••••••
5	9500	manager	yyyy-mm-dd	••••••
5	Salesman	Rahul Patil	yyyy-mm-dd	••••••

Relational tables have six properties:

- Values are atomic.
- Column values are of the same kind. (Attribute Domain: Every attribute has some pre-defined datatypes, format, constraints of a column, and defines the range of values that are valid for that column known as attribute domain.)
- Each row is unique.
- The sequence of columns is insignificant – (unimportant).
- The sequence of rows is insignificant – (unimportant).
- Each attribute/column must have a unique name.

What is data?



what is data?

Data is any facts that can be stored and that can be processed by a computer.

Data can be in the form of **Text** or **Multimedia**

e.g.

- number, characters, or symbol
- images, audio, video, or signal

Remember:

- A **Binary Large Object (BLOB)** is a MySQL data type that can store binary data such as multimedia, and PDF files.
- A **Character Large Object(CLOB)** is aa MySQL data type which is used to store large amount of textual data. Using this datatype, you can store data up to 2,147,483,647 characters.
- A number is a mathematical value used to count, measure, and label.



What is Entity Relationship
Diagram?

Entity Relationship Diagram (ER Diagram)

Use E-R model to get a high-level graphical view to describe the "**ENTITIES**" and their "**RELATIONSHIP**"

The basic constructs/components of ER Model are **Entity**, **Attributes** and **Relationships**.

An entity can be a **real-world object**.

What is Entity?

An entity in DBMS is a real-world object that has certain properties called attributes that define the nature of the entity.

In relation to a database , an entity is a

- Person(student, teacher, employee, client, department, ...)
- Place(classroom, building, ...) --a particular position or area
- Thing(computer, lab equipment, ...) --an object that is not named (represents a tangible object)
- Concept(course, batch, student's attendance, ...) -- an idea,

about which data can be stored. All these entities have some **attributes** or **properties** that give them their **identity**.


Every entity has its own characteristics.

In database management systems, **null** (*absence of a value*) is used to represent **missing** or **unknown** data in a table column.

What is an Attribute?

Attributes are the properties that define a relation.

e.g. **Student**(*rollNo*:INT, *name*:VARCHAR(20), *address*:VARCHAR(50), *age*:INT)

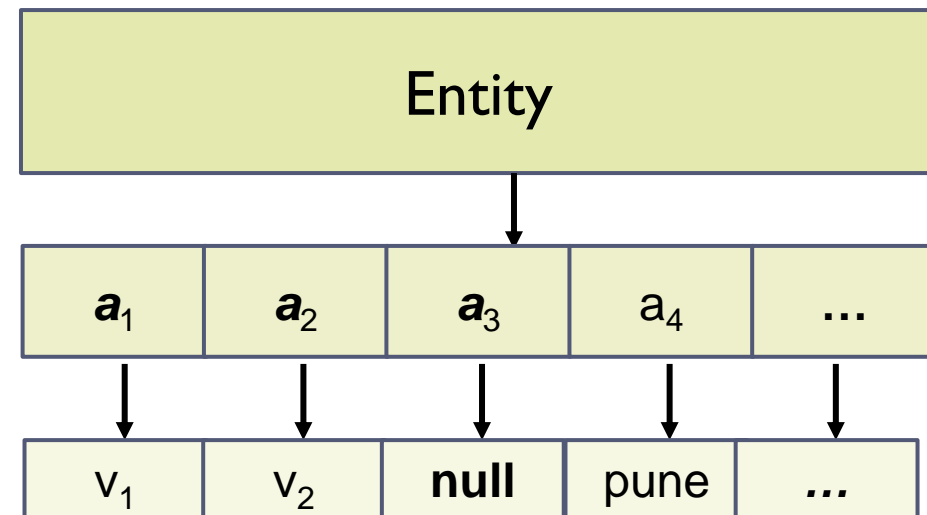

In Entity Relationship(ER) Model attributes can be classified into the following types.

- Simple/Atomic and Composite Attribute
- Single Valued and Multi Valued attribute
- Stored and Derived Attributes
- Complex Attribute

Remember:

In SQL, the same name can be used for two (or more) attributes as long as the attributes are in different relations.

attributes

• Simple / Atomic Attribute (Can't be divided further)	--VS--	Composite Attribute (Can be divided further)
• Single Value Attribute (Only One value)	--VS--	Multi Valued Attribute (Multiple values)
• Stored Attribute (Only One value)	--VS--	Derived Attribute (Virtual)
• Complex Attribute (Composite & Multivalued)		

Employee ID: An employee ID can be a composite attribute, which is composed of sub-attributes such as department code, job code, and employee number.

- **Atomic Attribute:** An attribute that cannot be divided into smaller independent attribute is known as atomic attribute.
e.g. ID's, PRN, age, gender, zip, marital status cannot further divide.
- **Single Value Attribute:** An attribute that holds exactly one value for a given record at any point in time is known as single valued attribute. Single-valued attributes are typically used to provide a unique identifier for a record.
e.g. manufactured part can have only one serial number, voter card ID, blood group, branchID can have only one value.
- **Stored Attribute:** The stored attribute are such attributes which are already stored in the database and from which the value of another attribute is derived.
e.g. (HRA, DA...) can be derive from salary, age can be derived from DoB, total marks or average marks of a student can be derived from marks.

Composite **VS** Multi Valued Attribute

Composite Attribute

Person Entity

- *Name* attribute: (`firstName` + `middleName` + `lastName`)
- *PhoneNumber* attribute: (`countryCode` + `cityCode` + `phoneNumber`)
- *Date* attribute: (`Day` + `Month` + `Year`)
- *Dimensions* attribute: (`Length` + `Width` + `Height`)

{Address}



{street, city, state, postal-code}



{street-number, street-name, apartment-number}

Multi Valued Attribute

Person Entity

- *Hobbies* attribute: [reading, hiking, hockey, skiing, photography, ...]
- *SpokenLanguages* attribute: [Hindi, Marathi, Gujarati, English, ...]
- *Degrees* attribute: [10th, 12th, BE, ME, PhD, ...]
- *emailID* attribute: [saleel@gmail.com, salil@yahoo.com, ...]
- *Skills* attribute: [MySQL, Oracle, Redis, MongoDB, Java, ...]

What is an Prime, Non-Prime
Attribute?

Prime attribute (*Entity integrity*):- An attribute, which is a **part of the prime-key** (candidate key), is known as a prime attribute.

Consider a relation Student(StudentID, Name, Email, Phone).

- *Candidate Keys:* {StudentID}, {Email}, {Phone}
- *Prime Attributes:* StudentID, Email, Phone (since they are part of a Candidate Key).




Non-prime attribute:- An attribute, which is **not a part of the prime-key** (candidate key), is said to be a non-prime attribute.

In the Student(StudentID, Name, Email, Phone) relation:

- *Candidate Keys:* {StudentID}, {Email}, {Phone}
- *Prime Attributes:* StudentID, Email, Phone
- *Non-Prime Attribute:* Name (because it is not part of any Candidate Key).

Entity Relationship Diagram Symbols

entity relationship diagram symbols

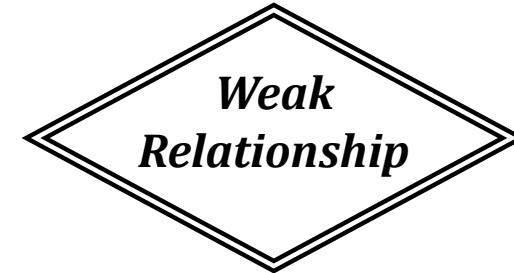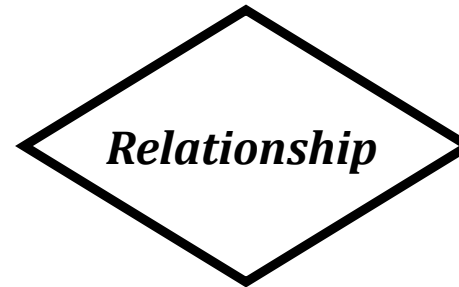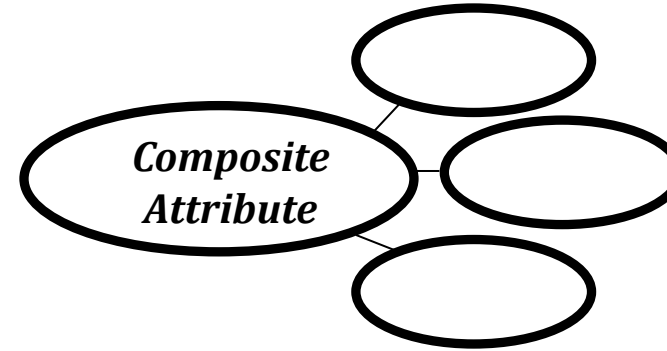

strong and weak entity

An entity may participate in a relation either totally or partially.

Strong Entity: A strong entity is not dependent on any other entity in the schema. A strong entity will always have a primary key. Strong entities are represented by a single rectangle.

Weak Entity: A weak entity is dependent on a strong entity to ensure its existence. Unlike a strong entity, a weak entity does not have any primary key. A weak entity is represented by a double rectangle. The relation between one strong and one weak entity is represented by a double diamond. This relationship is also known as identifying relationship.

Example 1 – A loan entity can not be created for a customer if the customer doesn't exist

Example 2 – A payment entity can not be created for a loan if the loan doesn't exist


Example 3 – A customer address entity can not be created for the customer if the customer doesn't exist

Example 4 – A prescription entity can not be created for a patient if the patient doesn't exist

strong and weak entity

Strong Entity	Weak Entity
— Order (OrderID)	— OrderItem (ItemID, OrderID)
— University (UnID)	— Scholarship (ScholarshipID, UnID)
— Patient (PatientID)	— MedicalRecord (RecordID, PatientID)
— Account (AccountID)	— Transaction (TransactionID, AccountID)
— Student (StudentID)	— Grade (GradeID, StudentID)
— Vehicle (VehicleID)	— InsurancePolicy (PolicyID, VehicleID)
— Hotel (HotelID)	— RoomBooking (BookingID, HotelID)
— Product (ProductID)	— WarrantyClaim (ClaimID, ProductID)
— Student (StudentID)	— AttendanceRecord (RecordID, StudentID)

entity relationship diagram

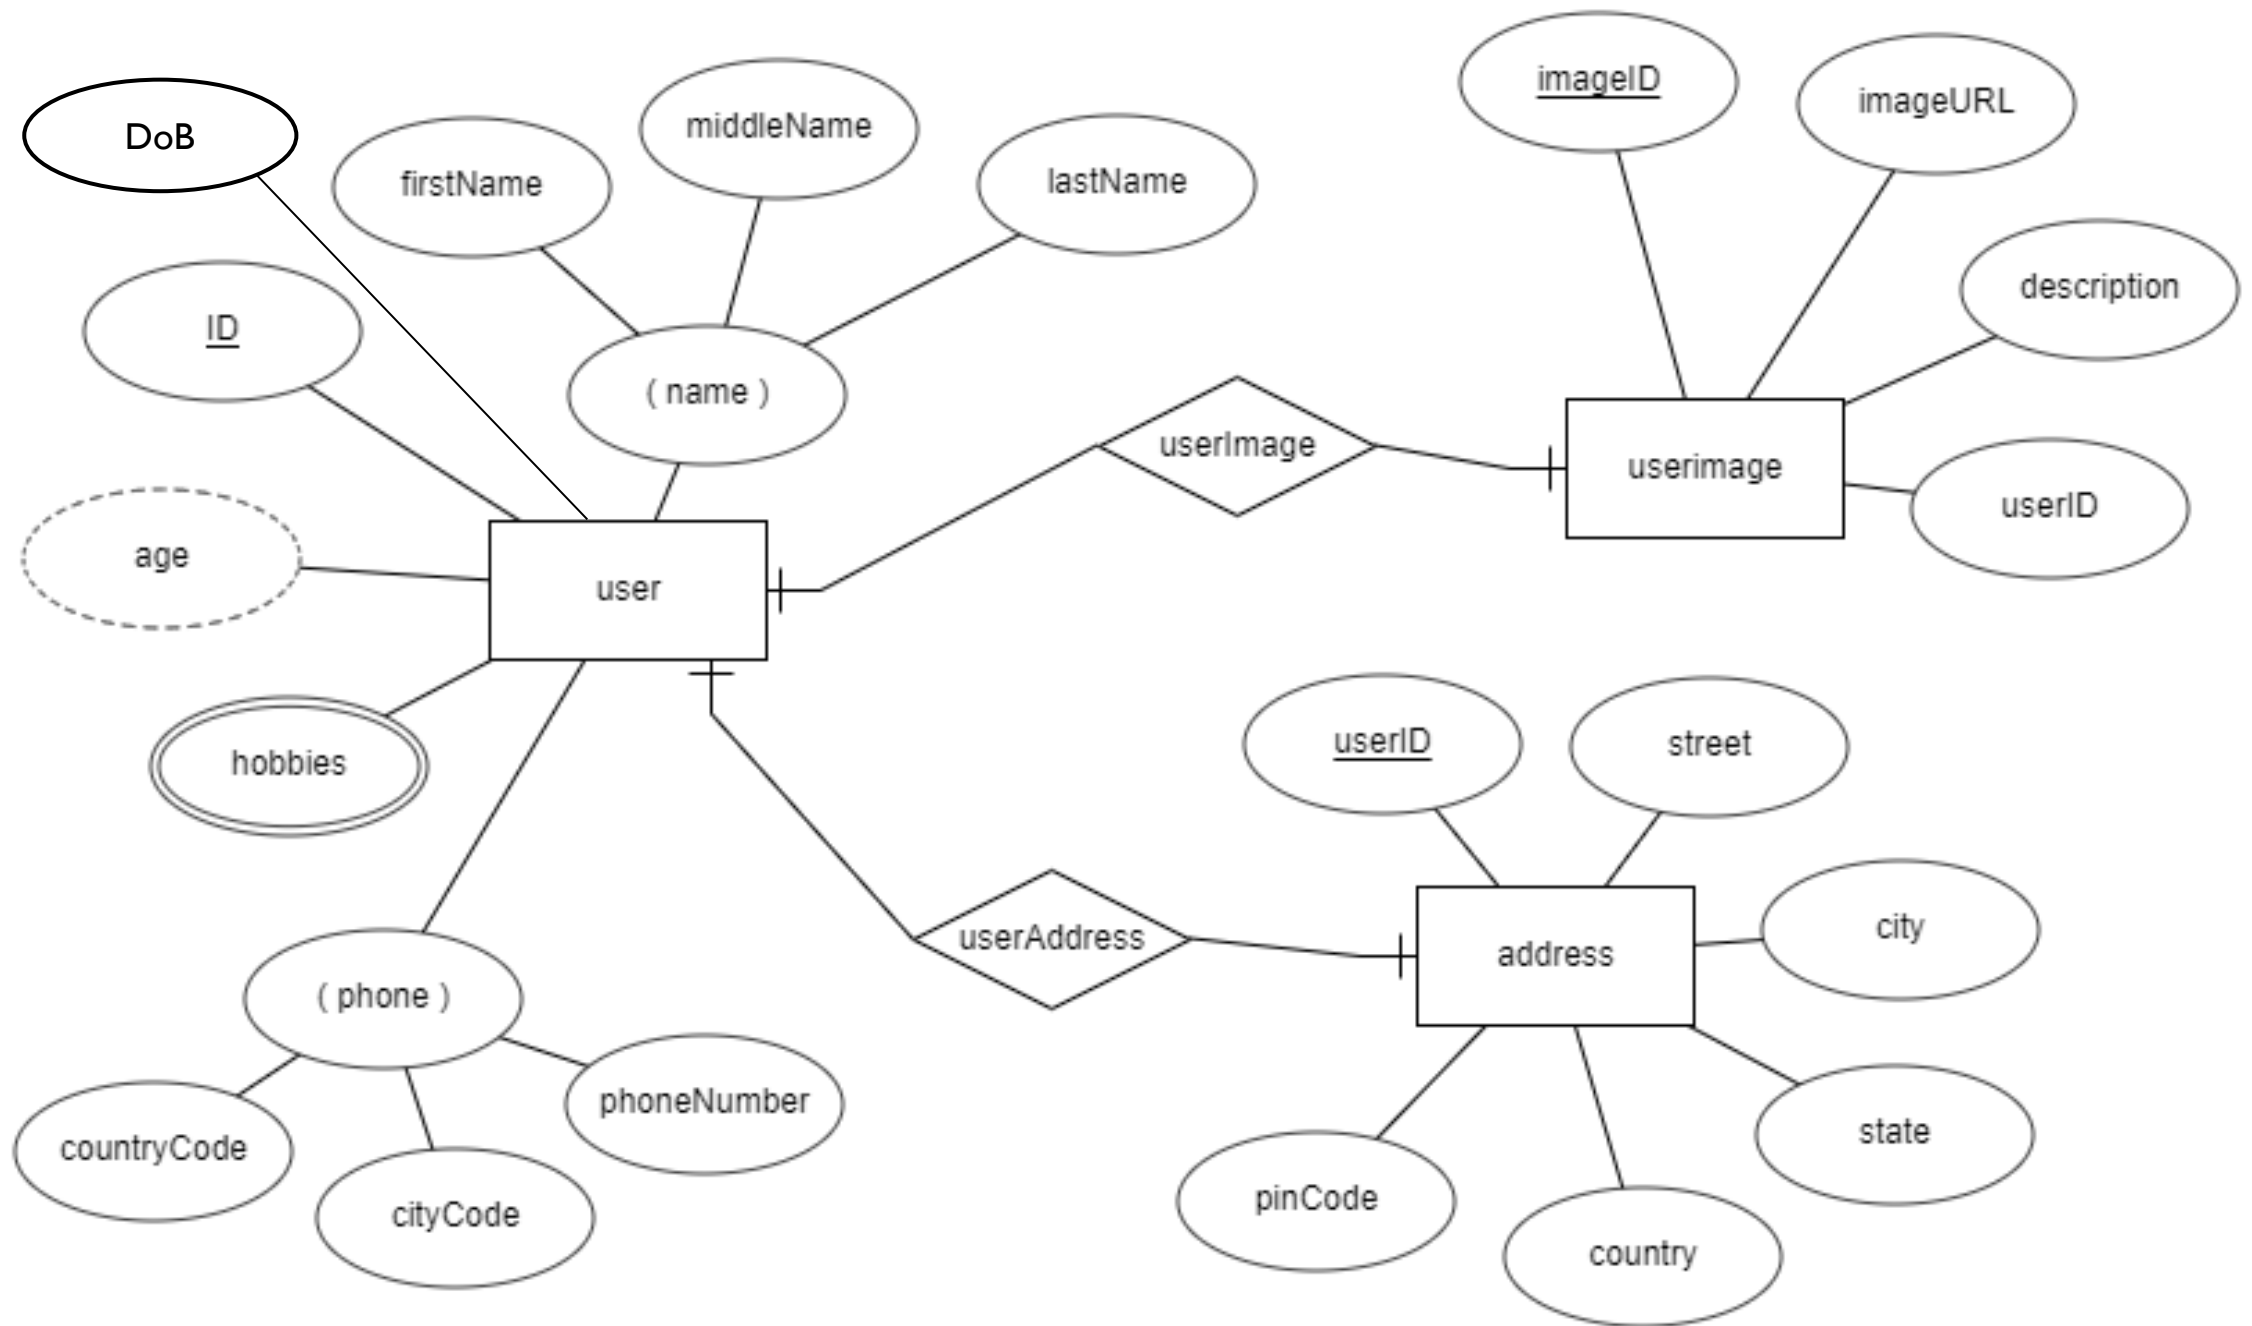

What is a degree, cardinality and union in database?

What is a degree, cardinality and union in database?

- **Degree $d(R)$ / Arity:** Total number of **attributes/columns** present in a relation/table is called **degree of the relation** and is denoted by **$d(R)$** .
- **Cardinality $|R|$:** Total number of **tuples/rows** present in a relation/table, is called **cardinality of a relation** and is denoted by **$|R|$** .

Cardinality is the numerical relationship between rows of one table and rows in another. Common cardinalities include *one-to-one*, *one-to-many*, and *many-to-many*.

- **Union Compatibility:** Two relations R and S are set to be Union Compatible to each other if and only if:
 1. They have the **same degree $d(R)$** .
 2. Domains of the respective attributes should also be same.

What is domain constraint and types of data integrity constraints?

Data integrity refers to the correctness and completeness of data.

A domain constraint and types of data integrity constraints

- ❖ **Domain Constraint** = data type + Constraints (not null/unique/primary key/foreign key/check/default)
e.g. custID INT, constraint pk_custid PRIMARY KEY(custID)

Three types of integrity constraints: **entity integrity**, **referential integrity** and **domain integrity**:

- **Entity integrity:** Entity Integrity Constraint is used to ensure the uniqueness of each record the table. There are primarily two types of integrity constraints that help us in ensuring the uniqueness of each row, namely, UNIQUE KEY constraint and PRIMARY KEY constraint.
- **Referential integrity:** Referential Integrity Constraint ensures that there always exists a valid relationship between two tables. This makes sure that if a foreign key exists in a table t_2 relationship then it should always reference a corresponding value in the second table t_1 :- $t_1[\text{PK}] = t_2[\text{FK}]$ or it should be null.
- **Domain integrity:** A domain is a set of values of the same type.

Data integrity refers to the correctness and completeness of data.

A domain constraint and types of data integrity constraints

❖ **Domain Constraint** = data type + Constraints (not null/unique/primary key/foreign key/check/default)
e.g. custID INT, constraint pk_custid PRIMARY KEY(custID)

Domain integrity is enforced using the following constraints:

Constraint	Description	Example
Data Type	Ensures that values match a specific type (e.g., INT, VARCHAR, DATE).	age INT NOT NULL (Only integers allowed)
NOT NULL	Prevents null (empty) values in a column.	name VARCHAR(50) NOT NULL
CHECK	Restricts values based on a condition.	salary DECIMAL(10,2) CHECK (salary > 0)
DEFAULT	Sets a default value if none is provided.	status VARCHAR(10) DEFAULT 'Active'
ENUM	Limits a column to predefined values.	gender ENUM('Male', 'Female', 'Other')
SET	Allows multiple predefined values.	roles SET('Admin', 'Editor', 'User')

types of Keys?

Keys are used to establish relationships between tables and also to uniquely identify any record in the table.

types of Keys?

$r = \text{Employee}(\text{EmployeeID}, \text{FullName}, \text{job}, \text{salary}, \text{PAN}, \text{DateOfBirth}, \text{emailID}, \text{deptno})$

- **Candidate Key:** are individual columns in a table that qualifies for uniqueness of all the rows. Here in Employee table EmployeeID, PAN or emailID are Candidate keys.
- **Primary Key:** is the columns you choose to maintain uniqueness in a table. Here in Employee table you can choose either EmployeeID, PAN or emailID columns, EmployeeID is preferable choice.
- **Alternate Key:** Candidate column other the primary key column, like if EmployeeID is primary key then , PAN or emailID columns would be the Alternate key.
- **Super Key:** If you add any other column to a primary key then it become a super key, like EmployeeID + FullName or EmployeeID + deptno is a Super Key.
- **Composite Key:** If a table do not have any single column that qualifies for a Candidate key, then you have to select 2 or more columns to make a row unique. Like if there is no EmployeeID, PAN or emailID columns, then you can make FullName + DateOfBirth as Composite key. But still there can be a narrow chance of duplicate row. Ensures data uniqueness in many-to-many relationships. *e.g.* in order_details table we can have multiple products OrderID + ProductID

Common relationships


relationships

Common relationship


1. one-to-one (1:1)




2. one-to-many (1:M)

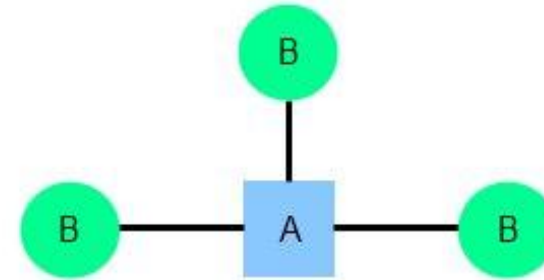

3. many-to-many (M:N)

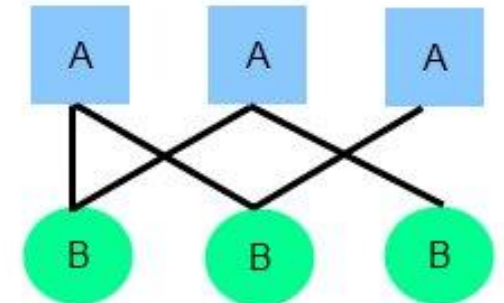

4. Self-Referencing (Recursive)




one-to-one relationship

one-to-one relationship

A *one-to-one* relationship between two tables means that a row in one table can only relate to zero/one row in the table on the other side of their relationship. This is the least common database relationship.


A *one-to-one* relationship is a type of cardinality that refers to the relationship between two entities R and S in which one element of entity R may only be linked to zero/one element of entity S , and vice versa.

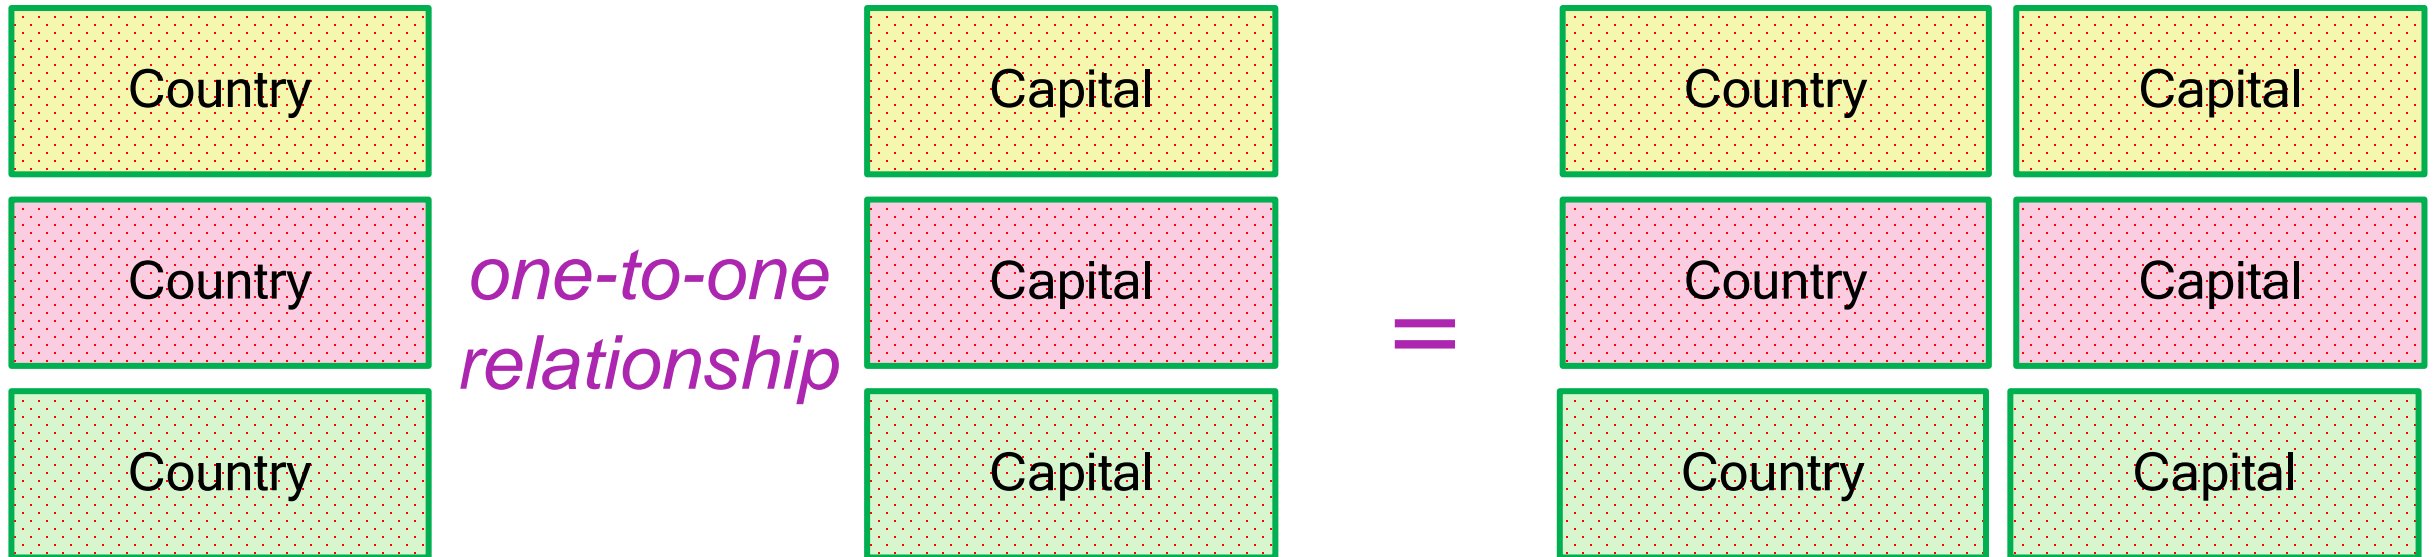

one-to-one relationship

A *one-to-one* relationship between two tables means that a row in one table can only relate to zero/one row in the table on the other side of their relationship. This is the least common database relationship.

A *one-to-one* relationship is a type of cardinality that refers to the relationship between two entities R and S in which one element of entity R may only be linked to zero/one element of entity S , and vice versa.

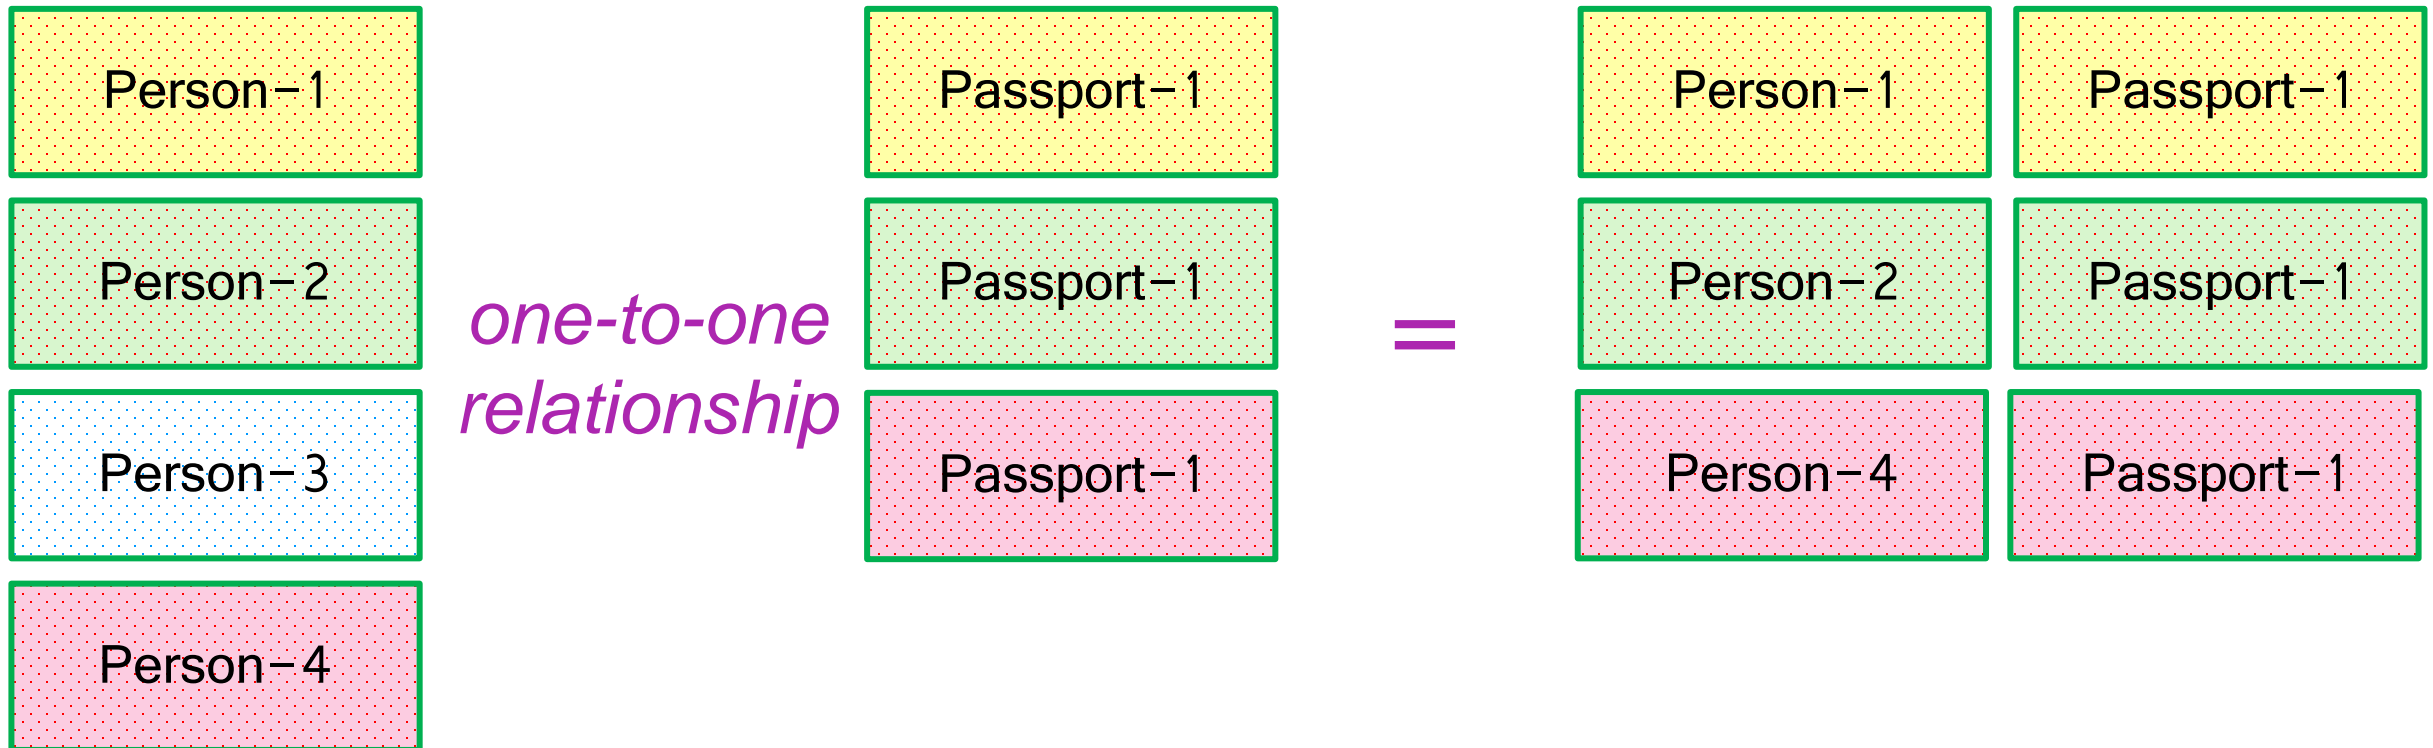


one-to-many relationship

one-to-many relationship

A *one-to-many* relationship between two tables means that a row in one table can have zero or more row in the table on the other side of their relationship.


a *one-to-many* relationship is a type of cardinality that refers to the relationship between two entities R and S in which an element of R may be linked to many elements of S , but a member of S is linked to only one element of R .

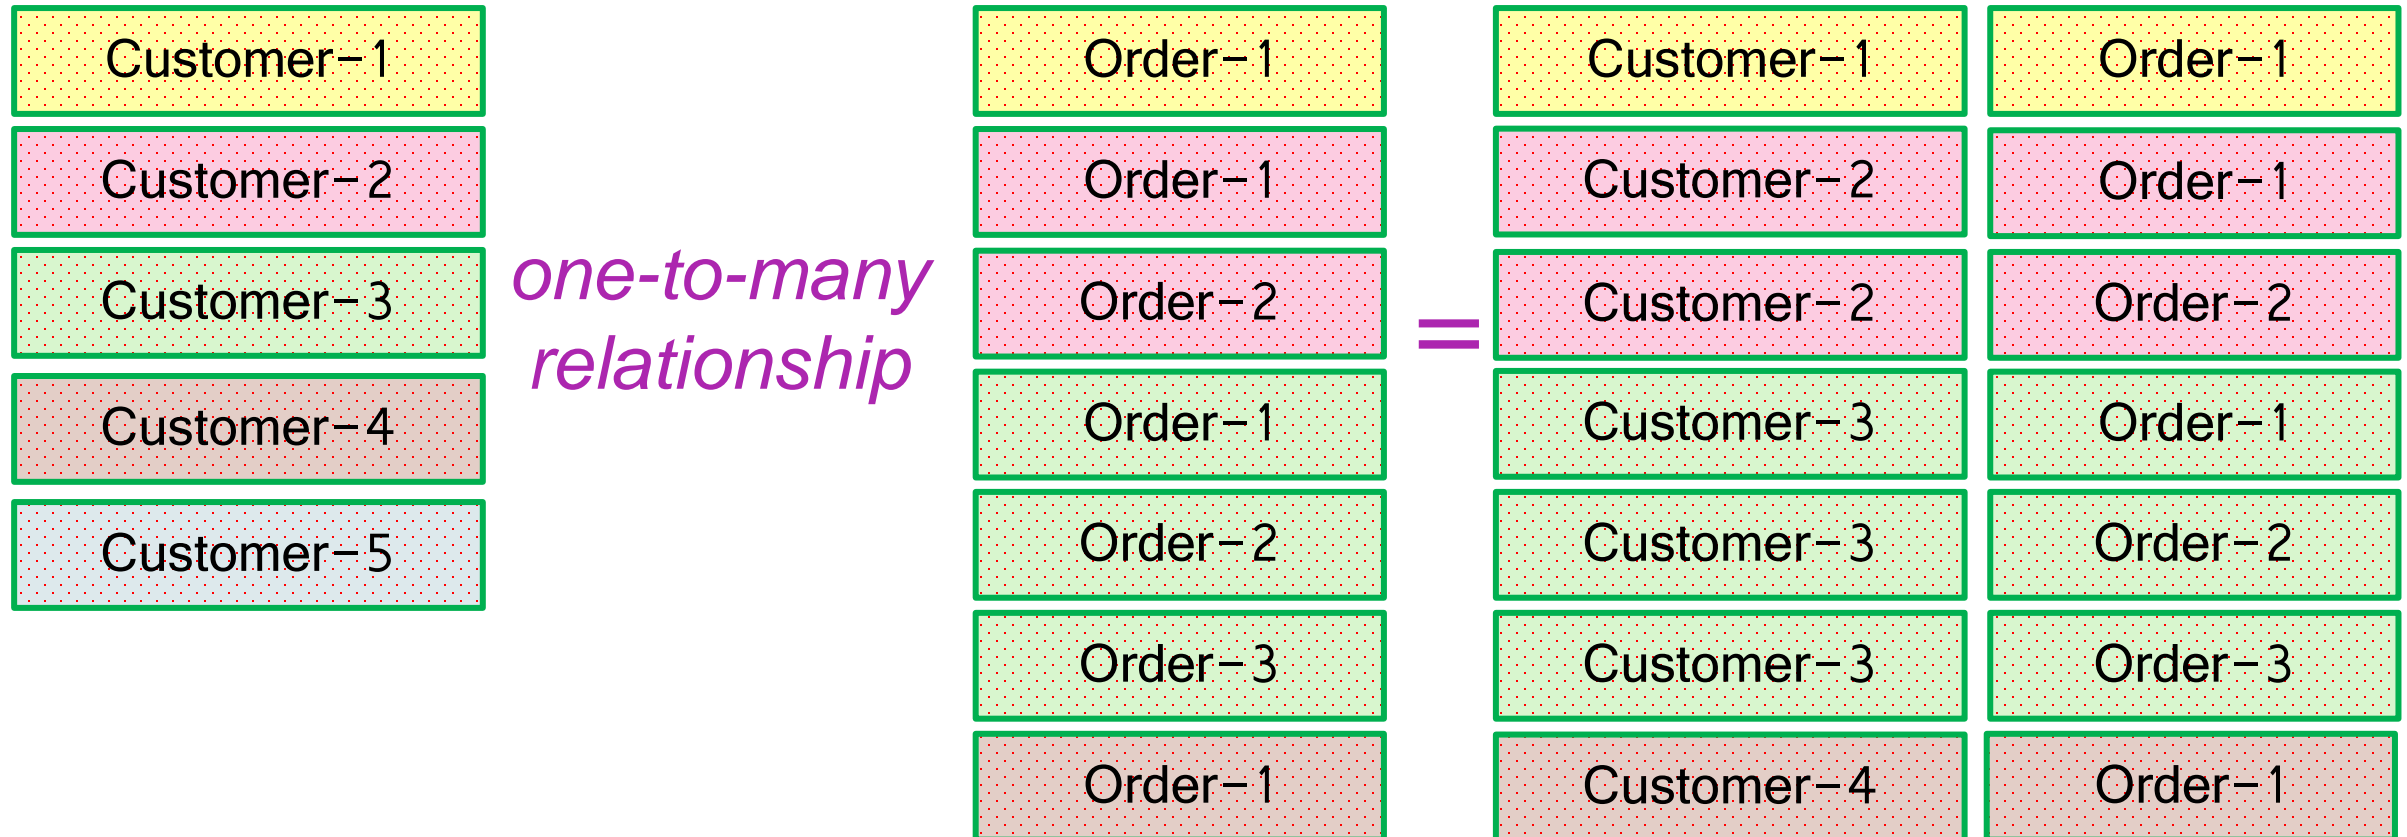

one-to-many relationship


A *one-to-many* relationship between two tables means that a row in one table can have one or more row in the table on the other side of their relationship.

a *one-to-many* relationship is a type of cardinality that refers to the relationship between two entities R and S in which an element of R may be linked to many elements of S , but a member of S is linked to only one element of R .

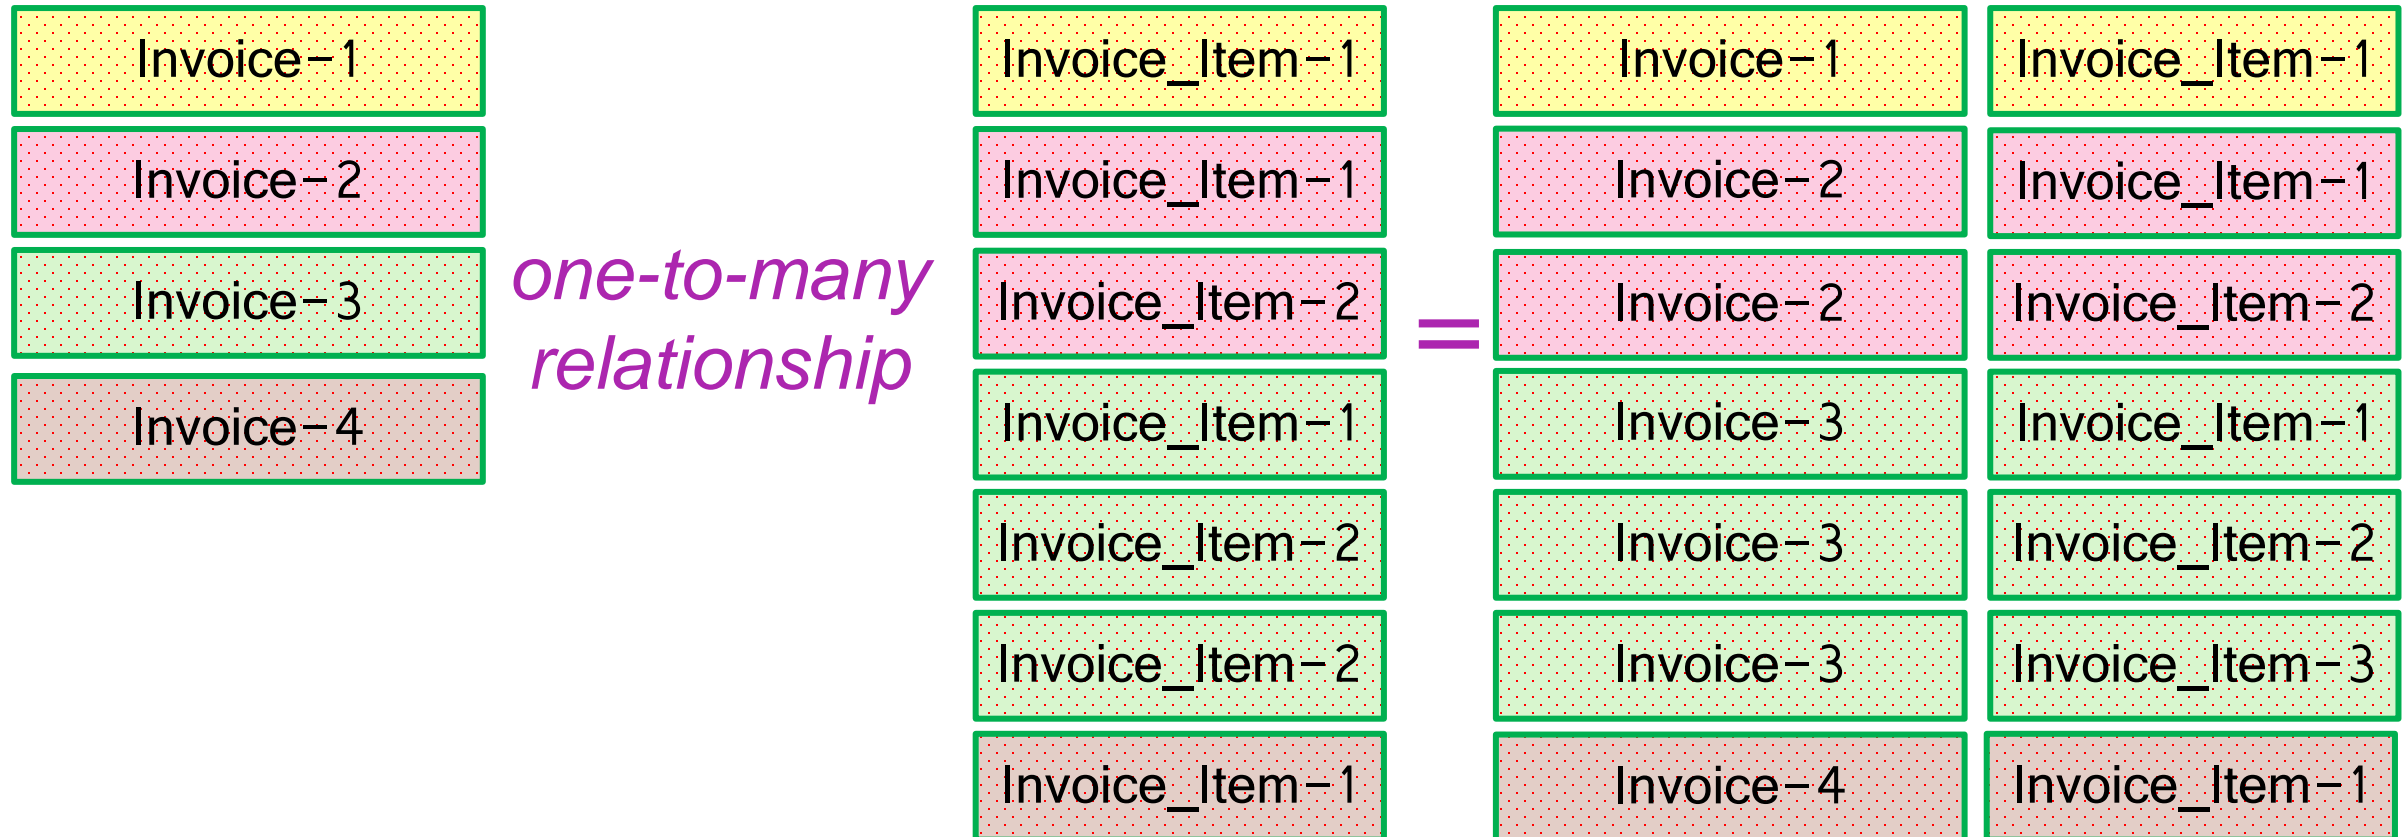

many-to-one relationship


many-to-one relationship

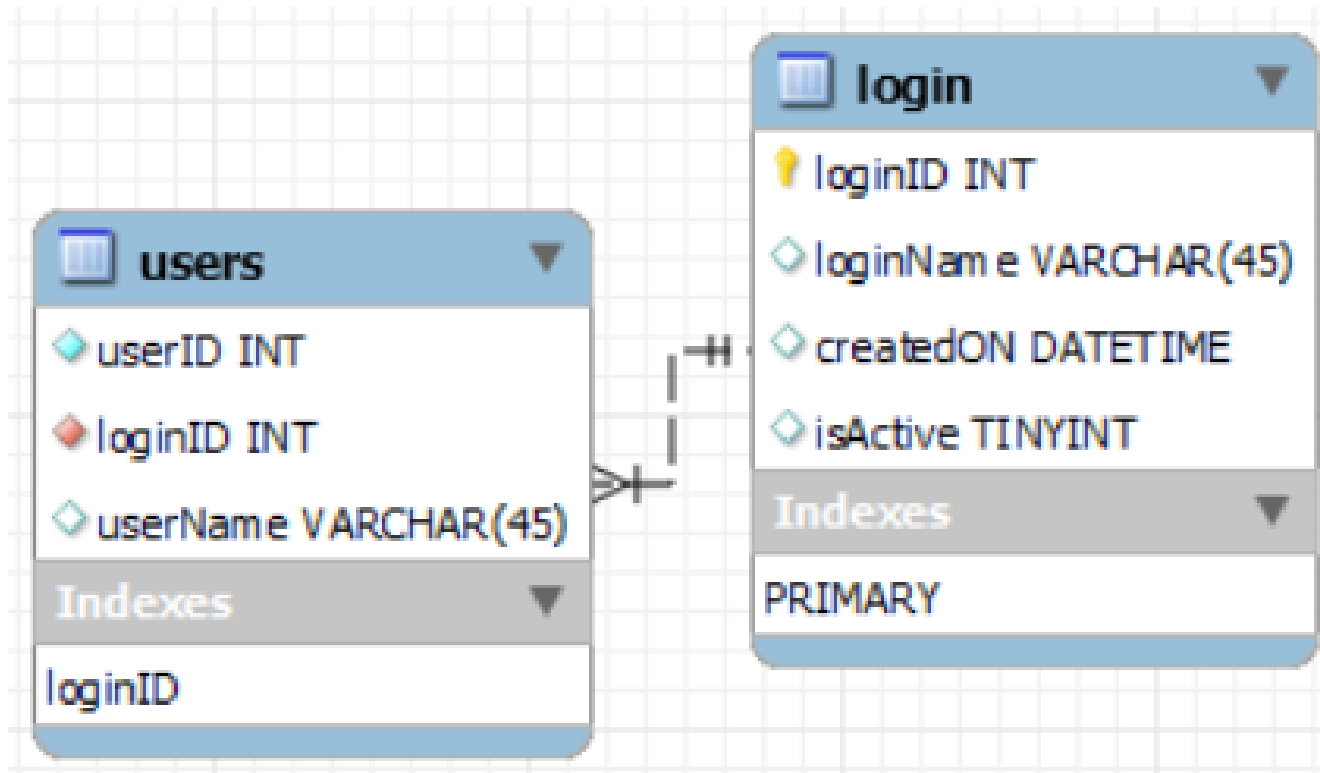

many-to-many relationship

many-to-many relationship


A *many-to-many* relationship is a type of cardinality that refers to the relationship between two entities *R* and *S* in which *R* may contain a parent instance for which there are many children in *S* and vice versa.

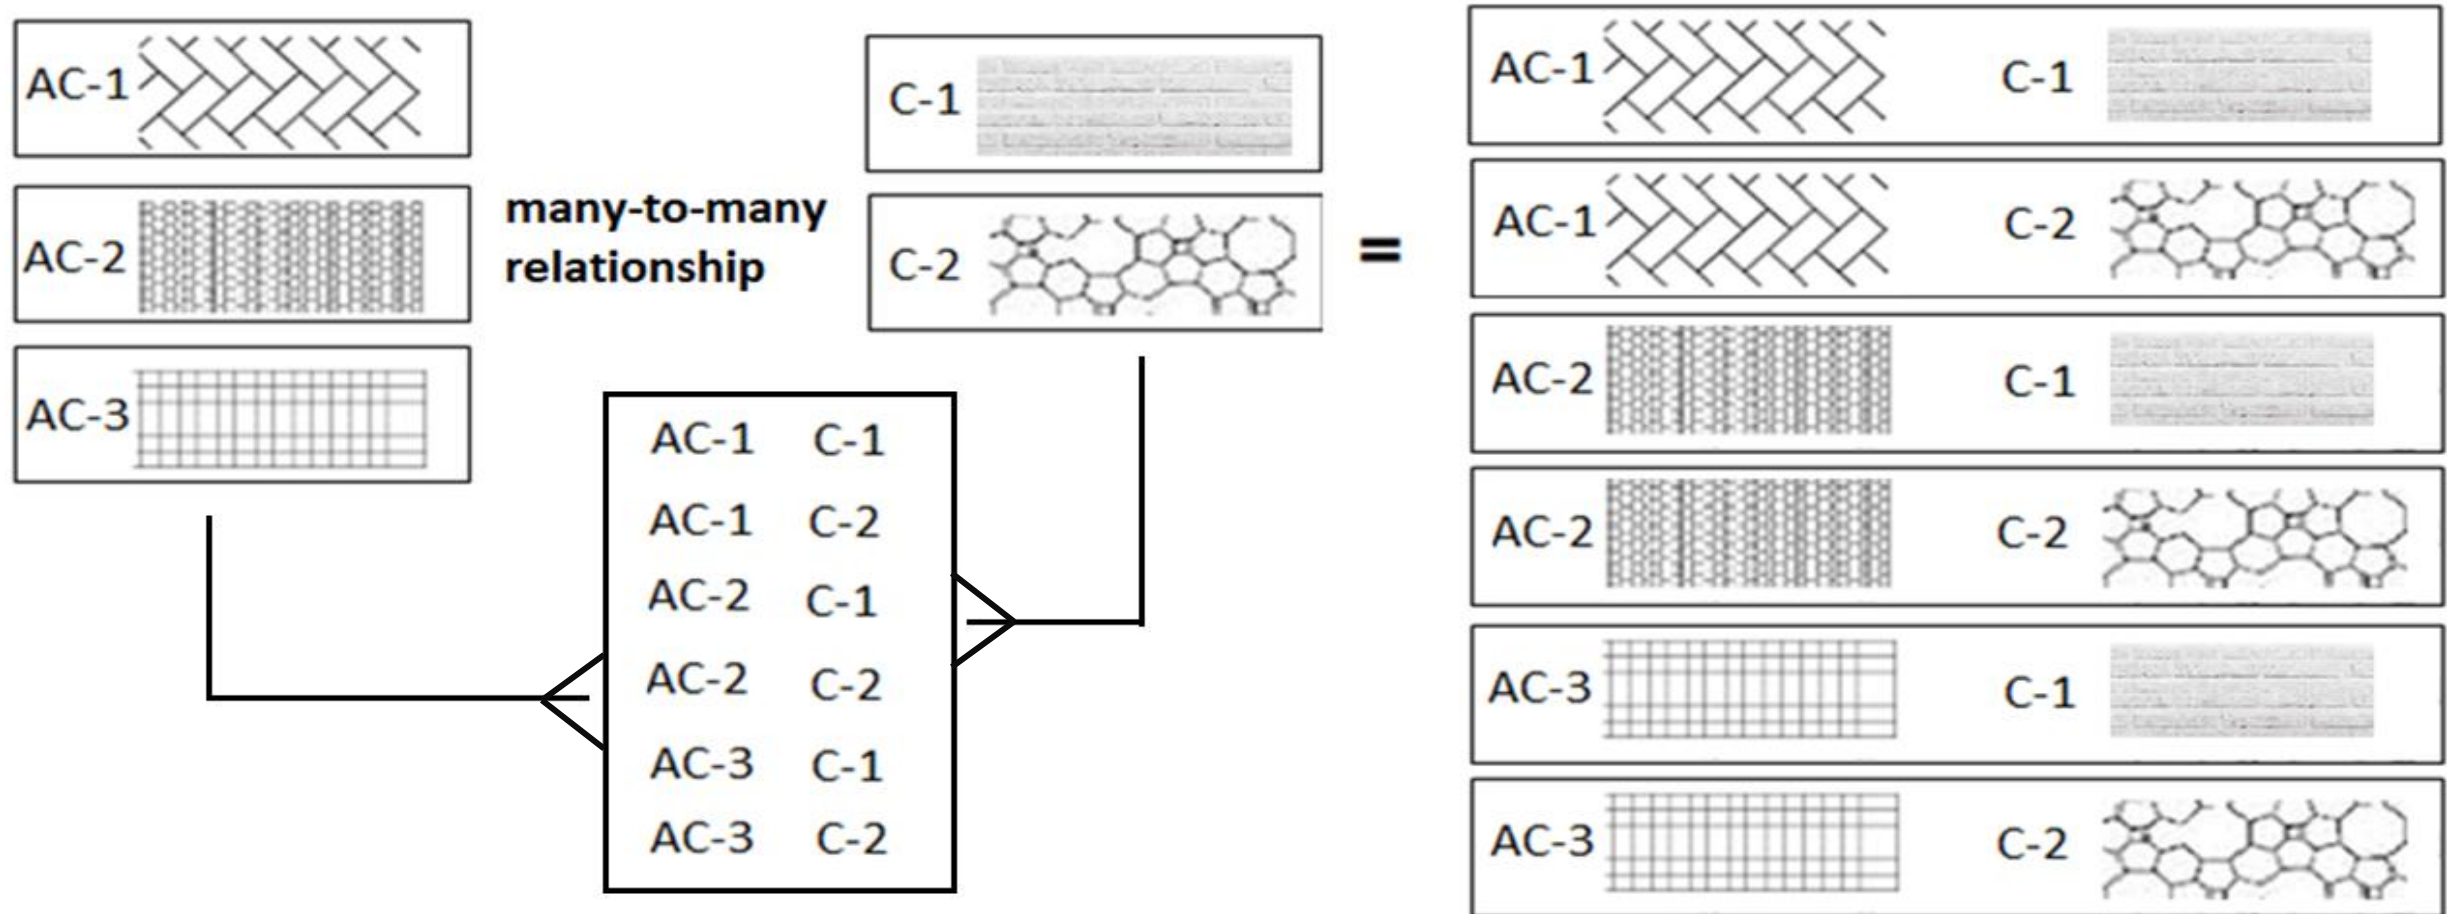

self-referencing relationship

self-referencing relationship

A "self-referencing" or "recursive" relationship in databases or data structures means that a record within a table can reference another record in the same table.

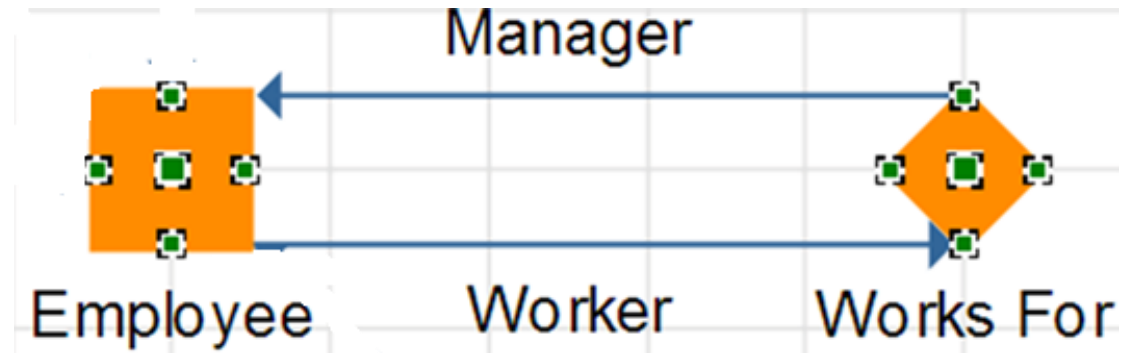

Product Categories and Subcategories

CategoryID	CategoryName	ParentCategoryID
1	Electronics	NULL
2	Phones	1
3	Laptops	1
4	Smartphones	2
5	Gaming Laptops	3

MySQL is the most popular **Open Source** Relational Database Management System.

MySQL was created by a Swedish company - MySQL AB that was founded in 1995. It was acquired by Sun Microsystems in 2008; Sun was in turn acquired by Oracle Corporation in 2010.

When you use MySQL, you're actually using at least two programmes. One program is the MySQL server (**mysqld.exe**) and other program is MySQL client program (**mysql.exe**) that connects to the database server.



What is SQL?

Remember:

- **EXPLICIT** or **IMPLICIT** commit will commit the data.

what is sql?


SQL (Structured Query Language) is a database language designed and developed for managing data in relational database management systems (RDBMS). SQL is common language for all Relational Databases.



Remember:

what is sql?

- An **implicit commit** occurs **automatically** in MySQL **without the need of COMMIT command**. This means changes made by the SQL statement are immediately saved to the database and **cannot be rolled back**.
- An **explicit commit** is done by the user issuing a **COMMIT** command to **manually save all changes** made in the current transaction.

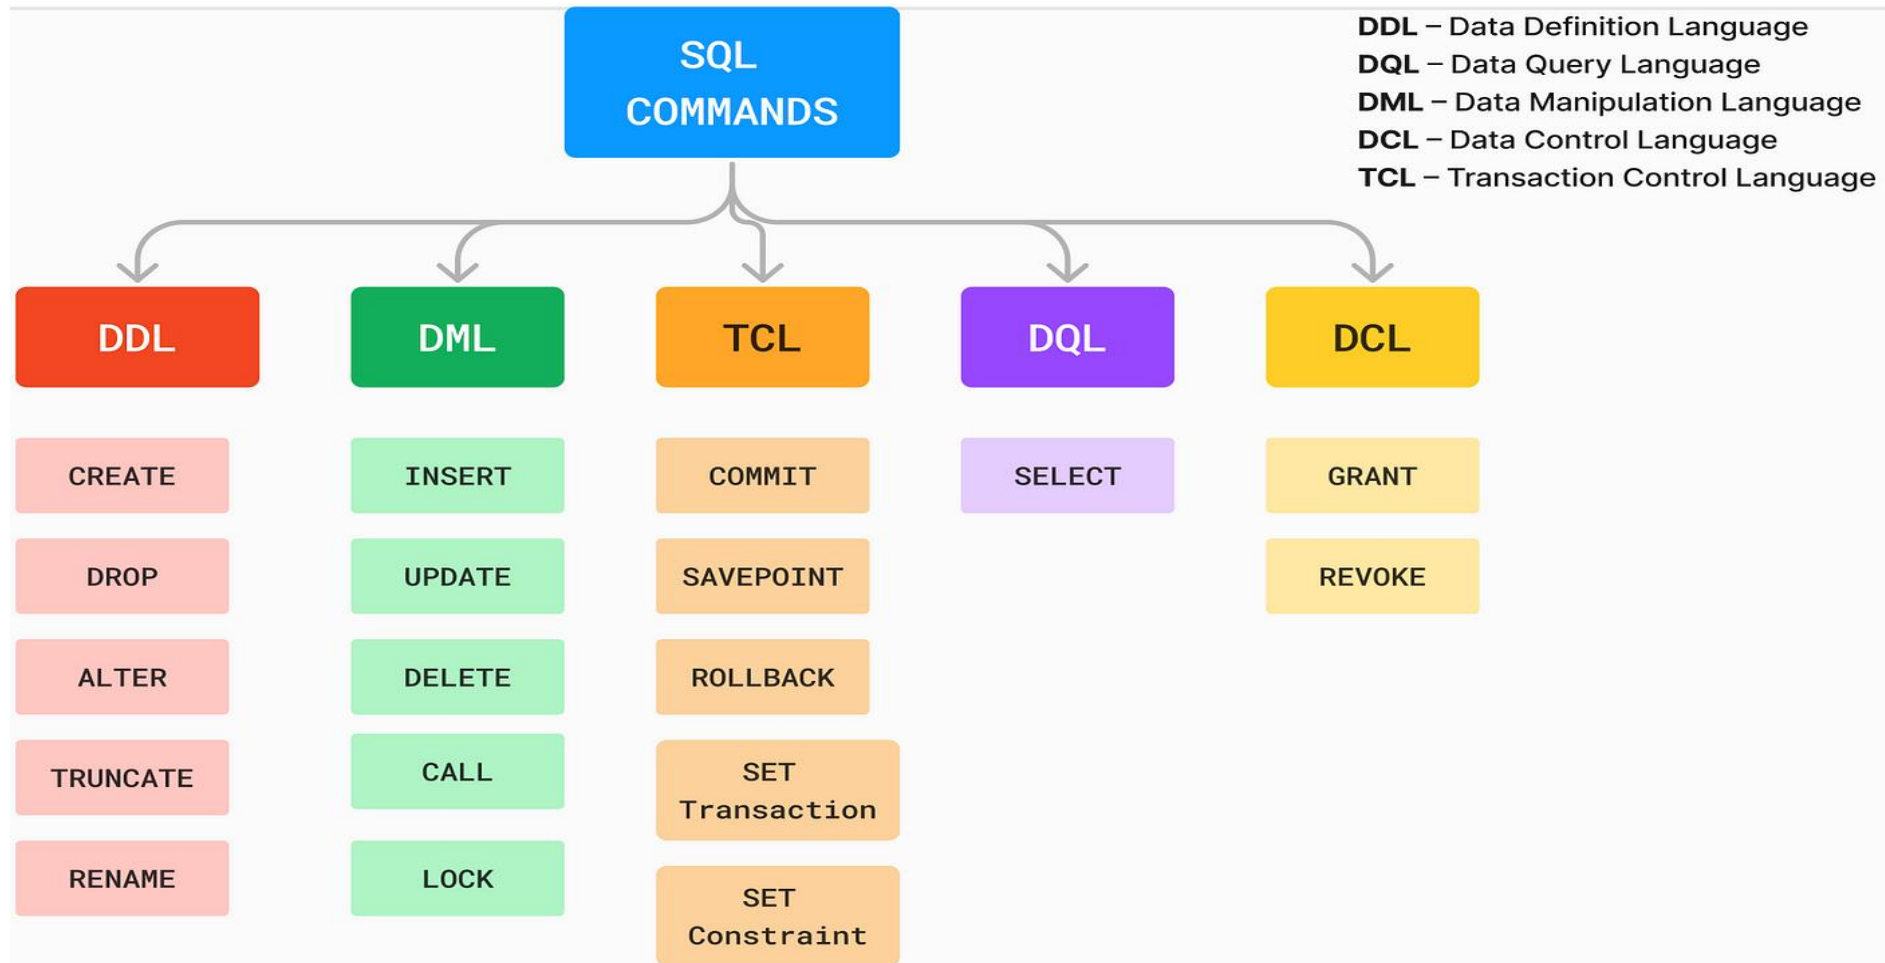

comments in mysql

- From a **#** character to the end of the line.
- From a **--** sequence to the end of the line.
- From a **/*** sequence to the following ***/** sequence.

Reconnect to the server	\r
Execute a system shell command	\!
Exit mysql	\q
Change your mysql prompt.	prompt str or \R str

Login to MySQL

Default port for MySQL Server: 3306

login

- C:\> mysql -hlocalhost -P3307 -uroot -p
- C:\> mysql -h127.0.0.1 -P3307 -uroot -p [database_name]
- C:\> mysql -h192.168.100.14 -P3307 -uroot -psaleel [database_name]
- C:\> mysql --host localhost --port 3306 --user root --password=ROOT [database_name]
- C:\> mysql --host=localhost --port=3306 --user=root --password=ROOT [database_name]

Windows Command Processor

Microsoft Windows [Version 10.0.18363.900]
(c) 2019 Microsoft Corporation. All rights reserved.

C:\Windows\system32>mysql -h127.0.0.1 -P3306 -uroot -proot_

The **char** is a fixed-length character data type,
The **varchar** is a variable-length character data type.

```
CREATE TABLE temp (c1 CHAR(10), c2 VARCHAR(10));  
INSERT INTO temp VALUES('SALEEL', 'SALEEL');  
SELECT * FROM temp WHERE c1 LIKE 'SALEEL';
```

datatypes

ENAME CHAR (10)	S	A	L	E	E	L					LENGTH -> 10
ENAME VARCHAR2(10)	S	A	L	E	E	L					LENGTH -> 6

In MySQL

When CHAR values are retrieved, the trailing spaces are removed
(unless the **PAD_CHAR_TO_FULL_LENGTH** SQL mode is enabled)

ENAME CHAR (10)	S	A	L	E	E	L					LENGTH -> 6
ENAME VARCHAR(10)	S	A	L	E	E	L					LENGTH -> 6

Note:

The BINARY and VARBINARY types are similar to CHAR and VARCHAR, except that they store binary strings rather than nonbinary strings. That is, they store byte strings rather than character strings.

datatype - string

Datatypes	Size	Description
CHAR [(length)]	0-255	
VARCHAR (length)	0 to 65,535	The maximum row size (65,535 bytes, which is shared among all columns.
TINYTEXT [(length)]	(2 ⁸ - 1) bytes	
TEXT [(length)]	(2 ¹⁶ -1) bytes	65,535 bytes ~ 64kb
MEDIUMTEXT [(length)]	(2 ²⁴ -1) bytes	16,777,215 bytes ~16MB
LONGTEXT [(length)]	(2 ³² -1) bytes	4,294,967,295 bytes ~4GB
ENUM('value1', 'value2',...)	65,535 members	
SET('value1', 'value2',...)	64 members	
BINARY[(length)]	255	
VARBINARY(length)		

By default, trailing spaces are trimmed from CHAR column values on retrieval. If **PAD_CHAR_TO_FULL_LENGTH** is enabled, trimming does not occur and retrieved CHAR values are padded to their full length.

- *SET sql_mode = '';*
- *SET sql_mode = 'PAD_CHAR_TO_FULL_LENGTH';*

example of char and varchar

Datatypes	Size	Description
CHAR [(length)]	0-255	
VARCHAR (length)	0 to 65,535	The maximum row size (65,535 bytes, which is shared among all columns.

Try Out

- CREATE TABLE x (x1 CHAR(4), x2 VARCHAR(4));
- INSERT INTO x VALUE(' ', '');
- INSERT INTO x VALUE('ab', 'ab');
- INSERT INTO x VALUE('abcd', 'abcd');
- SELECT x1, LENGTH(x1), x2, LENGTH(x2) FROM x;
- SET sql_mode = 'PAD_CHAR_TO_FULL_LENGTH';
- SELECT x1, LENGTH(x1), x2, LENGTH(x2) FROM x;
- SET sql_mode = '';
- SELECT x1, LENGTH(x1), x2, LENGTH(x2) FROM x;

* In CHAR, if a table contains value 'a', an attempt to store 'a ' causes a duplicate-key error.

- CREATE TABLE x (x1 CHAR(4) PRIMARY KEY, x2 VARCHAR(4));
 - INSERT INTO x VALUE('a', 'a');
 - INSERT INTO x VALUE('a ', 'a ');
-
- CREATE TABLE x (x1 CHAR(4), x2 VARCHAR(4) PRIMARY KEY);
 - INSERT INTO x VALUE('a', 'a');
 - INSERT INTO x VALUE('a ', 'a ');

datatype - numeric

Datatypes	Size	Description
TINYINT	1 byte	-128 to +127 (The unsigned range is 0 to 255).
SMALLINT [(length)]	2 bytes	-32768 to 32767. (The unsigned range is 0 to 65535).
MEDIUMINT [(length)]	3 bytes	-8388608 to 8388607. (The unsigned range is 0 to 16777215).
INT, INTEGER [(length)]	4 bytes	-2147483648 to 2147483647. (The unsigned range is 0 to 4294967295).
BIGINT [(length)]	8 bytes	-9,223,372,036,854,775,808 to 9,223,372,036,854,775,807
FLOAT [(length[,decimals])]	4 bytes	FLOAT(255,30)
DOUBLE [PRECISION] [(length[,decimals])], REAL [(length[,decimals])]	8 bytes	REAL(255,30) / DOUBLE(255,30) REAL will get converted to DOUBLE
DECIMAL [(length[,decimals])], NUMERIC [(length[,decimals])]		DECIMAL(65,30) / NUMERIC(65,30) NUMERIC will get converted in DECIMAL

For: float(M,D), double(M,D) or decimal(M,D), M must be >= D

Here, **(M,D)** means that values can be stored with up to *M* digits in total, of which *D* digits may be after the decimal point.

UNSIGNED prohibits negative values.

datatype – date and time

Datatypes	Size	Description
YEAR	1 byte	YYYY
DATE	3 bytes	YYYY-MM-DD
TIME	3 bytes	HH:MM:SS
DATETIME	8 bytes	YYYY-MM-DD hh:mm:ss

A value of **zero** is considered **false**. **Nonzero** values are considered **true**.

datatype – boolean

```
CREATE TABLE temp (col1 INT ,col2 BOOL, col3 BOOLEAN);
```

```
CREATE TABLE tasks ( id INT AUTO_INCREMENT PRIMARY KEY, title VARCHAR(255) NOT NULL, completed BOOLEAN);
```

- INSERT INTO tasks VALUE(default, 'Task1', 0);
- INSERT INTO tasks VALUE(default, 'Task2', 1);
- INSERT INTO tasks VALUE(default, 'Task3', False);
- INSERT INTO tasks VALUE(default, 'Task4', True);
- INSERT INTO tasks VALUE(default, 'Task5', null);
- INSERT INTO tasks VALUE(default, 'Task6', default);
- INSERT INTO tasks VALUE(default, 'Task7', 1 > 2);
- INSERT INTO tasks VALUE(default, 'Task8', 1 < 2);
- INSERT INTO tasks VALUE(default, 'Task9', 12);
- INSERT INTO tasks VALUE(default, 'Task10', 58);
- INSERT INTO tasks VALUE(default, 'Task11', .75);
- INSERT INTO tasks VALUE(default, 'Task12', .15);
- INSERT INTO tasks VALUE(default, 'Task13', 'a' = 'a');

Note:

- BOOL and BOOLEAN are **synonym of TINYINT(1)**

	id	title	completed
▶	1	Task1	0
	2	Task2	1
	3	Task3	0
	4	Task4	1
	5	Task5	NULL
	6	Task6	NULL
	7	Task7	0
	8	Task8	1
	9	Task9	12
	10	Task10	58
	11	Task11	1
	12	Task12	0
	13	Task13	1
⌵	NULL	NULL	NULL

NOTE:

datatype – enum

- An ENUM column can have a maximum of **65,535** distinct elements.
- Each ENUM value is stored as a number internally, starting from 1.
- ENUM values are sorted based on their index numbers, which depend on the order in which the enumeration members were listed in the column specification.
- Default value, NULL if the column can be NULL, first enumeration value if NOT NULL
- `CREATE TABLE temp (col1 INT, COL2 ENUM('A','B','C'));`
- `INSERT INTO temp (col1, col2) VALUES(1, 1);`
- `INSERT INTO temp(col1) VALUES (1); // NULL`
- `CREATE TABLE temp (col1 INT, col2 ENUM('A','B','C') NOT NULL);`
- `INSERT INTO temp(col1) VALUES (1); // First element from the ENUM datatype`
- `CREATE TABLE temp (col1 INT, col2 ENUM('') NOT NULL);`
- `INSERT INTO temp (col1, col2) VALUES (1,'This is the test'); // NULL`
- `CREATE TABLE temp (col1 INT, COL2 ENUM('A','B','C') default 'C'); // Valid default value for 'COL2'`
- `CREATE TABLE temp (col1 INT, COL2 ENUM('A','B','C') default 'D'); // Invalid default value for 'COL2'`

IMP:

- MySQL maps [membership `ENUM('Silver', 'Gold', 'Diamond', 'Platinum')`] these enumeration member to a numeric index where Silver=1, Gold=2, Diamond=3, Platinum=4 respectively.

- An ENUM column can have a maximum of **65,535** distinct elements.

datatype – enum

size `ENUM('small', 'medium', 'large', 'x-large')`

membership `ENUM('Silver', 'Gold', 'Diamond', 'Platinum')`

interest `ENUM('Movie', 'Music', 'Concert')`

zone `ENUM('North', 'South', 'East', 'West')`

season `ENUM('Winter', 'Summer', 'Monsoon', 'Autumn')`

sortby `ENUM('Popularity', 'Price -- Low to High', 'Price -- High to Low', 'Newest First')`

status `ENUM('active', 'inactive', 'pending', 'expired', 'shipped', 'in-process', 'resolved', 'on-hold', 'cancelled', 'disputed')`

Note:

- You cannot use user variable as an enumeration value. This pair of statements do not work:

```
SET @mysize = 'medium';
```

```
CREATE TABLE sizes ( size ENUM('small', @mysize, 'large')); // error
```

NOTE:

datatype – set

- A SET column can have a maximum of **64** distinct members.
- Prevents invalid or duplicate values from being inserted.
- A SET is a string object that can have zero or more values, each of which must be chosen from a list of permitted values specified when the table is created.
- SET column values that consist of multiple set members are specified with members separated by commas (,) without leaving a spaces.

```
CREATE TABLE clients(id INT AUTO_INCREMENT PRIMARY KEY, name VARCHAR(10), membership ENUM('Silver', 'Gold', 'Premium', 'Diamond'), interest SET('Movie', 'Music', 'Concert'));
```

```
INSERT INTO clients (name, membership, interest) VALUES('Saleel', 'Gold', 'Music');
```

```
INSERT INTO clients (name, membership, interest) VALUES('Saleel', 'Premium', 'Movie,Concert');
```

```
FIND_IN_SET(str, { strlist | Field } )
```

```
SELECT FIND_IN_SET('Concert', 'Movie,Music,Concert');
```

```
SELECT * FROM clients WHERE FIND_IN_SET('Music', interest);
```

IMP:

- The SET data type allows you to specify a list of values to be inserted in the column, like ENUM. But, unlike the ENUM data type, which lets you choose only one value, the SET data type allows you to choose multiple values from the list of specified values.

Use a CREATE TABLE statement to specify the layout of your table.

```
CREATE TABLE `123` (c1 INT, c2 VARCHAR(10));
```

Remember:

- Max 4096 columns per table provided the row size $\leq 65,535$ Bytes.
- The NULL value is different from values such as 0 for numeric types or the empty string for string types.

create table

Use a **CREATE TABLE** statement to specify the layout of your table.

Note:

- **USER TABLES:** This is a collection of tables created and maintained by the user. Contain USER information.
- **DATA DICTIONARY:** This is a collection of tables created and maintained by the MySQL Server. It contains database information. All data dictionary tables are owned by the SYS user.

create table

Use a **CREATE TABLE** statement to specify the layout of your table.

Remember:

- by default, tables are created in the default database, using the InnoDB storage engine.
- table name should not begin with a number or special symbols.
- table name can start with `_table_name` (underscore) or `$table_name` (dollar sign)
- table name and column name can have max 64 char.
- multiple words as `table_name` is invalid, if you want to give multiple words as `table_name` then give it in ``table_name`` (backtick)
- error occurs if the table exists.
- error occurs if there is no default database.
- error occurs if the database does not exist.

Note:

- Table names are stored in lowercase on disk. MySQL converts all table names to lowercase on storage. This behavior also applies to database names and table aliases.
e.g. show variables like 'lower_case_table_names';

syntax

```
CREATE [TEMPORARY] TABLE [IF NOT EXISTS] tbl_name  
    (create_definition, ...)  
    [table_options]  
    [partition_options]
```

create_definition:

col_name *column_definition*

column_definition:

```
data_type [NOT NULL | NULL] [DEFAULT default_value]  
    [AUTO_INCREMENT] [UNIQUE [KEY] | [PRIMARY] KEY]  
    [reference_definition]  
| data_type [GENERATED ALWAYS] AS (expression) [VIRTUAL]  
    [VISIBLE | INVISIBLE]
```

table_options:

AUTO_INCREMENT = <number> // must be used with AUTO_INCREMENT definition

ENGINE [=] engine_name

create table

e.g.

- CREATE TABLE student(
 ID INT,
 firstName VARCHAR(45),
 lastName VARCHAR(45),
 DoB DATE,
 emailID VARCHAR(128)
);

show engines;

set default_storage_engine = memory;

- Literals, built-in functions (both deterministic and nondeterministic), and operators are permitted.
- Subqueries, parameters, variables, and stored functions are not permitted.
- An expression default value cannot depend on a column that has the AUTO_INCREMENT attribute.

default value

The DEFAULT specifies a default value for the column.

- `CREATE TABLE temp (c1 INT PRIMARY KEY AUTO_INCREMENT, c2 INT DEFAULT(c1 + c2));` // Error
- `CREATE TABLE temp (c1 INT, c2 INT DEFAULT(c1 < c2));` // Error
- `CREATE TABLE temp (c1 INT, c2 INT , c3 INT DEFAULT(c1 < c2));` // OK

default value

col_name data_type **DEFAULT** value

The **DEFAULT** specifies a **default** value for the column.

- **CREATE TABLE** posts(
 postID **INT**,
 postTitle **VARCHAR**(255),
 postDate **DATETIME** **DEFAULT** **NOW**(),
 deleted **INT**
);

	Field	Type	Null	Key	Default	Extra
►	postID	int	YES		NULL	
	postTitle	varchar(255)	YES		NULL	
	postDate	datetime	YES		CURRENT_TIMESTAMP	DEFAULT_GENERATED
	deleted	int	YES		NULL	

version 8.0 and above.

- **CREATE TABLE** empl(
 ID **INT** **PRIMARY KEY**,
 firstName **VARCHAR**(45),
 phone **INT**,
 city **VARCHAR**(10) **DEFAULT** 'PUNE',
 salary **INT**,
 comm **INT**,
 total **INT** **DEFAULT**(salary + comm)
);

	Field	Type	Null	Key	Default	Extra
►	ID	int	NO	PRI	NULL	
	firstName	varchar(45)	YES		NULL	
	phone	int	YES		NULL	
	city	varchar(10)	YES		PUNE	
	salary	int	YES		NULL	
	comm	int	YES		NULL	
	total	int	YES		(`salary` + `comm`)	DEFAULT_GENERATED

default value - insert

The **DEFAULT** example.

- `CREATE TABLE r(
 c1 INT,
 c2 INT DEFAULT 1,
 c3 INT DEFAULT 3,
);`
- `INSERT INTO r VALUES();`
- `INSERT INTO r VALUES(-1, DEFAULT, DEFAULT);`
- `INSERT INTO r VALUES(-2, DEFAULT(c2), DEFAULT(c3));`
- `INSERT INTO r VALUES(-3, DEFAULT(c3), DEFAULT(c2));`

	Field	Type	Null	Key	Default	Extra
►	c1	int	YES		NULL	
	c2	int	YES		1	
	c3	int	YES		3	

default value - update

The **DEFAULT** example.

- `CREATE TABLE temp(
 c1 INT,
 c2 INT,
 c3 INT DEFAULT(c1 + c2),
 c4 INT DEFAULT(c1 * c2)
);`
- `INSERT INTO temp (c1, c2, c3, c4) VALUES(1, 1, 1, 1);`
- `INSERT INTO temp (c1, c2, c3, c4) VALUES(2, 2, 2, 2);`
- `UPDATE temp SET c3 = DEFAULT;`
- `UPDATE temp SET c4 = DEFAULT;`

insert rows

INSERT is used to add a single or multiple tuple to a relation. We must specify the relation name and a list of values for the tuple. **The values should be listed in the same order in which the corresponding attributes were specified in the CREATE TABLE command.**

You can insert data using following methods:

- INSERT ... VALUES
- INSERT ... SET
- INSERT ... SELECT

INSERT can violate for any of the four types of constraints.

Important:

- If an attribute value is not of the appropriate data type.
- Entity integrity can be violated if a key value in the new tuple t already exists in another tuple in the relation $r(R)$.
- Entity integrity can be violated if any part of the primary key of the new tuple t is NULL.
- Referential integrity can be violated if the value of any foreign key in t refers to a tuple that does not exist in the referenced relation.

INSERT will also fail in following cases.

Important :

- Your database table has **X** columns, Where as the **VALUES** you are passing are for (**X-1**) or (**X+1**). This mismatch of column-values will giving you the error.
- Inserting a string into a string column that exceeds the column maximum length. Data too long for column error will be raise.
- Inserting data into a column than does not exists, then Unknown column error will raise.
- `INSERT INTO tbl_name (col1,col2) VALUES(15,col1*2);` // is legal.
- `INSERT INTO tbl_name (col1,col2) VALUES(col2*2,15);` // is not legal, because the value for col1 refers to col2, which is assigned after col1.

- **INSERT** is used to add a single or multiple tuple to a relation. We must specify the relation name and a list of values for the tuple. **The values should be listed in the same order in which the corresponding attributes were specified in the CREATE TABLE command.**
- A second form of the **INSERT** statement allows the user to specify explicit attribute names that correspond to the values provided in the **INSERT** command. This is useful if a relation has many attributes but only a few of those attributes are assigned values in the new tuple. However, the values must include all attributes with **NOT NULL** specification and no default value. Attributes with **NULL** allowed or **DEFAULT** values are the ones that can be left out.

insert rows using values

dml- insert ... values

INSERT inserts new row(s) into an existing table. The INSERT ... VALUES

```
INSERT [IGNORE] [INTO] tbl_name [PARTITION (partition_name [, partition_name] ...)] [ (field_name, ... ) ]  
{ VALUES | VALUE } [ROW] ( { expr | DEFAULT }, ... ), [ROW] ( ... ), [ROW] ... [ ON DUPLICATE KEY UPDATE  
assignment_list ]
```

The affected-rows value for an INSERT can be obtained using the ROW_COUNT() function.

```
INSERT INTO DEPT VALUES (1, 'HRD', 'Pune')
```

↑
Column Values

```
INSERT INTO DEPT(ID, NAME, LOC) VALUES (1, 'HRD', 'Pune')
```

↑
Column List

```
INSERT INTO DEPT(ID, NAME, LOC) VALUES (1, 'HRD', 'Baroda'),  
(2, 'Sales', 'Surat'), (3, 'Purchase', 'Pune'), (4, 'Account', 'Mumbai')
```

↑
Inserting multiple rows

dml- insert ... values

INSERT inserts new row(s) into an existing table. The INSERT ... VALUES

```
INSERT [IGNORE] [INTO] tbl_name [PARTITION (partition_name [, partition_name] ...)] [ (field_name, ... ) ]  
{ VALUES | VALUE } [ROW] ( { expr | DEFAULT }, ... ), [ROW] (...), [ROW] ... [ ON DUPLICATE KEY UPDATE  
assignment_list ]
```

```
CREATE TABLE student (  
  ID INT PRIMARY KEY,  
  nameFirst VARCHAR(45),  
  nameLast VARCHAR(45),  
  DoB DATE ,  
  emailID VARCHAR(128)  
);
```

e.g.

- INSERT INTO student VALUES (29, 'sharmin', 'patil', '1999-11-10', 'sharmin.patil@gmail.com');
- INSERT INTO student (ID, nameFirst, nameLast, DOB, emailID) VALUES (30, 'john', 'thomas', '1983-11-10', 'john.thomas@gmail.com');
- INSERT INTO student (ID, nameFirst, emailID) VALUES (31, 'jack', 'jack.thorn@gmail.com');
- INSERT INTO student (ID, nameFirst) VALUES (32, 'james'), (33, 'jr. james'), (34, 'sr. james');

insert multiple rows

dml- insert ... values

INSERT inserts new rows into an existing table. The INSERT ... VALUES

```
INSERT [INTO] tbl_name { VALUES | VALUE } [ROW] ( { expr | DEFAULT }, . . .), [ROW] (. . .), [ROW] (. . .)
```

```
CREATE TABLE student(  
  ID INT PRIMARY KEY,  
  nameFirst VARCHAR(45),  
  nameLast VARCHAR(45),  
  DoB DATE ,  
  emailID VARCHAR(128)  
);
```

e.g.

- INSERT INTO student (ID, nameFirst) VALUES (32, 'james'), (33, 'jr. james'), (34, 'sr. james');
- INSERT INTO student (ID, nameFirst) VALUES ROW (32, 'james'), ROW(33, 'jr. james'), ROW(34, 'sr. james');

Do not use the * operator in your SELECT statements. Instead, use column names. Reason is that in MySQL Server scans for all column names and replaces the * with all the column names of the table(s) in the SELECT statement. Providing column names avoids this search-and-replace, and enhances performance.

SELECT statement...

```
SELECT what_to_select  
FROM which_table  
WHERE conditions_to_satisfy;
```

SELECT CLAUSE

The **SELECT** statement retrieves or extracts data from tables in the database.

- You can use one or more tables separated by comma to extract data.
- You can fetch one or more fields/columns in a single **SELECT** command.
- You can specify star (*) in place of fields. In this case, **SELECT** will return all the fields.
- **SELECT** can also be used to retrieve rows computed without reference to any table e.g. **SELECT 1 + 2;**

Capabilities of SELECT Statement

1. SELECTION
2. PROJECTION
3. JOINING

Capabilities of *SELECT* Statement

➤ *SELECTION*

Selection capability in SQL is to choose the record's/row's/tuple's in a table that you want to return by a query.

R

EMPNO	ENAME	JOB	HIREDATE	DEPTNO
1	Saleel	Manager	1995-01-01	10
2	Janhavi	Sales	1994-12-20	20
3	Snehal	Manager	1997-05-21	10
4	Rahul	Account	1997-07-30	10
5	Ketan	Sales	1994-01-01	30

Capabilities of *SELECT* Statement

➤ *PROJECTION*

Projection capability in SQL to choose the column's/attribute's/field's in a table that you want to return by your query.

R

EMPNO	ENAME	JOB	HIREDATE	DEPTNO
1	Saleel	Manager	1995-01-01	10
2	Janhavi	Sales	1994-12-20	20
3	Snehal	Manager	1997-05-21	10
4	Rahul	Account	1997-07-30	10
5	Ketan	Sales	1994-01-01	30

Table DEPARTMENTS

DEPARTMENT_ID	DEPARTMENT_NAME	MANAGER_ID	LOCATION_ID
60	IT	103	1400
90	Executive	100	1700

Projection
 Selection

Table EMPLOYEES

EMPLOYEE_ID	LAST_NAME	EMAIL	HIRE_DATE	JOB_ID	MANAGER_ID	DEPARTMENT_ID
100	King	SKING		AD_PRES		90
101	Kochhar	NKOCHHAR	21-SEP-89	AD_VP	100	90
102	De Hann	LDEHANN	13-JAN-93	AD_VP	100	90
103	Hunold	AHUNOLD		IT_PROG	102	60


Capabilities of *SELECT* Statement

➤ JOINING

Join capability in SQL to bring together data that is stored in different tables by creating a link between them.

R


EMPNO	ENAME	JOB	HIREDATE	DEPTNO
1	Saleel	Manager	1995-01-01	20
2	Janhavi	Sales	1994-12-20	10
3	Snehal	Manager	1997-05-21	10
4	Rahul	Account	1997-07-30	20
5	Ketan	Sales	1994-01-01	30




S

DEPTNO	DNAME	LOC
10	HRD	PUNE
20	SALES	BARODA
40	PURCHASE	SURAT


SQL JOINS

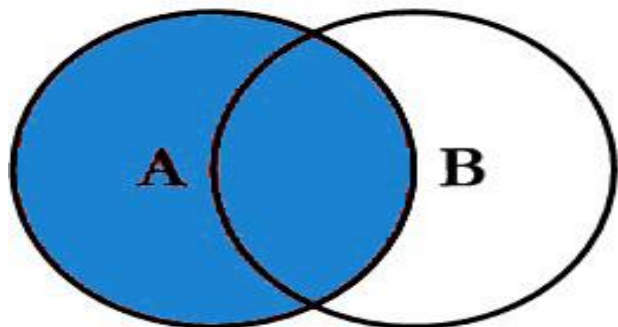


```
SELECT <select_list>  
FROM TableA A  
LEFT JOIN TableB B  
ON A.Key = B.Key
```

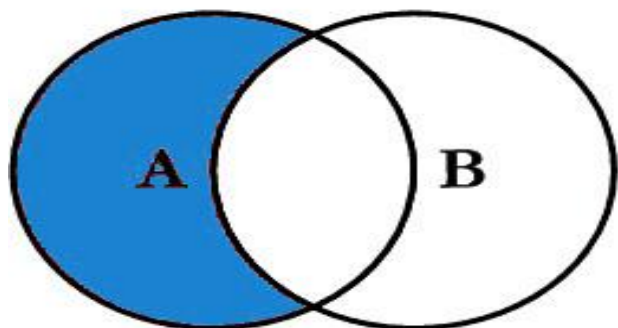


```
SELECT <select_list>  
FROM TableA A  
LEFT JOIN TableB B  
ON A.Key = B.Key  
WHERE B.Key IS NULL
```

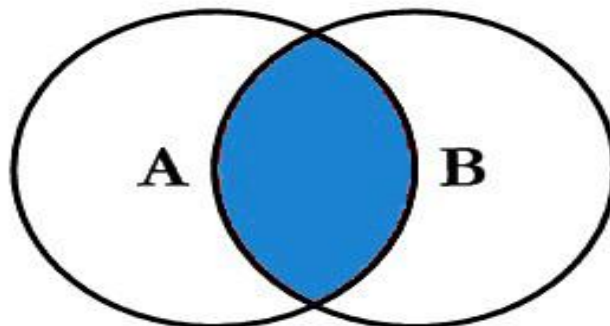


```
SELECT <select_list>  
FROM TableA A  
INNER JOIN TableB B  
ON A.Key = B.Key
```

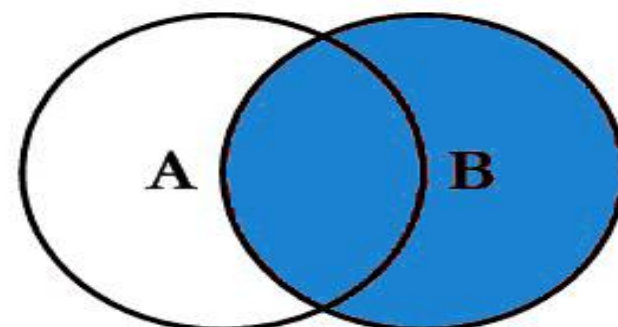


```
SELECT <select_list>  
FROM TableA A  
RIGHT JOIN TableB B  
ON A.Key = B.Key
```

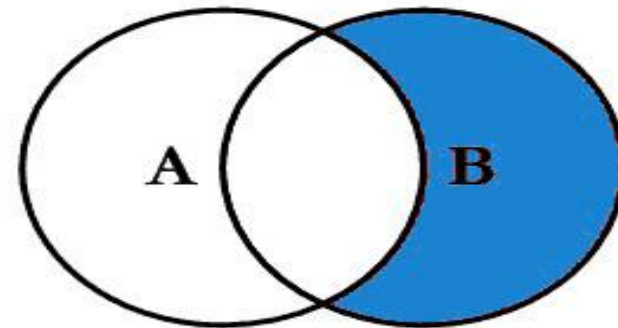

```
SELECT <select_list>  
FROM TableA A  
RIGHT JOIN TableB B  
ON A.Key = B.Key  
WHERE A.Key IS NULL
```

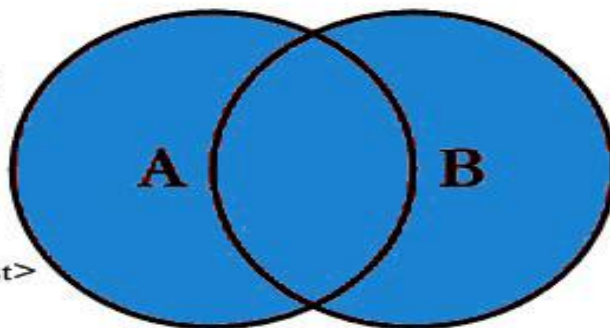


```
SELECT <select_list>  
FROM TableA A  
FULL OUTER JOIN TableB B  
ON A.Key = B.Key
```

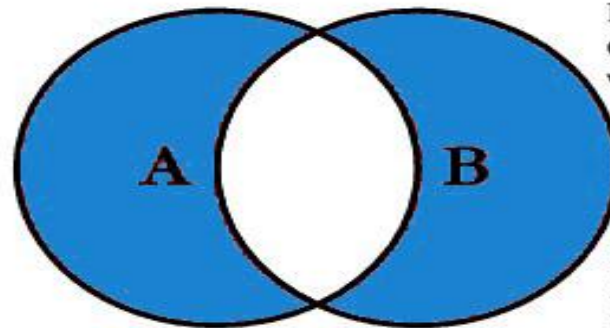

```
SELECT <select_list>  
FROM TableA A  
FULL OUTER JOIN TableB B  
ON A.Key = B.Key  
WHERE A.Key IS NULL  
OR B.Key IS NULL
```

SELECTION Process

SELECT * FROM <table_references>




selection-list | field-list | column-list

Remember:

- Here, " * " is known as metacharacter (all columns)

PROJECTION Process

SELECT column-list FROM <table_references>

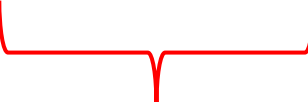

selection-list | field-list | column-list

Remember:

- Position of columns in SELECT statement will determine the position of columns in the output (as per user requirements)

ORDER BY in UPDATE: if the table contains two values 1 and 2 in the id column and 1 is updated to 2 before 2 is updated to 3, an error occurs. To avoid this problem, add an ORDER BY clause to cause the rows with larger id values to be updated before those with smaller values.

In a **SET** statement, **=** is treated identically to **:=**

Note:

Here c1 column is a **Primary Key**

SELECT ename, job, sal, sal * 1.1, sal * 1.25 **FROM** emp;

- **UPDATE** temp **SET** c1 = c1 - 1 **ORDER BY** c1 **ASC**; # In case of decrement
- **UPDATE** temp **SET** c1 = c1 + 1 **ORDER BY** c1 **DESC**; # In case of increment

single-table update

UPDATE is used to change/modify the values of some attributes of one or more selected tuples.

- **SET** @x := 0;
- **UPDATE** emp **SET** id = @x := @x + 1;
- **UPDATE** t, (**SELECT** isactive, **COUNT**(isactive) r1 **FROM** emp **GROUP BY** isactive) a **SET** t.c2 = a.r1 **WHERE** t.c1 = a.isactive;

mysql> **SELECT** * **FROM** t;

+-----+-----+			+-----+-----+		
c1	c2		c1	c2	
+-----+-----+			+-----+-----+		
0	NULL		0	6	
1	NULL		1	14	
+-----+-----+			+-----+-----+		

e.g.

1. Update top 2 rows.
2. Update UnitPrice for the top 5 most expensive products.

single-table update

The UPDATE statement updates columns of existing rows in the named table with new values. The SET clause indicates which columns to modify and the values they should be given. The **WHERE** clause, if given, specifies the conditions that identify which rows to update. With **no WHERE** clause, all rows are updated. If the **ORDER BY** clause is specified, the rows are updated in the order that is specified. The **LIMIT** clause places a limit on the number of rows that can be updated.

```
UPDATE tbl_name SET col_name1 = { expr1 | DEFAULT } [, col_name2 = { expr2 | DEFAULT } ] ...  
[WHERE where_condition]
```

- UPDATE temp SET dname = 'new_value' LIMIT 2;
- UPDATE temp SET c1 = 'new_value' ORDER BY loc LIMIT 2;
- UPDATE temp SET c1 := 'new_value' WHERE deptno < 50;
- UPDATE temp SET c1 := 'new_value' WHERE deptno < 50 LIMIT 2;
- ALTER TABLE dept ADD SUMSALARY INT;
- UPDATE dept SET sumsalary = (SELECT SUM(sal) FROM emp WHERE emp.deptno = dept.deptno GROUP BY emp.deptno);
- UPDATE candidate SET totalvotes = (SELECT COUNT(*) FROM votes WHERE candidate.id = votes.candidateID GROUP BY votes.candidateID);
- UPDATE duplicate SET id = (SELECT @cnt := @cnt + 1);

single-table delete

DELETE is used to delete tuples from a relation.

delete can violate only in referential integrity.

Important:

- The **DELETE** operation can violate only referential integrity. This occurs if the tuple t being deleted is referenced by foreign keys from other tuple t in the database.

single-table delete

The DELETE statement deletes rows from tbl_name and returns the number of deleted rows. To check the number of deleted rows, call the `ROW_COUNT()` function. The optional WHERE clause identify which rows to delete. With no WHERE clause, all rows are deleted. If the ORDER BY clause is specified, the rows are deleted in the order that is specified. The LIMIT clause places a limit on the number of rows that can be deleted.

```
DELETE FROM tbl_name  
[WHERE where_condition]
```

Note:

- LIMIT clauses apply to single-table deletes, but not multi-table deletes.
- `DELETE FROM temp;`
- `DELETE FROM temp ORDER BY loc LIMIT 2;`
- `DELETE FROM temp WHERE deptno < 50;`
- `DELETE FROM temp WHERE deptno < 50 LIMIT 2;`

auto_increment column

The **AUTO_INCREMENT** attribute can be used to generate a unique number/identity for new rows.

auto_increment

IDENTITY is a synonym to the *LAST_INSERT_ID* variable.

col_name data_type **AUTO_INCREMENT** [**UNIQUE** [**KEY**] | [**PRIMARY**] **KEY**]

Remember:

- There can be only one AUTO_INCREMENT column per table.
- it must be indexed.
- it cannot have a DEFAULT value.
- it works properly only if it contains only positive values.
- It applies only to integer and floating-point types.
- when you insert a value of NULL or 0 into AUTO_INCREMENT column, it generates next value.
- use *LAST_INSERT_ID()* function to find the row that contains the most recent AUTO_INCREMENT value.

-
- | | |
|--|--|
| <ul style="list-style-type: none">• SELECT @@IDENTITY• SELECT LAST_INSERT_ID()• SET INSERT_ID = 7 | <ul style="list-style-type: none">• CREATE TABLE posts (
 c1 INT UNIQUE KEY AUTO_INCREMENT,
 c2 VARCHAR(20)
) AUTO_INCREMENT = 2; // auto_number will start with value 2. |
|--|--|

generated column

A SQL generated column is a type of column that stores values calculated from an expression applied to data in other columns of the same table. The value of a generated column cannot be altered manually and is automatically updated whenever the data it depends on changes.

Remember:

- Stored functions and user-defined functions are not permitted.
- Stored procedure and function parameters are not permitted.
- Variables (system variables, user-defined variables, and stored program local variables) are not permitted.
- Subqueries are not permitted.
- The AUTO_INCREMENT attribute cannot be used in a generated column definition.
- Triggers cannot use NEW.COL_NAME or use OLD.COL_NAME to refer to generated columns.
- Stored column cannot be converted to virtual column and virtual column cannot be converted to stored column.
- Generated column can be made as invisible column.

Note:

- The expression can contain literals, built-in functions with no parameters, operators, or references to any column within the same table. If you use a function, it must be scalar and deterministic.

virtual column - generated always

col_name data_type [GENERATED ALWAYS] AS (*expression*) [VIRTUAL | STORED]

- **VIRTUAL**: Column values are not stored, but are evaluated when rows are read, immediately after any BEFORE triggers. A virtual column takes no storage.
- **STORED**: Column values are evaluated and stored when rows are inserted or updated. A stored column does require storage space and can be indexed.

Note:

- The default is **VIRTUAL** if neither keyword is specified.

- CREATE TABLE product(
productCode INT AUTO_INCREMENT PRIMARY KEY,
productName VARCHAR(45),
productVendor VARCHAR(45),
productDescription TEXT,
quantityInStock INT,
buyPrice FLOAT,
stockValue FLOAT GENERATED ALWAYS AS(quantityInStock * buyPrice) VIRTUAL
);

	Field	Type	Null	Key	Default	Extra
▶	productCode	int	NO	PRI	NULL	auto_increment
	productName	varchar(45)	YES		NULL	
	productVendor	varchar(45)	YES		NULL	
	productDescription	text	YES		NULL	
	quantityInStock	int	YES		NULL	
	buyPrice	float	YES		NULL	
	stockValue	float	YES		NULL	VIRTUAL GENERATED

visible / invisible columns

Columns are visible by default. To explicitly specify visibility for a new column, use a `VISIBLE` or `INVISIBLE` keyword as part of the column definition for `CREATE TABLE` or `ALTER TABLE`.

Note:

- An invisible column is normally hidden to queries, but can be accessed if explicitly referenced. Prior to MySQL 8.0.23, all columns are visible.
- A table must have at least one visible column. Attempting to make all columns invisible produces an error.
- `SELECT *` does not include invisible columns.

invisible column

col_name data_type **INVISIBLE**

```
CREATE TABLE employee(  
  ID INT AUTO_INCREMENT PRIMARY KEY,  
  firstName VARCHAR(40),  
  salary INT,  
  commission INT,  
  total INT DEFAULT(salary + commission) INVISIBLE  
  tax INT GENERATED ALWAYS AS (total * .25) VIRTUAL INVISIBLE  
);
```

```
CREATE TABLE employee(  
  ID INT PRIMARY KEY AUTO_INCREMENT INVISIBLE ,  
  firstName VARCHAR(40)  
);
```

- INSERT INTO employee(firstName, salary, commission) VALUES('ram', 4700, -700);
- INSERT INTO employee(firstName, salary, commission) VALUES('pankaj', 3400, NULL);
- INSERT INTO employee(firstName, salary, commission) VALUES('rajan', 3200, 250);
- INSERT INTO employee(firstName, salary, commission) VALUES('ninad', 2600, 0);
- INSERT INTO employee(firstName, salary, commission) VALUES('omkar', 4500, 300);
- SELECT * FROM employee;
- ALTER TABLE employee MODIFY total INT VISIBLE;
- ALTER TABLE employee MODIFY total INT INVISIBLE;

varbinary column

TODO

Note:

- TODO
- TODO
- TODO

varbinary column

col_name VARBINARY

```
CREATE TABLE login (  
    ID INT AUTO_INCREMENT PRIMARY KEY,  
    userName VARCHAR(40),  
    password VARBINARY(40) INVISIBLE  
);
```

- INSERT INTO login(userName, password) VALUES('ram', 'ram@123');
- INSERT INTO login(userName, password) VALUES('pankaj', 'pankaj');
- INSERT INTO login(userName, password) VALUES('rajan', 'rajan');
- INSERT INTO login(userName, password) VALUES('ninad', 'ninad');
- INSERT INTO login(userName, password) VALUES('omkar', 'omkar');

- SELECT * FROM login;
- SELECT username, CAST(password as CHAR) FROM login;

constraints

CONSTRAINT is used to define rules to allow or restrict what values can be stored in columns. The purpose of inducing constraints is to enforce the integrity of a database.

CONSTRAINTS can be classified into two types –

- *Column Level*
- *Table Level*

The column level constraints can apply only to one column where as table level constraints are applied to the entire table.

Remember:

- **PRI** => primary key
- **UNI** => unique key
- **MUL** => is basically an index that is neither a **primary key** nor a **unique key**. The name comes from "multiple" because multiple occurrences of the same value are allowed.

constraints

To limit or to restrict or to check or to control.

Note:

- a table with a foreign key that references another table's primary key is **MUL**.
- If more than one of the Key values applies to a given column of a table, Key displays the one with the highest priority, in the order **PRI**, **UNI**, and **MUL**.
- If a table has a PRIMARY KEY or UNIQUE NOT NULL index that consists of a single column that has an integer type, you can use **_rowid** to refer to the indexed column in SELECT statements.

Keys are used to establish relationships between tables and also to uniquely identify any record in the table.

types of Keys?

$r = \text{Employee}(\text{EmployeeID}, \text{FullName}, \text{job}, \text{salary}, \text{PAN}, \text{DateOfBirth}, \text{emailID}, \text{deptno})$

- **Candidate Key:** are individual columns in a table that qualifies for uniqueness of all the rows. Here in Employee table EmployeeID, PAN or emailID are Candidate keys.
- **Primary Key:** is the columns you choose to maintain uniqueness in a table. Here in Employee table you can choose either EmployeeID, PAN or emailID columns, EmployeeID is preferable choice.
- **Alternate Key:** Candidate column other the primary key column, like if EmployeeID is primary key then , PAN or emailID columns would be the Alternate key.
- **Super Key:** If you add any other column to a primary key then it become a super key, like EmployeeID + FullName is a Super Key.
- **Composite Key:** If a table do not have any single column that qualifies for a Candidate key, then you have to select 2 or more columns to make a row unique. Like if there is no EmployeeID, PAN or emailID columns, then you can make FullName + DateOfBirth as Composite key. But still there can be a narrow chance of duplicate row.

Remember:

- A primary key cannot be NULL (absence of a value).
- A primary key value must be unique.
- A table has only one primary key.
- The primary key values cannot be changed, if it is referred by some other column.
- The primary key must be given a value when a new record is inserted.
- **An index can consist of 16 columns, at maximum. Since a PRIMARY KEY constraint automatically adds an index, it can't have more than 16 columns.**

Database	Max Columns in Primary Key
MySQL	16
PostgreSQL	32
Oracle	32
SQL Server	16
DB2	16
MariaDB	16

PRIMARY KEY constraint

A primary key is a special column (or set of combined columns) in a relational database table, that is used to uniquely identify each record. Each database table needs a primary key.

Note:

- Primary key in a relation is always associated with an **INDEX** object.
- If, we give on a column a combination of **NOT NULL & UNIQUE** key then it behaves like a PRIMARY key.
- If, we give on a column a combination of **UNIQUE key & AUTO_INCREMENT** then also it behaves like a PRIMARY key.
- Stability: The value of the primary key should be stable over time and not change frequently.

clustered and non-clustered index

Indexing in MySQL is a process that helps us to return the requested data from the table very fast. If the table does not have an index, it scans the whole table for the requested data.

MySQL allows two different types of Indexing:

- Clustered Index
- Non-Clustered Index

Clustered Index:-

- Clustered index is used to optimize the speed of most common lookups and DML operations like INSERT, UPDATE, and DELETE command.
- Clustered indexes sort and store the data rows in the table based on their key (primary key) values that can be sorted in only one direction.
- If the table column contains a **primary key** or **not null** and **unique key**, MySQL creates a clustered index.
- Data retrieval is faster than non-cluster index.
- Slower inserts/updates if the indexed column values change frequently, as it may require rearranging rows to maintain the order.

clustered and non-clustered index

Indexing in MySQL is a process that helps us to return the requested data from the table very fast. If the table does not have an index, it scans the whole table for the requested data.

MySQL allows two different types of Indexing:

- Clustered Index
- Non-Clustered Index

Non-Clustered Index:-

- The indexes other than PRIMARY indexes (clustered indexes) called a non-clustered index.
- The non-clustered indexes are also known as secondary indexes.
- A secondary index may be created on one or more virtual columns or on a combination of virtual columns and regular columns.
- The non-clustered index and base table data are both stored in different places, so it does not affect the physical row order in the base table.
- It is not sorted (ordering) the table data.
- Extra space is required to store logical structure
- Data update is faster than clustered index

```
ALTER TABLE table_name  
ADD [ CONSTRAINT constraint_name ]  
PRIMARY KEY (column1, column2, . . . column_n)
```

```
ALTER TABLE table_name  
DROP PRIMARY KEY
```

add /drop Primary Key using
Alter

Remember:

- A unique key can be NULL (absence of a value).
- A unique key value must be unique.
- A table can have multiple unique key.
- A column can have unique key as well as a primary key.

UNIQUE KEY constraint

A **UNIQUE key** constraint is a set of one or more than one fields/columns of a table that uniquely identify a record in a database table.

Note:

- Unique key in a relation is always associated with an ***INDEX*** object.

constraints – add unique key

col_name data_type **UNIQUE KEY**

The following example creates table with **UNIQUE KEY** column.

- **CREATE TABLE** clients (
 client_id **INT**,
 first_name **VARCHAR**(50),
 last_name **VARCHAR**(50),
 company_name **VARCHAR**(255),
 email **VARCHAR**(255) **UNIQUE**
);
- **CREATE TABLE** brands (
 ID **INT**,
 brandName **VARCHAR**(30),
 constraint uni_brandName **UNIQUE**(brandName)
);
- **SHOW INDEX FROM** clients;
- **CREATE TABLE** contacts (
 ID **INT**,
 first_name **VARCHAR**(50),
 last_name **VARCHAR**(50),
 phone **VARCHAR**(15),
 UNIQUE(phone)
);

- ALTER TABLE users DROP INDEX <COLUMN_NAME>;
- ALTER TABLE users DROP INDEX U_USER_ID; #CONSTRAINT NAME

```
ALTER TABLE table_name  
ADD [ CONSTRAINT constraint_name ]  
    UNIQUE (column1, column2, . . . column_n)
```

```
ALTER TABLE table_name  
    DROP INDEX constraint_name;
```

add / drop Unique Key using
Alter

[**CONSTRAINT** [*symbol*]] **FOREIGN KEY** (*col_name*, ...) **REFERENCES** *tbl_name* (*col_name*, ...)
[**ON DELETE CASCADE** | **SET NULL**]
[**ON UPDATE CASCADE** | **SET NULL**]

FOREIGN KEY constraint

A **FOREIGN KEY** is a **key** used to link two tables together. A **FOREIGN KEY** is a field (or collection of fields) in one table that refers to the **PRIMARY KEY** in another table. The table containing the **foreign key** is called the child table, and the table containing the candidate **key** is called the referenced or parent table.

constraints – foreign key

Remember:

- A foreign key can have a different column name from its primary key.
- DataType of primary key and foreign key column must be same.
- It ensures rows in one table have corresponding rows in another.
- Unlike the Primary key, they do not have to be unique.
- Foreign keys can be null even though primary keys can not.

Note:

- The table containing the FOREIGN KEY is referred to as the child table, and the table containing the PRIMARY KEY (referenced key) is the parent table.
- PARENT and CHILD tables must use the same storage engine,
- and they cannot be defined as temporary tables.

insert, update, & delete – (primary key/foreign key)

A referential constraint could be violated in following cases.

- An **INSERT** attempt to add a row to a child table that has a value in its foreign key columns that does not match a value in the corresponding parent table's column.
- An **UPDATE** attempt to change the value in a child table's foreign key columns to a value that has no matching value in the corresponding parent table's parent key.
- An **UPDATE** attempt to change the value in a parent table's parent key to a value that does not have a matching value in a child table's foreign key columns.
- A **DELETE** attempt to remove a record from a parent table that has a matching value in a child table's foreign key columns.

Note:

- PARENT and CHILD tables must use the same storage engine,
- and they cannot be defined as temporary tables.
- If we don't give constraint name. System will automatically generated the constraint name and will assign to foreign key constraint. **e.g. login_ibfk_1, login_ibfk_2,**

anomaly – (primary key/foreign key)

Remember:

Student (parent) Table

RollNo	Name	Mobile	City	State	isActive
1	Ramesh	●●●●	Pune	MH	1
2	Amit	●●●●	Baroda	GJ	1
3	Rajan	●●●●	Surat	GJ	1
4	Bhavin	●●●●	Baroda	GJ	1
5	Pankaj	●●●●	Surat	GJ	1

student_course (child) Table

RollNo	CourseDuration	CourseName
1	1.5 month	RDBMS
2	1.2 month	NoSQL
3	2 month	Networking
1	2 month	Java
2	2 month	.NET

Insertion anomaly:

- If we try to insert a record in Student_Course (child) table with RollNo = 7, it will not allow.

Updation and Deletion anomaly:

- If you try to change the RollNo from Student (parent) table with RollNo = 6 whose RollNo = 1, it will not allow.
- If you try to change the RollNo from Student_Course (child) table with RollNo = 9 whose RollNo = 3, it will not allow.
- If we try to delete a record from Student (parent) table with RollNo = 1, it will not allow.

alter, drop – (primary key/foreign key)

Remember:

Parent Table

```
student = {  
    rollno INT, * (PK)  
    name VARCHAR(10),  
    mobile VARCHAR(10),  
    city VARCHAR(10),  
    state VARCHAR(10),  
    isActive BOOL  
}
```

Child Table

```
student_course = {  
    rollno INT, * (FK)  
    courceduration VARCHAR(10),  
    courcename VARCHAR(10)  
}
```

DDL command could be violated in following cases.

Alter command:


- If we try to modify datatype of RollNo in Student or Student_Course table with VARCHAR, it will not allow.
- If we try to apply auto_increment to RollNo in Student table, it will not allow
- If we try to drop RollNo column from Student table or student_course , it will not allow.

Drop command:

- If we try to drop Student (parent) table, it will not allow.

constraints – foreign key

A foreign key is a field in a table that matches another field of another table. A foreign key places constraints on data in the related tables, which enables MySQL to maintain referential integrity.

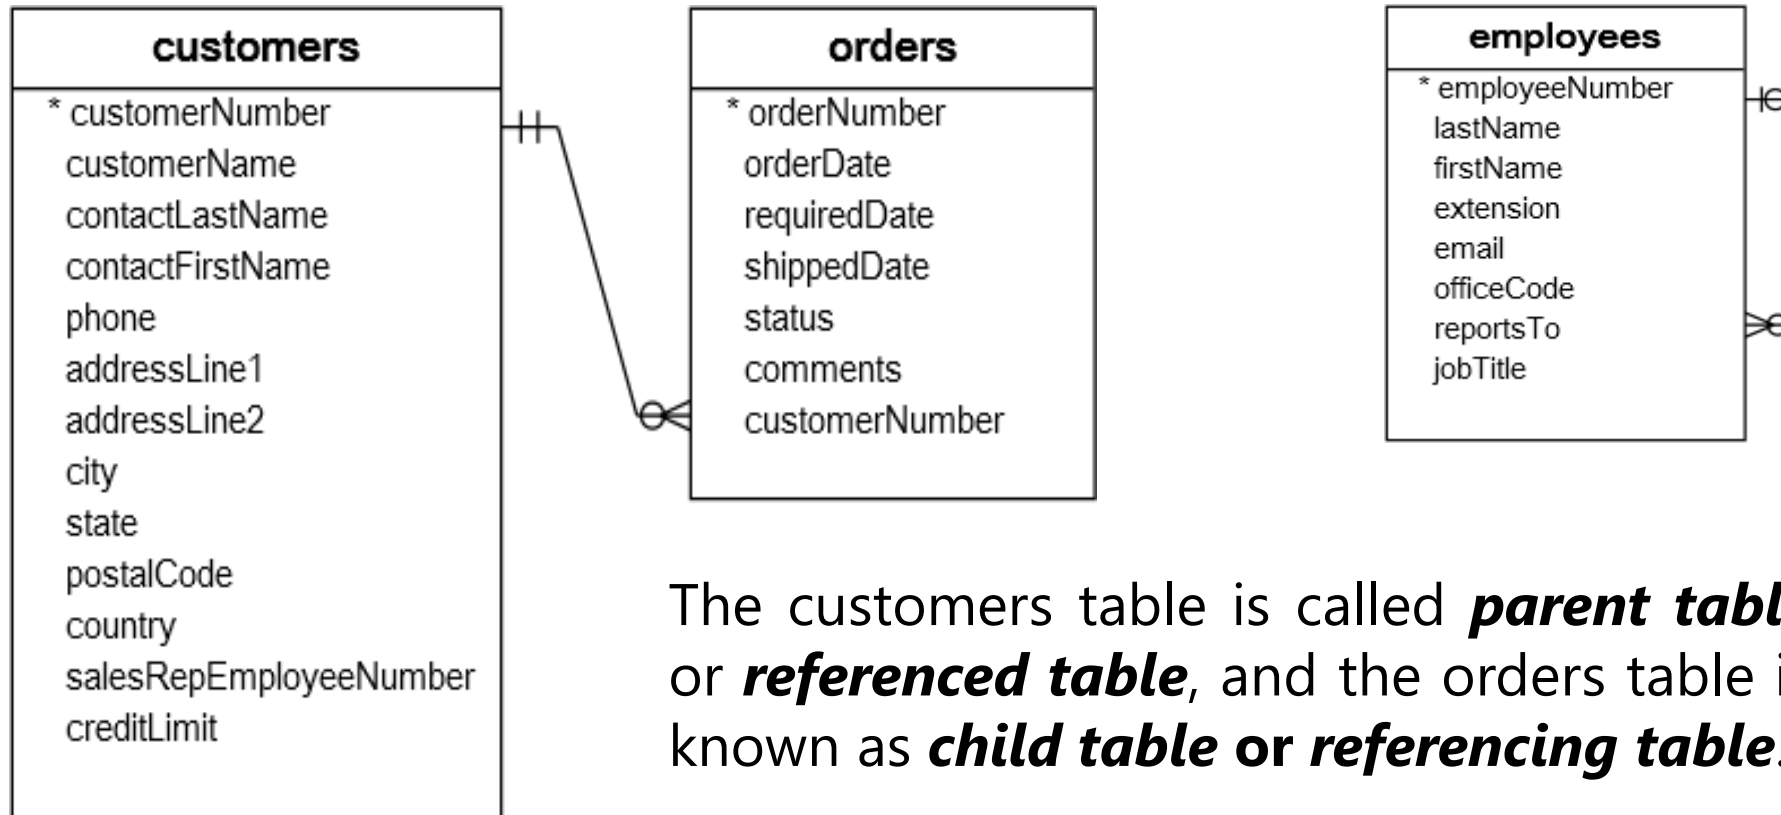

```
ALTER TABLE table_name  
ADD [ CONSTRAINT constraint_name ]  
    FOREIGN KEY (child_col1, child_col2, . . . child_col_n)  
    REFERENCES parent_table (parent_col1, parent_col2, . . . parent_col_n);
```

Add Foreign Key Constraint using
Alter

constraints – add foreign key using alter

You can use the **ALTER TABLE** statement to **ADD FOREIGN KEY** on existing column.

```
ALTER TABLE table_name
ADD [ CONSTRAINT constraint_name ]
    FOREIGN KEY (child_col1, child_col2, . . . child_col_n)
    REFERENCES parent_table (parent_col1, parent_col2, . . . parent_col_n);
```

```
CREATE TABLE users (
    ID INT PRIMARY KEY,
    userName VARCHAR(40),
    password VARCHAR(255),
    email VARCHAR(255) UNIQUE KEY
);
```

```
CREATE TABLE login (
    ID INT PRIMARY KEY,
    userID INT,
    loginDate DATE,
    loginTime TIME
);
```

- **ALTER TABLE** login **ADD FOREIGN KEY**(userID) **REFERENCES** users(ID);
- **ALTER TABLE** login **ADD constraint** fk_userID **FOREIGN KEY**(userID) **REFERENCES** users(ID);

```
ALTER TABLE table_name  
DROP FOREIGN KEY constraint_name
```

Drop Foreign Key Constraint
using Alter

constraints – drop foreign key

You can use the **ALTER TABLE** statement to **DROP FOREIGN KEY**.

```
CREATE TABLE users (  
  ID INT PRIMARY KEY ,  
  userName VARCHAR(40),  
  password VARCHAR(255),  
  email VARCHAR(255)  
);
```

```
CREATE TABLE login (  
  ID INT PRIMARY KEY,  
  userID INT,  
  loginDate DATE,  
  loginTime TIME,  
  constraint fk_userID FOREIGN KEY(userID) REFERENCES users(ID)  
);
```

```
CREATE TABLE login (  
  ID INT PRIMARY KEY,  
  userID INT,  
  loginDate DATE,  
  loginTime TIME,  
  FOREIGN KEY(userID) REFERENCES users(ID)  
);
```

- **ALTER TABLE** login **DROP FOREIGN KEY** fk_userID;
- **ALTER TABLE** login **DROP FOREIGN KEY** login_ibfk_1; **// login_ibfk_1 is the default constraint name.**
- **SELECT** table_name, constraint_name, constraint_type **FROM** information_schema.table_constraints **WHERE** table_schema = 'DB2';

1. CREATE TABLE test (c1 INT, c2 INT, c3 INT, check (c3 = SUM(c1)));



// ERROR

SUM(SAL)	MIN(SAL)	COUNT(*)
AVG(SAL)	MAX(SAL)	COUNT(JOB)

Check Constraint

CHECK condition expressions must follow some rules.

- Literals, deterministic built-in functions, and operators are permitted.
 - Non-generated and generated columns are permitted, except columns with the `AUTO_INCREMENT` attribute.
 - Sub-queries are not permitted.
 - Environmental variables (such as `CURRENT_USER`, `CURRENT_DATE`, ...) are not permitted.
 - Non-Deterministic built-in functions (such as `AVG`, `COUNT`, `RAND`, `LAST_INSERT_ID`, `FIRST_VALUE`, `LAST_VALUE`, ...) are not permitted.
 - Variables (system variables, user-defined variables, and stored program local variables) are not permitted.
 - Stored functions and user-defined functions are not permitted.
-

Note:

Prior to MySQL 8.0.16, `CREATE TABLE` permits only the following limited version of table `CHECK` constraint syntax, which is parsed and ignored.

Remember:

If you omit the constraint name, MySQL automatically generates a name with the following convention:

- `table_name_chk_n`

constraints – check

col_name data_type **CHECK**(*expr*)

The following example creates **USERS** table with **CHECK** column.

```
CREATE TABLE users (  
  ID INT PRIMARY KEY,  
  userName VARCHAR(40),  
  password VARCHAR(255),  
  email VARCHAR(255),  
  ratings INT CHECK(ratings > 50)  
);
```

```
CREATE TABLE users (  
  ID INT PRIMARY KEY,  
  userName VARCHAR(40),  
  password VARCHAR(255),  
  email VARCHAR(255),  
  ratings INT,  
  constraint chk_ratings CHECK(ratings > 50)  
);
```

```
CREATE TABLE users (  
  ID INT PRIMARY KEY,  
  userName VARCHAR(40),  
  password VARCHAR(255),  
  email VARCHAR(255),  
  ratings INT,  
  CHECK(ratings > 50)  
);
```

```
CREATE TABLE users (  
  ID INT PRIMARY KEY,  
  userName VARCHAR(40),  
  password VARCHAR(255),  
  email VARCHAR(255),  
  ratings INT,  
  constraint chk_ratings CHECK(ratings > 50),  
  constraint chk_email CHECK(LENGTH(email) > 12)  
);
```

```
ALTER TABLE table_name  
ADD [ CONSTRAINT constraint_name ]  
CHECK (condition)
```

```
ALTER TABLE table_name  
DROP { CHECK | CONSTRAINT } constraint_name
```

Add / Drop Check Constraint
using Alter

constraints – add check using alter

You can use the **ALTER TABLE** statement to **ADD CHECK KEY** on existing column.

```
ALTER TABLE table_name  
ADD CONSTRAINT [ constraint_name ]  
CHECK (condition)
```

```
CREATE TABLE users (  
    ID INT PRIMARY KEY,  
    userName VARCHAR(40),  
    password VARCHAR(255),  
    email VARCHAR(255),  
    ratings INT  
);
```

- ALTER TABLE users ADD CHECK(ratings > 50);
- ALTER TABLE users ADD constraint chk_ratings CHECK(ratings > 50);


```
ALTER TABLE table_name  
  DROP { CHECK | CONSTRAINT } constraint_name
```

drop check constraint

constraints – drop check key

You can use the **ALTER TABLE** statement to **DROP CHECK KEY**.

```
ALTER TABLE table_name  
DROP { CHECK | CONSTRAINT } constraint_name
```

- ALTER TABLE users DROP CHECK chk_ratings;
- ALTER TABLE users DROP constraint chk_ratings;
- ALTER TABLE users DROP CHECK users_chk_1;

- SELECT table_name, constraint_name, constraint_type FROM information_schema.table_constraints WHERE table_schema = 'DB2' AND (table_name LIKE 'U%' OR table_name LIKE 'L%');

```
CREATE TABLE users (  
  ID INT PRIMARY KEY,  
  userName VARCHAR(40),  
  password VARCHAR(255),  
  email VARCHAR(255),  
  ratings INT,  
  constraint chk_ratings CHECK(ratings > 50)  
);
```

```
CREATE TABLE users (  
  ID INT PRIMARY KEY,  
  userName VARCHAR(40),  
  password VARCHAR(255),  
  email VARCHAR(255),  
  ratings INT,  
  CHECK(ratings > 50)  
);
```

alter table

ALTER TABLE changes the structure of a table.

Note:

- you can add or delete columns,
- create or destroy indexes,
- change the type of existing columns, or
- rename columns or the table itself.
- You cannot change the position of columns in table structure. If not, then what? create a new table with **SELECT statement**.

syntax

alter table

ALTER TABLE tbl_name

[*alter_specification* [, *alter_specification*] . . .

- | ADD [COLUMN] *col_name* *column_definition* [FIRST | AFTER *col_name*]
- | ADD [COLUMN] (*col_name* *column_definition*, . . .)
- | ADD {INDEX|KEY} [*index_name*] (*index_col_name*, . . .)
- | ADD [CONSTRAINT [*symbol*]] PRIMARY KEY
- | ADD [CONSTRAINT [*symbol*]] UNIQUE KEY
- | ADD [CONSTRAINT [*symbol*]] FOREIGN KEY *reference_definition*
- | CHANGE [COLUMN] *old_col_name* *new_col_name* *column_definition* [FIRST|AFTER *col_name*]
- | MODIFY [COLUMN] *col_name* *column_definition* [FIRST | AFTER *col_name*]
- | DROP [COLUMN] *col_name*
- | DROP PRIMARY KEY
- | DROP {INDEX|KEY} *index_name*
- | DROP FOREIGN KEY *fk_symbol*
- | RENAME [TO|AS] *new_tbl_name*
- | RENAME COLUMN *old_col_name* TO *new_col_name*
- | ALTER [COLUMN] *col_name* { SET DEFAULT {*literal* | (*expr*)} | SET {VISIBLE | INVISIBLE} | DROP DEFAULT }

Remember:

- **Change Columns** :- You can rename a column using a CHANGE old_col_name new_col_name column_definition clause. To do so, specify the old and new column names and the definition that the column currently has.
- **Modify Columns** :- You can also use MODIFY to change a column's type without renaming it.
- **Dropping Columns** :- If a table contains only one column, the column cannot be dropped. If columns are dropped from a table, the columns are also removed from any index of which they are a part. If all columns that make up an index are dropped, the index is dropped as well.

Note:

- To convert a table from one storage engine to another, use an ALTER TABLE statement that indicates the new engine:

```
ALTER TABLE tbl_name ENGINE = InnoDB;
```

```
ALTER TABLE tbl_name ADD col1 INT, ADD col2 INT;
```

```
ALTER TABLE tbl_name DROP COLUMN col1, DROP COLUMN col2 , ADD col3 INT;
```

add column

ALTER TABLE tbl_name [alter_specification [, alter_specification] . . .]

alter_specification

- **ADD** [COLUMN] col_name column_definition [FIRST | AFTER col_name]
- **ADD** [COLUMN] (col_name column_definition, . . .)

add column

- `CREATE TABLE vehicles(
 vehicleID INT PRIMARY KEY ,
 year INT,
 make VARCHAR(100)
);`

	Field	Type	Null	Key	Default	Extra
▶	vehicleID	int	NO	PRI	NULL	
	year	int	YES		NULL	
	make	varchar(100)	YES		NULL	

- `INSERT INTO vehicles VALUES (111, 2000, 'Honda');`
- `INSERT INTO vehicles VALUES (112, 2002, 'Hyundai');`
- `INSERT INTO vehicles VALUES (113, 2000, 'Jeep');`
- `INSERT INTO vehicles VALUES (114, 2005, 'Toyota');`

- ALTER TABLE vehicles
ADD ID INT UNIQUE auto_increment first,
ADD model VARCHAR(100) NOT NULL,
ADD color VARCHAR(50),
ADD note VARCHAR(255);

	Field	Type	Null	Key	Default	Extra
►	ID	int	NO	UNI	NULL	auto_increment
	vehicleID	int	NO	PRI	NULL	
	year	int	YES		NULL	
	make	varchar(100)	YES		NULL	
	model	varchar(100)	NO		NULL	
	color	varchar(50)	YES		NULL	
	note	varchar(255)	YES		NULL	

[illegible]

modify column

ALTER TABLE tbl_name [alter_specification [, alter_specification] ...]

alter_specification

- **MODIFY** [COLUMN] col_name column_definition [FIRST | AFTER col_name]

- **CREATE TABLE** vehicles(
vehicleID **INT PRIMARY KEY** ,
year **INT**,
make **VARCHAR(100)**,
model **VARCHAR(100) NOT NULL**,
color **VARCHAR(50)**,
note **VARCHAR(255)**
);

modify column

- **ALTER TABLE** vehicles
MODIFY year **SMALLINT NOT NULL**,
MODIFY make **VARCHAR(150) NOT NULL**,
MODIFY color **VARCHAR(20) NOT NULL**;

	Field	Type	Null	Key	Default	Extra
▶	vehicleID	int	NO	PRI	NULL	
	year	int	YES		NULL	
	make	varchar(100)	YES		NULL	
	model	varchar(100)	NO		NULL	
	color	varchar(50)	YES		NULL	
	note	varchar(255)	YES		NULL	

	Field	Type	Null	Key	Default	Extra
▶	vehicleID	int	NO	PRI	NULL	
	year	smallint	NO		NULL	
	make	varchar(150)	NO		NULL	
	model	varchar(100)	NO		NULL	
	color	varchar(20)	NO		NULL	
	note	varchar(255)	YES		NULL	

- **INSERT INTO** vehicles **VALUES** (111, 2000, 'Honda', 'A1', 'silver', ' Honda was the first Japanese automobile manufacturer to release a dedicated luxury brand, Acura, in 1986.');
- **INSERT INTO** vehicles **VALUES** (112, 2002, 'Hyundai', 'AC1', 'white', ' Hyundai operates the world's largest integrated automobile manufacturing facility in Ulsan, South Korea which has an annual production capacity of 1.6 million units.');
- **INSERT INTO** vehicles **VALUES** (113, 2000, 'Jeep', 'D2', 'black', ' Fiat Chrysler Automobiles has owned Jeep since 2014. Previous owners include the Kaiser Jeep Corporation and American Motors Corporation. Most Jeeps are American-made, except for a select few models. The Toledo Assembly Complex in Ohio manufactures the Jeep Wrangler.');

rename column

ALTER TABLE tbl_name [alter_specification [, alter_specification] ...]

alter_specification

- **RENAME COLUMN** old_col_name TO new_col_name

rename column

- **CREATE TABLE** vehicles (
 vehicleID **INT**,
 year **SMALLINT**,
 make **VARCHAR**(150),
 model **VARCHAR**(100),
 color **VARCHAR**(20),
 note **VARCHAR**(255)
);

	Field	Type	Null	Key	Default	Extra
►	vehicleID	int	YES		NULL	
	year	smallint	YES		NULL	
	make	varchar(150)	YES		NULL	
	model	varchar(100)	YES		NULL	
	color	varchar(20)	YES		NULL	
	note	varchar(255)	YES		NULL	

- **ALTER TABLE** vehicles
 RENAME COLUMN year **TO** model_year

	Field	Type	Null	Key	Default	Extra
►	vehicleID	int	YES		NULL	
	model_year	int	NO		NULL	
	make	varchar(150)	YES		NULL	
	model	varchar(100)	YES		NULL	
	model_color	varchar(20)	YES		NULL	
	vehicleCondition	varchar(150)	YES		NULL	

change column

ALTER TABLE tbl_name [alter_specification [, alter_specification] ...]

alter_specification

- **CHANGE** [COLUMN] old_col_name new_col_name column_definition [FIRST | AFTER col_name]

change column

- **CREATE TABLE** vehicles (
 vehicleID **INT**,
 year **SMALLINT**,
 make **VARCHAR**(150),
 model **VARCHAR**(100),
 color **VARCHAR**(20),
 note **VARCHAR**(255)
);

	Field	Type	Null	Key	Default	Extra
►	vehicleID	int	YES		NULL	
	year	smallint	YES		NULL	
	make	varchar(150)	YES		NULL	
	model	varchar(100)	YES		NULL	
	color	varchar(20)	YES		NULL	
	note	varchar(255)	YES		NULL	

- **ALTER TABLE** vehicles
 CHANGE year model_year **INT**,
 CHANGE color model_color **VARCHAR**(20),
 CHANGE note vehicleCondition **VARCHAR**(150);

	Field	Type	Null	Key	Default	Extra
►	vehicleID	int	YES		NULL	
	model_year	int	NO		NULL	
	make	varchar(150)	YES		NULL	
	model	varchar(100)	YES		NULL	
	model_color	varchar(20)	YES		NULL	
	vehicleCondition	varchar(150)	YES		NULL	

change column

- `CREATE TABLE users (
 ID INT PRIMARY KEY,
 userName VARCHAR(40),
 password VARCHAR(25),
 email VARCHAR(255)
);`
- `CREATE TABLE login (
 ID INT PRIMARY KEY,
 userID INT,
 loginDate DATE,
 loginTime TIME,
 constraint fk_userID FOREIGN KEY(userID) REFERENCES users(ID)
);`
- `INSERT INTO users VALUES (1, 'rajan', 'ranaj123', 'rajan447.gmail.com');`
- `INSERT INTO users VALUES (2, 'raj', 'raj', 'raj.gmail.com');`
- `INSERT INTO login VALUES (1, 1, curdate(), curtime());`
- `INSERT INTO login VALUES (2, 1, curdate(), curtime());`
- `INSERT INTO login VALUES (3, 2, curdate(), curtime());`
- `INSERT INTO login VALUES (4, NULL, curdate(), curtime());`
- `ALTER TABLE users CHANGE ID userID INT;`
- `ALTER TABLE login CHANGE userID UID INT;`
- `INSERT INTO login VALUES (5, NULL, curdate(), curtime());`

drop column

ALTER TABLE tbl_name [*alter_specification* [, *alter_specification*] . . .]

alter_specification

- **DROP** [COLUMN] *col_name*

drop column

- **CREATE TABLE** vehicles(
 vehicleID **INT**,
 model_year **SMALLINT**,
 make **VARCHAR**(150),
 model **VARCHAR**(100),
 model_color **VARCHAR**(20),
 vehicleCondition **VARCHAR**(150)
);

	Field	Type	Null	Key	Default	Extra
▶	vehideID	int	YES		NULL	
	model_year	smallint	YES		NULL	
	make	varchar(150)	YES		NULL	
	model	varchar(100)	YES		NULL	
	model_color	varchar(20)	YES		NULL	
	vehideCondition	varchar(150)	YES		NULL	

- **ALTER TABLE** vehicles
 CHANGE model_year year **INT NOT NULL**,
 DROP model,
 DROP model_color,
 DROP vehicleCondition;

	Field	Type	Null	Key	Default	Extra
▶	vehideID	int	YES		NULL	
	year	int	NO		NULL	
	make	varchar(150)	YES		NULL	

alter table

Sample table

```
CREATE TABLE vehicles(  
vehicleID INT PRIMARY KEY ,  
year INT,  
make VARCHAR(100)  
);
```

Add new columns to a table

```
ALTER TABLE vehicles  
ADD model VARCHAR(100) NOT NULL,  
ADD color VARCHAR(50),  
ADD note VARCHAR(255);
```

Modify columns

```
ALTER TABLE vehicles  
MODIFY year SMALLINT NOT NULL,  
MODIFY color VARCHAR(20) NOT NULL,  
MODIFY make VARCHAR(150) NOT NULL;
```

Rename columns

```
ALTER TABLE vehicles  
CHANGE year model_year SMALLINT NOT NULL,  
CHANGE color model_color VARCHAR(20),  
CHANGE note vehicleCondition VARCHAR(150);
```

DROP columns

```
ALTER TABLE vehicles  
CHANGE model_year year INT NOT NULL,  
DROP model,  
DROP model_color,  
DROP vehicleCondition;
```

drop table

Remember:

- DROP and TRUNCATE are DDL commands, whereas DELETE is a DML command.
- DELETE operations can be rolled back (undone), while DROP and TRUNCATE operations cannot be rolled back (DDL statements are auto committed).
- Dropping a TABLE also drops any TRIGGERS for the table.
- Dropping a TABLE also drops any INDEX for the table.
- Dropping a TABLE will not drop any VIEW for the table.
- If you try to drop a PARENT/MASTER TABLE, it will not get dropped.

drop table

DROP [TEMPORARY] TABLE [IF EXISTS] tbl_name [, tbl_name] ...

Note:

- All table data and the table definition are removed/dropped.
 - If it is desired to delete only the records but to leave the table definition for future use, then the ***DELETE*** command should be used instead of ***DROP TABLE***.
-
- DROP login;
 - DROP TABLE users;
 - DROP TABLE login, users;