

# Key concepts on Deep Neural Networks

测验, 10 个问题

10/10 分 (100%)

✓ 恭喜! 您通过了!

下一项



1 / 1 分

1。

What is the "cache" used for in our implementation of forward propagation and backward propagation?



We use it to pass variables computed during forward propagation to the corresponding backward propagation step. It contains useful values for backward propagation to compute derivatives.



正确

Correct, the "cache" records values from the forward propagation units and sends it to the backward propagation units because it is needed to compute the chain rule derivatives.



It is used to keep track of the hyperparameters that we are searching over, to speed up computation.



It is used to cache the intermediate values of the cost function during training.



We use it to pass variables computed during backward propagation to the corresponding forward propagation step. It contains useful values for forward propagation to compute activations.



1 / 1 分

2。

Among the following, which ones are "hyperparameters"? (Check all that apply.)



activation values  $a^{[l]}$



# Key concepts on Deep Neural Networks

测验, 10 个问题

10/10 分 (100%)

☐ bias vectors  $b^{[l]}$



未选择的是正确的

☒ size of the hidden layers  $n^{[l]}$



正确

☒ learning rate  $\alpha$



正确

☐ weight matrices  $W^{[l]}$



未选择的是正确的

☒ number of layers  $L$  in the neural network



正确

☒ number of iterations



正确



1 / 1 分

3.

Which of the following statements is true?

☒ The deeper layers of a neural network are typically computing more complex features of the input than the earlier layers.



正确

☐ The earlier layers of a neural network are typically computing more complex features of the input than the deeper layers.

## Key concepts on Deep Neural Networks

测验, 10 个问题

10/10 分 (100%)



1 / 1 分

4.

Vectorization allows you to compute forward propagation in an  $L$ -layer neural network without an explicit for-loop (or any other explicit iterative loop) over the layers  $l=1, 2, \dots, L$ . True/False?



True



False

正确

Forward propagation propagates the input through the layers, although for shallow networks we may just write all the lines ( $a^{[2]} = g^{[2]}(z^{[2]})$ ,  $z^{[2]} = W^{[2]}a^{[1]} + b^{[2]}$ , ...) in a deeper network, we cannot avoid a for loop iterating over the layers: ( $a^{[l]} = g^{[l]}(z^{[l]})$ ,  $z^{[l]} = W^{[l]}a^{[l-1]} + b^{[l]}$ , ...).



1 / 1 分

5.

Assume we store the values for  $n^{[l]}$  in an array called layers, as follows: layer\_dims = [ $n_x$ , 4,3,2,1]. So layer 1 has four hidden units, layer 2 has 3 hidden units and so on. Which of the following for-loops will allow you to initialize the parameters for the model?



```
1 for(i in range(1, len(layer_dims)/2)):
2     parameter['W' + str(i)] = np.random.randn(layers[i], layers[i-1])) * 0.01
3     parameter['b' + str(i)] = np.random.randn(layers[i], 1) * 0.01
```



```
1 for(i in range(1, len(layer_dims)/2)):
2     parameter['W' + str(i)] = np.random.randn(layers[i], layers[i-1])) * 0.01
3     parameter['b' + str(i)] = np.random.randn(layers[i-1], 1) * 0.01
```



```
1 for(i in range(1, len(layer_dims))):
2     parameter['W' + str(i)] = np.random.randn(layers[i-1], layers[i])) * 0.01
3     parameter['b' + str(i)] = np.random.randn(layers[i], 1) * 0.01
```



```
1
2
3
```

## Key concepts on Deep Neural Networks

测验, 10 个问题

正确

```
for(i in range(1, len(layer_dims))):
```

```
    parameter['W'+str(i)] = np.random.randn(layers[i], layers[i-1]) * 0.01
```

```
    parameter['b'+str(i)] = np.random.randn(layers[i], 1) * 0.01
```


10/10 分 (100%)



1 / 1 分

6.

Consider the following neural network.

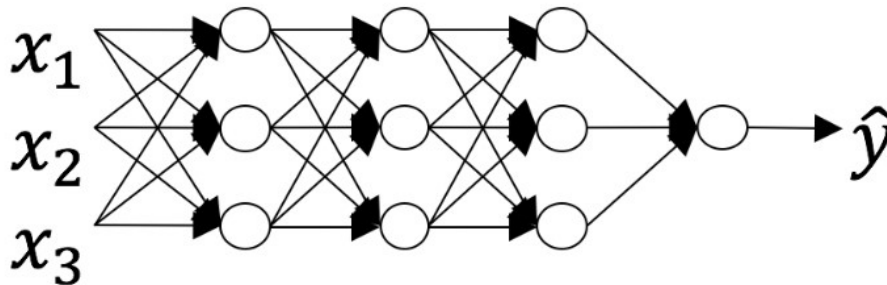

How many layers does this network have?



The number of layers  $L$  is 4. The number of hidden layers is 3.



正确

Yes. As seen in lecture, the number of layers is counted as the number of hidden layers + 1. The input and output layers are not counted as hidden layers.



The number of layers  $L$  is 3. The number of hidden layers is 3.



The number of layers  $L$  is 4. The number of hidden layers is 4.



The number of layers  $L$  is 5. The number of hidden layers is 4.



1 / 1 分

7.

During forward propagation, in the forward function for a layer  $l$  you need to know what is the activation function in a layer (Sigmoid, tanh, ReLU, etc.). During backpropagation, the corresponding backward function also needs to know what is the activation function for layer  $l$ , since the gradient depends on it. True/False?



True



## Key concepts on Deep Neural Networks

测验, 10 个问题

10/10 分 (100%)

Yes, as you've seen in the week 3 each activation has a different derivative. Thus, during backpropagation you need to know which activation was used in the forward propagation to be able to compute the correct derivative.

☐ False

---



1 / 1 分

8.

There are certain functions with the following properties:

(i) To compute the function using a shallow network circuit, you will need a large network (where we measure size by the number of logic gates in the network), but (ii) To compute it using a deep network circuit, you need only an exponentially smaller network. True/False?



True



正确



False

---



1 / 1 分


9.

# Key concepts on Deep Neural Networks

测验, 10 个问题

10/10 分 (100%)

Consider the following 2 hidden layer neural network:

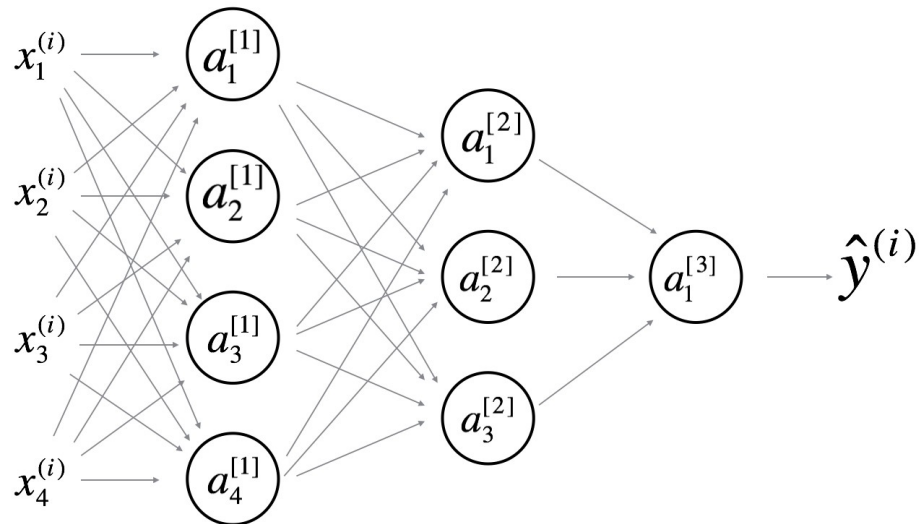

Which of the following statements are True? (Check all that apply).

☒  $W^{[1]}$  will have shape (4, 4)



正确

Yes. More generally, the shape of  $W^{[l]}$  is  $(n^{[l]}, n^{[l-1]})$ .

☒  $b^{[1]}$  will have shape (4, 1)



正确

Yes. More generally, the shape of  $b^{[l]}$  is  $(n^{[l]}, 1)$ .

☐  $W^{[1]}$  will have shape (3, 4)



未选择的是正确的

☐  $b^{[1]}$  will have shape (3, 1)



未选择的是正确的

☒  $W^{[2]}$  will have shape (3, 4)



正确

Yes. More generally, the shape of  $W^{[l]}$  is  $(n^{[l]}, n^{[l-1]})$ .



# Key concepts on Deep Neural Networks

测验, 10 个问题

10/10 分 (100%)

☐  $b^{[2]}$  will have shape (1, 1)  
未选择的是正确的

☐  $W^{[2]}$  will have shape (3, 1)  
未选择的是正确的

☒  $b^{[2]}$  will have shape (3, 1)  
正确  
Yes. More generally, the shape of  $b^{[l]}$  is  $(n^{[l]}, 1)$ .

☐  $W^{[3]}$  will have shape (3, 1)  
未选择的是正确的

☒  $b^{[3]}$  will have shape (1, 1)  
正确  
Yes. More generally, the shape of  $b^{[l]}$  is  $(n^{[l]}, 1)$ .

☒  $W^{[3]}$  will have shape (1, 3)  
正确  
Yes. More generally, the shape of  $W^{[l]}$  is  $(n^{[l]}, n^{[l-1]})$ .

☐  $b^{[3]}$  will have shape (3, 1)  
未选择的是正确的

---

☒ 1 / 1 分

10.  
Whereas the previous question used a specific network, in the general case what is the dimension of  $W^{[l]}$ , the weight matrix associated with layer  $l$ ?

☒  $W^{[l]}$  has shape  $(n^{[l]}, n^{[l-1]})$

## Key concepts on Deep Neural Networks

测验, 10 个问题

正确  
True

10/10 分 (100%)

- ☐  $W^{[l]}$  has shape  $(n^{[l]}, n^{[l+1]})$
  - ☐  $W^{[l]}$  has shape  $(n^{[l-1]}, n^{[l]})$
  - ☐  $W^{[l]}$  has shape  $(n^{[l+1]}, n^{[l]})$
- 

