


# VampirTrace 5.8.3 User Manual



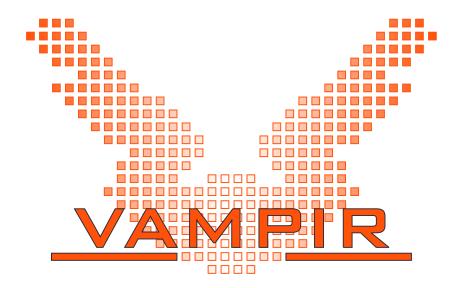

TU Dresden Center for Information Services and High Performance Computing (ZIH) 01062 Dresden Germany

http://www.tu-dresden.de/zih
http://www.tu-dresden.de/zih/vampirtrace

Contact: vampirsupport@zih.tu-dresden.de



## **Contents**

1	Intro	oduction	1
2	Inst	rumentation	5
	2.1	Compiler Wrappers	5
	2.2	Instrumentation Types	7
	2.3	Automatic Instrumentation	7
		2.3.1 Supported Compilers	8
		2.3.2 Notes for Using the GNU, Intel, or PathScale Compiler	8
		2.3.3 Notes on Instrumentation of Inline Functions	8
		2.3.4 Instrumentation of Loops with OpenUH Compiler	9
	2.4	Manual Instrumentation	9
		2.4.1 Using the VampirTrace API	9
		2.4.2 Measurement Controls	10
	2.5	Binary Instrumentation Using Dyninst	11
	2.6	Tracing Java Applications Using JVMTI	12
	2.7	Tracing Calls to 3rd-Party Libraries	12
3	Run	time Measurement	15
	3.1	Trace File Name and Location	15
	3.2	Environment Variables	15
	3.3	Influencing Trace Buffer Size	18
	3.4	Profiling an Application	19
	3.5	Unification of Local Traces	19
	3.6	Synchronized Buffer Flush	20
	3.7	Enhanced Timer Synchronization	20
4	Rec	ording Additional Events and Counters	23
	4.1	Hardware Performance Counters	23
	4.2	Resource Usage Counters	24
	4.3	Memory Allocation Counter	24
	4.4	CPU ID Counter	25
	4.5	Pthread API Calls	25
	4.6	I/O Calls	26
	4.7	fork/system/exec Calls	
	4.8	MPI Correctness Checking Using UniMCI	
	1 Q	Llear defined Counters	20



	4.10 User-defined Markers	30
5	Filtering & Grouping 5.1 Function Filtering	32
A	VampirTrace InstallationA.1 BasicsA.2 Configure OptionsA.3 Cross CompilationA.4 Environment Set-UpA.5 Notes for Developers	35 41 42
В	Command Reference  B.1 Compiler Wrappers (vtcc,vtcxx,vtf77,vtf90)	43 44 46 47 49
С	Counter Specifications C.1 PAPI	55 56
D	<ul> <li>D.1 Can I use different compilers for VampirTrace and my application?</li> <li>D.2 Why does my application takes such a long time to start up?</li> <li>D.3 How can I trace functions in shared libraries?</li> <li>D.4 How can I speed up trace unification?</li> <li>D.5 There is no *.otf file. What can I do?</li> <li>D.6 What limitations are associated with VT_ON/VT_OFF?</li> <li>D.7 VampirTrace warns that it "cannot lock file a.lock", what's wrong?</li> <li>D.8 Can I re-locate my VampirTrace installation without re-build from source?</li> <li>D.9 I have a question that is not answered in this document!</li> <li>D.10 I need support for additional features so I can trace application xyz.</li> </ul>	59 59 59 60 60 61 61 61 61

This documentation describes how to apply VampirTrace to an application in order to generate trace files at execution time. This step is called *instrumentation*. It furthermore explains how to control the runtime measurement system during execution (*tracing*). This also includes performance counter sampling as well as selective filtering and grouping of functions.



## 1 Introduction

VampirTrace consists of a tool set and a runtime library for instrumentation and tracing of software applications. It is particularly tailored to parallel and distributed High Performance Computing (HPC) applications.

The instrumentation part modifies a given application in order to inject additional measurement calls during runtime. The tracing part provides the actual measurement functionality used by the instrumentation calls. By this means, a variety of detailed performance properties can be collected and recorded during runtime. This includes function enter and leave events, MPI communication, OpenMP events, and performance counters.

After a successful tracing run, VampirTrace writes all collected data to a trace file in the Open Trace Format (OTF)<sup>1</sup>. As a result, the information is available for post-mortem analysis and visualization by various tools. Most notably, Vampir-Trace provides the input data for the Vampir analysis and visualization tool<sup>2</sup>.

VampirTrace is included in Open MPI 1.3 and later versions. If not disabled explicitly, VampirTrace is built automatically when installing Open MPI<sup>3</sup>.

Trace files can quickly become very large, especially with automatic instrumentation. Tracing applications for only a few seconds can result in trace files of several hundred megabytes. To protect users from creating trace files of several gigabytes, the default behavior of VampirTrace limits the internal buffer to 32 MB per process. Thus, even for larger scale runs the total trace file size will be moderate. Please read Section 3.3 on how to remove or change this limit.

VampirTrace supports various Unix and Linux platforms that are common in HPC nowadays. It is available as open source software under a BSD License.

The following list shows a summary of all instrumentation and tracing features that VampirTrace offers. Note that not all features are supported on all platforms.

#### Tracing of user functions ⇒ Chapter 2

- Record function enter and leave events
- Record name and source code location (file name, line)
- Automatic instrumentation with many compilers and via Dyninst
- Manual instrumentation using VampirTrace API

<sup>1</sup>http://www.tu-dresden.de/zih/otf

<sup>2</sup>http://www.vampir.eu

<sup>3</sup>http://www.open-mpi.org/faq/?category=vampirtrace



#### MPI Tracing ⇒ Chapter 2

- Record MPI functions
- Record MPI communication: participating processes, transferred bytes, tag, communicator

#### OpenMP Tracing ⇒ Chapter 2

- OpenMP directives, synchronization, thread idle time
- Also hybrid (MPI and OpenMP) applications are supported

#### **Pthread Tracing**

- Trace POSIX thread API calls ⇒ Section 4.5
- Also hybrid (MPI and POSIX threads) applications are supported

#### Java Tracing ⇒ Chapter 2

- Record method calls
- Using JVMTI as interface between VampirTrace and Java Applications

#### 3rd-Party Library tracing ⇒ Section 2.7

- Trace calls to arbitrary third party libraries
- Generate wrapper for library functions based on library's header file(s)
- No recompilation of application or library is required

#### MPI Correctness Checking ⇒ Section 4.8

- Record MPI usage errors
- Using UniMCI as interface between VampirTrace and a MPI correctness checking tool (e.g. Marmot)

#### **User API**

- Manual instrumentation of source code regions ⇒ Section 2.4.1
- Measurement controls ⇒ Section 2.4.2
- User-defined counters ⇒ Section 4.9
- User-defined marker ⇒ Section 4.10

#### **Performance Counters** ⇒ Sections 4.1 and 4.2

- Hardware performance counters using PAPI, CPC, or NEC SX performance counter
- Resource usage counters using getrusage

#### **Memory Tracing** ⇒ Section 4.3

- Trace GLIBC memory allocation and free functions
- Record size of currently allocated memory as counter



#### I/O Tracing ⇒ Section 4.6

- Trace LIBC I/O calls
- Record I/O events: file name, transferred bytes

#### **CPU ID Tracing** ⇒ Section 4.4

- Trace core ID of a CPU on which the calling thread is running
- Record core ID as counter

#### Fork/System/Exec Tracing ⇒ Section 4.7

- Trace applications calling LIBC's fork, system, or one of the exec functions
- Add forked processes to the trace

#### Filtering & Grouping ⇒ Chapter 5

- Runtime and post-mortem filter (i.e. exclude functions from being recorded in the trace)
- Runtime grouping (i.e. assign functions to groups for improved analysis)

#### **OTF Output** ⇒ Chapter 3

- Writes compressed OTF files
- Output as trace file, statistical summary (profile), or both





## 2 Instrumentation

To perform measurements with VampirTrace, the user's application program needs to be instrumented, i.e., at specific points of interest (called "events") VampirTrace measurement calls have to be activated. As an example, common events are, amongst others, entering and leaving of functions as well as sending and receiving of MPI messages.

VampirTrace handles this automatically by default. In order to enable the instrumentation of function calls, the user only needs to replace the compiler and linker commands with VampirTrace's wrappers, see Section 2.1 below. VampirTrace supports different ways of instrumentation as described in Section 2.2.

## 2.1 Compiler Wrappers

ΑII the necessary instrumentation of user functions. MPI. OpenMP events is handled by VampirTrace's compiler wrappers (vtcc, vtcxx, vtf77, and vtf90). In the script used to build the application (e.g. a makefile), all compile and link commands should be replaced by the VampirTrace compiler wrapper. The wrappers perform the necessary instrumentation of the program and link the suitable VampirTrace library. Note that the VampirTrace version included in Open MPI 1.3 has additional wrappers (mpicc-vt, mpicxx-vt, mpif77vt, and mpif90-vt) which are like the ordinary MPI compiler wrappers (mpicc, mpicxx, mpif77, and mpif90) with the extension of automatic instrumentation.

The following list shows some examples specific to the parallelization type of the program:

• **Serial programs**: Compiling serial codes is the default behavior of the wrappers. Simply replace the compiler by VampirTrace's wrapper:

This will instrument user functions (if supported by the compiler) and link the VampirTrace library.

MPI parallel programs: MPI instrumentation is always handled by means
of the PMPI interface, which is part of the MPI standard. This requires
the compiler wrapper to link with an MPI-aware version of the VampirTrace
library. If your MPI implementation uses special MPI compilers (e.g. mpicc,



mpxlf90), you will need to tell VampirTrace's wrapper to use this compiler instead of the serial one:

MPI implementations without own compilers require the user to link the MPI library manually. In this case, simply replace the compiler by VampirTrace's compiler wrapper:

```
original: icc hello.c -o hello -lmpi with instrumentation: vtc hello.c -o hello -lmpi
```

If you want to instrument MPI events only (this creates smaller trace files and less overhead) use the option -vt:inst manual to disable automatic instrumentation of user functions (see also Section 2.4.1).

• Threaded parallel programs: When VampirTrace detects OpenMP or Pthread flags on the command line, special instrumentation calls are invoked. For OpenMP events OPARI is invoked for automatic source code instrumentation.

```
original: ifort <-openmp|-pthread> hello.f90
```

-o hello

with instrumentation: vtf90 <-openmp|-pthread> hello.f90

-o hello

For more information about OPARI read the documentation available in VampirTrace's installation directory at: share/vampirtrace/doc/opari/Readme.html

• **Hybrid MPI/Threaded parallel programs**: With a combination of the above mentioned approaches, hybrid applications can be instrumented:

```
original: mpif90 <-openmp|-pthread> hello.F90
```

-o hello

with instrumentation: vtf90 -vt:f90 mpif90

<-openmp|-pthread> hello.F90

-o hello

The VampirTrace compiler wrappers automatically try to detect which parallelization method is used by means of the compiler flags (e.g. <code>-lmpi, -openmp</code> or <code>-pthread</code>) and the compiler command (e.g. <code>mpif90</code>). If the compiler wrapper failed to detect this correctly, the instrumentation could be incomplete and an unsuitable VampirTrace library would be linked to the binary. In this case, you should tell the compiler wrapper which parallelization method your program uses



by using the switches <code>-vt:mpi</code>, <code>-vt:mt</code>, and <code>-vt:hyb</code> for MPI, multithreaded, and hybrid programs, respectively. Note that these switches do not change the underlying compiler or compiler flags. Use the option <code>-vt:verbose</code> to see the command line that the compiler wrapper executes. See Section B.1 for a list of all compiler wrapper options.

The default settings of the compiler wrappers can be modified in the files <code>share/vampirtrace/vtcc-wrapper-data.txt</code> (and similar for the other languages) in the installation directory of VampirTrace. The settings include compilers, compiler flags, libraries, and instrumentation types. You could for instance modify the default C compiler from <code>gcc</code> to <code>mpicc</code> by changing the line <code>compiler=gcc</code> to <code>compiler=mpicc</code>. This may be convenient if you instrument MPI parallel programs only.

## 2.2 Instrumentation Types

The wrapper option -vt:inst <insttype> specifies the instrumentation type to be used. The following values for <insttype> are possible:

- compinst
   Fully-automatic instrumentation by the compiler (⇒ Section 2.3)
- manual
   Manual instrumentation by using VampirTrace's API (⇒ Section 2.4.1)
   (needs source-code modifications)
- dyninst
   Binary-instrumentation with Dyninst (⇒ Section 2.5)

To determine which instrumentation type will be used by default and which instrumentation types are available on your system have a look at the entry inst\_avail in the wrapper's configuration file (e.g. share/vampirtrace/vtcc-wrapper-data.txt in the installation directory of VampirTrace for the C compiler wrapper).

See Section B.1 or type vtcc -vt:help for other options that can be passed to VampirTrace's compiler wrapper.

## 2.3 Automatic Instrumentation

Automatic instrumentation is the most convenient method to instrument your program. If available, simply use the compiler wrappers without any parameters, e.g.:

```
% vtf90 hello.f90 -o hello
```



### 2.3.1 Supported Compilers

VampirTrace supports following compilers for automatic instrumentation:

- GNU (i.e. gcc, g++, gfortran, g95)
- Intel version ≥10.0 (i.e. icc, icpc, ifort)
- PathScale version ≥3.1 (i.e. pathcc, pathCC, pathf90)
- Portland Group (PGI) (i.e. pgcc, pgCC, pgf90, pgf77)
- SUN Fortran 90 (i.e. cc, CC, f90)
- IBM (i.e. xlcc, xlCC, xlf90)
- NEC SX (i.e. sxcc, sxc++, sxf90)
- OpenUH version ≥4.0 (i.e. uhcc, uhCC, uhf90)

### 2.3.2 Notes for Using the GNU, Intel, or PathScale Compiler

For these compilers the command nm is required to get symbol information of the running application executable. For example on Linux systems, this program is a part of the *GNU Binutils*, which is downloadable from http://www.gnu.org/software/binutils.

To get the application executable for nm during runtime, VampirTrace uses the /proc file system. As /proc is not present on all operating systems, automatic symbol information might not be available. In this case, it is necessary to set the environment variable  $\texttt{VT\_APPPATH}$  to the pathname of the application executable to get symbols resolved via nm.

Should any problems emerge to get symbol information automatically, then the environment variable  $VT\_GNU\_NMFILE$  can be set to a symbol list file, which is created with the command nm, like:

```
% nm hello > hello.nm
```

To get the source code line for the application functions use nm-1 on Linux systems. VampirTrace will include this information into the trace. Note that the output format of nm must be written in BSD-style. See the manual page of nm to obtain help for dealing with the output format setting.

#### 2.3.3 Notes on Instrumentation of Inline Functions

Compilers behave differently when they automatically instrument inlined functions. The GNU and Intel  $\geq$ 10.0 compilers instrument all functions by default



when they are used with VampirTrace. They therefore switch off inlining completely, disregarding the optimization level chosen. One can prevent these particular functions from being instrumented by appending the following attribute to function declarations, hence making them able to be inlined (this works only for C/C++):

```
__attribute__ ((__no_instrument_function__))
```

The PGI and IBM compilers prefer inlining over instrumentation when compiling with enabled inlining. Thus, one needs to disable inlining to enable the instrumentation of inline functions and vice versa.

The bottom line is that a function cannot be inlined and instrumented at the same time. For more information on how to inline functions read your compiler's manual.

### 2.3.4 Instrumentation of Loops with OpenUH Compiler

The OpenUH compiler provides the possibility of instrumenting loops in addition to functions. To use this functionality add the compiler flag -OPT:instrloop. In this case loops induce additional events including the type of loop (e.g. for, while, or do) and the source code location.

## 2.4 Manual Instrumentation

## 2.4.1 Using the VampirTrace API

The VT\_USER\_START, VT\_USER\_END calls can be used to instrument any user-defined sequence of statements.

```
#include "vt_user.inc"
VT_USER_START('name')
...
VT_USER_END('name')

C:
    #include "vt_user.h"
    VT_USER_START("name");
...
VT_USER_END("name");
```

If a block has several exit points (as it is often the case for functions), all exit points have to be instrumented with VT\_USER\_END, too.



For C++ it is simpler as is demonstrated in the following example. Only entry points into a scope need to be marked. The exit points are detected automatically when C++ deletes scope-local variables.

```
C++:
    #include "vt_user.h"
{
      VT_TRACER("name");
      ...
}
```

The instrumented sources have to be compiled with <code>-DVTRACE</code> for all three languages, otherwise the <code>VT\_\*</code> calls are ignored. Note that Fortran source files instrumented this way have to be preprocessed, too.

In addition, you can combine this particular instrumentation type with all other types. In such a way, all user functions can be instrumented by a compiler while special source code regions (e.g. loops) can be instrumented by VT's API.

Use VT's compiler wrapper (described above) for compiling and linking the instrumented source code, such as:

• combined with automatic compiler instrumentation:

```
% vtcc -DVTRACE hello.c -o hello
```

without compiler instrumentation:

```
% vtcc -vt:inst manual -DVTRACE hello.c -o hello
```

Note that you can also use the option <code>-vt:inst</code> <code>manual</code> with non-instrumented sources. Binaries created in this manner only contain MPI and OpenMP instrumentation, which might be desirable in some cases.

#### 2.4.2 Measurement Controls

**Switching tracing on/off:** In addition to instrumenting arbitrary blocks of code, one can use the VT\_ON/VT\_OFF instrumentation calls to start and stop the recording of events. These constructs can be used to stop recording of events for a part of the application and later resume recording. For example, one could not collect trace events during the initialization phase of an application and turn on tracing for the computation part.

Furthermore the "on/off" functionality can be used to control the tracing behavior of VampirTrace and allows to trace only parts of interests. Therefore the amount of trace data can be reduced essentially.

To check whether if tracing is enabled or not use the call VT\_IS\_ON.



Please note that stopping and starting the recording of events has to be performed at the same call stack level. If this is not the case, an error message will be printed during runtime and VampirTrace will abort execution. For further information have a look at the FAQ D.6.

**Intermediate buffer flush:** In addition to an automated buffer flush when the buffer is filled, it is possible to flush the buffer at any point of the application. This way you can guarantee that after a manual buffer flush there will be a sequence of the program with no automatic buffer flush interrupting. To flush the buffer you can use the call VT\_BUFFER\_FLUSH.

Intermediate time synchronisation: VampirTrace provides several mechanisms for timer synchronization ( $\Rightarrow$  Section 3.7). In addition it is also possible to initiate a timer synchronization at any point of the application by calling VT\_TIMESYNC. Please note that the user has to ensure that all processes are actual at a synchronized point in the program (e.g. at a barrier). To use this call make sure that the enhanced timer synchronization is activated (set the environment variable VT\_ETIMESYNC  $\Rightarrow$  Section 3.2).

**Intermediate counter update:** VampirTrace provides the functionality to collect the values of arbitrary hardware counters. Chosen counter values are automatically recorded whenever an event occurs. Sometimes (e.g. within a long-lasting function) it is desirable to get the counter values at an arbitrary point within the program. To record the counter values at any given point you can call VT\_UPDATE\_COUNTER.

**Note:** For all three languages the instrumented sources have to be compiled with  $\neg DVTRACE$ . Otherwise the  $VT_{-}*$  calls are ignored.

In addition, if the sources contains further VampirTrace API calls and only the calls for measurement controls shall be disabled, then the sources have to be compiled with <code>-DVTRACE\_NO\_CONTROL</code>, too.

## 2.5 Binary Instrumentation Using Dyninst

The option -vt:inst dyninst is used with the compiler wrapper to instrument the application during runtime (binary instrumentation), by using Dyninst 1. Recompiling is not necessary for this kind of instrumentation, but relinking:

```
% vtf90 -vt:inst dyninst hello.o -o hello
```

The compiler wrapper dynamically links the library libvt-dynatt.so to the

<sup>1</sup>http://www.dyninst.org



application. This library attaches the *Mutator*-program vtdyn during runtime which invokes the instrumentation by using the Dyninst-API. Note that the application should have been compiled with the -g switch to have visible symbol names. After a tracing run with this kind of instrumentation, the vtunify utility needs to be invoked manually ( $\Rightarrow$  Sections 3.5 and B.2).

To prevent certain functions from being instrumented you can set the environment variable  ${\tt VT\_DYN\_BLACKLIST}$  to a file containing a newline-separated list of function names. All additional overhead, due to instrumentation of these functions, will be removed.

VampirTrace also allows binary instrumentation of functions located in shared libraries. For this to work the shared libraries have to be compiled with -g and a colon-separated list of their names has to be given in the environment variable  $VT\_DYN\_SHLIBS$ :

```
VT_DYN_SHLIBS=libsupport.so:libmath.so
```

## 2.6 Tracing Java Applications Using JVMTI

In addition to C, C++, and Fortran, VampirTrace is capable of tracing Java applications. This is accomplished by means of the Java Virtual Machine Tool Interface (JVMTI) which is part of JDK versions 5 and later. If VampirTrace was built with Java tracing support, the library libvt-java.so can be used as follows to trace any Java program:

```
% java -agentlib:vt-java ...
```

Or more easier, by replacing the usal Java application launcher <code>java</code> by the command <code>vtjava</code>:

```
% vtjava ...
```

When tracing Java applications, you probably want to filter out dispensable function calls. Please have a look at Sections 5.1 and 5.2 to learn about different ways for excluding parts of the application from tracing.

## 2.7 Tracing Calls to 3rd-Party Libraries

VampirTrace is also capable to trace calls to third party libraries which come with at least one C header file even without the library's source code. If VampirTrace was built with support for library tracing the tool vtlibwrapgen can be used to generate a wrapper library to intercept each call to the actual library functions. This wrapper library can be linked to the application or used in combination with the LD\_PRELOAD mechanism provided by Linux. The generation of a wrapper library is done using the vtlibwrapgen command and consists of two steps.



The first step generates a C source file, providing the wrapped functions of the library header file:

```
% vtlibwrapgen -g SDL -o SDLwrap.c /usr/include/SDL/*.h
```

This generates the source file SDLwrap.c that contains wrapper-functions for all library functions found in the header-files located in /usr/include/SDL/ and instructs VampirTrace to assign these functions to the new group SDL.

The generated wrapper source file can be edited in order to add manual instrumentation or alter attributes of the library wrapper. A detailed description can be found in the generated source file or in the header file <code>vt\_libwrap.h</code> which can be found in the include directory of VampirTrace.

To adapt the library instrumentation it is possible to pass a filter file to the generation process. The rules are like these for normal VampirTrace instrumentation (see Section 5.1), where only 0 (exclude functions) and -1 (generally include functions) are allowed.

The second step is to compile the generated source file:

```
% vtlibwrapgen --build --shared -o libSDLwrap SDLwrap.c
```

This builds the shared library libSDLwrap.so which can be linked to the application or preloaded by using the environment variable LD\_PRELOAD:

```
% LD_PRELOAD=$PWD/libSDLwrap.so <executable>
```

For more information about the tool vtlibwrapgen see Section B.5.





## 3 Runtime Measurement

Running a VampirTrace instrumented application should normally result in an OTF trace file in the current working directory where the application was executed. If a problem occurs, set the environment variable VT\_VERBOSE to 2 before executing the instrumented application in order to see control messages of the VampirTrace runtime system which might help tracking down the problem.

The internal buffer of VampirTrace is limited to 32 MB per process. Use the environment variables VT\_BUFFER\_SIZE and VT\_MAX\_FLUSHES to increase this limit. Section 3.3 contains further information on how to influence trace file size.

## 3.1 Trace File Name and Location

The default name of the trace file depends on the operating system where the application is run. On Linux, MacOS and Sun Solaris the trace file will be named like the application, e.g. hello.otf for the executable hello. For other systems, the default name is a.otf. Optionally, the trace file name can be defined manually by setting the environment variable  $VT_FILE_PREFIX$  to the desired name. The suffix .otf will be added automatically.

To prevent overwriting of trace files by repetitive program runs, one can enable unique trace file naming by setting <code>VT\_FILE\_UNIQUE</code> to <code>yes</code>. In this case, VampirTrace adds a unique number to the file names as soon as a second trace file with the same name is created. A  $\star$  . <code>lock</code> file is used to count up the number of trace files in a directory. Be aware that VampirTrace potentially overwrites an existing trace file if you delete this lock file. The default value of <code>VT\_FILE\_UNIQUE</code> is <code>no</code>. You can also set this variable to a number greater than zero, which will be added to the trace file name. This way you can manually control the unique file naming.

The default location of the final trace file is the working directory at application start time. If the trace file shall be stored in another place, use VT\_PFORM\_GDIR as described in Section 3.2 to change the location of the trace file.

## 3.2 Environment Variables

The following environment variables can be used to control the measurement of a VampirTrace instrumented executable:



Variable	Purpose	Default
	Global Settings	
VT_APPPATH	Path to the application executable.  ⇒ Section 2.3.2	_
VT_BUFFER_SIZE	Size of internal event trace buffer. This is the place where event records are stored, before being written to a file.  ⇒ Section 3.3	32M
VT_CLEAN	Remove temporary trace files?	yes
VT_COMPRESSION	Write compressed trace files?	yes
VT_FILE_PREFIX	Prefix used for trace filenames.	$\Rightarrow$ Sect. 3.1
VT_FILE_UNIQUE	Enable unique trace file naming? Set to yes, no, or a numerical ID.  ⇒ Section 3.1	no
VT_MAX_FLUSHES	Maximum number of buffer flushes.  ⇒ Section 3.3	1
VT_MAX_THREADS	Maximum number of threads ( $\leq 65536$ ) per process that VampirTrace reserves resources for.	65536
VT_PFORM_GDIR	Name of global directory to store final trace file in.	./
VT_PFORM_LDIR	Name of node-local directory which can be used to store temporary trace files.	/tmp/
VT_UNIFY	Unify local trace files afterwards?	yes
VT_VERBOSE	Level of VampirTrace related information messages: Quiet (0), Critical (1), Information (2)	1
	Optional Features	
VT_CPUIDTRACE	Enable tracing of core ID of a CPU?  ⇒ Section 4.4	no
VT_ETIMESYNC	Enable enhanced timer synchronization?  ⇒ Section 3.7	no
VT_ETIMESYNC_INTV	Interval between two successive synchronization phases in s.	120
VT_IOLIB_PATHNAME	Provides an alternative library to use for LIBC I/O calls. $\Rightarrow$ Section 4.6	-
VT_IOTRACE	Enable tracing of application I/O calls?  ⇒ Section 4.6	no
VT_LIBCTRACE	Enable tracing of fork/system/exec calls?  ⇒ Section 4.7 calls	yes



Variable VT_MEMTRACE	Purpose Enable memory allocation counter?	<b>Default</b> no		
VT_MODE	<ul> <li>⇒ Section 4.3</li> <li>Colon-separated list of VampirTrace modes:</li> <li>Tracing (TRACE), Profiling (STAT).</li> <li>⇒ Section 3.4</li> </ul>	TRACE		
VT_MPICHECK	Enable MPI correctness checking via UniMCI?	no		
VT_MPICHECK_ERREXIT	Force trace write and application exit if an MPI usage error is detected?	no		
VT_MPITRACE	Enable tracing of MPI events?	yes		
VT_PTHREAD_REUSE	Reuse IDs of terminated Pthreads?	yes		
VT_STAT_INV	Length of interval for writing the next profiling record	0		
VT_STAT_PROPS	Colon-separated list of event types that shall be recorded in profiling mode: Functions (FUNC), Messages (MSG), Collective Ops. (COLLOP) or all of them (ALL)  ⇒ Section 3.4			
VT_SYNC_FLUSH	Enable synchronized buffer flush?  ⇒ Section 3.6	no		
VT_SYNC_FLUSH_LEVEL	Minimum buffer fill level for synchronized buffer flush in percent.	80		
	Counters			
VT_METRICS	Specify counter metrics to be recorded with trace events as a colon/VT_METRICS_SEP-separated list of names.  ⇒ Section 4.1	_		
VT_METRICS_SEP	Separator string between counter specifications in VT_METRICS.	:		
VT_RUSAGE	Colon-separated list of resource usage counters which shall be recorded.  ⇒ Section 4.2	_		
VT_RUSAGE_INTV	Sample interval for recording resource usage counters in ms.	100		
	Filtering, Grouping			
VT_DYN_BLACKLIST	Name of blacklist file for Dyninst instrumentation. $\Rightarrow$ Section 2.5	_		



Variable	Purpose	Default	
VT_DYN_SHLIBS	Colon-separated list of shared libraries for Dyninst instrumentation. $\Rightarrow$ Section 2.5	_	
VT_FILTER_SPEC	Name of function/region filter file.  ⇒ Section 5.1	-	
VT_GROUPS_SPEC	Name of function grouping file.  ⇒ Section 5.3	_	
VT_JAVA_FILTER_SPEC	Name of Java specific filter file.  ⇒ Section 5.2	-	
VT_GROUP_CLASSES	Create a group for each Java class automatically?		
VT_MAX_STACK_DEPTH	Maximum number of stack level to be traced. (0 = unlimited)		
	Symbol List		
VT_GNU_NM	Command to list symbols from object files.  ⇒ Section 2.3	nm	
VT_GNU_NMFILE	ILE Name of file with symbol list information. $\Rightarrow$ Section 2.3		

The variables <code>VT\_PFORM\_GDIR</code>, <code>VT\_PFORM\_LDIR</code>, <code>VT\_FILE\_PREFIX</code> may contain (sub)strings of the form \$XYZ\$ or  $$\{XYZ\}$$  where XYZ is the name of another environment variable. Evaluation of the environment variable is done at measurement runtime.

When you use these environment variables, make sure that they have the same value for all processes of your application on **all** nodes of your cluster. Some cluster environments do not automatically transfer your environment when executing parts of your job on remote nodes of the cluster, and you may need to explicitly set and export them in batch job submission scripts.

## 3.3 Influencing Trace Buffer Size

The default values of the environment variables VT\_BUFFER\_SIZE and VT\_MAX\_FLUSHES limit the internal buffer of VampirTrace to 32 MB per process and the number of times that the buffer is flushed to 1, respectively. Events that are to be recorded after the limit has been reached are no longer written into the trace file. The environment variables apply to every process of a parallel application, meaning that applications with n processes will typically create trace files n times the size of a serial application.



To remove the limit and get a complete trace of an application, set VT\_MAX\_FLUSHES to 0. This causes VampirTrace to always write the buffer to disk when it is full. To change the size of the buffer, use the environment variable VT\_BUFFER\_SIZE. The optimal value for this variable depends on the application which is to be traced. Setting a small value will increase the memory available to the application, but will trigger frequent buffer flushes by VampirTrace. These buffer flushes can significantly change the behavior of the application. On the other hand, setting a large value, like 2G, will minimize buffer flushes by VampirTrace, but decrease the memory available to the application. If not enough memory is available to hold the VampirTrace buffer and the application data, parts of the application may be swapped to disk, leading to a significant change in the behavior of the application.

Note that you can decrease the size of trace files significantly by using the runtime function filtering as explained in Section 5.1.

## 3.4 Profiling an Application

Profiling an application collects aggregated information about certain events during a program run, whereas tracing records information about individual events. Profiling can therefore be used to get a summary of the program activity and to detect events that are called very often. The profiling information can also be used to generate filter rules to reduce the trace file size ( $\Rightarrow$  Section 5.1).

To profile an application set the variable VT\_MODE to STAT. Setting VT\_MODE to STAT: TRACE tells VampirTrace to perform tracing and profiling at the same time. By setting the variable VT\_STAT\_PROPS the user can influence whether functions, messages, and/or collective operations shall be profiled. See Section 3.2 for information about these environment variables.

## 3.5 Unification of Local Traces

After a run of an instrumented application the traces of the single processes need to be *unified* in terms of timestamps and event IDs. In most cases, this happens automatically. If the environment variable VT\_UNIFY is set to no or under certain circumstances it is necessary to perform unification of local traces manually. To do this, use the following command:

```
% vtunify <nproc> <prefix>
```

If VampirTrace was built with support for OpenMP and/or MPI, it is possible to speedup the unification of local traces significantly. To distribute the unification on multible processes the MPI parallel version <code>vtunify-mpi</code> can be used as follow:



% mpirun -np <nranks> vtunify-mpi <nproc> <prefix>

Furthermore, both tools <code>vtunify</code> and <code>vtunify-mpi</code> are capable to open additional OpenMP threads for unification. The number of threads can be specified by the <code>OMP\_NUM\_THREADS</code> environment variable.

## 3.6 Synchronized Buffer Flush

When tracing an application, VampirTrace temporarily stores the recorded events in a trace buffer. Typically, if a buffer of a process or thread has reached its maximum fill level, the buffer has to be flushed and other processes or threads maybe have to wait for this process or thread. This will result in an asynchronous runtime behavior.

To avoid this problem, VampirTrace provides a buffer flush in a synchronized manner. That means, if one buffer has reached its minimum buffer fill level  $VT\_SYNC\_FLUSH\_LEVEL$  ( $\Rightarrow$  Section 3.2), all buffers will be flushed. This buffer flush is only available at appropriate points in the program flow. Currently, VampirTrace makes use of all MPI collective functions associated with MPI\_COMM\_WORLD. Use the environment variable VT\_SYNC\_FLUSH to enable synchronized buffer flush.

## 3.7 Enhanced Timer Synchronization

Especially on cluster environments, where each process has its own local timer, tracing relies on precisely synchronized timers. Therefore, VampirTrace provides several mechanisms for timer synchronization. The default synchronization scheme is a linear synchronization at the very begin and the very end of a trace run with a master-slave communication pattern.

However, this way of synchronization can become to imprecise for long trace runs. Therefore, we recommend the usage of the enhanced timer synchronization scheme of VampirTrace. This scheme inserts additional synchronization phases at appropriate points in the program flow. Currently, VampirTrace makes use of all MPI collective functions associated with MPI\_COMM\_WORLD.

To enable this synchronization scheme, a LAPACK library with C wrapper support has to be provided for VampirTrace and the environment variable VT\_ETIMESYNC ( $\Rightarrow$  Section 3.2) has to be set before the tracing.

The length of the interval between two successive synchronization phases can be adjusted with VT\_ETIMESYNC\_INTV.

The following LAPACK libraries provide a C-LAPACK API that can be used by VampirTrace for the enhanced timer synchronization:



- CLAPACK<sup>1</sup>
- AMD ACML
- IBM ESSL
- Intel MKL
- SUN Performance Library

**Note:** Systems equipped with a global timer do not need timer synchronization.

**Note:** It is recommended to combine enhanced timer synchronization and synchronized buffer flush.

**Note:** Be aware that the asynchronous behavior of the application will be disturbed since VampirTrace makes use of asynchronous MPI collective functions for timer synchronization and synchronized buffer flush.

Only make use of these approaches, if your application does not rely on an asynchronous behavior! Otherwise, keep this fact in mind during the process of performance analysis.

<sup>1</sup>www.netlib.org/clapack





## 4 Recording Additional Events and Counters

#### 4.1 Hardware Performance Counters

If VampirTrace has been built with hardware counter support ( $\Rightarrow$  Appendix A), it is capable of recording hardware counter information as part of the event records. To request the measurement of certain counters, the user is required to set the environment variable VT\_METRICS. The variable should contain a colon-separated list of counter names or a predefined platform-specific group.

The user can leave the environment variable unset to indicate that no counters are requested. If any of the requested counters are not recognized or the full list of counters cannot be recorded due to hardware resource limits, program execution will be aborted with an error message.

#### **PAPI Hardware Performance Counters**

If the PAPI library is used to access hardware performance counters, metric names can be any PAPI preset names or PAPI native counter names. For example, set

```
VT_METRICS=PAPI_FP_OPS:PAPI_L2_TCM:!CPU_TEMP1
```

to record the number of floating point instructions and level 2 cache misses (PAPI preset counters), cpu temperature from the Im\_sensors component. The leading exclamation mark let CPU\_TEMP1 be interpreted as absolute value counter. See Section C.1 for a full list of PAPI preset counters.

#### **CPC Hardware Performance Counters**

On Sun Solaris operating systems VampirTrace can make use of the CPC performance counter library to query the processor's hardware performance counters. The counters which are actually available on your platform can be queried with the tool <code>vtcpcavail</code>. The listed names can then be used within <code>VT\_METRICS</code> to tell VampirTrace which counters to record.



#### **NEC SX Hardware Performance Counters**

On NEC SX machines VampirTrace uses special register calls to query the processor's hardware counters. Use VT\_METRICS to specify the counters that have to be recorded. See Section C.3 for a full list of NEC SX hardware performance counters.

## 4.2 Resource Usage Counters

The Unix system call <code>getrusage</code> provides information about consumed resources and operating system events of processes such as user/system time, received signals, and context switches.

If VampirTrace has been built with resource usage support, it is able to record this information as performance counters to the trace. You can enable tracing of specific resource counters by setting the environment variable VT\_RUSAGE to a colon-separated list of counter names, as specified in Section C.4. For example, set

```
VT_RUSAGE=ru_stime:ru_majflt
```

to record the system time consumed by each process and the number of page faults. Alternatively, one can set this variable to the value all to enable recording of all 16 resource usage counters. Note that not all counters are supported by all Unix operating systems. Linux 2.6 kernels, for example, support only resource information for six of them. See Section C.4 and the manual page of getrusage for details.

The resource usage counters are not recorded at every event. They are only read if 100 ms have passed since the last sampling. The interval can be changed by setting VT\_RUSAGE\_INTV to the number of desired milliseconds. Setting VT\_RUSAGE\_INTV to zero leads to sampling resource usage counters at every event, which may introduce a large runtime overhead. Note that in most cases the operating system does not update the resource usage information at the same high frequency as the hardware performance counters. Setting VT\_RUSAGE\_INTV to a value less than 10 ms does usually not improve the granularity.

Be aware that, when using the resource usage counters for multi-threaded programs, the information displayed is valid for the whole process and not for each single thread.

## 4.3 Memory Allocation Counter

The GNU LIBC implementation provides a special hook mechanism that allows intercepting all calls to memory allocation and free functions (e.g. malloc,



realloc, free). This is independent from compilation or source code access, but relies on the underlying system library.

If VampirTrace has been built with memory-tracing support ( $\Rightarrow$  Appendix A), VampirTrace is capable of recording memory allocation information as part of the event records. To request the measurement of the application's allocated memory, the user must set the environment variable VT\_MEMTRACE to yes.

**Note:** This approach to get memory allocation information requires changing internal function pointers in a non-thread-safe way, so VampirTrace currently does not support memory tracing for thread-able programs, e.g., programs parallelized with OpenMP or Pthreads!

#### 4.4 CPU ID Counter

The GNU LIBC implementation provides a function to determine the core id of a CPU on which the calling thread is running. VampirTrace uses this functionality to record the current core identifier as counter. This feature can be activated by setting the environment variable VT\_CPUIDTRACE to yes.

**Note:** To use this feature you need the GNU LIBC implementation at least in version 2.6.

## 4.5 Pthread API Calls

When tracing applications with Pthreads, only user events and functions are recorded which are automatically or manually instrumented. Pthread API functions will not be traced by default.

To enable tracing of all C-Pthread API functions include the header <code>vt\_user.h</code> and compile the instrumented sources with <code>-DVTRACE\_PTHREAD</code>.

**Note:** Currently, Pthread instrumentation is only available for C/C++.



## 4.6 I/O Calls

Calls to functions which reside in external libraries can be intercepted by implementing identical functions and linking them before the external library. Such "wrapper functions" can record the parameters and return values of the library functions.

If VampirTrace has been built with I/O tracing support, it uses this technique for recording calls to I/O functions of the standard C library, which are executed by the application. The following functions are intercepted by VampirTrace:

close	creat	creat64	dup
dup2	fclose	fcntl	fdopen
fgetc	fgets	flockfile	fopen
fopen64	fprintf	fputc	fputs
fread	fscanf	fseek	fseeko
fseeko64	fsetpos	fsetpos64	ftrylockfile
funlockfile	fwrite	getc	gets
lockf	lseek	lseek64	open
open64	pread	pread64	putc
puts	pwrite	pwrite64	read
readv	rewind	unlink	write
writev			

The gathered information will be saved as I/O event records in the trace file. This feature has to be activated for each tracing run by setting the environment variable VT\_IOTRACE to yes.

This works for both dynamically and statically linked executables. Note that when linking statically, a warning like the following may be issued: Using 'dlopen' in statically linked applications requires at runtime the shared libraries from the glibc version used for linking. This is ok as long as the mentioned libraries are available for running the application.

If you'd like to experiment with some other I/O library, set the environment variable VT\_IOLIB\_PATHNAME to the alternative one. Beware that this library must provide all I/O functions mentioned above otherwise VampirTrace will abort.

## 4.7 fork/system/exec Calls

If VampirTrace has been built with LIBC trace support ( $\Rightarrow$  Appendix A), it is capable of tracing programs which call functions from the LIBC exec family (execl, execlp, execlp, execvp, execvp), system, and fork. VampirTrace records the call of the LIBC function to the trace. This feature works for sequential (i.e. no MPI or threaded parallelization) programs only. It works for both dynamically and statically linked executables. Note that when linking statically, a



warning like the following may be issued: Using 'dlopen' in statically linked applications requires at runtime the shared libraries from the glibc version used for linking. This is ok as long as the mentioned libraries are available for running the application.

When VampirTrace detects a call of an exec function, the current trace file is closed before executing the new program. If the executed program is also instrumented with VampirTrace, it will create a different trace file. Note that VampirTrace aborts if the exec function returns unsuccessfully.

Calling fork in an instrumented program creates an additional process in the same trace file.

## 4.8 MPI Correctness Checking Using UniMCI

VampirTrace supports the recording of MPI correctness events, e.g., usage of invalid MPI requests. This is implemented by using the Universal MPI Correctness Interface (UniMCI), which provides an interface between tools like VampirTrace and existing runtime MPI correctness checking tools. Correctness events are stored as markers in the trace file and are visualized by Vampir.

If VampirTrace is built with UniMCI support, the user only has to enable MPI correctness checking. This is done by merely setting the environment variable  $\tt VT\_MPICHECK$  to  $\tt yes$ . Further, if your application crashes due to an MPI error you should set  $\tt VT\_MPICHECK\_ERREXIT$  to  $\tt yes$ . This environmental variable forces VampirTrace to write its trace to disk and exit afterwards. As a result, the trace with the detected error is stored before the application might crash.

To install VampirTrace with correctness checking support it is necessary to have UniMCI installed on your system. UniMCI in turn requires you to have a supported MPI correctness checking tool installed, currently only the tool Marmot is known to have UniMCI support. So all in all you should use the following order to install with correctness checking support:

```
1. Marmot
   (see http://www.hlrs.de/organization/av/amt/research/marmot)
```

2. UniMCI
 (see http://www.tu-dresden.de/zih/unimci)

```
3. VampirTrace
   (see http://www.tu-dresden.de/zih/vampirtrace)
```

Information on how to install Marmot and UniMCI is given in their respective manuals. VampirTrace will automatically detect an UniMCI installation if the unimci-config tool is in path.



## 4.9 User-defined Counters

In addition to the manual instrumentation ( $\Rightarrow$  Section 2.4.1), the VampirTrace API provides instrumentation calls which allow recording of program variable values (e.g. iteration counts, calculation results, ...) or any other numerical quantity. A user-defined counter is identified by its name, the counter group it belongs to, the type of its value (integer or floating-point) and the unit that the value is quoted (e.g. "GFlop/sec").

The VT\_COUNT\_GROUP\_DEF and VT\_COUNT\_DEF instrumentation calls can be used to define counter groups and counters:

```
#include "vt_user.inc"
    integer :: id, gid
    VT_COUNT_GROUP_DEF('name', gid)
    VT_COUNT_DEF('name', 'unit', type, gid, id)

C/C++:
    #include "vt_user.h"
    unsigned int id, gid;
    gid = VT_COUNT_GROUP_DEF("name");
    id = VT_COUNT_DEF("name", "unit", type, gid);
```

The definition of a counter group is optional. If no special counter group is desired, the default group "User" can be used. In this case, set the parameter gid of VT\_COUNT\_DEF() to VT\_COUNT\_DEFGROUP.

The third parameter type of  $VT\_COUNT\_DEF$  specifies the data type of the counter value. To record a value for any of the defined counters the corresponding instrumentation call  $VT\_COUNT\_\star\_VAL$  must be invoked.

۲	0	r	t	ra	al	n	

Туре	Count call	Data type
VT_COUNT_TYPE_INTEGER	VT_COUNT_INTEGER_VAL	integer (4 byte)
VT_COUNT_TYPE_INTEGER8	VT_COUNT_INTEGER8_VAL	integer (8 byte)
VT_COUNT_TYPE_REAL	VT_COUNT_REAL_VAL	real
VT_COUNT_TYPE_DOUBLE	VT_COUNT_DOUBLE_VAL	double precision

#### C/C++:

Туре	Count call	Data type
VT_COUNT_TYPE_SIGNED	VT_COUNT_SIGNED_VAL	signed int (max. 64-bit)
VT_COUNT_TYPE_UNSIGNED	VT_COUNT_UNSIGNED_VAL	unsigned int (max. 64-bit)
VT_COUNT_TYPE_FLOAT	VT_COUNT_FLOAT_VAL	float
VT_COUNT_TYPE_DOUBLE	VT_COUNT_DOUBLE_VAL	double



The following example records the loop index i:

```
Fortran:
  #include "vt_user.inc"
  program main
  integer :: i, cid, cgid
  VT_COUNT_GROUP_DEF('loopindex', cgid)
  VT_COUNT_DEF('i', '#', VT_COUNT_TYPE_INTEGER, cgid, cid)
  do i=1,100
    VT_COUNT_INTEGER_VAL(cid, i)
  end do
  end program main
C/C++:
  #include "vt_user.h"
  int main() {
    unsigned int i, cid, cgid;
    cgid = VT_COUNT_GROUP_DEF('loopindex');
    cid = VT_COUNT_DEF("i", "#", VT_COUNT_TYPE_UNSIGNED,
                        cgid);
    for ( i = 1; i \le 100; i++ ) {
      VT_COUNT_UNSIGNED_VAL(cid, i);
    return 0;
  }
```

For all three languages the instrumented sources have to be compiled with -DVTRACE. Otherwise the VT\_\* calls are ignored.

Optionally, if the sources contain further VampirTrace API calls and only the calls for user-defined counters shall be disabled, then the sources have to be compiled with <code>-DVTRACE\_NO\_COUNT</code> in addition to <code>-DVTRACE</code>.



## 4.10 User-defined Markers

In addition to the manual instrumentation ( $\Rightarrow$  Section 2.4.1), the VampirTrace API provides instrumentation calls which allow recording of special user information, which can be used to better identify parts of interest. A user-defined marker is identified by its name and type.

For all three languages the instrumented sources have to be compiled with -DVTRACE. Otherwise the  $\text{VT}_-\star$  calls are ignored.

Optionally, if the sources contain further VampirTrace API calls and only the calls for user-defined markers shall be disabled, then the sources have to be compiled with <code>-DVTRACE\_NO\_MARKER</code> in addition to <code>-DVTRACE</code>.



## 5 Filtering & Grouping

## 5.1 Function Filtering

By default, all calls of instrumented functions will be traced, so that the resulting trace files can easily become very large. In order to decrease the size of a trace, VampirTrace allows the specification of filter directives before running an instrumented application. The user can decide on how often an instrumented function/region shall be recorded to a trace file. To use a filter, the environment variable VT\_FILTER\_SPEC needs to be defined. It should contain the path and name of a file with filter directives.

Here is an example of a file containing filter directives:

```
# VampirTrace region filter specification
#
# call limit definitions and region assignments
# syntax: <regions> -- <limit>
#
# regions semicolon-separated list of regions
# (can be wildcards)
# limit assigned call limit
# 0 = region(s) denied
# -1 = unlimited
# add; sub; mul; div -- 1000
* -- 3000000
```

These region filter directives cause that the functions  $\tt add, sub, mul and div be recorded at most 1000 times. The remaining functions <math display="inline">\star$  will be recorded at most 3000000 times.

Besides creating filter files manually, you can also use the <code>vtfilter</code> tool to generate them automatically. This tool reads a provided trace and decides whether a function should be filtered or not, based on the evaluation of certain parameters. For more information see Section B.4.



### Rank Specific Filtering

An experimental extension allows rank specific filtering. Use @ clauses to restrict all following filters to the given ranks. The rank selection must be given as a list of < from > - < to > pairs or single values.

```
@ 4 - 10, 20 - 29, 34 foo; bar -- 2000 * -- 0
```

The example defines two limits for the ranks 4 - 10, 20 - 29, and 34.

**Attention:** The rank specific rules are activated later than usual at MPI\_Init, because the ranks are not available earlier. The special MPI routines MPI\_Init, MPI\_Init\_thread, and MPI\_Initialized cannot be filtered in this way.

## 5.2 Java Specific Filtering

For Java tracing there are additional possibilities of filtering. Firstly, there is a default filter applied. The rules can be found in the filter file <vt-install>/etc/vt-java-default-filter.spec. Secondly, user-defined filters can be applied additionally by setting VT\_JAVA\_FILTER\_SPEC to a file containing the rules.

The syntax of the filter rules is as follows:

```
<method|thread> <include|exclude> <filter string[;fs]...>
```

Filtering can be done on thread names and method names, defined by the first parameter. The second parameter determines whether the matching item shall be included for tracing or excluded from it. Multiple filter strings on a line have to be separated by ; and may contain occurences of \* for wildcard matching.

The user-supplied filter rules will be applied before the default filter and the first match counts so it is possible to include items that would be excluded by the default filter otherwise.

## 5.3 Function Grouping

VampirTrace allows assigning functions/regions to a group. Groups can, for instance, be highlighted by different colors in Vampir displays. The following standard groups are created by VampirTrace:



#### Group name Contained functions/regions MPI functions MΡΙ OpenMP API function calls OMP OpenMP barriers OMP\_SYNC OpenMP parallel regions OMP\_PREG Pthread API function calls Pthreads Memory allocation functions ( $\Rightarrow$ Section 4.3) MEM I/O functions ( $\Rightarrow$ Section 4.6) I/O LIBC fork/system/exec functions (⇒ Section 4.7) LIBC Application remaining instrumented functions and source code regions

Additionally, you can create your own groups, e.g., to better distinguish different phases of an application. To use function/region grouping set the environment variable VT\_GROUPS\_SPEC to the path of a file which contains the group assignments. Below, there is an example of how to use group assignments:

```
#
     VampirTrace region groups specification
#
#
     group definitions and region assignments
#
     syntax: <group>=<regions>
#
       group
                   group name
#
       regions
                   semicolon-separated list of regions
                   (can be wildcards)
#
CALC=add; sub; mul; div
USER=app_*
```

These group assignments associate the functions  $\mathtt{add}$ ,  $\mathtt{sub}$ ,  $\mathtt{mul}$  and  $\mathtt{div}$  with group "CALC", and all functions with the prefix  $\mathtt{app}_-$  are associated with group "USER".





# A VampirTrace Installation

# A.1 Basics

Building VampirTrace is typically a combination of running configure and make. Execute the following commands to install VampirTrace from the directory at the top of the tree:

```
% ./configure --prefix=/where/to/install
[...lots of output...]
% make all install
```

If you need special access for installing, you can execute make all as a user with write permissions in the build tree and a separate make install as a user with write permissions to the install tree.

However, for more details, also read the following instructions. Sometimes it might be necessary to provide ./configure with options, e.g., specifications of paths or compilers.

VampirTrace comes with example programs written in C, C++, and Fortran. They can be used to test different instrumentation types of the VampirTrace installation. You can find them in the directory examples of the VampirTrace package.

Note that you should compile VampirTrace with the same compiler you use for the application to trace, see D.1.

# **A.2 Configure Options**

# **Compilers and Options**

Some systems require unusual options for compiling or linking which the configure script does not know. Run ./configure --help for details on some of the pertinent environment variables.

You can pass initial values for configuration parameters to configure by setting variables in the command line or in the environment. Here is an example:

```
% ./configure CC=c89 CFLAGS=-02 LIBS=-lposix
```



# **Installation Names**

By default, make install will install the package's files in /usr/local/bin, /usr/local/include, etc. You can specify an installation prefix other than /usr/local by giving configure the option --prefix=PATH.

# **Optional Features**

This a summary of the most important optional features. For a full list of all available features run ./configure --help.

## --enable-compinst=TYPE

enable support for compiler instrumentation, e.g. gnu, pgi, sun default: automatically by configure

## --enable-dyninst

enable support for Dyninst instrumentation, default: enable if found by configure **Note:** Requires Dyninst <sup>1</sup> version 5.1 or higher!

# --enable-dyninst-attlib

build shared library which attaches Dyninst to the running application, default: enable if Dyninst found by configure and system supports shared libraries

#### --enable-memtrace

enable memory tracing support, default: enable if found by configure

#### --enable-cpuidtrace

enable CPU ID tracing support, default: enable if found by configure

## --enable-libtrace=LIST

enable library tracing support (gen,libc,io), default: automatically by configure

#### --enable-rutrace

enable resource usage tracing support, default: enable if found by configure

#### --enable-metrics=TYPE

enable support for hardware performance counter (papi, cpc, necsx), default: automatically by configure

#### --enable-zlib

enable ZLIB trace compression support, default: enable if found by configure

<sup>1</sup>http://www.dyninst.org



#### --enable-mpi

enable MPI support, default: enable if MPI found by configure

## --enable-fmpi-lib

build the MPI Fortran support library, in case your system does not have a MPI Fortran library. default: enable if no MPI Fortran library found by configure

## --enable-fmpi-handle-convert

do convert MPI handles, default: enable if MPI conversion functions found by configure

# --enable-mpi2-thread

enable MPI-2 Thread support, default: enable if found by configure

## --enable-mpi2-1sided

enable MPI-2 One-Sided Communication support, default: enable if found by configure

# --enable-mpi2-extcoll

enable MPI-2 Extended Collective Operation support, default: enable if found by configure

#### --enable-mpi2-io

enable MPI-2 I/O support, default: enable if found configure

#### --enable-mpicheck

enable support for Universal MPI Correctness Interface (UniMCI), default: enable if unimci-config found by configure

# --enable-etimesync

enable enhanced timer synchronization support, default: enable if C-LAPACK found by configure

## --enable-threads=LIST

enable support for threads (pthread, omp), default: automatically by configure

## --enable-java

enable Java support, default: enable if JVMTI found by configure

# **Important Optional Packages**

This a summary of the most important optional features. For a full list of all available features run ./configure --help.



# --with-platform=PLATFORM

configure for given platform (altix, bgl, bgp, crayt3e, crayx1, crayxt,
ibm, linux, macos, necsx, origin, sicortex, sun, generic), default:
automatically by configure

# --with-bitmode=32 | 64

specify bit mode

## --with-options=FILE

load options from FILE, default: configure searches for a config file in config/defaults based on given platform and bitmode

# --with-local-tmp-dir=DIR

give the path for node-local temporary directory to store local traces to, default: / tmp

If you would like to use an external version of OTF library, set:

#### --with-extern-otf

use external OTF library, default: not set

#### --with-extern-otf-dir=OTFDIR

give the path for OTF, default: /usr

#### --with-otf-flags=FLAGS

pass FLAGS to the OTF distribution configuration (only for internal OTF version)

#### --with-otf-lib=OTFLIB

use given off lib, default: -lotf -lz

If the supplied OTF library was built without zlib support then OTFLIB will be set to -lotf.

### --with-dyninst-dir=DYNIDIR

give the path for DYNINST, default: /usr

# --with-papi-dir=PAPIDIR

give the path for PAPI, default: /usr

# --with-cpc-dir=CPCDIR

give the path for CPC, default: /usr

If you have not specified the environment variable MPICC (MPI compiler command) use the following options to set the location of your MPI installation:

#### --with-mpi-dir=MPIDIR

give the path for MPI, default: /usr/



## --with-mpi-inc-dir=MPIINCDIR

give the path for MPI-include files,

default: \$MPIDIR/include/

## --with-mpi-lib-dir=MPILIBDIR

give the path for MPI-libraries, default: \$MPIDIR/lib/

## --with-mpi-lib

use given mpi lib

# --with-pmpi-lib

use given pmpi lib

If your system does not have an MPI Fortran library set --enable-fmpi-lib (see above), otherwise set:

# --with-fmpi-lib

use given fmpi lib

Use the following options to specify your MPI-implementation

# --with-hpmpi

set MPI-libs for HP MPI

# --with-intelmpi

set MPI-libs for Intel MPI

## --with-intelmpi2

set MPI-libs for Intel MPI2

## --with-lam

set MPI-libs for LAM/MPI

## --with-mpibgl

set MPI-libs for IBM BG/L

#### --with-mpibqp

set MPI-libs for IBM BG/P

## --with-mpich

set MPI-libs for MPICH

#### --with-mpich2

set MPI-libs for MPICH2

#### --with-mvapich

set MPI-libs for MVAPICH



#### --with-mvapich2

set MPI-libs for MVAPICH2

### --with-mpisx

set MPI-libs for NEC MPI/SX

## --with-mpisx-ew

set MPI-libs for NEC MPI/SX with 8 Byte Fortran Integer

# --with-openmpi

set MPI-libs for Open MPI

### --with-sgimpt

set MPI-libs for SGI MPT

#### --with-sunmpi

set MPI-libs for SUN MPI

# --with-sunmpi-mt

set MPI-libs for SUN MPI-MT

To enable enhanced timer synchronization a LAPACK library with C wrapper support is needed:

## --with-clapack-dir=LAPACKDIR

set the path for CLAPACK, default: /usr

## --with-clapack-lib

set CLAPACK-libs, default: -lclapack -lcblas -lf2c

## --with-clapack-acml

set CLAPACK-libs for ACML

## --with-clapack-essl

set CLAPACK-libs for ESSL

## --with-clapack-mkl

set CLAPACK-libs for MKL

#### --with-clapack-sunperf

set CLAPACK-libs for SUN Performance Library

To enable Java support the JVM Tool Interface (JVMTI) version 1.0 or higher is required:

#### --with-jvmti-dir=JVMTIDIR

give the path for JVMTI, default: \$JAVA\_HOME



# --with-jvmti-inc-dir=JVMTIINCDIR give the path for JVMTI-include files, default: JVMTI/include

To enable support for generating wrapper for 3th-Party libraries the C code parser CTool is needed:

- --with-ctool-dir=CTOOLDIR
  give the path for CTool, default: /usr
- --with-ctool-inc-dir=CTOOLINCDIR
  give the path for CTool-include files, default: CTOOLDIR/include
- --with-ctool-lib-dir=CTOOLLIBDIR
  give the path for CTool-libraries, default: CTOOLDIR/lib
- --with-ctool-lib=CTOOLLIB

  use given CTool lib, default: automatically by configure

# A.3 Cross Compilation

Building VampirTrace on cross compilation platforms needs some special attention. The compiler wrappers and OPARI are built for the front-end (build system) whereas the VampirTrace libraries, vtdyn, vtunify, and vtfilter are built for the back-end (host system). Some configure options which are of interest for cross compilation are shown below:

- Set CC, CXX, F77, and FC to the cross compilers installed on the front-end.
- Set CXX\_FOR\_BUILD to the native compiler of the front-end (used to compile compiler wrappers and OPARI only).
- Set --host= to the output of config.guess on the back-end.
- Set --with-cross-prefix= to a prefix which will be prepended to the executables of the compiler wrappers and OPARI (default: "cross-")
- Maybe you also need to set additional commands and flags for the backend (e.g. RANLIB, AR, MPICC, CXXFLAGS).

For example, this configure command line works for an NEC SX6 system with an X86\_64 based front-end:



# A.4 Environment Set-Up

Add the bin subdirectory of the installation directory to your \$PATH environment variable. To use VampirTrace with Dyninst, you will also need to add the lib subdirectory to your LD\_LIBRARY\_PATH environment variable:

#### for csh and tcsh:

```
> setenv PATH <vt-install>/bin:$PATH
> setenv LD_LIBRARY_PATH <vt-install>/lib:$LD_LIBRARY_PATH
```

#### for bash and sh:

```
% export PATH=<vt-install>/bin:$PATH
% export LD_LIBRARY_PATH=<vt-install>/lib:$LD_LIBRARY_PATH
```

# A.5 Notes for Developers

# **Build from SVN**

If you have checked out a *developer's copy* of VampirTrace (i.e. checked out from CVS), you should first run:

Note that GNU Autoconf  $\geq$ 2.60 and GNU Automake  $\geq$ 1.9.6 are required. You can download them from http://www.gnu.org/software/autoconf and http://www.gnu.org/software/automake.



# **B** Command Reference

# **B.1 Compiler Wrappers (vtcc,vtcxx,vtf77,vtf90)**

```
vtcc, vtcxx, vtf77, vtf90 - compiler wrappers for C, C++,
                         Fortran 77, Fortran 90
Syntax: vt<cc|cxx|f77|f90> [-vt:<cc|cxx|f77|f90> <cmd>]
        [-vt:inst <insttype>] [-vt:<seq|mpi|mt|hyb>]
        [-vt:opari <args>] [-vt:verbose] [-vt:version]
        [-vt:show] ...
options:
  -vt:help
                      Show this help message.
  -vt:<cc|cxx|f77|f90> <cmd>
                      Set the underlying compiler command.
  -vt:inst <insttype> Set the instrumentation type.
   possible values:
                      fully-automatic by compiler
    compinst
                      manual by using VampirTrace's API
   manual
    dyninst
                      binary by using Dyninst (www.dyninst.org)
  -vt:opari <arqs>
                      Set options for OPARI command. (see
                      share/vampirtrace/doc/opari/Readme.html)
  -vt:<seq|mpi|mt|hyb>
                      Force application's parallelization type.
                      Necessary, if this cannot be determined
                      by underlying compiler and flags.
                      seq = sequential
                      mpi = parallel (uses MPI)
                      mt = parallel (uses OpenMP/POSIX threads)
                      hyb = hybrid parallel (MPI + Threads)
                      (default: automatically determining by
                       underlying compiler and flags)
                      Enable verbose mode.
  -vt:verbose
```



-vt:show Do not invoke the underlying compiler.

Instead, show the command line that would be executed to compile and

link the program.

See the man page for your underlying compiler for other options that can be passed through 'vt<cc|cxx|f77|f90>'.

#### Environment variables:

VT\_INST Equivalent to '-vt:inst'
VT\_CC Equivalent to '-vt:cc'
VT\_CXX Equivalent to '-vt:cxx'
VT\_F77 Equivalent to '-vt:f77'
VT\_F90 Equivalent to '-vt:f90'

VT\_CFLAGS C compiler flags VT\_CXXFLAGS C++ compiler flags

VT\_F77FLAGS Fortran 77 compiler flags VT\_FCFLAGS Fortran 90 compiler flags

VT\_LDFLAGS Linker flags

VT\_LIBS Libraries to pass to the linker

The corresponding command line options overwrite the environment variables setting.

#### Examples:

automatically instrumentation by compiler:

```
vtcc -vt:cc gcc -vt:inst compinst -c foo.c -o foo.o
vtcc -vt:cc gcc -vt:inst compinst -c bar.c -o bar.o
vtcc -vt:cc gcc -vt:inst compinst foo.o bar.o -o foo
```

manually instrumentation by using VT's API:

```
vtf90 -vt:inst manual foobar.F90 -o foobar -DVTRACE
```

IMPORTANT: Fortran source files instrumented by VT's API have to be preprocessed by CPP.

# **B.2 Local Trace Unifier (vtunify)**

```
vtunify[-mpi] - local trace unifier for VampirTrace.
Syntax: vtunify[-mpi] <#files> <iprefix> [options...]
```

## **B** Command Reference



Options:

-h, --help Show this help message.

#files Number of local trace files.

(equal to # of '\*.uctl' files)

iprefix Prefix of input trace filename.

-o <oprefix> Prefix of output trace filename.

-s <statsofile> Statistics output filename.

default=<oprefix>.stats

-c, --nocompress Don't compress output trace files.

-k, --keeplocal Don't remove input trace files.

-p, --progress Show progress.

-q, --quiet Enable quiet mode.

(only emergency output)

-v, --verbose Increase output verbosity.

(can be used more than once)



# **B.3 Dyninst Mutator (vtdyn)**

```
vtdyn - Dyninst Mutator for VampirTrace.
Syntax: vtdyn [-v|--verbose] [-s|--shlib < shlib>[,...]]
              [-b|--blacklist <bfile> [-p|--pid <pid>]
              <app> [appargs ...]
Options:
 -h, --help
                     Show this help message.
 -v, --verbose
                     Enable verbose mode.
 -s, --shlib
                     Comma-separated list of shared libraries
 <shlib>[,...]
                     which should also be instrumented.
 -b, --blacklist
                     Set path of blacklist file containing
 <bfile>
                     a newline-separated list of functions
                     which should not be instrumented.
 -p, --pid <pid>
                     application's process id
                     (attaches the mutator to a running process)
                     path of application executable
 app
 appargs
                     application's arguments
```



# **B.4 Trace Filter Tool (vtfilter)**

vtfilter - filter generator for VampirTrace.

Syntax:

Filter a trace file using an already existing filter file:
 vtfilter -filt [filt-options] <input trace file>
Generate a filter:

vtfilter -gen [gen-options] <input trace file>

general options:

-h, --help show this help message

-p show progress

filt-options:

-to <file> output trace file name

-fi <file> input filter file name

-z <zlevel> Set the compression level. Level

reaches from 0 to 9 where 0 is no compression and 9 is the highest

level. Standard is 4.

-f <n> Set max number of file handles

available. Standard is 256.

gen-options:

-fo <file> output filter file name

-r <n> Reduce the trace size to <n> percent

of the original size. The program relies on the fact that the major part of the trace are function calls. The approximation of size will get worse with a rising percentage of communication and other non function

calling or performance counter

records.

-l <n> Limit the number of accepted

function calls for filtered functions

to  $\langle n \rangle$ . Standard is 0.

-ex <f>, <f>, ... Exclude certain symbols from

filtering. A symbol may contain



wildcards.

-in <f>,<f>,... Force to include certain symbols

into the filter. A symbol may contain

wildcards.

-inc Automatically include children of

included functions as well into the

filter.

-stats Prints out the desired and the

expected percentage of file size.

environment variables:

TRACEFILTER\_EXCLUDEFILE Specifies a file containing a list

of symbols not to be filtered. The list of members can be seperated by space, comma, tab, newline and

may contain wildcards.

TRACEFILTER\_INCLUDEFILE Specifies a file containing a list

of symbols to be filtered.



# **B.5 Library Wrapper Generator (vtlibwrapgen)**

vtlibwrapgen - library wrapper generator for VampirTrace. Syntax: Generate a library wrapper source file: vtlibwrapgen [gen-options] <input header file> [input header file...] Build a wrapper library from a generated source file: vtlibwrapgen --build [build-options] <input lib. wrapper source file> options: Generate a library wrapper source file. (default) --gen See 'gen-options' below for valid options. --build Build a wrapper library from a generated source file. See 'build-options' below for valid options. Enable quiet mode. -q, --quiet (only emergency output) -v, --verbose Increase output verbosity. (can be used more than once) -h, --help Show this help message. gen-options: -o, --output=FILE Pathname of output wrapper source file. (default: wrap.c) -l, --shlib=SHLIB Pathname of shared library that contains the actual library functions. (can be used more then once) -f, --filter=FILE Pathname of input filter file. -g, --group=NAME Separate function group name for wrapped functions. -s, --sysheader=FILE Header file to be included additionally. Don't use preprocessor. --nocpp --keepcppfile Don't remove preprocessed header files. --cpp=CPP C preprocessor command



```
(default: gcc -E)
  --cppflags=CPPFLAGS C preprocessor flags, e.g. -I<include dir>
                      Change to this preprocessing directory.
  --cppdir=DIR
  environment variables:
    VT CPP
                      C preprocessor command (equivalent to '--cpp')
    VT_CPPFLAGS
                      C preprocessor flags (equivalent to '--cppflags')
build-options:
  -o, --output=PREFIX Prefix of output wrapper library.
                      (default: libwrap)
  --shared
                      Do only build shared wrapper library.
  --static
                      Do only build static wrapper library.
  --libtool=LT
                      Libtool command
  --cc=CC
                      C compiler command
                      (default: gcc)
  --cflags=CFLAGS
                      C compiler flags
  --ld=LD
                      linker command
                      (default: CC)
  --ldflags=LDFLAGS
                      linker flags, e.g. -L<lib dir>
                      (default: CFLAGS)
  --libs=LIBS
                      libraries to pass to the linker, e.g. -l<library>
  environment variables:
   VT_CC
                     C compiler command (equivalent to '--cc')
   VT_CFLAGS
                     C compiler flags (equivalent to '--cflags')
                      linker command (equivalent to '--ld')
    VT_LD
    VT_LDFLAGS
                      linker flags (equivalent to '--ldflags')
    VT_LIBS
                      libraries to pass to the linker
                      (equivalent to '--libs')
examples:
  Generating wrapper library 'libm_wrap' for the Math library 'libm.so':
    vtlibwrapgen -l libm.so -g MATH -o mwrap.c /usr/include/math.h
    vtlibwrapgen --build -o libm_wrap mwrap.c
```



export LD\_PRELOAD=\$PWD/libm\_wrap.so:libvt.so





# **C** Counter Specifications

# C.1 PAPI

Available counter names can be queried with the PAPI commands papi\_avail and papi\_native\_avail. Depending on the hardware there are limitations in the combination of different counters. To check whether your choice works properly, use the command papi\_event\_chooser.

```
PAPI_L[1|2|3]_[D|I|T]C[M|H|A|R|W]
             Level 1/2/3 data/instruction/total cache
             misses/hits/accesses/reads/writes
PAPI_L[1|2|3]_[LD|ST]M
             Level 1/2/3 load/store misses
PAPI_CA_SNP Requests for a snoop
PAPI_CA_SHR Requests for exclusive access to shared cache line
PAPI_CA_CLN Requests for exclusive access to clean cache line
PAPI_CA_INV Requests for cache line invalidation
PAPI_CA_ITV Requests for cache line intervention
PAPI_BRU_IDL Cycles branch units are idle
PAPI_FXU_IDL Cycles integer units are idle
PAPI_FPU_IDL Cycles floating point units are idle
PAPI_LSU_IDL Cycles load/store units are idle
PAPI_TLB_DM Data translation lookaside buffer misses
PAPI_TLB_IM
             Instruction translation lookaside buffer misses
PAPI TLB TL Total translation lookaside buffer misses
PAPI_BTAC_M Branch target address cache misses
PAPI_PRF_DM Data prefetch cache misses
PAPI_TLB_SD
             Translation lookaside buffer shootdowns
PAPI_CSR_FAL Failed store conditional instructions
PAPI CSR SUC Successful store conditional instructions
PAPI CSR TOT Total store conditional instructions
PAPI_MEM_SCY Cycles Stalled Waiting for memory accesses
```



```
PAPI_MEM_RCY Cycles Stalled Waiting for memory Reads
PAPI_MEM_WCY Cycles Stalled Waiting for memory writes
PAPI_STL_ICY Cycles with no instruction issue
PAPI_FUL_ICY Cycles with maximum instruction issue
PAPI_STL_CCY Cycles with no instructions completed
PAPI FUL CCY Cycles with maximum instructions completed
PAPI_BR_UCN Unconditional branch instructions
PAPI_BR_CN
             Conditional branch instructions
PAPI_BR_TKN Conditional branch instructions taken
PAPI_BR_NTK Conditional branch instructions not taken
PAPI_BR_MSP Conditional branch instructions mispredicted
PAPI_BR_PRC Conditional branch instructions correctly
             predicted
PAPI_FMA_INS FMA instructions completed
PAPI_TOT_IIS Instructions issued
PAPI_TOT_INS Instructions completed
PAPI_INT_INS Integer instructions
PAPI_FP_INS Floating point instructions
PAPI_LD_INS Load instructions
PAPI_SR_INS Store instructions
PAPI_BR_INS Branch instructions
PAPI_VEC_INS Vector/SIMD instructions
PAPI_LST_INS Load/store instructions completed
PAPI_SYC_INS Synchronization instructions completed
PAPI_FML_INS Floating point multiply instructions
PAPI_FAD_INS Floating point add instructions
PAPI_FDV_INS Floating point divide instructions
PAPI_FSQ_INS Floating point square root instructions
PAPI_FNV_INS Floating point inverse instructions
PAPI_RES_STL Cycles stalled on any resource
PAPI_FP_STAL Cycles the FP unit(s) are stalled
PAPI_FP_OPS Floating point operations
PAPI_TOT_CYC Total cycles
PAPI_HW_INT Hardware interrupts
```



# C.2 CPC

Available counter names can be queried with the VampirTrace tool vtcpcavail. In addition to the counter names, it shows how many performance counters can be queried at a time. See below for a sample output.

```
% ./vtcpcavail
CPU performance counter interface: UltraSPARC T2
Number of concurrently readable performance counters
on the CPU: 2
Available events:
AES_busy_cycle
AES_op
Atomics
Br_completed
Br_taken
CPU_ifetch_to_PCX
CPU_ld_to_PCX
CPU_st_to_PCX
CRC_MPA_cksum
CRC_TCPIP_cksum
DC_miss
DES_3DES_busy_cycle
DES_3DES_op
DTLB_HWTW_miss_L2
DTLB_HWTW_ref_L2
DTLB_miss
IC_miss
ITLB_HWTW_miss_L2
ITLB_HWTW_ref_L2
ITLB_miss
Idle strands
Instr_FGU_arithmetic
Instr_cnt
Instr_ld
Instr_other
Instr_st
Instr_sw
L2_dmiss_ld
L2_imiss
MA_busy_cycle
MA_op
MD5_SHA-1_SHA-256_busy_cycle
MD5_SHA-1_SHA-256_op
MMU_ld_to_PCX
RC4_busy_cycle
```



RC4\_op Stream\_ld\_to\_PCX Stream\_st\_to\_PCX TLB\_miss

See the "UltraSPARC T2 User's Manual" for descriptions of these events. Documentation for Sun processors can be found at: http://www.sun.com/processors/manuals

# C.3 NEC SX Hardware Performance Counter

This is a list of all supported hardware performance counters for NEC SX machines.

SX\_CTR\_STM System timer reg SX\_CTR\_USRCC User clock counter SX\_CTR\_EX Execution counter SX\_CTR\_VX Vector execution counter SX\_CTR\_VE Vector element counter SX\_CTR\_VECC Vector execution clock counter SX\_CTR\_VAREC Vector arithmetic execution clock counter SX\_CTR\_VLDEC Vector load execution clock counter SX\_CTR\_FPEC Floating point data execution counter SX\_CTR\_BCCC Bank conflict clock counter SX\_CTR\_ICMCC Instruction cache miss clock counter SX\_CTR\_OCMCC Operand cache miss clock counter SX\_CTR\_IPHCC Instruction pipeline hold clock counter SX\_CTR\_MNCCC Memory network conflict clock counter SX\_CTR\_SRACC Shared resource access clock counter SX\_CTR\_BREC Branch execution counter SX CTR BPFC Branch prediction failure counter



# C.4 Resource Usage

The list of resource usage counters can also be found in the manual page of <code>getrusage</code>. Note that, depending on the operating system, not all fields may be maintained. The fields supported by the Linux 2.6 kernel are shown in the table.

Name	Unit	Linux	Description
ru_utime	ms	X	Total amount of user time used.
ru_stime	ms	X	Total amount of system time used.
ru_maxrss	kB		Maximum resident set size.
ru_ixrss	$kB \times s$		Integral shared memory size (text segment) over the runtime.
ru_idrss	$kB \times s$		Integral data segment memory used over the runtime.
ru_isrss	$kB \times s$		Integral stack memory used over the runtime.
ru_minflt	#	Х	Number of soft page faults (i.e. those serviced by reclaiming a page from the list of pages awaiting reallocation).
ru_majflt	#	X	Number of hard page faults (i.e. those that required I/O).
ru_nswap	#		Number of times a process was swapped out of physical memory.
ru_inblock	#		Number of input operations via the file system. Note: This and ru_oublock do not include operations with the cache.
ru_oublock	#		Number of output operations via the file system.
ru_msgsnd	#		Number of IPC messages sent.
ru_msgrcv	#		Number of IPC messages received.
ru_nsignals	#		Number of signals delivered.
ru_nvcsw	#	Х	Number of voluntary context switches, i.e. because the process gave up the processor before it had to (usually to wait for some resource to be available).
ru_nivcsw	#	X	Number of involuntary context switches, i.e. a higher priority process became runnable or the current process used up its time slice.





# D FAQ

# D.1 Can I use different compilers for VampirTrace and my application?

There are several limitations which make this generally a bad idea:

- Using different compilers when tracing OpenMP applications does not work.
- Both compilers should have the same naming style for Fortran symbols (i.e. uppercase/lowercase, appending underscores) when tracing Fortran MPI applications.
- VampirTrace must be built to support the instrumentation type of the compiler you use for the application.

For example, the combination of a GCC compiled VampirTrace with an Intel compiled application will work except for OpenMP. But to avoid any trouble it is advisable to compile both VampirTrace and the application with the same compiler.

# D.2 Why does my application takes such a long time to start up?

If subroutines have been instrumented with automatic instrumentation by GNU, Intel, or PathScale compilers, VampirTrace needs to look-up the function names and their source code line before program start. In certain cases, this may take very long. To accelerate this process prepare a file with symbol information using the command nm as explained in Section 2.3 and set VT\_GNU\_NMFILE to the pathname of this file. This method prevents VampirTrace from getting the function names from the binary.

# D.3 How can I trace functions in shared libraries?

Functions that reside in shared libraries ( $\star$ .so) cannot be traced with the GNU backend of VampirTrace. This affects GNU GCC, Intel and PathScale compilers. Tracing of functions in shared libraries works for the PGI compiler. The workaround for tracing such functions is building a static binary.



# D.4 How can I speed up trace unification?

vtunify is an OpenMP parallel application that operates on all local traces and produces the final OTF trace. Normally, it is called automatically by VampirTrace after the actual application has run to completion. vtunify opens as many threads as specified by the <code>OMP\_NUM\_THREADS</code> environment variable. If the variable is not set, it uses only a single thread, so one should set <code>OMP\_NUM\_THREADS</code> also for applications that normally do not use OpenMP.

To speed up trace unification, one can disable automatic trace unification by setting the environment variable  $VT\_UNIFY$  to no and manually unify the trace described in section 3.5.

# D.5 The application has run to completion, but there is no \*.otf file. What can I do?

The absence of an  $\star.otf$  file usually means that the trace was not unified. This is the case on certain platforms, e.g. when using DYNINST or when the local traces are not available when the application ends and VampirTrace performs trace unification.

In those cases,  $\star.uctl$  files can be found in the directory of the trace file and the user needs to perform trace unification manually. See Sections 3.5 and B.2 to learn more about using vtunify.

# D.6 What limitations are associated with VT\_ON/VT\_OFF?

Starting and stopping tracing by using the  $VT\_ON/VT\_OFF$  calls is considered advanced usage of VampirTrace and should be performed with care. When restarting the recording of events, the call stack of the application has to have the same depth as when stopping the recording. For example, this can be ensured by calling  $VT\_OFF$  and  $VT\_ON$  in the same function.

In addition, stopping tracing while waiting for MPI messages can cause those MPI messages not to be recorded in the trace. This can cause problems when analyzing the OTF trace afterwards, e.g., with Vampir.



# D.7 VampirTrace warns that it "cannot lock file a.lock", what's wrong?

For unique naming of multiple trace files in the same directory, a file  $\star.lock$  is created and locked for exclusive access if  $VT_FILE_UNIQUE$  is set to yes ( $\Rightarrow$  Section 3.1). Some file systems do not implement file locking. In this case, VampirTrace still tries to name the trace files uniquely, but this may fail in certain cases. Alternatively, you can manually control the unique file naming by setting  $VT_FILE_UNIQUE$  to a different numerical ID for each program run.

# D.8 Can I re-locate my VampirTrace installation without re-build from source?

VampirTrace hard-codes some directory paths in its executables and libraries based on installation paths specified by the <code>configure</code> script. However, it's possible to move an existing VampirTrace installation to another location and use it without re-build from source. Therefore it's necessary to set the environment variable <code>VT\_PREFIX</code> to the new installation prefix before using VampirTrace's Compiler Wrappers ( $\Rightarrow$  Section 2.1) or launching an instrumented application. For example:

```
./configure --prefix=/opt/vampirtrace
make install
mv /opt/vampirtrace $HOME/vampirtrace
export VT_PREFIX=$HOME/vampirtrace
```

# D.9 I have a question that is not answered in this document!

You may contact us at vampirsupport@zih.tu-dresden.de for support on installing and using VampirTrace.

# D.10 I need support for additional features so I can trace application xyz.

Suggestions are always welcome (contact: vampirsupport@zih.tu-dresden.de) but there is a chance that we can not implement all your wishes as our resources are limited.



Anyways, the source code of VampirTrace is open to everybody so you may implement support for new stuff yourself. If you provide us with your additions afterwards we will consider merging them into the official VampirTrace package.