


/home/dave/thesis/qtwayland
-motorcar-compositor/qt
/src/qopenglwindow.h

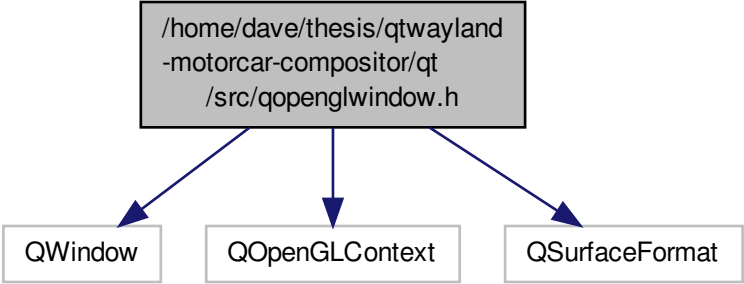

```
graph TD; A["/home/dave/thesis/qtwayland<br/>-motorcar-compositor/qt<br/>/src/qopenglwindow.h"] --> B["QWindow"]; A --> C["QOpenGLContext"]; A --> D["QSurfaceFormat"];
```

The diagram illustrates a file path dependency. A central gray box at the top contains the file path: /home/dave/thesis/qtwayland-motorcar-compositor/qt/src/qopenglwindow.h. Three blue arrows point downwards from this box to three separate white boxes below it. The left box is labeled QWindow, the middle box is labeled QOpenGLContext, and the right box is labeled QSurfaceFormat.

QWindow

QOpenGLContext

QSurfaceFormat