

# Beginner's Python Cheat Sheet

## Variables and Strings

*Variables are used to store values. A string is a series of characters, surrounded by single or double quotes.*

### Hello world

```
print("Hello world!")
```

### Hello world with a variable

```
msg = "Hello world!"  
print(msg)
```

### Concatenation (combining strings)

```
first_name = 'albert'  
last_name = 'einstein'  
full_name = first_name + ' ' + last_name  
print(full_name)
```

## Lists

*A list stores a series of items in a particular order. You access items using an index, or within a loop.*

### Make a list

```
bikes = ['trek', 'redline', 'giant']
```

### Get the first item in a list

```
first_bike = bikes[0]
```

### Get the last item in a list

```
last_bike = bikes[-1]
```

### Looping through a list

```
for bike in bikes:  
    print(bike)
```

### Adding items to a list

```
bikes = []  
bikes.append('trek')  
bikes.append('redline')  
bikes.append('giant')
```

### Making numerical lists

```
squares = []  
for x in range(1, 11):  
    squares.append(x**2)
```

## Lists (cont.)

### List comprehensions

```
squares = [x**2 for x in range(1, 11)]
```

### Slicing a list

```
finishers = ['sam', 'bob', 'ada', 'bea']  
first_two = finishers[:2]
```

### Copying a list

```
copy_of_bikes = bikes[:]
```

## Tuples

*Tuples are similar to lists, but the items in a tuple can't be modified.*

### Making a tuple

```
dimensions = (1920, 1080)
```

## If statements

*If statements are used to test for particular conditions and respond appropriately.*

### Conditional tests

equals	x == 42
not equal	x != 42
greater than	x > 42
or equal to	x >= 42
less than	x < 42
or equal to	x <= 42

### Conditional test with lists

```
'trek' in bikes  
'surly' not in bikes
```

### Boolean values

```
game_active = True  
can_edit = False
```

### A simple if test

```
if age >= 18:  
    print("You can vote!")
```

### If-elif-else statements

```
if age < 4:  
    ticket_price = 0  
elif age < 18:  
    ticket_price = 10  
else:  
    ticket_price = 15
```

## Dictionaries

*Dictionaries store connections between pieces of information. Each item in a dictionary is a key-value pair.*

### A simple dictionary

```
alien = {'color': 'green', 'points': 5}
```

### Accessing a value

```
print("The alien's color is " + alien['color'])
```

### Adding a new key-value pair

```
alien['x_position'] = 0
```

### Looping through all key-value pairs

```
fav_numbers = {'eric': 17, 'ever': 4}  
for name, number in fav_numbers.items():  
    print(name + ' loves ' + str(number))
```

### Looping through all keys

```
fav_numbers = {'eric': 17, 'ever': 4}  
for name in fav_numbers.keys():  
    print(name + ' loves a number')
```

### Looping through all the values

```
fav_numbers = {'eric': 17, 'ever': 4}  
for number in fav_numbers.values():  
    print(str(number) + ' is a favorite')
```

## User input

*Your programs can prompt the user for input. All input is stored as a string.*

### Prompting for a value

```
name = input("What's your name? ")  
print("Hello, " + name + "!")
```

### Prompting for numerical input

```
age = input("How old are you? ")  
age = int(age)
```

```
pi = input("What's the value of pi? ")  
pi = float(pi)
```

## Python Crash Course

*Covers Python 3 and Python 2*

[nostarchpress.com/pythoncrashcourse](http://nostarchpress.com/pythoncrashcourse)



## While loops

A while loop repeats a block of code as long as a certain condition is true.

### A simple while loop

```
current_value = 1
while current_value <= 5:
    print(current_value)
    current_value += 1
```

### Letting the user choose when to quit

```
msg = ''
while msg != 'quit':
    msg = input("What's your message? ")
    print(msg)
```

## Functions

Functions are named blocks of code, designed to do one specific job. Information passed to a function is called an argument, and information received by a function is called a parameter.

### A simple function

```
def greet_user():
    """Display a simple greeting."""
    print("Hello!")

greet_user()
```

### Passing an argument

```
def greet_user(username):
    """Display a personalized greeting."""
    print("Hello, " + username + "!")

greet_user('jesse')
```

### Default values for parameters

```
def make_pizza(topping='bacon'):
    """Make a single-topping pizza."""
    print("Have a " + topping + " pizza!")
```

```
make_pizza()
make_pizza('pepperoni')
```

### Returning a value

```
def add_numbers(x, y):
    """Add two numbers and return the sum."""
    return x + y

sum = add_numbers(3, 5)
print(sum)
```

## Classes

A class defines the behavior of an object and the kind of information an object can store. The information in a class is stored in attributes, and functions that belong to a class are called methods. A child class inherits the attributes and methods from its parent class.

### Creating a dog class

```
class Dog():
    """Represent a dog."""

    def __init__(self, name):
        """Initialize dog object."""
        self.name = name

    def sit(self):
        """Simulate sitting."""
        print(self.name + " is sitting.")
```

```
my_dog = Dog('Peso')
```

```
print(my_dog.name + " is a great dog!")
my_dog.sit()
```

### Inheritance

```
class SARDog(Dog):
    """Represent a search dog."""

    def __init__(self, name):
        """Initialize the sardog."""
        super().__init__(name)

    def search(self):
        """Simulate searching."""
        print(self.name + " is searching.")
```

```
my_dog = SARDog('Willie')
```

```
print(my_dog.name + " is a search dog.")
my_dog.sit()
my_dog.search()
```

## Infinite Skills

*If you had infinite programming skills, what would you build?*

As you're learning to program, it's helpful to think about the real-world projects you'd like to create. It's a good habit to keep an "ideas" notebook that you can refer to whenever you want to start a new project. If you haven't done so already, take a few minutes and describe three projects you'd like to create.

## Working with files

Your programs can read from files and write to files. Files are opened in read mode ('r') by default, but can also be opened in write mode ('w') and append mode ('a').

### Reading a file and storing its lines

```
filename = 'siddhartha.txt'
with open(filename) as file_object:
    lines = file_object.readlines()

for line in lines:
    print(line)
```

### Writing to a file

```
filename = 'journal.txt'
with open(filename, 'w') as file_object:
    file_object.write("I love programming.")
```

### Appending to a file

```
filename = 'journal.txt'
with open(filename, 'a') as file_object:
    file_object.write("\nI love making games.")
```

## Exceptions

Exceptions help you respond appropriately to errors that are likely to occur. You place code that might cause an error in the try block. Code that should run in response to an error goes in the except block. Code that should run only if the try block was successful goes in the else block.

### Catching an exception

```
prompt = "How many tickets do you need? "
num_tickets = input(prompt)

try:
    num_tickets = int(num_tickets)
except ValueError:
    print("Please try again.")
else:
    print("Your tickets are printing.")
```

## Zen of Python

*Simple is better than complex*

If you have a choice between a simple and a complex solution, and both work, use the simple solution. Your code will be easier to maintain, and it will be easier for you and others to build on that code later on.

*More cheat sheets available at*  
[ehmatthes.github.io/pcc/](https://ehmatthes.github.io/pcc/)

# Beginner's Python Cheat Sheet - Lists

## What are lists?

A list stores a series of items in a particular order. Lists allow you to store sets of information in one place, whether you have just a few items or millions of items. Lists are one of Python's most powerful features readily accessible to new programmers, and they tie together many important concepts in programming.

## Defining a list

Use square brackets to define a list, and use commas to separate individual items in the list. Use plural names for lists, to make your code easier to read.

## Making a list

```
users = ['val', 'bob', 'mia', 'ron', 'ned']
```

## Accessing elements

Individual elements in a list are accessed according to their position, called the index. The index of the first element is 0, the index of the second element is 1, and so forth. Negative indices refer to items at the end of the list. To get a particular element, write the name of the list and then the index of the element in square brackets.

## Getting the first element

```
first_user = users[0]
```

## Getting the second element

```
second_user = users[1]
```

## Getting the last element

```
newest_user = users[-1]
```

## Modifying individual items

Once you've defined a list, you can change individual elements in the list. You do this by referring to the index of the item you want to modify.

## Changing an element

```
users[0] = 'valerie'  
users[-2] = 'ronald'
```

## Adding elements

You can add elements to the end of a list, or you can insert them wherever you like in a list.

## Adding an element to the end of the list

```
users.append('amy')
```

## Starting with an empty list

```
users = []  
users.append('val')  
users.append('bob')  
users.append('mia')
```

## Inserting elements at a particular position

```
users.insert(0, 'joe')  
users.insert(3, 'bea')
```

## Removing elements

You can remove elements by their position in a list, or by the value of the item. If you remove an item by its value, Python removes only the first item that has that value.

## Deleting an element by its position

```
del users[-1]
```

## Removing an item by its value

```
users.remove('mia')
```

## Popping elements

If you want to work with an element that you're removing from the list, you can "pop" the element. If you think of the list as a stack of items, pop() takes an item off the top of the stack. By default pop() returns the last element in the list, but you can also pop elements from any position in the list.

## Pop the last item from a list

```
most_recent_user = users.pop()  
print(most_recent_user)
```

## Pop the first item in a list

```
first_user = users.pop(0)  
print(first_user)
```

## List length

The len() function returns the number of items in a list.

## Find the length of a list

```
num_users = len(users)  
print("We have " + str(num_users) + " users.")
```

## Sorting a list

The sort() method changes the order of a list permanently. The sorted() function returns a copy of the list, leaving the original list unchanged. You can sort the items in a list in alphabetical order, or reverse alphabetical order. You can also reverse the original order of the list. Keep in mind that lowercase and uppercase letters may affect the sort order.

## Sorting a list permanently

```
users.sort()
```

## Sorting a list permanently in reverse alphabetical order

```
users.sort(reverse=True)
```

## Sorting a list temporarily

```
print(sorted(users))  
print(sorted(users, reverse=True))
```

## Reversing the order of a list

```
users.reverse()
```

## Looping through a list

Lists can contain millions of items, so Python provides an efficient way to loop through all the items in a list. When you set up a loop, Python pulls each item from the list one at a time and stores it in a temporary variable, which you provide a name for. This name should be the singular version of the list name.

The indented block of code makes up the body of the loop, where you can work with each individual item. Any lines that are not indented run after the loop is completed.

## Printing all items in a list

```
for user in users:  
    print(user)
```


## Printing a message for each item, and a separate message afterwards

```
for user in users:  
    print("Welcome, " + user + "!")  
  
print("Welcome, we're glad to see you all!")
```

## Python Crash Course

Covers Python 3 and Python 2

[nostarchpress.com/pythoncrashcourse](http://nostarchpress.com/pythoncrashcourse)



## The range() function

You can use the range() function to work with a set of numbers efficiently. The range() function starts at 0 by default, and stops one number below the number passed to it. You can use the list() function to efficiently generate a large list of numbers.

### Printing the numbers 0 to 1000

```
for number in range(1001):  
    print(number)
```

### Printing the numbers 1 to 1000

```
for number in range(1, 1001):  
    print(number)
```

### Making a list of numbers from 1 to a million

```
numbers = list(range(1, 1000001))
```

## Simple statistics

There are a number of simple statistics you can run on a list containing numerical data.

### Finding the minimum value in a list

```
ages = [93, 99, 66, 17, 85, 1, 35, 82, 2, 77]  
youngest = min(ages)
```

### Finding the maximum value

```
ages = [93, 99, 66, 17, 85, 1, 35, 82, 2, 77]  
oldest = max(ages)
```

### Finding the sum of all values

```
ages = [93, 99, 66, 17, 85, 1, 35, 82, 2, 77]  
total_years = sum(ages)
```

## Slicing a list

You can work with any set of elements from a list. A portion of a list is called a slice. To slice a list start with the index of the first item you want, then add a colon and the index after the last item you want. Leave off the first index to start at the beginning of the list, and leave off the last index to slice through the end of the list.

### Getting the first three items

```
finishers = ['kai', 'abe', 'ada', 'gus', 'zoe']  
first_three = finishers[:3]
```

### Getting the middle three items

```
middle_three = finishers[1:4]
```

### Getting the last three items

```
last_three = finishers[-3:]
```

## Copying a list

To copy a list make a slice that starts at the first item and ends at the last item. If you try to copy a list without using this approach, whatever you do to the copied list will affect the original list as well.

### Making a copy of a list

```
finishers = ['kai', 'abe', 'ada', 'gus', 'zoe']  
copy_of_finishers = finishers[:]
```

## List comprehensions

You can use a loop to generate a list based on a range of numbers or on another list. This is a common operation, so Python offers a more efficient way to do it. List comprehensions may look complicated at first; if so, use the for loop approach until you're ready to start using comprehensions.

To write a comprehension, define an expression for the values you want to store in the list. Then write a for loop to generate input values needed to make the list.

### Using a loop to generate a list of square numbers

```
squares = []  
for x in range(1, 11):  
    square = x**2  
    squares.append(square)
```

### Using a comprehension to generate a list of square numbers

```
squares = [x**2 for x in range(1, 11)]
```

### Using a loop to convert a list of names to upper case

```
names = ['kai', 'abe', 'ada', 'gus', 'zoe']  
  
upper_names = []  
for name in names:  
    upper_names.append(name.upper())
```

### Using a comprehension to convert a list of names to upper case

```
names = ['kai', 'abe', 'ada', 'gus', 'zoe']  
  
upper_names = [name.upper() for name in names]
```

## Styling your code

### Readability counts

- Use four spaces per indentation level.
- Keep your lines to 79 characters or fewer.
- Use single blank lines to group parts of your program visually.

## Tuples

A tuple is like a list, except you can't change the values in a tuple once it's defined. Tuples are good for storing information that shouldn't be changed throughout the life of a program. Tuples are designated by parentheses instead of square brackets. (You can overwrite an entire tuple, but you can't change the individual elements in a tuple.)

### Defining a tuple

```
dimensions = (800, 600)
```

### Looping through a tuple

```
for dimension in dimensions:  
    print(dimension)
```

### Overwriting a tuple

```
dimensions = (800, 600)  
print(dimensions)
```

```
dimensions = (1200, 900)
```

## Visualizing your code

When you're first learning about data structures such as lists, it helps to visualize how Python is working with the information in your program. pythontutor.com is a great tool for seeing how Python keeps track of the information in a list. Try running the following code on pythontutor.com, and then run your own code.

### Build a list and print the items in the list

```
dogs = []  
dogs.append('willie')  
dogs.append('hootz')  
dogs.append('peso')  
dogs.append('goblin')
```

```
for dog in dogs:  
    print("Hello " + dog + "!")  
print("I love these dogs!")
```

```
print("\nThese were my first two dogs:")  
old_dogs = dogs[:2]  
for old_dog in old_dogs:  
    print(old_dog)
```

```
del dogs[0]  
dogs.remove('peso')  
print(dogs)
```

More cheat sheets available at  
[ehmatthes.github.io/pcc/](https://ehmatthes.github.io/pcc/)



# Beginner's Python Cheat Sheet — Dictionaries

## What are dictionaries?

Python's dictionaries allow you to connect pieces of related information. Each piece of information in a dictionary is stored as a key-value pair. When you provide a key, Python returns the value associated with that key. You can loop through all the key-value pairs, all the keys, or all the values.

## Defining a dictionary

*Use curly braces to define a dictionary. Use colons to connect keys and values, and use commas to separate individual key-value pairs.*

### Making a dictionary

```
alien_0 = {'color': 'green', 'points': 5}
```

## Accessing values

*To access the value associated with an individual key give the name of the dictionary and then place the key in a set of square brackets. If the key you're asking for is not in the dictionary, an error will occur.*

*You can also use the `get()` method, which returns `None` instead of an error if the key doesn't exist. You can also specify a default value to use if the key is not in the dictionary.*

### Getting the value associated with a key

```
alien_0 = {'color': 'green', 'points': 5}
```

```
print(alien_0['color'])
print(alien_0['points'])
```

### Getting the value with `get()`

```
alien_0 = {'color': 'green'}
```

```
alien_color = alien_0.get('color')
alien_points = alien_0.get('points', 0)
```

```
print(alien_color)
print(alien_points)
```

## Adding new key-value pairs

*You can store as many key-value pairs as you want in a dictionary, until your computer runs out of memory. To add a new key-value pair to an existing dictionary give the name of the dictionary and the new key in square brackets, and set it equal to the new value.*

*This also allows you to start with an empty dictionary and add key-value pairs as they become relevant.*

### Adding a key-value pair

```
alien_0 = {'color': 'green', 'points': 5}
```

```
alien_0['x'] = 0
alien_0['y'] = 25
alien_0['speed'] = 1.5
```

### Adding to an empty dictionary

```
alien_0 = {}
alien_0['color'] = 'green'
alien_0['points'] = 5
```

## Modifying values

*You can modify the value associated with any key in a dictionary. To do so give the name of the dictionary and enclose the key in square brackets, then provide the new value for that key.*

### Modifying values in a dictionary

```
alien_0 = {'color': 'green', 'points': 5}
print(alien_0)
```

```
# Change the alien's color and point value.
alien_0['color'] = 'yellow'
alien_0['points'] = 10
print(alien_0)
```

## Removing key-value pairs

*You can remove any key-value pair you want from a dictionary. To do so use the `del` keyword and the dictionary name, followed by the key in square brackets. This will delete the key and its associated value.*

### Deleting a key-value pair

```
alien_0 = {'color': 'green', 'points': 5}
print(alien_0)
```

```
del alien_0['points']
print(alien_0)
```

## Visualizing dictionaries

*Try running some of these examples on [pythontutor.com](http://pythontutor.com).*

## Looping through a dictionary

*You can loop through a dictionary in three ways: you can loop through all the key-value pairs, all the keys, or all the values.*

*A dictionary only tracks the connections between keys and values; it doesn't track the order of items in the dictionary. If you want to process the information in order, you can sort the keys in your loop.*

### Looping through all key-value pairs

```
# Store people's favorite languages.
fav_languages = {
    'jen': 'python',
    'sarah': 'c',
    'edward': 'ruby',
    'phil': 'python',
}
```

```
# Show each person's favorite language.
for name, language in fav_languages.items():
    print(name + ": " + language)
```

### Looping through all the keys

```
# Show everyone who's taken the survey.
for name in fav_languages.keys():
    print(name)
```

### Looping through all the values

```
# Show all the languages that have been chosen.
for language in fav_languages.values():
    print(language)
```

### Looping through all the keys in order

```
# Show each person's favorite language,
# in order by the person's name.
for name in sorted(fav_languages.keys()):
    print(name + ": " + language)
```

## Dictionary length

*You can find the number of key-value pairs in a dictionary.*

### Finding a dictionary's length

```
num_responses = len(fav_languages)
```

## Python Crash Course

*Covers Python 3 and Python 2*

[nostarchpress.com/pythoncrashcourse](http://nostarchpress.com/pythoncrashcourse)



## Nesting — A list of dictionaries

*It's sometimes useful to store a set of dictionaries in a list; this is called nesting.*

### Storing dictionaries in a list

```
# Start with an empty list.
users = []

# Make a new user, and add them to the list.
new_user = {
    'last': 'fermi',
    'first': 'enrico',
    'username': 'efermi',
}
users.append(new_user)

# Make another new user, and add them as well.
new_user = {
    'last': 'curie',
    'first': 'marie',
    'username': 'mcurie',
}
users.append(new_user)

# Show all information about each user.
for user_dict in users:
    for k, v in user_dict.items():
        print(k + ": " + v)
    print("\n")
```

You can also define a list of dictionaries directly, without using `append()`:

```
# Define a list of users, where each user
# is represented by a dictionary.
users = [
    {
        'last': 'fermi',
        'first': 'enrico',
        'username': 'efermi',
    },
    {
        'last': 'curie',
        'first': 'marie',
        'username': 'mcurie',
    },
]

# Show all information about each user.
for user_dict in users:
    for k, v in user_dict.items():
        print(k + ": " + v)
    print("\n")
```

## Nesting — Lists in a dictionary

*Storing a list inside a dictionary allows you to associate more than one value with each key.*

### Storing lists in a dictionary

```
# Store multiple languages for each person.
fav_languages = {
    'jen': ['python', 'ruby'],
    'sarah': ['c'],
    'edward': ['ruby', 'go'],
    'phil': ['python', 'haskell'],
}

# Show all responses for each person.
for name, langs in fav_languages.items():
    print(name + ": ")
    for lang in langs:
        print("- " + lang)
```

## Nesting — A dictionary of dictionaries

*You can store a dictionary inside another dictionary. In this case each value associated with a key is itself a dictionary.*

### Storing dictionaries in a dictionary

```
users = {
    'aeinstein': {
        'first': 'albert',
        'last': 'einstein',
        'location': 'princeton',
    },
    'mcurie': {
        'first': 'marie',
        'last': 'curie',
        'location': 'paris',
    },
}

for username, user_dict in users.items():
    print("\nUsername: " + username)
    full_name = user_dict['first'] + " "
    full_name += user_dict['last']
    location = user_dict['location']

    print("\tFull name: " + full_name.title())
    print("\tLocation: " + location.title())
```

## Levels of nesting

*Nesting is extremely useful in certain situations. However, be aware of making your code overly complex. If you're nesting items much deeper than what you see here there are probably simpler ways of managing your data, such as using classes.*

## Using an OrderedDict

*Standard Python dictionaries don't keep track of the order in which keys and values are added; they only preserve the association between each key and its value. If you want to preserve the order in which keys and values are added, use an `OrderedDict`.*

### Preserving the order of keys and values

```
from collections import OrderedDict

# Store each person's languages, keeping
# track of who responded first.
fav_languages = OrderedDict()

fav_languages['jen'] = ['python', 'ruby']
fav_languages['sarah'] = ['c']
fav_languages['edward'] = ['ruby', 'go']
fav_languages['phil'] = ['python', 'haskell']

# Display the results, in the same order they
# were entered.
for name, langs in fav_languages.items():
    print(name + ":")
    for lang in langs:
        print("- " + lang)
```

## Generating a million dictionaries

*You can use a loop to generate a large number of dictionaries efficiently, if all the dictionaries start out with similar data.*

### A million aliens

```
aliens = []

# Make a million green aliens, worth 5 points
# each. Have them all start in one row.
for alien_num in range(1000000):
    new_alien = {}
    new_alien['color'] = 'green'
    new_alien['points'] = 5
    new_alien['x'] = 20 * alien_num
    new_alien['y'] = 0
    aliens.append(new_alien)

# Prove the list contains a million aliens.
num_aliens = len(aliens)

print("Number of aliens created:")
print(num_aliens)
```

*More cheat sheets available at*  
[ehmatthes.github.io/pcc/](https://ehmatthes.github.io/pcc/)

# Beginner's Python Cheat Sheet — If Statements and While Loops

## What are if statements? What are while loops?

If statements allow you to examine the current state of a program and respond appropriately to that state. You can write a simple if statement that checks one condition, or you can create a complex series of if statements that identify the exact conditions you're looking for.

While loops run as long as certain conditions remain true. You can use while loops to let your programs run as long as your users want them to.

## Conditional Tests

*A conditional test is an expression that can be evaluated as True or False. Python uses the values True and False to decide whether the code in an if statement should be executed.*

### Checking for equality

*A single equal sign assigns a value to a variable. A double equal sign (==) checks whether two values are equal.*

```
>>> car = 'bmw'
>>> car == 'bmw'
True
>>> car = 'audi'
>>> car == 'bmw'
False
```

### Ignoring case when making a comparison

```
>>> car = 'Audi'
>>> car.lower() == 'audi'
True
```

### Checking for inequality

```
>>> topping = 'mushrooms'
>>> topping != 'anchovies'
True
```

## Numerical comparisons

*Testing numerical values is similar to testing string values.*

### Testing equality and inequality

```
>>> age = 18
>>> age == 18
True
>>> age != 18
False
```

### Comparison operators

```
>>> age = 19
>>> age < 21
True
>>> age <= 21
True
>>> age > 21
False
>>> age >= 21
False
```

## Checking multiple conditions

*You can check multiple conditions at the same time. The and operator returns True if all the conditions listed are True. The or operator returns True if any condition is True.*

### Using and to check multiple conditions

```
>>> age_0 = 22
>>> age_1 = 18
>>> age_0 >= 21 and age_1 >= 21
False
>>> age_1 = 23
>>> age_0 >= 21 and age_1 >= 21
True
```

### Using or to check multiple conditions

```
>>> age_0 = 22
>>> age_1 = 18
>>> age_0 >= 21 or age_1 >= 21
True
>>> age_0 = 18
>>> age_0 >= 21 or age_1 >= 21
False
```

## Boolean values

*A boolean value is either True or False. Variables with boolean values are often used to keep track of certain conditions within a program.*

### Simple boolean values

```
game_active = True
can_edit = False
```

## If statements

*Several kinds of if statements exist. Your choice of which to use depends on the number of conditions you need to test. You can have as many elif blocks as you need, and the else block is always optional.*

### Simple if statement

```
age = 19

if age >= 18:
    print("You're old enough to vote!")
```

### If-else statements

```
age = 17

if age >= 18:
    print("You're old enough to vote!")
else:
    print("You can't vote yet.")
```

### The if-elif-else chain

```
age = 12

if age < 4:
    price = 0
elif age < 18:
    price = 5
else:
    price = 10

print("Your cost is $" + str(price) + ".")
```

## Conditional tests with lists

*You can easily test whether a certain value is in a list. You can also test whether a list is empty before trying to loop through the list.*

### Testing if a value is in a list

```
>>> players = ['al', 'bea', 'cyn', 'dale']
>>> 'al' in players
True
>>> 'eric' in players
False
```

## Python Crash Course

*Covers Python 3 and Python 2*

[nostarchpress.com/pythoncrashcourse](http://nostarchpress.com/pythoncrashcourse)



## Conditional tests with lists (cont.)

### Testing if a value is not in a list

```
banned_users = ['ann', 'chad', 'dee']
user = 'erin'
```

```
if user not in banned_users:
    print("You can play!")
```

### Checking if a list is empty

```
players = []
```

```
if players:
    for player in players:
        print("Player: " + player.title())
else:
    print("We have no players yet!")
```

## Accepting input

*You can allow your users to enter input using the input() statement. In Python 3, all input is stored as a string.*

### Simple input

```
name = input("What's your name? ")
print("Hello, " + name + ".")
```

### Accepting numerical input

```
age = input("How old are you? ")
age = int(age)

if age >= 18:
    print("\nYou can vote!")
else:
    print("\nYou can't vote yet.")
```

### Accepting input in Python 2.7

*Use raw\_input() in Python 2.7. This function interprets all input as a string, just as input() does in Python 3.*

```
name = raw_input("What's your name? ")
print("Hello, " + name + ".")
```

## While loops

*A while loop repeats a block of code as long as a condition is True.*

### Counting to 5

```
current_number = 1

while current_number <= 5:
    print(current_number)
    current_number += 1
```

## While loops (cont.)

### Letting the user choose when to quit

```
prompt = "\nTell me something, and I'll "
prompt += "repeat it back to you."
prompt += "\nEnter 'quit' to end the program. "
```

```
message = ""
while message != 'quit':
    message = input(prompt)

    if message != 'quit':
        print(message)
```

### Using a flag

```
prompt = "\nTell me something, and I'll "
prompt += "repeat it back to you."
prompt += "\nEnter 'quit' to end the program. "
```

```
active = True
while active:
    message = input(prompt)
```

```
    if message == 'quit':
        active = False
    else:
        print(message)
```

### Using break to exit a loop

```
prompt = "\nWhat cities have you visited?"
prompt += "\nEnter 'quit' when you're done. "
```

```
while True:
    city = input(prompt)

    if city == 'quit':
        break
    else:
        print("I've been to " + city + "!")
```

## Accepting input with Sublime Text

*Sublime Text doesn't run programs that prompt the user for input. You can use Sublime Text to write programs that prompt for input, but you'll need to run these programs from a terminal.*

## Breaking out of loops

*You can use the break statement and the continue statement with any of Python's loops. For example you can use break to quit a for loop that's working through a list or a dictionary. You can use continue to skip over certain items when looping through a list or dictionary as well.*

## While loops (cont.)

### Using continue in a loop

```
banned_users = ['eve', 'fred', 'gary', 'helen']
```

```
prompt = "\nAdd a player to your team."
prompt += "\nEnter 'quit' when you're done. "
```

```
players = []
while True:
    player = input(prompt)
    if player == 'quit':
        break
    elif player in banned_users:
        print(player + " is banned!")
        continue
    else:
        players.append(player)
```

```
print("\nYour team:")
for player in players:
    print(player)
```

## Avoiding infinite loops

*Every while loop needs a way to stop running so it won't continue to run forever. If there's no way for the condition to become False, the loop will never stop running.*

### An infinite loop

```
while True:
    name = input("\nWho are you? ")
    print("Nice to meet you, " + name + "!")
```

## Removing all instances of a value from a list

*The remove() method removes a specific value from a list, but it only removes the first instance of the value you provide. You can use a while loop to remove all instances of a particular value.*

### Removing all cats from a list of pets

```
pets = ['dog', 'cat', 'dog', 'fish', 'cat',
        'rabbit', 'cat']
print(pets)
```

```
while 'cat' in pets:
    pets.remove('cat')
```

```
print(pets)
```

*More cheat sheets available at*  
[ehmatthes.github.io/pcc/](https://ehmatthes.github.io/pcc/)



# Beginner's Python Cheat Sheet — Functions

## What are functions?

Functions are named blocks of code designed to do one specific job. Functions allow you to write code once that can then be run whenever you need to accomplish the same task. Functions can take in the information they need, and return the information they generate. Using functions effectively makes your programs easier to write, read, test, and fix.

## Defining a function

*The first line of a function is its definition, marked by the keyword `def`. The name of the function is followed by a set of parentheses and a colon. A docstring, in triple quotes, describes what the function does. The body of a function is indented one level.*

*To call a function, give the name of the function followed by a set of parentheses.*

## Making a function

```
def greet_user():  
    """Display a simple greeting."""  
    print("Hello!")  
  
greet_user()
```

## Passing information to a function

*Information that's passed to a function is called an argument; information that's received by a function is called a parameter. Arguments are included in parentheses after the function's name, and parameters are listed in parentheses in the function's definition.*

## Passing a single argument

```
def greet_user(username):  
    """Display a simple greeting."""  
    print("Hello, " + username + "!")  
  
greet_user('jesse')  
greet_user('diana')  
greet_user('brandon')
```

## Positional and keyword arguments

*The two main kinds of arguments are positional and keyword arguments. When you use positional arguments Python matches the first argument in the function call with the first parameter in the function definition, and so forth.*

*With keyword arguments, you specify which parameter each argument should be assigned to in the function call. When you use keyword arguments, the order of the arguments doesn't matter.*

## Using positional arguments

```
def describe_pet(animal, name):  
    """Display information about a pet."""  
    print("\nI have a " + animal + ".")  
    print("Its name is " + name + ".")  
  
describe_pet('hamster', 'harry')  
describe_pet('dog', 'willie')
```

## Using keyword arguments

```
def describe_pet(animal, name):  
    """Display information about a pet."""  
    print("\nI have a " + animal + ".")  
    print("Its name is " + name + ".")  
  
describe_pet(animal='hamster', name='harry')  
describe_pet(name='willie', animal='dog')
```

## Default values

*You can provide a default value for a parameter. When function calls omit this argument the default value will be used. Parameters with default values must be listed after parameters without default values in the function's definition so positional arguments can still work correctly.*

## Using a default value

```
def describe_pet(name, animal='dog'):  
    """Display information about a pet."""  
    print("\nI have a " + animal + ".")  
    print("Its name is " + name + ".")  
  
describe_pet('harry', 'hamster')  
describe_pet('willie')
```

## Using None to make an argument optional

```
def describe_pet(animal, name=None):  
    """Display information about a pet."""  
    print("\nI have a " + animal + ".")  
    if name:  
        print("Its name is " + name + ".")  
  
describe_pet('hamster', 'harry')  
describe_pet('snake')
```

## Return values

*A function can return a value or a set of values. When a function returns a value, the calling line must provide a variable in which to store the return value. A function stops running when it reaches a return statement.*

## Returning a single value

```
def get_full_name(first, last):  
    """Return a neatly formatted full name."""  
    full_name = first + ' ' + last  
    return full_name.title()  
  
musician = get_full_name('jimi', 'hendrix')  
print(musician)
```

## Returning a dictionary

```
def build_person(first, last):  
    """Return a dictionary of information  
    about a person."""  
    person = {'first': first, 'last': last}  
    return person  
  
musician = build_person('jimi', 'hendrix')  
print(musician)
```

## Returning a dictionary with optional values

```
def build_person(first, last, age=None):  
    """Return a dictionary of information  
    about a person."""  
    person = {'first': first, 'last': last}  
    if age:  
        person['age'] = age  
    return person  
  
musician = build_person('jimi', 'hendrix', 27)  
print(musician)  
  
musician = build_person('janis', 'joplin')  
print(musician)
```


## Visualizing functions

*Try running some of these examples on [pythontutor.com](http://pythontutor.com).*

## Python Crash Course

*Covers Python 3 and Python 2*

[nostarchpress.com/pythoncrashcourse](http://nostarchpress.com/pythoncrashcourse)



## Passing a list to a function

You can pass a list as an argument to a function, and the function can work with the values in the list. Any changes the function makes to the list will affect the original list. You can prevent a function from modifying a list by passing a copy of the list as an argument.

### Passing a list as an argument

```
def greet_users(names):
    """Print a simple greeting to everyone."""
    for name in names:
        msg = "Hello, " + name + "!"
        print(msg)

usernames = ['hannah', 'ty', 'margot']
greet_users(usernames)
```

### Allowing a function to modify a list

The following example sends a list of models to a function for printing. The original list is emptied, and the second list is filled.

```
def print_models(unprinted, printed):
    """3d print a set of models."""
    while unprinted:
        current_model = unprinted.pop()
        print("Printing " + current_model)
        printed.append(current_model)

# Store some unprinted designs,
# and print each of them.
unprinted = ['phone case', 'pendant', 'ring']
printed = []
print_models(unprinted, printed)

print("\nUnprinted:", unprinted)
print("Printed:", printed)
```

### Preventing a function from modifying a list

The following example is the same as the previous one, except the original list is unchanged after calling print\_models().

```
def print_models(unprinted, printed):
    """3d print a set of models."""
    while unprinted:
        current_model = unprinted.pop()
        print("Printing " + current_model)
        printed.append(current_model)

# Store some unprinted designs,
# and print each of them.
original = ['phone case', 'pendant', 'ring']
printed = []

print_models(original[:], printed)
print("\nOriginal:", original)
print("Printed:", printed)
```

## Passing an arbitrary number of arguments

Sometimes you won't know how many arguments a function will need to accept. Python allows you to collect an arbitrary number of arguments into one parameter using the \* operator. A parameter that accepts an arbitrary number of arguments must come last in the function definition.

The \*\* operator allows a parameter to collect an arbitrary number of keyword arguments.

### Collecting an arbitrary number of arguments

```
def make_pizza(size, *toppings):
    """Make a pizza."""
    print("\nMaking a " + size + " pizza.")
    print("Toppings:")
    for topping in toppings:
        print("- " + topping)

# Make three pizzas with different toppings.
make_pizza('small', 'pepperoni')
make_pizza('large', 'bacon bits', 'pineapple')
make_pizza('medium', 'mushrooms', 'peppers',
            'onions', 'extra cheese')
```

### Collecting an arbitrary number of keyword arguments

```
def build_profile(first, last, **user_info):
    """Build a user's profile dictionary."""
    # Build a dict with the required keys.
    profile = {'first': first, 'last': last}

    # Add any other keys and values.
    for key, value in user_info.items():
        profile[key] = value

    return profile

# Create two users with different kinds
# of information.
user_0 = build_profile('albert', 'einstein',
                        location='princeton')
user_1 = build_profile('marie', 'curie',
                        location='paris', field='chemistry')

print(user_0)
print(user_1)
```

## What's the best way to structure a function?

As you can see there are many ways to write and call a function. When you're starting out, aim for something that simply works. As you gain experience you'll develop an understanding of the more subtle advantages of different structures such as positional and keyword arguments, and the various approaches to importing functions. For now if your functions do what you need them to, you're doing well.

## Modules

You can store your functions in a separate file called a module, and then import the functions you need into the file containing your main program. This allows for cleaner program files. (Make sure your module is stored in the same directory as your main program.)

### Storing a function in a module

File: pizza.py

```
def make_pizza(size, *toppings):
    """Make a pizza."""
    print("\nMaking a " + size + " pizza.")
    print("Toppings:")
    for topping in toppings:
        print("- " + topping)
```

### Importing an entire module

File: making\_pizzas.py

Every function in the module is available in the program file.

```
import pizza

pizza.make_pizza('medium', 'pepperoni')
pizza.make_pizza('small', 'bacon', 'pineapple')
```

### Importing a specific function

Only the imported functions are available in the program file.

```
from pizza import make_pizza

make_pizza('medium', 'pepperoni')
make_pizza('small', 'bacon', 'pineapple')
```

### Giving a module an alias

```
import pizza as p

p.make_pizza('medium', 'pepperoni')
p.make_pizza('small', 'bacon', 'pineapple')
```

### Giving a function an alias

```
from pizza import make_pizza as mp

mp('medium', 'pepperoni')
mp('small', 'bacon', 'pineapple')
```

### Importing all functions from a module

Don't do this, but recognize it when you see it in others' code. It can result in naming conflicts, which can cause errors.

```
from pizza import *

make_pizza('medium', 'pepperoni')
make_pizza('small', 'bacon', 'pineapple')
```

More cheat sheets available at  
[ehmatthes.github.io/pcc/](https://ehmatthes.github.io/pcc/)

# Beginner's Python Cheat Sheet - Classes

## What are classes?

Classes are the foundation of object-oriented programming. Classes represent real-world things you want to model in your programs: for example dogs, cars, and robots. You use a class to make objects, which are specific instances of dogs, cars, and robots. A class defines the general behavior that a whole category of objects can have, and the information that can be associated with those objects.

Classes can inherit from each other – you can write a class that extends the functionality of an existing class. This allows you to code efficiently for a wide variety of situations.

## Creating and using a class

*Consider how we might model a car. What information would we associate with a car, and what behavior would it have? The information is stored in variables called attributes, and the behavior is represented by functions. Functions that are part of a class are called methods.*

### The Car class

```
class Car():
    """A simple attempt to model a car."""

    def __init__(self, make, model, year):
        """Initialize car attributes."""
        self.make = make
        self.model = model
        self.year = year

    # Fuel capacity and level in gallons.
    self.fuel_capacity = 15
    self.fuel_level = 0

    def fill_tank(self):
        """Fill gas tank to capacity."""
        self.fuel_level = self.fuel_capacity
        print("Fuel tank is full.")

    def drive(self):
        """Simulate driving."""
        print("The car is moving.")
```

## Creating and using a class (cont.)

### Creating an object from a class

```
my_car = Car('audi', 'a4', 2016)
```

### Accessing attribute values

```
print(my_car.make)
print(my_car.model)
print(my_car.year)
```

### Calling methods

```
my_car.fill_tank()
my_car.drive()
```

### Creating multiple objects

```
my_car = Car('audi', 'a4', 2016)
my_old_car = Car('subaru', 'outback', 2013)
my_truck = Car('toyota', 'tacoma', 2010)
```

## Modifying attributes

*You can modify an attribute's value directly, or you can write methods that manage updating values more carefully.*

### Modifying an attribute directly

```
my_new_car = Car('audi', 'a4', 2016)
my_new_car.fuel_level = 5
```

### Writing a method to update an attribute's value

```
def update_fuel_level(self, new_level):
    """Update the fuel level."""
    if new_level <= self.fuel_capacity:
        self.fuel_level = new_level
    else:
        print("The tank can't hold that much!")
```

### Writing a method to increment an attribute's value

```
def add_fuel(self, amount):
    """Add fuel to the tank."""
    if (self.fuel_level + amount
        <= self.fuel_capacity):
        self.fuel_level += amount
        print("Added fuel.")
    else:
        print("The tank won't hold that much.")
```

## Naming conventions

*In Python class names are written in CamelCase and object names are written in lowercase with underscores. Modules that contain classes should still be named in lowercase with underscores.*

## Class inheritance

*If the class you're writing is a specialized version of another class, you can use inheritance. When one class inherits from another, it automatically takes on all the attributes and methods of the parent class. The child class is free to introduce new attributes and methods, and override attributes and methods of the parent class.*

*To inherit from another class include the name of the parent class in parentheses when defining the new class.*

### The \_\_init\_\_() method for a child class

```
class ElectricCar(Car):
    """A simple model of an electric car."""

    def __init__(self, make, model, year):
        """Initialize an electric car."""
        super().__init__(make, model, year)

    # Attributes specific to electric cars.
    # Battery capacity in kWh.
    self.battery_size = 70
    # Charge level in %.
    self.charge_level = 0
```

### Adding new methods to the child class

```
class ElectricCar(Car):
    --snip--
    def charge(self):
        """Fully charge the vehicle."""
        self.charge_level = 100
        print("The vehicle is fully charged.")
```

### Using child methods and parent methods

```
my_ecar = ElectricCar('tesla', 'model s', 2016)

my_ecar.charge()
my_ecar.drive()
```

## Finding your workflow

*There are many ways to model real world objects and situations in code, and sometimes that variety can feel overwhelming. Pick an approach and try it – if your first attempt doesn't work, try a different approach.*

## Python Crash Course

Covers Python 3 and Python 2

[nostarchpress.com/pythoncrashcourse](http://nostarchpress.com/pythoncrashcourse)



## Class inheritance (cont.)

### Overriding parent methods

```
class ElectricCar(Car):
    --snip--
    def fill_tank(self):
        """Display an error message."""
        print("This car has no fuel tank!")
```

## Instances as attributes

*A class can have objects as attributes. This allows classes to work together to model complex situations.*

### A Battery class

```
class Battery():
    """A battery for an electric car."""

    def __init__(self, size=70):
        """Initialize battery attributes."""
        # Capacity in kWh, charge level in %.
        self.size = size
        self.charge_level = 0

    def get_range(self):
        """Return the battery's range."""
        if self.size == 70:
            return 240
        elif self.size == 85:
            return 270
```

### Using an instance as an attribute

```
class ElectricCar(Car):
    --snip--

    def __init__(self, make, model, year):
        """Initialize an electric car."""
        super().__init__(make, model, year)

        # Attribute specific to electric cars.
        self.battery = Battery()

    def charge(self):
        """Fully charge the vehicle."""
        self.battery.charge_level = 100
        print("The vehicle is fully charged.")
```

### Using the instance

```
my_ecar = ElectricCar('tesla', 'model x', 2016)

my_ecar.charge()
print(my_ecar.battery.get_range())
my_ecar.drive()
```

## Importing classes

*Class files can get long as you add detailed information and functionality. To help keep your program files uncluttered, you can store your classes in modules and import the classes you need into your main program.*

### Storing classes in a file

*car.py*

```
"""Represent gas and electric cars."""

class Car():
    """A simple attempt to model a car."""
    --snip--

class Battery():
    """A battery for an electric car."""
    --snip--

class ElectricCar(Car):
    """A simple model of an electric car."""
    --snip--
```

### Importing individual classes from a module

*my\_cars.py*

```
from car import Car, ElectricCar

my_beetle = Car('volkswagen', 'beetle', 2016)
my_beetle.fill_tank()
my_beetle.drive()

my_tesla = ElectricCar('tesla', 'model s',
                        2016)
my_tesla.charge()
my_tesla.drive()
```

### Importing an entire module

```
import car

my_beetle = car.Car(
    'volkswagen', 'beetle', 2016)
my_beetle.fill_tank()
my_beetle.drive()

my_tesla = car.ElectricCar(
    'tesla', 'model s', 2016)
my_tesla.charge()
my_tesla.drive()
```

### Importing all classes from a module

*(Don't do this, but recognize it when you see it.)*

```
from car import *

my_beetle = Car('volkswagen', 'beetle', 2016)
```

## Classes in Python 2.7

### Classes should inherit from object

```
class ClassName(object):
```

### The Car class in Python 2.7

```
class Car(object):
```

### Child class \_\_init\_\_() method is different

```
class ChildClassName(ParentClass):
    def __init__(self):
        super(ClassName, self).__init__()
```

### The ElectricCar class in Python 2.7

```
class ElectricCar(Car):
    def __init__(self, make, model, year):
        super(ElectricCar, self).__init__(
            make, model, year)
```

## Storing objects in a list

*A list can hold as many items as you want, so you can make a large number of objects from a class and store them in a list.*

*Here's an example showing how to make a fleet of rental cars, and make sure all the cars are ready to drive.*

### A fleet of rental cars

```
from car import Car, ElectricCar

# Make lists to hold a fleet of cars.
gas_fleet = []
electric_fleet = []

# Make 500 gas cars and 250 electric cars.
for _ in range(500):
    car = Car('ford', 'focus', 2016)
    gas_fleet.append(car)
for _ in range(250):
    ecar = ElectricCar('nissan', 'leaf', 2016)
    electric_fleet.append(ecar)

# Fill the gas cars, and charge electric cars.
for car in gas_fleet:
    car.fill_tank()
for ecar in electric_fleet:
    ecar.charge()

print("Gas cars:", len(gas_fleet))
print("Electric cars:", len(electric_fleet))
```

*More cheat sheets available at*  
[ehmatthes.github.io/pcc/](https://ehmatthes.github.io/pcc/)



# Beginner's Python Cheat Sheet — Files and Exceptions

## What are files? What are exceptions?

Your programs can read information in from files, and they can write data to files. Reading from files allows you to work with a wide variety of information; writing to files allows users to pick up where they left off the next time they run your program. You can write text to files, and you can store Python structures such as lists in data files.

Exceptions are special objects that help your programs respond to errors in appropriate ways. For example if your program tries to open a file that doesn't exist, you can use exceptions to display an informative error message instead of having the program crash.

## Reading from a file

*To read from a file your program needs to open the file and then read the contents of the file. You can read the entire contents of the file at once, or read the file line by line. The with statement makes sure the file is closed properly when the program has finished accessing the file.*

### Reading an entire file at once

```
filename = 'siddhartha.txt'

with open(filename) as f_obj:
    contents = f_obj.read()

print(contents)
```

### Reading line by line

*Each line that's read from the file has a newline character at the end of the line, and the print function adds its own newline character. The rstrip() method gets rid of the the extra blank lines this would result in when printing to the terminal.*

```
filename = 'siddhartha.txt'

with open(filename) as f_obj:
    for line in f_obj:
        print(line.rstrip())
```

## Reading from a file (cont.)

### Storing the lines in a list

```
filename = 'siddhartha.txt'

with open(filename) as f_obj:
    lines = f_obj.readlines()

for line in lines:
    print(line.rstrip())
```

## Writing to a file

*Passing the 'w' argument to open() tells Python you want to write to the file. Be careful; this will erase the contents of the file if it already exists. Passing the 'a' argument tells Python you want to append to the end of an existing file.*

### Writing to an empty file

```
filename = 'programming.txt'

with open(filename, 'w') as f:
    f.write("I love programming!")
```

### Writing multiple lines to an empty file

```
filename = 'programming.txt'

with open(filename, 'w') as f:
    f.write("I love programming!\n")
    f.write("I love creating new games.\n")
```

### Appending to a file

```
filename = 'programming.txt'

with open(filename, 'a') as f:
    f.write("I also love working with data.\n")
    f.write("I love making apps as well.\n")
```

## File paths

*When Python runs the open() function, it looks for the file in the same directory where the program that's being executed is stored. You can open a file from a subfolder using a relative path. You can also use an absolute path to open any file on your system.*

### Opening a file from a subfolder

```
f_path = "text_files/alice.txt"

with open(f_path) as f_obj:
    lines = f_obj.readlines()

for line in lines:
    print(line.rstrip())
```

## File paths (cont.)

### Opening a file using an absolute path

```
f_path = "/home/ehmatthes/books/alice.txt"

with open(f_path) as f_obj:
    lines = f_obj.readlines()
```

### Opening a file on Windows

*Windows will sometimes interpret forward slashes incorrectly. If you run into this, use backslashes in your file paths.*

```
f_path = "C:\\Users\\ehmatthes\\books\\alice.txt"

with open(f_path) as f_obj:
    lines = f_obj.readlines()
```

## The try-except block

*When you think an error may occur, you can write a try-except block to handle the exception that might be raised. The try block tells Python to try running some code, and the except block tells Python what to do if the code results in a particular kind of error.*

### Handling the ZeroDivisionError exception

```
try:
    print(5/0)
except ZeroDivisionError:
    print("You can't divide by zero!")
```

### Handling the FileNotFoundError exception

```
f_name = 'siddhartha.txt'

try:
    with open(f_name) as f_obj:
        lines = f_obj.readlines()
except FileNotFoundError:
    msg = "Can't find file {0}.".format(f_name)
    print(msg)
```


## Knowing which exception to handle

*It can be hard to know what kind of exception to handle when writing code. Try writing your code without a try block, and make it generate an error. The traceback will tell you what kind of exception your program needs to handle.*

## Python Crash Course

Covers Python 3 and Python 2

[nostarchpress.com/pythoncrashcourse](http://nostarchpress.com/pythoncrashcourse)



## The else block

*The try block should only contain code that may cause an error. Any code that depends on the try block running successfully should be placed in the else block.*

### Using an else block

```
print("Enter two numbers. I'll divide them.")

x = input("First number: ")
y = input("Second number: ")

try:
    result = int(x) / int(y)
except ZeroDivisionError:
    print("You can't divide by zero!")
else:
    print(result)
```

### Preventing crashes from user input

*Without the except block in the following example, the program would crash if the user tries to divide by zero. As written, it will handle the error gracefully and keep running.*

```
"""A simple calculator for division only."""

print("Enter two numbers. I'll divide them.")
print("Enter 'q' to quit.")

while True:
    x = input("\nFirst number: ")
    if x == 'q':
        break
    y = input("Second number: ")
    if y == 'q':
        break

    try:
        result = int(x) / int(y)
    except ZeroDivisionError:
        print("You can't divide by zero!")
    else:
        print(result)
```

## Deciding which errors to report

*Well-written, properly tested code is not very prone to internal errors such as syntax or logical errors. But every time your program depends on something external such as user input or the existence of a file, there's a possibility of an exception being raised.*

*It's up to you how to communicate errors to your users. Sometimes users need to know if a file is missing; sometimes it's better to handle the error silently. A little experience will help you know how much to report.*

## Failing silently

*Sometimes you want your program to just continue running when it encounters an error, without reporting the error to the user. Using the pass statement in an else block allows you to do this.*

### Using the pass statement in an else block

```
f_names = ['alice.txt', 'siddhartha.txt',
           'moby_dick.txt', 'little_women.txt']

for f_name in f_names:
    # Report the length of each file found.
    try:
        with open(f_name) as f_obj:
            lines = f_obj.readlines()
    except FileNotFoundError:
        # Just move on to the next file.
        pass
    else:
        num_lines = len(lines)
        msg = "{0} has {1} lines.".format(
            f_name, num_lines)
        print(msg)
```

## Avoid bare except blocks

*Exception-handling code should catch specific exceptions that you expect to happen during your program's execution. A bare except block will catch all exceptions, including keyboard interrupts and system exits you might need when forcing a program to close.*

*If you want to use a try block and you're not sure which exception to catch, use Exception. It will catch most exceptions, but still allow you to interrupt programs intentionally.*

### Don't use bare except blocks

```
try:
    # Do something
except:
    pass
```

### Use Exception instead

```
try:
    # Do something
except Exception:
    pass
```

### Printing the exception

```
try:
    # Do something
except Exception as e:
    print(e, type(e))
```

## Storing data with json

*The json module allows you to dump simple Python data structures into a file, and load the data from that file the next time the program runs. The JSON data format is not specific to Python, so you can share this kind of data with people who work in other languages as well.*

*Knowing how to manage exceptions is important when working with stored data. You'll usually want to make sure the data you're trying to load exists before working with it.*

### Using json.dump() to store data

```
"""Store some numbers."""

import json

numbers = [2, 3, 5, 7, 11, 13]

filename = 'numbers.json'
with open(filename, 'w') as f_obj:
    json.dump(numbers, f_obj)
```

### Using json.load() to read data

```
"""Load some previously stored numbers."""

import json

filename = 'numbers.json'
with open(filename) as f_obj:
    numbers = json.load(f_obj)

print(numbers)
```

### Making sure the stored data exists

```
import json

f_name = 'numbers.json'

try:
    with open(f_name) as f_obj:
        numbers = json.load(f_obj)
except FileNotFoundError:
    msg = "Can't find {0}.".format(f_name)
    print(msg)
else:
    print(numbers)
```

### Practice with exceptions

*Take a program you've already written that prompts for user input, and add some error-handling code to the program.*

*More cheat sheets available at*  
[ehmatthes.github.io/pcc/](https://ehmatthes.github.io/pcc/)

# Beginner's Python Cheat Sheet — Testing Your Code

## Why test your code?

When you write a function or a class, you can also write tests for that code. Testing proves that your code works as it's supposed to in the situations it's designed to handle, and also when people use your programs in unexpected ways. Writing tests gives you confidence that your code will work correctly as more people begin to use your programs. You can also add new features to your programs and know that you haven't broken existing behavior.

A unit test verifies that one specific aspect of your code works as it's supposed to. A test case is a collection of unit tests which verify your code's behavior in a wide variety of situations.

## Testing a function: A passing test

*Python's unittest module provides tools for testing your code. To try it out, we'll create a function that returns a full name. We'll use the function in a regular program, and then build a test case for the function.*

### A function to test

*Save this as full\_names.py*

```
def get_full_name(first, last):
    """Return a full name."""
    full_name = "{0} {1}".format(first, last)
    return full_name.title()
```

### Using the function

*Save this as names.py*

```
from full_names import get_full_name

janis = get_full_name('janis', 'joplin')
print(janis)

bob = get_full_name('bob', 'dylan')
print(bob)
```

## Testing a function (cont.)

### Building a testcase with one unit test

*To build a test case, make a class that inherits from unittest.TestCase and write methods that begin with test\_. Save this as test\_full\_names.py*

```
import unittest
from full_names import get_full_name

class NamesTestCase(unittest.TestCase):
    """Tests for names.py."""

    def test_first_last(self):
        """Test names like Janis Joplin."""
        full_name = get_full_name('janis',
                                   'joplin')
        self.assertEqual(full_name,
                           'Janis Joplin')

unittest.main()
```

### Running the test

*Python reports on each unit test in the test case. The dot reports a single passing test. Python informs us that it ran 1 test in less than 0.001 seconds, and the OK lets us know that all unit tests in the test case passed.*

```
.
-----
Ran 1 test in 0.000s

OK
```

## Testing a function: A failing test

*Failing tests are important; they tell you that a change in the code has affected existing behavior. When a test fails, you need to modify the code so the existing behavior still works.*

### Modifying the function

*We'll modify get\_full\_name() so it handles middle names, but we'll do it in a way that breaks existing behavior.*

```
def get_full_name(first, middle, last):
    """Return a full name."""
    full_name = "{0} {1} {2}".format(first,
                                       middle, last)

    return full_name.title()
```

### Using the function

```
from full_names import get_full_name

john = get_full_name('john', 'lee', 'hooker')
print(john)

david = get_full_name('david', 'lee', 'roth')
print(david)
```

## A failing test (cont.)

### Running the test

*When you change your code, it's important to run your existing tests. This will tell you whether the changes you made affected existing behavior.*

```
E
=====
ERROR: test_first_last (__main__.NamesTestCase)
Test names like Janis Joplin.
-----
Traceback (most recent call last):
  File "test_full_names.py", line 10,
    in test_first_last
    'joplin')
TypeError: get_full_name() missing 1 required
positional argument: 'last'

-----
Ran 1 test in 0.001s
```

FAILED (errors=1)

### Fixing the code

*When a test fails, the code needs to be modified until the test passes again. (Don't make the mistake of rewriting your tests to fit your new code.) Here we can make the middle name optional.*

```
def get_full_name(first, last, middle=''):
    """Return a full name."""
    if middle:
        full_name = "{0} {1} {2}".format(first,
                                           middle, last)
    else:
        full_name = "{0} {1}".format(first,
                                       last)

    return full_name.title()
```

### Running the test

*Now the test should pass again, which means our original functionality is still intact.*


```
.
-----
Ran 1 test in 0.000s

OK
```

## Python Crash Course

*Covers Python 3 and Python 2*

[nostarchpress.com/pythoncrashcourse](http://nostarchpress.com/pythoncrashcourse)



## Adding new tests

You can add as many unit tests to a test case as you need. To write a new test, add a new method to your test case class.

### Testing middle names

We've shown that `get_full_name()` works for first and last names. Let's test that it works for middle names as well.

```
import unittest
from full_names import get_full_name

class NamesTestCase(unittest.TestCase):
    """Tests for names.py."""

    def test_first_last(self):
        """Test names like Janis Joplin."""
        full_name = get_full_name('janis',
                                   'joplin')
        self.assertEqual(full_name,
                           'Janis Joplin')

    def test_middle(self):
        """Test names like David Lee Roth."""
        full_name = get_full_name('david',
                                   'roth', 'lee')
        self.assertEqual(full_name,
                           'David Lee Roth')

unittest.main()
```

### Running the tests

The two dots represent two passing tests.

```
..
-----
Ran 2 tests in 0.000s

OK
```

## A variety of assert methods

Python provides a number of assert methods you can use to test your code.

### Verify that `a==b`, or `a!=b`

```
assertEqual(a, b)
assertNotEqual(a, b)
```

### Verify that `x` is True, or `x` is False

```
assertTrue(x)
assertFalse(x)
```

### Verify an item is in a list, or not in a list

```
assertIn(item, list)
assertNotIn(item, list)
```

## Testing a class

Testing a class is similar to testing a function, since you'll mostly be testing your methods.

### A class to test

Save as `accountant.py`

```
class Accountant():
    """Manage a bank account."""

    def __init__(self, balance=0):
        self.balance = balance

    def deposit(self, amount):
        self.balance += amount

    def withdraw(self, amount):
        self.balance -= amount
```

### Building a testcase

For the first test, we'll make sure we can start out with different initial balances. Save this as `test_accountant.py`.

```
import unittest
from accountant import Accountant

class TestAccountant(unittest.TestCase):
    """Tests for the class Accountant."""

    def test_initial_balance(self):
        # Default balance should be 0.
        acc = Accountant()
        self.assertEqual(acc.balance, 0)

        # Test non-default balance.
        acc = Accountant(100)
        self.assertEqual(acc.balance, 100)

unittest.main()
```

### Running the test

```
.
-----
Ran 1 test in 0.000s

OK
```

## When is it okay to modify tests?

In general you shouldn't modify a test once it's written. When a test fails it usually means new code you've written has broken existing functionality, and you need to modify the new code until all existing tests pass.

If your original requirements have changed, it may be appropriate to modify some tests. This usually happens in the early stages of a project when desired behavior is still being sorted out.

## The `setUp()` method

When testing a class, you usually have to make an instance of the class. The `setUp()` method is run before every test. Any instances you make in `setUp()` are available in every test you write.

### Using `setUp()` to support multiple tests

The instance `self.acc` can be used in each new test.

```
import unittest
from accountant import Accountant

class TestAccountant(unittest.TestCase):
    """Tests for the class Accountant."""

    def setUp(self):
        self.acc = Accountant()

    def test_initial_balance(self):
        # Default balance should be 0.
        self.assertEqual(self.acc.balance, 0)

        # Test non-default balance.
        acc = Accountant(100)
        self.assertEqual(acc.balance, 100)

    def test_deposit(self):
        # Test single deposit.
        self.acc.deposit(100)
        self.assertEqual(self.acc.balance, 100)

        # Test multiple deposits.
        self.acc.deposit(100)
        self.acc.deposit(100)
        self.assertEqual(self.acc.balance, 300)

    def test_withdrawal(self):
        # Test single withdrawal.
        self.acc.deposit(1000)
        self.acc.withdraw(100)
        self.assertEqual(self.acc.balance, 900)
```

```
unittest.main()
```

### Running the tests

```
...
-----
Ran 3 tests in 0.001s

OK
```

More cheat sheets available at  
[ehmatthes.github.io/pcc/](https://ehmatthes.github.io/pcc/)



# Beginner's Python Cheat Sheet - Pygame

## What is Pygame?

Pygame is a framework for making games using Python. Making games is fun, and it's a great way to expand your programming skills and knowledge. Pygame takes care of many of the lower-level tasks in building games, which lets you focus on the aspects of your game that make it interesting.

## Installing Pygame

*Pygame runs on all systems, but setup is slightly different on each OS. The instructions here assume you're using Python 3, and provide a minimal installation of Pygame. If these instructions don't work for your system, see the more detailed notes at <http://ehmatthes.github.io/pcc/>.*

### Pygame on Linux

```
$ sudo apt-get install python3-dev mercurial
  libsdl-image1.2-dev libsdl2-dev
  libsdl-ttf2.0-dev
$ pip install --user
  hg+http://bitbucket.org/pygame/pygame
```

### Pygame on OS X

*This assumes you've used Homebrew to install Python 3.*

```
$ brew install hg sdl sdl_image sdl_ttf
$ pip install --user
  hg+http://bitbucket.org/pygame/pygame
```

### Pygame on Windows

*Find an installer at <https://bitbucket.org/pygame/pygame/downloads/> or <http://www.lfd.uci.edu/~gohlke/pythonlibs/#pygame> that matches your version of Python. Run the installer file if it's a .exe or .msi file. If it's a .whl file, use pip to install Pygame:*

```
> python -m pip install --user
  pygame-1.9.2a0-cp35-none-win32.whl
```

### Testing your installation

*To test your installation, open a terminal session and try to import Pygame. If you don't get any error messages, your installation was successful.*

```
$ python
>>> import pygame
>>>
```

## Starting a game

*The following code sets up an empty game window, and starts an event loop and a loop that continually refreshes the screen.*

### An empty game window

```
import sys
import pygame as pg

def run_game():
    # Initialize and set up screen.
    pg.init()
    screen = pg.display.set_mode((1200, 800))
    pg.display.set_caption("Alien Invasion")

    # Start main loop.
    while True:
        # Start event loop.
        for event in pg.event.get():
            if event.type == pg.QUIT:
                sys.exit()

        # Refresh screen.
        pg.display.flip()

run_game()
```

### Setting a custom window size

*The display.set\_mode() function accepts a tuple that defines the screen size.*

```
screen_dim = (1200, 800)
screen = pg.display.set_mode(screen_dim)
```

### Setting a custom background color

*Colors are defined as a tuple of red, green, and blue values. Each value ranges from 0-255.*

```
bg_color = (230, 230, 230)
screen.fill(bg_color)
```

## Pygame rect objects

*Many objects in a game can be treated as simple rectangles, rather than their actual shape. This simplifies code without noticeably affecting game play. Pygame has a rect object that makes it easy to work with game objects.*

### Getting the screen rect object

*We already have a screen object; we can easily access the rect object associated with the screen.*

```
screen_rect = screen.get_rect()
```

### Finding the center of the screen

*Rect objects have a center attribute which stores the center point.*

```
screen_center = screen_rect.center
```

## Pygame rect objects (cont.)

### Useful rect attributes

*Once you have a rect object, there are a number of attributes that are useful when positioning objects and detecting relative positions of objects. (You can find more attributes in the Pygame documentation.)*

```
# Individual x and y values:
screen_rect.left, screen_rect.right
screen_rect.top, screen_rect.bottom
screen_rect.centerx, screen_rect.centery
screen_rect.width, screen_rect.height
```

```
# Tuples
screen_rect.center
screen_rect.size
```

### Creating a rect object

*You can create a rect object from scratch. For example a small rect object that's filled in can represent a bullet in a game. The Rect() class takes the coordinates of the upper left corner, and the width and height of the rect. The draw.rect() function takes a screen object, a color, and a rect. This function fills the given rect with the given color.*

```
bullet_rect = pg.Rect(100, 100, 3, 15)
color = (100, 100, 100)
pg.draw.rect(screen, color, bullet_rect)
```

## Working with images

*Many objects in a game are images that are moved around the screen. It's easiest to use bitmap (.bmp) image files, but you can also configure your system to work with jpg, png, and gif files as well.*

### Loading an image

```
ship = pg.image.load('images/ship.bmp')
```

### Getting the rect object from an image

```
ship_rect = ship.get_rect()
```

### Positioning an image


*With rects, it's easy to position an image wherever you want on the screen, or in relation to another object. The following code positions a ship object at the bottom center of the screen.*

```
ship_rect.midbottom = screen_rect.midbottom
```

## Python Crash Course

*Covers Python 3 and Python 2*

[nostarchpress.com/pythoncrashcourse](http://nostarchpress.com/pythoncrashcourse)



## Working with images (cont.)

### Drawing an image to the screen

Once an image is loaded and positioned, you can draw it to the screen with the `blit()` method. The `blit()` method acts on the screen object, and takes the image object and image rect as arguments.

```
# Draw ship to screen.  
screen.blit(ship, ship_rect)
```

### The `blitme()` method

Game objects such as ships are often written as classes. Then a `blitme()` method is usually defined, which draws the object to the screen.

```
def blitme(self):  
    """Draw ship at current location."""  
    self.screen.blit(self.image, self.rect)
```

## Responding to keyboard input

Pygame watches for events such as key presses and mouse actions. You can detect any event you care about in the event loop, and respond with any action that's appropriate for your game.

### Responding to key presses

Pygame's main event loop registers a `KEYDOWN` event any time a key is pressed. When this happens, you can check for specific keys.

```
for event in pg.event.get():  
    if event.type == pg.KEYDOWN:  
        if event.key == pg.K_RIGHT:  
            ship_rect.x += 1  
        elif event.key == pg.K_LEFT:  
            ship_rect.x -= 1  
        elif event.key == pg.K_SPACE:  
            ship.fire_bullet()  
        elif event.key == pg.K_q:  
            sys.exit()
```

### Responding to released keys

When the user releases a key, a `KEYUP` event is triggered.

```
if event.type == pg.KEYUP:  
    if event.key == pg.K_RIGHT:  
        ship.moving_right = False
```

## Pygame documentation

The Pygame documentation is really helpful when building your own games. The home page for the Pygame project is at <http://pygame.org/>, and the home page for the documentation is at <http://pygame.org/docs/>.

The most useful part of the documentation are the pages about specific parts of Pygame, such as the `Rect()` class and the `sprite` module. You can find a list of these elements at the top of the help pages.

## Responding to mouse events

Pygame's event loop registers an event any time the mouse moves, or a mouse button is pressed or released.

### Responding to the mouse button

```
for event in pg.event.get():  
    if event.type == pg.MOUSEBUTTONDOWN:  
        ship.fire_bullet()
```

### Finding the mouse position

The mouse position is returned as a tuple.

```
mouse_pos = pg.mouse.get_pos()
```

### Clicking a button

You might want to know if the cursor is over an object such as a button. The `rect.collidepoint()` method returns true when a point is inside a rect object.

```
if button_rect.collidepoint(mouse_pos):  
    start_game()
```

### Hiding the mouse

```
pg.mouse.set_visible(False)
```

## Pygame groups

Pygame has a `Group` class which makes working with a group of similar objects easier. A group is like a list, with some extra functionality that's helpful when building games.

### Making and filling a group

An object that will be placed in a group must inherit from `Sprite`.

```
from pygame.sprite import Sprite, Group
```

```
def Bullet(Sprite):  
    ...  
    def draw_bullet(self):  
        ...  
    def update(self):  
        ...
```

```
bullets = Group()
```

```
new_bullet = Bullet()  
bullets.add(new_bullet)
```

### Looping through the items in a group

The `sprites()` method returns all the members of a group.

```
for bullet in bullets.sprites():  
    bullet.draw_bullet()
```

### Calling `update()` on a group

Calling `update()` on a group automatically calls `update()` on each member of the group.

```
bullets.update()
```

## Pygame groups (cont.)

### Removing an item from a group

It's important to delete elements that will never appear again in the game, so you don't waste memory and resources.

```
bullets.remove(bullet)
```

## Detecting collisions

You can detect when a single object collides with any member of a group. You can also detect when any member of one group collides with a member of another group.

### Collisions between a single object and a group

The `sprite.collideany()` function takes an object and a group, and returns True if the object overlaps with any member of the group.

```
if pg.sprite.spritecollideany(ship, aliens):  
    ships_left -= 1
```

### Collisions between two groups

The `sprite.groupcollide()` function takes two groups, and two booleans. The function returns a dictionary containing information about the members that have collided. The booleans tell Pygame whether to delete the members of either group that have collided.

```
collisions = pg.sprite.groupcollide(  
    bullets, aliens, True, True)
```

```
score += len(collisions) * alien_point_value
```

## Rendering text

You can use text for a variety of purposes in a game. For example you can share information with players, and you can display a score.

### Displaying a message

The following code defines a message, then a color for the text and the background color for the message. A font is defined using the default system font, with a font size of 48. The `font.render()` function is used to create an image of the message, and we get the rect object associated with the image. We then center the image on the screen and display it.

```
msg = "Play again?"  
msg_color = (100, 100, 100)  
bg_color = (230, 230, 230)
```

```
f = pg.font.SysFont(None, 48)  
msg_image = f.render(msg, True, msg_color,  
    bg_color)  
msg_image_rect = msg_image.get_rect()  
msg_image_rect.center = screen_rect.center  
screen.blit(msg_image, msg_image_rect)
```

More cheat sheets available at  
[ehmatthes.github.io/pcc/](https://github.com/ehmatthes/pcc/)

# Beginner's Python Cheat Sheet — matplotlib

## What is matplotlib?

Data visualization involves exploring data through visual representations. The matplotlib package helps you make visually appealing representations of the data you're working with. matplotlib is extremely flexible; these examples will help you get started with a few simple visualizations.

## Installing matplotlib

*matplotlib runs on all systems, but setup is slightly different depending on your OS. If the minimal instructions here don't work for you, see the more detailed instructions at <http://ehmatthes.github.io/pcc/>. You should also consider installing the Anaconda distribution of Python from <https://continuum.io/downloads/>, which includes matplotlib.*

### matplotlib on Linux

```
$ sudo apt-get install python3-matplotlib
```

### matplotlib on OS X

Start a terminal session and enter `import matplotlib` to see if it's already installed on your system. If not, try this command:

```
$ pip install --user matplotlib
```

### matplotlib on Windows

You first need to install Visual Studio, which you can do from <https://dev.windows.com/>. The Community edition is free. Then go to <https://pypi.python.org/pypi/matplotlib/> or <http://www.lfd.uci.edu/~gohlke/pythonlibs/#matplotlib> and download an appropriate installer file.

## Line graphs and scatter plots

### Making a line graph

```
import matplotlib.pyplot as plt

x_values = [0, 1, 2, 3, 4, 5]
squares = [0, 1, 4, 9, 16, 25]
plt.plot(x_values, squares)
plt.show()
```

## Line graphs and scatter plots (cont.)

### Making a scatter plot

The `scatter()` function takes a list of x values and a list of y values, and a variety of optional arguments. The `s=10` argument controls the size of each point.

```
import matplotlib.pyplot as plt

x_values = list(range(1000))
squares = [x**2 for x in x_values]

plt.scatter(x_values, squares, s=10)
plt.show()
```

## Customizing plots

*Plots can be customized in a wide variety of ways. Just about any element of a plot can be customized.*

### Adding titles and labels, and scaling axes

```
import matplotlib.pyplot as plt

x_values = list(range(1000))
squares = [x**2 for x in x_values]
plt.scatter(x_values, squares, s=10)

plt.title("Square Numbers", fontsize=24)
plt.xlabel("Value", fontsize=18)
plt.ylabel("Square of Value", fontsize=18)
plt.tick_params(axis='both', which='major',
                labelsize=14)
plt.axis([0, 1100, 0, 1100000])

plt.show()
```

### Using a colormap

A colormap varies the point colors from one shade to another, based on a certain value for each point. The value used to determine the color of each point is passed to the `c` argument, and the `cmap` argument specifies which colormap to use.

The `edgecolor='none'` argument removes the black outline from each point.

```
plt.scatter(x_values, squares, c=squares,
            cmap=plt.cm.Blues, edgecolor='none',
            s=10)
```



## Customizing plots (cont.)

### Emphasizing points

You can plot as much data as you want on one plot. Here we re-plot the first and last points larger to emphasize them.

```
import matplotlib.pyplot as plt

x_values = list(range(1000))
squares = [x**2 for x in x_values]
plt.scatter(x_values, squares, c=squares,
            cmap=plt.cm.Blues, edgecolor='none',
            s=10)

plt.scatter(x_values[0], squares[0], c='green',
            edgecolor='none', s=100)
plt.scatter(x_values[-1], squares[-1], c='red',
            edgecolor='none', s=100)
```

```
plt.title("Square Numbers", fontsize=24)
--snip--
```

### Removing axes

You can customize or remove axes entirely. Here's how to access each axis, and hide it.

```
plt.axes().get_xaxis().set_visible(False)
plt.axes().get_yaxis().set_visible(False)
```

### Setting a custom figure size

You can make your plot as big or small as you want. Before plotting your data, add the following code. The `dpi` argument is optional; if you don't know your system's resolution you can omit the argument and adjust the `figsize` argument accordingly.

```
plt.figure(dpi=128, figsize=(10, 6))
```

### Saving a plot

The matplotlib viewer has an interactive save button, but you can also save your visualizations programmatically. To do so, replace `plt.show()` with `plt.savefig()`. The `bbox_inches='tight'` argument trims extra whitespace from the plot.

```
plt.savefig('squares.png', bbox_inches='tight')
```

## Online resources

The matplotlib gallery and documentation are at <http://matplotlib.org/>. Be sure to visit the examples, gallery, and pyplot links.

## Python Crash Course

Covers Python 3 and Python 2

[nostarchpress.com/pythoncrashcourse](http://nostarchpress.com/pythoncrashcourse)





## Multiple plots

You can make as many plots as you want on one figure. When you make multiple plots, you can emphasize relationships in the data. For example you can fill the space between two sets of data.

### Plotting two sets of data

Here we use `plt.scatter()` twice to plot square numbers and cubes on the same figure.

```
import matplotlib.pyplot as plt

x_values = list(range(11))
squares = [x**2 for x in x_values]
cubes = [x**3 for x in x_values]

plt.scatter(x_values, squares, c='blue',
            edgecolor='none', s=20)
plt.scatter(x_values, cubes, c='red',
            edgecolor='none', s=20)
```

```
plt.axis([0, 11, 0, 1100])
plt.show()
```

### Filling the space between data sets

The `fill_between()` method fills the space between two data sets. It takes a series of x-values and two series of y-values. It also takes a facecolor to use for the fill, and an optional alpha argument that controls the color's transparency.

```
plt.fill_between(x_values, cubes, squares,
                 facecolor='blue', alpha=0.25)
```

## Working with dates and times

Many interesting data sets have a date or time as the x-value. Python's `datetime` module helps you work with this kind of data.

### Generating the current date

The `datetime.now()` function returns a `datetime` object representing the current date and time.

```
from datetime import datetime as dt

today = dt.now()
date_string = dt.strftime(today, '%m/%d/%Y')
print(date_string)
```

### Generating a specific date

You can also generate a `datetime` object for any date and time you want. The positional order of arguments is year, month, and day. The hour, minute, second, and microsecond arguments are optional.

```
from datetime import datetime as dt

new_years = dt(2017, 1, 1)
fall_equinox = dt(year=2016, month=9, day=22)
```

## Working with dates and times (cont.)

### Datetime formatting arguments

The `strftime()` function generates a formatted string from a `datetime` object, and the `strptime()` function generates a `datetime` object from a string. The following codes let you work with dates exactly as you need to.

%A	Weekday name, such as Monday
%B	Month name, such as January
%m	Month, as a number (01 to 12)
%d	Day of the month, as a number (01 to 31)
%Y	Four-digit year, such as 2016
%y	Two-digit year, such as 16
%H	Hour, in 24-hour format (00 to 23)
%I	Hour, in 12-hour format (01 to 12)
%p	AM or PM
%M	Minutes (00 to 59)
%S	Seconds (00 to 61)

### Converting a string to a datetime object

```
new_years = dt.strptime('1/1/2017', '%m/%d/%Y')
```

### Converting a datetime object to a string

```
ny_string = dt.strftime(new_years, '%B %d, %Y')
print(ny_string)
```

### Plotting high temperatures

The following code creates a list of dates and a corresponding list of high temperatures. It then plots the high temperatures, with the date labels displayed in a specific format.

```
from datetime import datetime as dt

import matplotlib.pyplot as plt
from matplotlib import dates as mdates

dates = [
    dt(2016, 6, 21), dt(2016, 6, 22),
    dt(2016, 6, 23), dt(2016, 6, 24),
]

highs = [57, 68, 64, 59]

fig = plt.figure(dpi=128, figsize=(10,6))
plt.plot(dates, highs, c='red')
plt.title("Daily High Temps", fontsize=24)
plt.ylabel("Temp (F)", fontsize=16)

x_axis = plt.axes().get_xaxis()
x_axis.set_major_formatter(
    mdates.DateFormatter('%B %d %Y')
)
fig.autofmt_xdate()

plt.show()
```

## Multiple plots in one figure

You can include as many individual graphs in one figure as you want. This is useful, for example, when comparing related datasets.

### Sharing an x-axis

The following code plots a set of squares and a set of cubes on two separate graphs that share a common x-axis.

The `plt.subplots()` function returns a figure object and a tuple of axes. Each set of axes corresponds to a separate plot in the figure. The first two arguments control the number of rows and columns generated in the figure.

```
import matplotlib.pyplot as plt
```

```
x_vals = list(range(11))
squares = [x**2 for x in x_vals]
cubes = [x**3 for x in x_vals]
```

```
fig, axarr = plt.subplots(2, 1, sharex=True)
```

```
axarr[0].scatter(x_vals, squares)
axarr[0].set_title('Squares')
```

```
axarr[1].scatter(x_vals, cubes, c='red')
axarr[1].set_title('Cubes')
```

```
plt.show()
```

### Sharing a y-axis

To share a y-axis, we use the `sharey=True` argument.

```
import matplotlib.pyplot as plt
```

```
x_vals = list(range(11))
squares = [x**2 for x in x_vals]
cubes = [x**3 for x in x_vals]
```

```
fig, axarr = plt.subplots(1, 2, sharey=True)
```

```
axarr[0].scatter(x_vals, squares)
axarr[0].set_title('Squares')
```

```
axarr[1].scatter(x_vals, cubes, c='red')
axarr[1].set_title('Cubes')
```

```
plt.show()
```



More cheat sheets available at  
[ehmatthes.github.io/pcc/](http://ehmatthes.github.io/pcc/)



# Beginner's Python Cheat Sheet — Pygal

## What is Pygal?

Data visualization involves exploring data through visual representations. Pygal helps you make visually appealing representations of the data you're working with. Pygal is particularly well suited for visualizations that will be presented online, because it supports interactive elements.

## Installing Pygal

*Pygal can be installed using pip.*

### Pygal on Linux and OS X

```
$ pip install --user pygal
```

### Pygal on Windows

```
> python -m pip install --user pygal
```

## Line graphs, scatter plots, and bar graphs

*To make a plot with Pygal, you specify the kind of plot and then add the data.*

### Making a line graph

*To view the output, open the file squares.svg in a browser.*

```
import pygal

x_values = [0, 1, 2, 3, 4, 5]
squares = [0, 1, 4, 9, 16, 25]

chart = pygal.Line()
chart.force_uri_protocol = 'http'
chart.add('x^2', squares)
chart.render_to_file('squares.svg')
```

### Adding labels and a title

```
--snip--
chart = pygal.Line()
chart.force_uri_protocol = 'http'
chart.title = "Squares"
chart.x_labels = x_values
chart.x_title = "Value"
chart.y_title = "Square of Value"
chart.add('x^2', squares)
chart.render_to_file('squares.svg')
```

## Line graphs, scatter plots, and bar graphs (cont.)

### Making a scatter plot

*The data for a scatter plot needs to be a list containing tuples of the form (x, y). The stroke=False argument tells Pygal to make an XY chart with no line connecting the points.*

```
import pygal

squares = [
    (0, 0), (1, 1), (2, 4), (3, 9),
    (4, 16), (5, 25),
]

chart = pygal.XY(stroke=False)
chart.force_uri_protocol = 'http'
chart.add('x^2', squares)
chart.render_to_file('squares.svg')
```

### Using a list comprehension for a scatter plot

*A list comprehension can be used to efficiently make a dataset for a scatter plot.*

```
squares = [(x, x**2) for x in range(1000)]
```

### Making a bar graph

*A bar graph requires a list of values for the bar sizes. To label the bars, pass a list of the same length to x\_labels.*

```
import pygal

outcomes = [1, 2, 3, 4, 5, 6]
frequencies = [18, 16, 18, 17, 18, 13]

chart = pygal.Bar()
chart.force_uri_protocol = 'http'
chart.x_labels = outcomes
chart.add('D6', frequencies)
chart.render_to_file('rolling_dice.svg')
```

### Making a bar graph from a dictionary

*Since each bar needs a label and a value, a dictionary is a great way to store the data for a bar graph. The keys are used as the labels along the x-axis, and the values are used to determine the height of each bar.*

```
import pygal

results = {
    1:18, 2:16, 3:18,
    4:17, 5:18, 6:13,
}

chart = pygal.Bar()
chart.force_uri_protocol = 'http'
chart.x_labels = results.keys()
chart.add('D6', results.values())
chart.render_to_file('rolling_dice.svg')
```

## Multiple plots

*You can add as much data as you want when making a visualization.*

### Plotting squares and cubes

```
import pygal

x_values = list(range(11))
squares = [x**2 for x in x_values]
cubes = [x**3 for x in x_values]


chart = pygal.Line()
chart.force_uri_protocol = 'http'
chart.title = "Squares and Cubes"
chart.x_labels = x_values

chart.add('Squares', squares)
chart.add('Cubes', cubes)
chart.render_to_file('squares_cubes.svg')
```

### Filling the area under a data series

*Pygal allows you to fill the area under or over each series of data. The default is to fill from the x-axis up, but you can fill from any horizontal line using the zero argument.*

```
chart = pygal.Line(fill=True, zero=0)
```

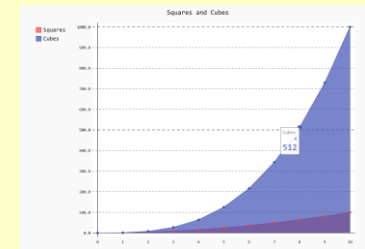

## Online resources

*The documentation for Pygal is available at <http://www.pygal.org/>.*


## Enabling interactive features

*If you're viewing svg output in a browser, Pygal needs to render the output file in a specific way. The force\_uri\_protocol attribute for chart objects needs to be set to 'http'.*

## Python Crash Course

*Covers Python 3 and Python 2*

[nostarchpress.com/pythoncrashcourse](http://nostarchpress.com/pythoncrashcourse)



## Styling plots

*Pygal lets you customize many elements of a plot. There are some excellent default themes, and many options for styling individual plot elements.*

### Using built-in styles

*To use built-in styles, import the style and make an instance of the style class. Then pass the style object with the style argument when you make the chart object.*

```
import pygal
from pygal.style import LightGreenStyle
```

```
x_values = list(range(11))
squares = [x**2 for x in x_values]
cubes = [x**3 for x in x_values]
```

```
chart_style = LightGreenStyle()
chart = pygal.Line(style=chart_style)
chart.force_uri_protocol = 'http'
chart.title = "Squares and Cubes"
chart.x_labels = x_values
```

```
chart.add('Squares', squares)
chart.add('Cubes', cubes)
chart.render_to_file('squares_cubes.svg')
```

### Parametric built-in styles

*Some built-in styles accept a custom color, then generate a theme based on that color.*

```
from pygal.style import LightenStyle

--snip--
chart_style = LightenStyle('#336688')
chart = pygal.Line(style=chart_style)
--snip--
```

### Customizing individual style properties

*Style objects have a number of properties you can set individually.*

```
chart_style = LightenStyle('#336688')
chart_style.plot_background = '#CCCCCC'
chart_style.major_label_font_size = 20
chart_style.label_font_size = 16
--snip--
```

### Custom style class

*You can start with a bare style class, and then set only the properties you care about.*

```
chart_style = Style()
chart_style.colors = [
    '#CCCCCC', '#AAAAAA', '#888888']
chart_style.plot_background = '#EEEEEE'
```

```
chart = pygal.Line(style=chart_style)
--snip--
```

## Styling plots (cont.)

### Configuration settings

*Some settings are controlled by a Config object.*

```
my_config = pygal.Config()
my_config.show_y_guides = False
my_config.width = 1000
my_config.dots_size = 5
```

```
chart = pygal.Line(config=my_config)
--snip--
```

### Styling series

*You can give each series on a chart different style settings.*

```
chart.add('Squares', squares, dots_size=2)
chart.add('Cubes', cubes, dots_size=3)
```

### Styling individual data points

*You can style individual data points as well. To do so, write a dictionary for each data point you want to customize. A 'value' key is required, and other properties are optional.*

```
import pygal

repos = [
    {
        'value': 20506,
        'color': '#3333CC',
        'xlink': 'http://djangoproject.com/',
    },
    20054,
    12607,
    11827,
]
```

```
chart = pygal.Bar()
chart.force_uri_protocol = 'http'
chart.x_labels = [
    'django', 'requests', 'scikit-learn',
    'tornado',
]
chart.y_title = 'Stars'
chart.add('Python Repos', repos)
chart.render_to_file('python_repos.svg')
```



## Plotting global datasets

*Pygal can generate world maps, and you can add any data you want to these maps. Data is indicated by coloring, by labels, and by tooltips that show data when users hover over each country on the map.*

### Installing the world map module

*The world map module is not included by default in Pygal 2.0. It can be installed with pip:*

```
$ pip install --user pygal_maps_world
```

### Making a world map

*The following code makes a simple world map showing the countries of North America.*

```
from pygal.maps.world import World

wm = World()
wm.force_uri_protocol = 'http'
wm.title = 'North America'
wm.add('North America', ['ca', 'mx', 'us'])

wm.render_to_file('north_america.svg')
```

### Showing all the country codes

*In order to make maps, you need to know Pygal's country codes. The following example will print an alphabetical list of each country and its code.*

```
from pygal.maps.world import COUNTRIES

for code in sorted(COUNTRIES.keys()):
    print(code, COUNTRIES[code])
```

### Plotting numerical data on a world map

*To plot numerical data on a map, pass a dictionary to add() instead of a list.*

```
from pygal.maps.world import World

populations = {
    'ca': 34126000,
    'us': 309349000,
    'mx': 113423000,
}

wm = World()
wm.force_uri_protocol = 'http'
wm.title = 'Population of North America'
wm.add('North America', populations)

wm.render_to_file('na_populations.svg')
```

*[More cheat sheets available at ehmatthes.github.io/pcc/](http://ehmatthes.github.io/pcc/)*