

UAS LAB PEMROGRAMAN WEB 1

Nama Anggota Kelompok :

1. Zaki Afwanul Hilmi Lubis (211401010)
2. Fransisca Haliem (211401016)

Screenshot Website

Tampilan localhost/uas/




Index of /uas

Name	Last modified	Size	Description
Parent Directory		-	
aksi_login.php	2022-12-25 23:47	1.6K	
content/	2022-12-25 23:47	-	
css/	2022-12-25 23:47	-	
images/	2022-12-25 23:47	-	
koneksi.php	2022-12-25 23:47	185	
login.php	2022-12-25 23:47	2.7K	
script.js	2022-12-25 23:47	594	
uas.sql	2022-12-25 23:47	2.4K	

Apache/2.4.54 (Win64) OpenSSL/1.1.1p PHP/7.4.33 Server at localhost Port 80



Tampilan Login website

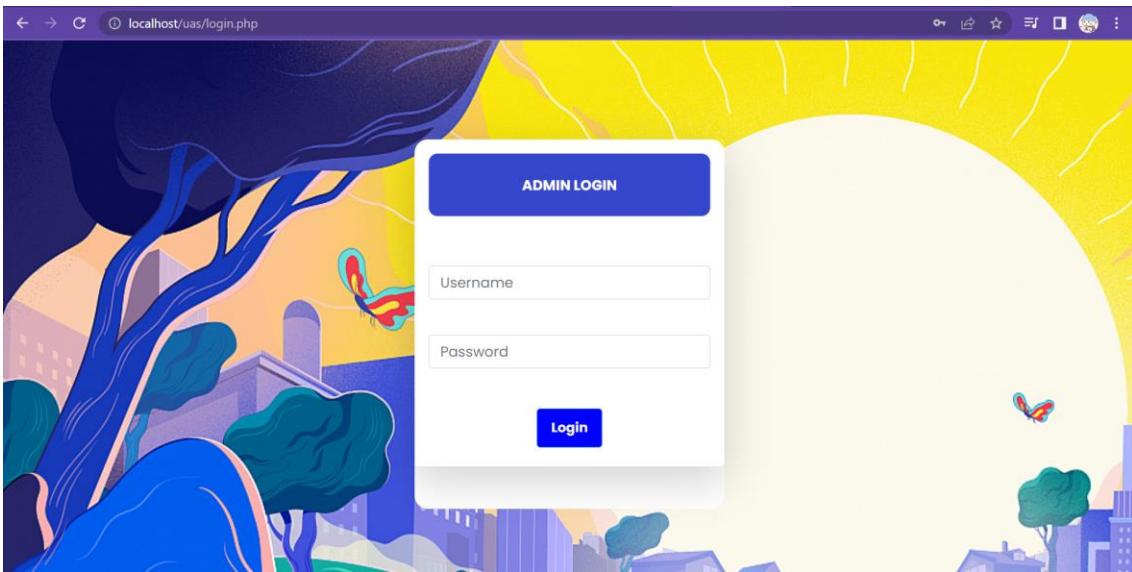

Hanya bisa dibuka dengan

Username : uaslabpw

Password : uaslabpw

Tampilan Dashboard/Home

A screenshot of a web browser showing a dashboard page. At the top, there is a navigation bar with links for "PRODUCTS", "HIRING", "DATA", "PORTOFOLIO", and "LOGOUT". Below the navigation bar, there is a large text block that reads: "We believe in caring for people and planet." To the right of this text is the Unilever logo, which consists of a stylized "U" shape made of various floral and leaf patterns, with the word "Unilever" written in a white, lowercase, sans-serif font below it. A detailed description of Unilever's business is provided in the text block: "We are a €12 billion business with much-loved deodorant, skin cleansing and oral care brands including Dove, Rexona, Lux, Axe, Lifebuoy and Pepsodent. We hold leading category positions in deodorants and skin cleansing globally and the #1 or #2 position in oral care in the countries where we are present."

← → ⌂ localhost/uas/content/index.html#products

Our Products

Nutrition

We want to be a World-Class Force for Good in Food, with top growth and financial results. Force for Good means doing well by doing good. We will field Boldly Healthier plans for people and planet. As our logo shows, we will be Boldly Healthier all the way from farm, to fork.

We strive for a future where our food system can



← → ⌂ localhost/uas/content/index.html#products



Personal Care

We are a €12 billion business with much-loved deodorant, skin cleansing and oral care brands including Dove, Rexona, LUX, Axe, Lifebuoy and Pepsodent.

We hold leading category positions in deodorants and skin cleansing globally and the #1 or #2 position in oral care in the countries where we are present.

← → ⌛ ⓘ localhost/uas/content/index.html#products ⌂ ⌃ ⌄ ⌅ ⌆ ⌇ ⌈ ⌉ ⌊ ⌋ ⌊ ⌋ ⌊ ⌋ ⌊ ⌋

Home Care

We're reimagining the future of cleaning and it starts with reinventing a century-old history of chemistry.

Billions of people around the world are asking for products that are tough on germs and stains, and ever more convenient to use. But now, people also want these products to be kinder to the planet.



← → ⌛ ⓘ localhost/uas/content/index.html#products ⌂ ⌃ ⌄ ⌅ ⌆ ⌇ ⌈ ⌉ ⌊ ⌋ ⌊ ⌋ ⌊ ⌋ ⌊ ⌋

We Are Hiring!

Job Title	Total Pay
Finance Manager	\$17,713
Project Manager	\$10,901
Supply Planner	\$7,473
Intern	\$5,260

localhost/uas/content/index.html#products

Job Title	Total Pay
Finance Manager	\$17,713
Project Manager	\$10,901
Supply Planner	\$7,473
Intern	\$5,260

[Register Now](#)

Tampilan Jika di klik tombol Register Now,akan terhubung ke koser_tambah.html

localhost/uas/content/konser_tambah.html

Job Title	Total Pay
Finance Manager	\$17,713
Project Manager	\$10,901
Supply Planner	\$7,473
Intern	\$5,260

[Form](#)

The screenshot shows a web page with a blue header bar. The URL in the address bar is `localhost/uas/content/konser_tambah.html`. Below the header is a form with a blue header labeled "Form". The form contains four input fields: "Name" (empty), "Job Title" (empty), "Total Pay (\$)" (empty), and "Phone Number" (empty). At the bottom are two buttons: a blue "Submit" button and a grey "Back" button.

Tampilan Navbar Data (terdapat CRUD didalamnya)

The screenshot shows a web page with a blue header bar. The URL in the address bar is `localhost/uas/content/konser.php`. The main content is a table titled "Hiring Data" with the following structure:

No.	Name	Job Title	Total Pay (\$)	Phone Number	Edit Delete
1	Hiskia Sinaga	Finance Manager	17713	082284583788	<button>Edit</button> <button>Delete</button>
2	Fransisca Haliem	Finance Manager	17713	081396190386	<button>Edit</button> <button>Delete</button>
3	Zwingli Raja	Project Manager	10901	082294613028	<button>Edit</button> <button>Delete</button>
4	Christento Siregar	Project Manager	10901	085262062685	<button>Edit</button> <button>Delete</button>
5	Agatha Sinaga	Project Manager	10901	089677876777	<button>Edit</button> <button>Delete</button>
6	Camilla	Supply Planner	7472	087017772210	<button>Edit</button> <button>Delete</button>

Tampilan Portofolio Penulis

The screenshot shows a web browser window with the URL `localhost/uas/content/portofolio.php`. The title of the page is "Portofolio Penulis". On the left, there is a portrait of a man named Zaki Afwanul Hilm Lubis. Below his portrait, there is some text about him: "was born in Medan, 15th April 2003, he is studying in Universitas Sumatera Utara major Ilmu Komputer, let's get to know more on his social media!!". On the right, there is a circular portrait of a woman named Fransica Haliem. Below her portrait, there is some text about her: "was born in Kotapinang, 21th January 2003, she is studying in Universitas Sumatera Utara major Ilmu Komputer, let's get to know more on her social media!!". At the bottom of the page, there are three social media sharing buttons: WhatsApp, Instagram, and Email.

Screenshot aksi_logout.php

The screenshot shows a Visual Studio Code interface with a dark theme. The file `aksi_logout.php` is open in the editor. The code contains the following PHP script:

```
<?php
session_start();
session_destroy();
echo "<script>window.location='../../login.php'</script>";
?>
```

The Explorer sidebar on the left shows a project structure for "UAS" containing files like `aksi_logout.php`, `index.html`, `konsertambah.html`, `konser.php`, `portofolio.php`, and several image files. The status bar at the bottom shows system information including the date and time (12:11 AM 12/26/2022).

Screenshot index.html

The screenshot shows the Visual Studio Code interface with the file 'index.html' open. The code editor displays the following HTML content:

```
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Document</title>
    <link rel="preconnect" href="https://fonts.googleapis.com">
    <link rel="preconnect" href="https://fonts.gstatic.com" crossorigin>
    <link href="https://fonts.googleapis.com/css2?family=Poppins:wght@400;700&display=swap" rel="stylesheet">
    <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.2.3/dist/css/bootstrap.min.css" rel="stylesheet" integrity="sha384-rbsA2ZqQjxL6+dKQH+qyJ/pxeKo1h+6M2d+qkxQdWZP0zjJZLHcDkq2F9CUG65" crossorigin="anonymous">
    <link rel="stylesheet" href="../css/main.css">
</head>
<body>
    <div class="hero-img"></div>
    <div class="wrapper">
        <header>
            <a class="navbar-brand" href="#">
                <img src="" height="130">
            </a>
            <!-- <a href="#" class="Logo text-dark fs-3">UniLever.</a> -->
        </header>
        <div class="container py-5" style="text-align: center">
            <h1>Edit Konser</h1>
            <form action="konser_edit.php" method="post" style="margin-top: 20px">
                <div class="mb-3">
                    <label for="nama" class="form-label">Nama Konser</label>
                    <input type="text" class="form-control" id="nama" name="nama" value="Unilever" required>
                </div>
                <div class="mb-3">
                    <label for="tickets" class="form-label">Jumlah Tiket</label>
                    <input type="number" class="form-control" id="tickets" name="tickets" value="100" required>
                </div>
                <div class="mb-3">
                    <label for="price" class="form-label">Harga</label>
                    <input type="number" class="form-control" id="price" name="price" value="10000" required>
                </div>
                <div class="mb-3">
                    <label for="no_hp" class="form-label">Nomor HP</label>
                    <input type="text" class="form-control" id="no_hp" name="no_hp" value="08123456789" required>
                </div>
                <div class="mb-3 form-group">
                    <input type="submit" class="btn btn-primary" value="Simpan" style="width: 100px; margin-left: auto; margin-right: 0;">
                </div>
            </form>
        </div>
    </div>
</body>
```

The Explorer sidebar shows the project structure with files like 'aksi_logout.php', 'konser_edit.php', 'konser_hapus.php', etc. The status bar at the bottom shows the weather as 'Partly cloudy' and the date/time as '12/26/2022 12:13 AM'.

Screenshot konser_edit.php

The screenshot shows the Visual Studio Code interface with the file 'konser_edit.php' open. The code editor displays the following PHP code:

```
<?php
$koneksi=mysqli_connect("localhost","root","","uas");
$id=$_GET['id'];
if(isset($_POST['edit'])){
    $nama=$_POST['nama'];
    $tickets=$_POST['tickets'];
    $price=$_POST['price'];
    $no_hp=$_POST['no_hp'];

    $update=mysqli_query($koneksi,"UPDATE crud SET nama='$nama',tickets='$tickets',price='$price',no_hp='$no_hp'
WHERE id='$id'");

    if($update >0){
        echo "<script> alert('Data Berhasil Diedit'); document.location.href='konser.php';</script>";
    }
    else{
        echo '<div class = "alert-error"> Data Gagal Ditambah </div>';
    }
}
?>

<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Edit Konser</title>
    <link rel="preconnect" href="https://fonts.googleapis.com">
    <link rel="preconnect" href="https://fonts.gstatic.com" crossorigin>
    <link href="https://fonts.googleapis.com/css2?family=Poppins:wght@400;700&display=swap" rel="stylesheet">
    <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.2.3/dist/css/bootstrap.min.css" rel="stylesheet" integrity="sha384-rbsA2ZqQjxL6+dKQH+qyJ/pxeKo1h+6M2d+qkxQdWZP0zjJZLHcDkq2F9CUG65" crossorigin="anonymous">
    <link rel="stylesheet" href="../css/main.css">
</head>
<body>
    <div class="hero-img"></div>
    <div class="wrapper">
        <header>
            <a class="navbar-brand" href="#">
                <img src="" height="130">
            </a>
            <!-- <a href="#" class="Logo text-dark fs-3">UniLever.</a> -->
        </header>
        <div class="container py-5" style="text-align: center">
            <h1>Edit Konser</h1>
            <form action="konser_edit.php" method="post" style="margin-top: 20px">
                <div class="mb-3">
                    <label for="nama" class="form-label">Nama Konser</label>
                    <input type="text" class="form-control" id="nama" name="nama" value="Unilever" required>
                </div>
                <div class="mb-3">
                    <label for="tickets" class="form-label">Jumlah Tiket</label>
                    <input type="number" class="form-control" id="tickets" name="tickets" value="100" required>
                </div>
                <div class="mb-3">
                    <label for="price" class="form-label">Harga</label>
                    <input type="number" class="form-control" id="price" name="price" value="10000" required>
                </div>
                <div class="mb-3">
                    <label for="no_hp" class="form-label">Nomor HP</label>
                    <input type="text" class="form-control" id="no_hp" name="no_hp" value="08123456789" required>
                </div>
                <div class="mb-3 form-group">
                    <input type="submit" class="btn btn-primary" value="Simpan" style="width: 100px; margin-left: auto; margin-right: 0;">
                </div>
            </form>
        </div>
    </div>
</body>
```

The Explorer sidebar shows the project structure with files like 'aksi_logout.php', 'konser_edit.php', 'konser_hapus.php', etc. The status bar at the bottom shows the weather as 'Partly cloudy' and the date/time as '12/26/2022 12:19 AM'.

Screenshot konser_hapus.php

The screenshot shows the Visual Studio Code interface with the file 'konser_hapus.php' open in the editor. The code handles the deletion of a record from a database table named 'crud'. It connects to a MySQL database using 'localhost', 'root', and the database 'uas'. It retrieves the value of the 'id' parameter from the URL query string. If the 'id' is provided, it executes a DELETE query to remove the row where 'id' matches the value. If successful, it outputs a success message ('Berhasil'); if failed, it outputs an error message ('Gagal'). The code uses PHP's mysqli extension for database interaction.

```
<?php
$koneksi=mysqli_connect("localhost","root","","uas");
$id=$_GET['id'];
$hapus=mysqli_query($koneksi,"DELETE FROM crud WHERE id='$id'");
if($hapus>0){
    echo "<p class=\"mycssquote\">Berhasil.</p>";
}
else{
    echo "<p class=\"mycssquote\">Gagal.</p>";
}
?>
```

Screenshot Konser_insert.php

The screenshot shows the Visual Studio Code interface with the file 'konser_insert.php' open in the editor. The code handles the insertion of new data into a database table named 'crud'. It connects to a MySQL database using 'localhost', 'root', and the database 'uas'. It checks if the 'tambah' parameter is set in the POST request. If it is, it retrieves values for 'nama', 'tickets', 'price', and 'no_hp' from the POST data. It then executes an INSERT INTO query to add a new row with these values. If the insertion is successful, it outputs a success message ('Data Berhasil Ditambahkan') and reloads the page. If it fails, it outputs an error message ('Data Gagal Ditambah'). The code uses PHP's mysqli extension for database interaction.

```
<?php
$koneksi=mysqli_connect("localhost","root","","uas");
if(isset($_POST['tambah'])){
    $nama=$_POST['nama'];
    $tickets=$_POST['tickets'];
    $price=$_POST['price'];
    $no_hp=$_POST['no_hp'];

    $tambah=mysqli_query($koneksi,"INSERT INTO crud VALUES ('','$nama','$tickets','$price','$no_hp')");

    if($tambah >0){
        echo "<script> alert('Data Berhasil Ditambahkan'); document.location.href='konser.php';</script>";
    }
    else{
        echo'<div class = "alert-error"> Data Gagal Ditambah </div>';
    }
}
?>

<html>
<link rel="stylesheet" href="uts.css">
<link rel="stylesheet" type="text/css" href="/css/bootstrap.min.css">
<link rel="stylesheet" type="text/css" href="/css/bootstrap.css">
<link rel="stylesheet" href="https://cdn.jsdelivr.net/npm/bootstrap@4.1.3/dist/css/bootstrap.min.css" integrity="sha384-MCw98/SFnGE8fJT3GXWEOngsV7Zt27NXFaoApmYm8liuXoPkFOJwJ8ERdknLPMO" crossorigin="anonymous">
<link rel="preconnect" href="https://fonts.googleapis.com">
<link rel="preconnect" href="https://fonts.gstatic.com" crossorigin="anonymous">
<link href="https://fonts.googleapis.com/css?family=Ubuntu:400,700&display=swap" rel="stylesheet">
```

Screenshot koser_tambah.html

```
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Document</title>
    <link rel="preconnect" href="https://fonts.googleapis.com">
    <link rel="preconnect" href="https://fonts.gstatic.com" crossorigin>
    <link href="https://fonts.googleapis.com/css2?family=Poppins:wght@400;700&display=swap" rel="stylesheet">
    <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.2.3/dist/css/bootstrap.min.css" rel="stylesheet" integrity="sha384-rbsA2VBQK2dI0M/ugrDz/42DgLNWZJedk2Kadq2F9CUG65" crossorigin="anonymous">
    <link rel="stylesheet" href="css/main.css">
<center>
<br>
<div class="w-50 p-3">
    <table class="shadow-lg p-3 mb-5 bg-body rounded">
        <thead>
            <tr>
                <th>Job Title</th>
                <th>Total Pay</th>
            </tr>
        <thead>
        <tbody>
            <tr>
                <td>Finance Manager</td>
                <td>$17,713</td>
            </tr>
        </tbody>
    </table>
</div>

```

Screenshot koser.php

```
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Document</title>
    <link rel="preconnect" href="https://fonts.googleapis.com">
    <link rel="preconnect" href="https://fonts.gstatic.com" crossorigin>
    <link href="https://fonts.googleapis.com/css2?family=Poppins:wght@400;700&display=swap" rel="stylesheet">
    <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.2.3/dist/css/bootstrap.min.css" rel="stylesheet" integrity="sha384-rbsA2VBQK2dI0M/ugrDz/42DgLNWZJedk2Kadq2F9CUG65" crossorigin="anonymous">
    <link rel="stylesheet" href="../css/main.css">
</head>
<body>
    <div class="wrapper">
        <header>
            <a class="navbar-brand" href="#">
                </a>
                <!-- <a href="#" class="Logo text-dark fs-3">Uni<span>Lever.</span></a> -->
        <nav>
            <ul>
                <li><a href="index.html#products" class="htn htn-outline-secondary" href="index.html#products">Products</a></li>

```

Screenshot portofolio.html

The screenshot shows the Visual Studio Code interface with the file 'portofolio.php' open in the editor. The code is a PHP file with embedded HTML and CSS. It includes links to Bootstrap and Google Fonts, and a main.css file located in the 'css' directory. The code is well-formatted with syntax highlighting.

```
<!DOCTYPE html>
<html>
    <head>
        <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.2.2/dist/css/bootstrap.min.css" rel="stylesheet" integrity="sha384-Zenh87qX5JnK2Jl0vWa8Ck2rdkQ2zep5IDxbncCeOxjzrPF/et3URy9Bv1WTRi" crossorigin="anonymous">
        <meta charset="utf-8">
        <meta name="viewport" content="width=device-width, initial-scale=1">
        <title> portofolio </title>
        <link rel="stylesheet" href="https://unpkg.com/aos@next/dist-aos.css" />
        <link rel="icon" type="image/x-icon" href="stack-of-books (1).png" />
        <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.2.2/dist/css/bootstrap.min.css" rel="stylesheet" integrity="sha384-Zenh87qX5JnK2Jl0vWa8Ck2rdkQ2zep5IDxbncCeOxjzrPF/et3URy9Bv1WTRi" crossorigin="anonymous">
        <link href="https://fonts.googleapis.com/css?family=Pacifico&display=swap" rel="stylesheet" />
        <link href="https://fonts.googleapis.com/css?family=Dancing+Script&family=Lemonada&display=swap" rel="stylesheet" />
        <link href="https://fonts.googleapis.com/css?family=Dancing+Script&family=Lemonada&display=swap" rel="stylesheet" />
        <link href="https://fonts.googleapis.com/css?family=Fugaz+One&display=swap" rel="stylesheet" />
        <link href="https://fonts.googleapis.com/css?family=Dancing+Script&family=Patua+One&display=swap" rel="stylesheet" />
        <link href="https://fonts.googleapis.com/css?family=Dancing+Script&family=Shrikhand&display=swap" rel="stylesheet" />
        <link rel="stylesheet" href="../css/main.css" />
    </head>
    <header>
        <a class="navabar-brand" href="#">
```

Screenshot CSS

The screenshot shows the Visual Studio Code interface with the file 'main.css' open in the editor. The code defines styles for the body, a hero image, and a logo. The hero image is set to cover the entire body with a background image from the 'images' folder. The logo is centered with specific styling for its text and a span element.


```
body {
    margin: 1.5em 0;
    font-family: "Poppins", sans-serif;
}

a {
    text-decoration: none;
    font-size: 1.5rem;
}



.hero-img {
    position: absolute;
    top: 0;
    left: 0;
    right: 0;
    background: url('../images/2.png');
    background-size: cover;
    background-position-x: 50%;
    width: 750px;
    height: 750px;
    z-index: -1;
}

.Logo {
    margin-top: 10pt;
    color: white;
    font-weight: bold;
}
.Logo span {
    margin-top: 10pt;
```

Screenshot Images

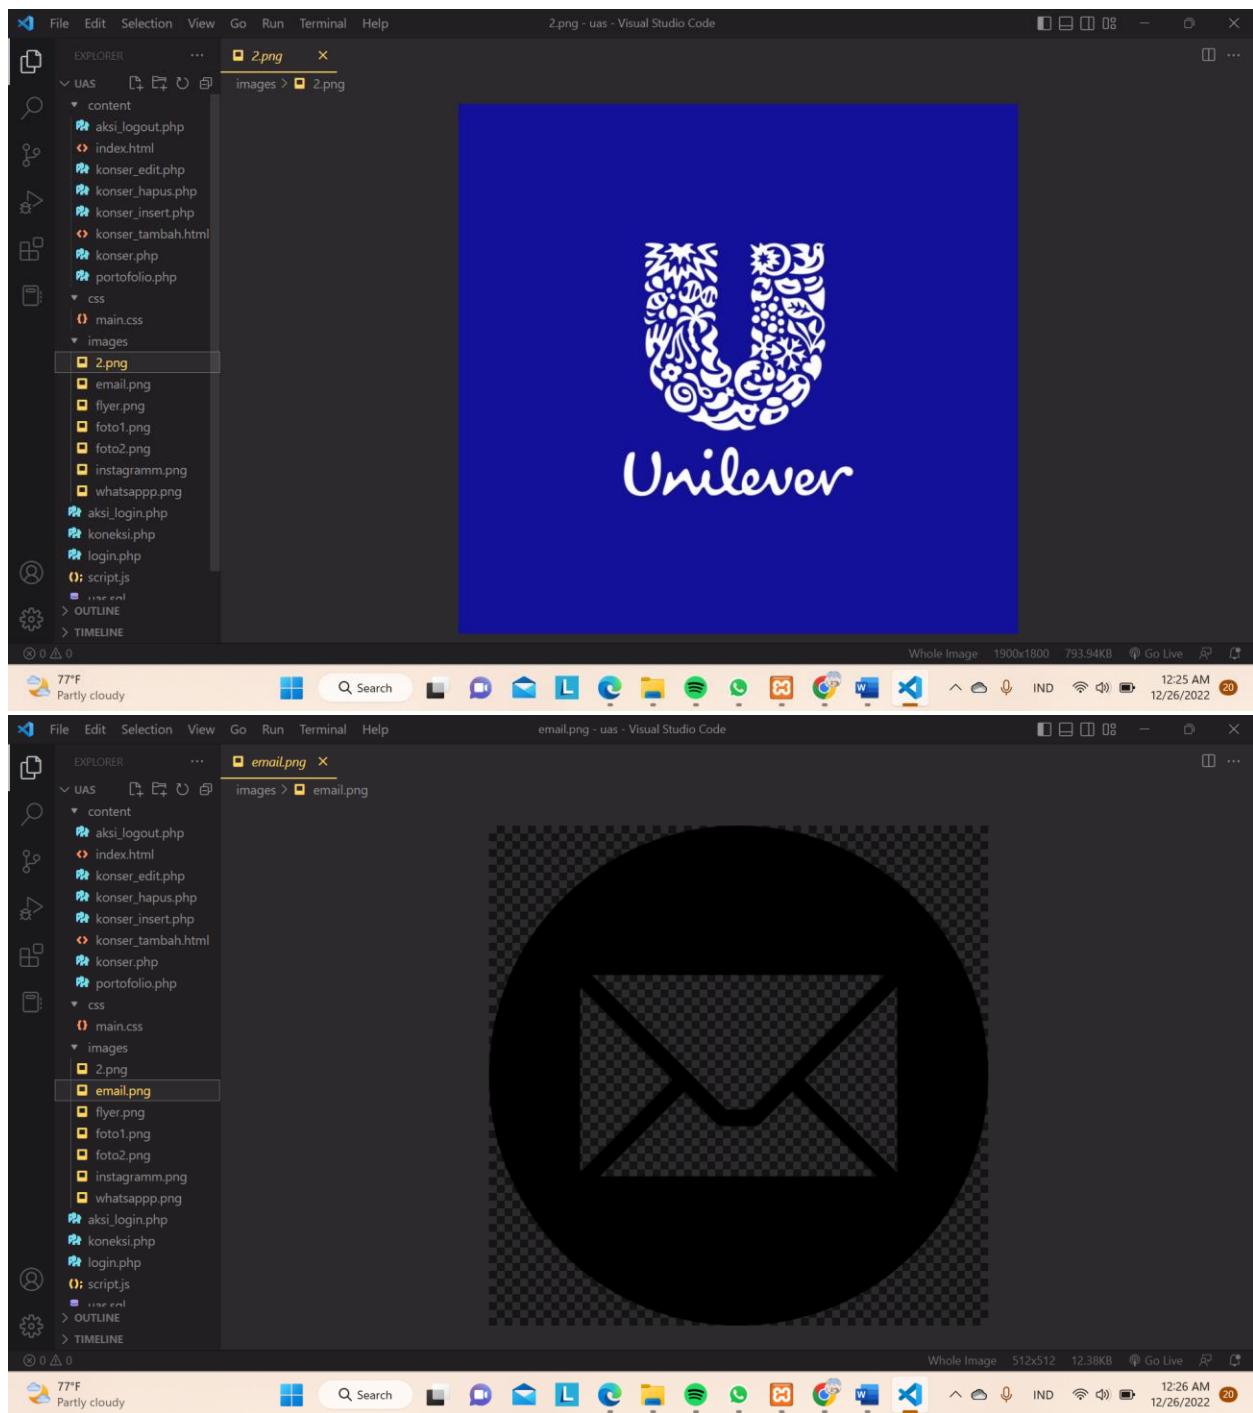



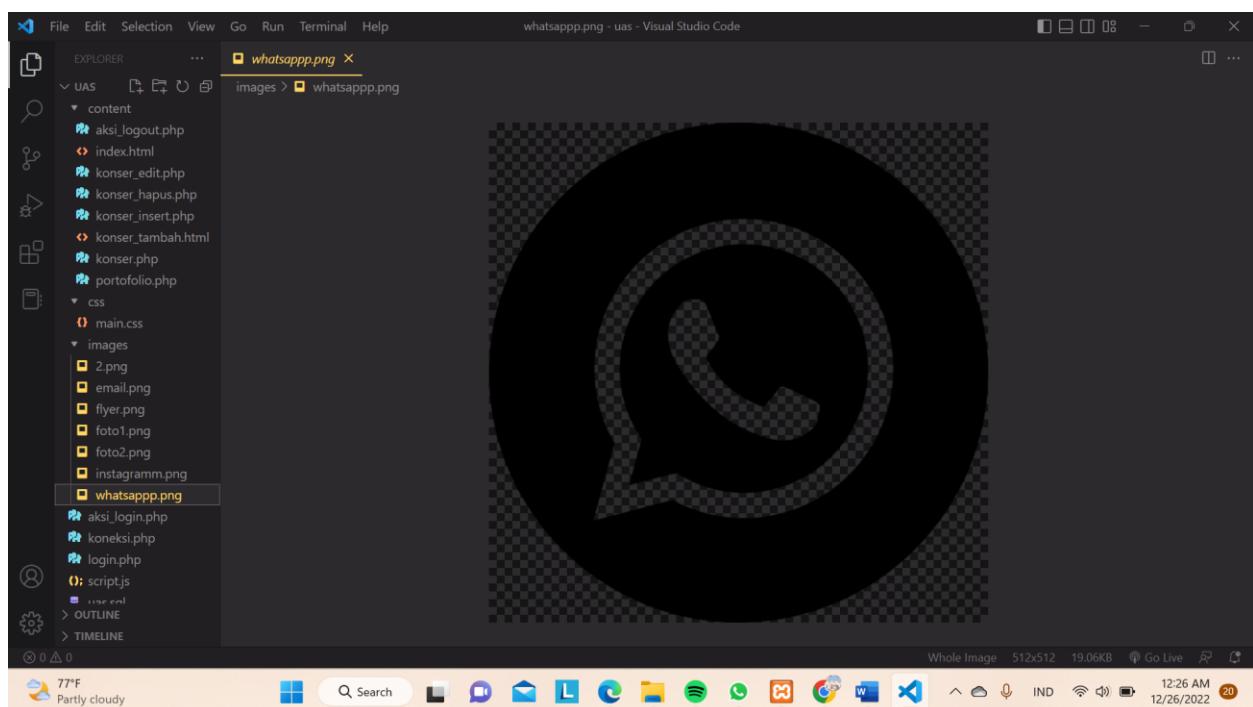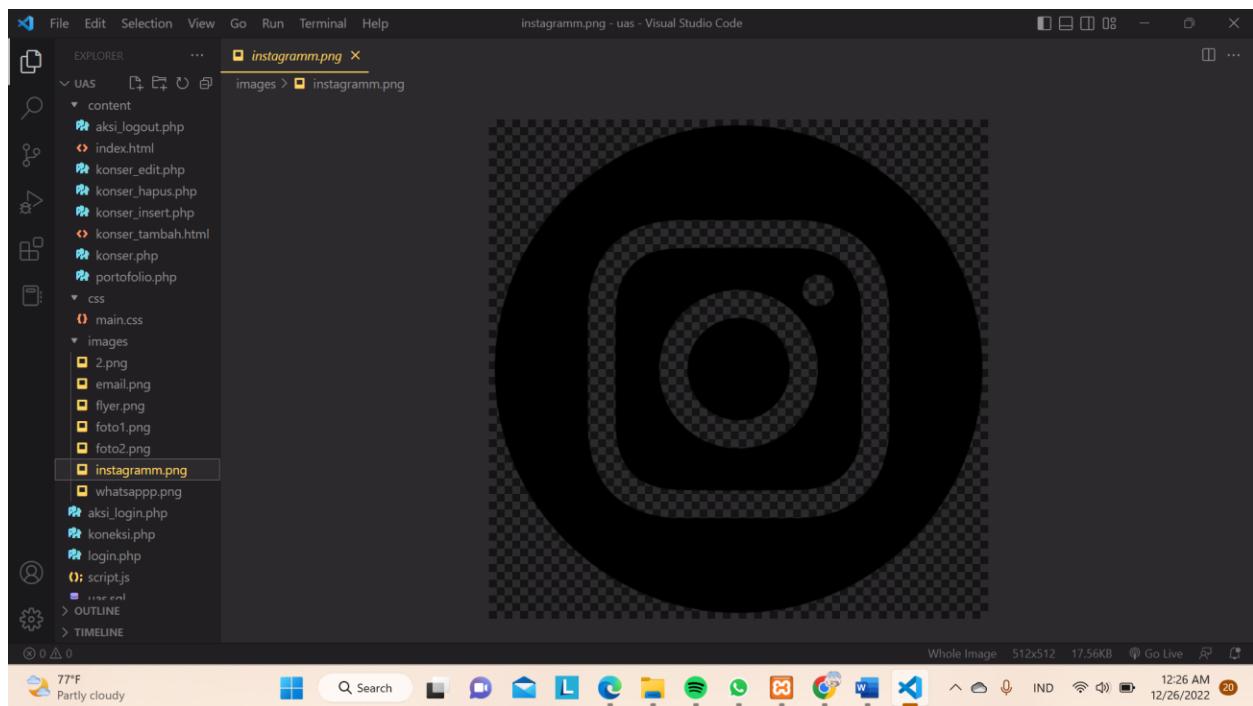

Screenshot aksi_login.php

The screenshot shows the Visual Studio Code interface with the file 'aksi_login.php' open in the editor. The code defines a CSS style for '.mycssquote' and a PHP session_start block. It includes an include statement for 'koneksi.php', retrieves POST variables for \$username and \$password, runs a MySQL query to check if the user exists, and checks if the result is greater than zero. If true, it sets the session variable and redirects to index.html.

```
<style>
.mycssquote {
    font-weight: bold;
    font-size: 30px;
    margin-top: 8em;
    text-align: center;
    text-transform: uppercase;
    color: red;
    font-family: "Poppins", sans-serif;
    text-align: center;
    top: 50%;
    left: 50%;
}
</style>

<?php
session_start();
include ('koneksi.php');
$username = $_POST['username'];
$password = $_POST['password'];
$query = mysqli_query($koneksi, "select * from login where username = '$username' and password = '$password'");

$cek = mysqli_num_rows($query);

if ($cek == TRUE){
    $_SESSION['username'] = $username;
    header ("location:content/index.html");
}
else
    >
```

Screenshot koneksi.php

The screenshot shows the Visual Studio Code interface with the file 'koneksi.php' open in the editor. The code connects to a MySQL database named 'uas' using host 'localhost', user 'root', and no password. It then selects the database.

```
<?php
$host="localhost";
$user="root";
$pass="";
$name="uas";
$koneksi=mysqli_connect($host,$user,$pass) or die("koneksi ke database gagal");
mysqli_select_db($koneksi,$name);
?>
```

Screenshot login

The screenshot shows the Visual Studio Code interface with the file `login.php` open in the editor. The code is a PHP script with HTML and CSS embedded. It includes meta tags for charset, language, and viewport, as well as links to external CSS files. The main content is a form for "ADMIN LOGIN" with a single input field for "username". The code uses Bootstrap classes like `shadow-lg p-3 mb-5 bg-body rounded` and `form-control`.

```
<!DOCTYPE html>
<html Lang="en">
<head>
<meta charset="UTF-8">
<meta http-equiv="X-UA-Compatible" content="IE=edge">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>LOGIN</title>
<link rel="stylesheet" href="uts.css">
<link rel="stylesheet" type="text/css" href="/css/bootstrap.min.css">
<link rel="stylesheet" type="text/css" href="/css/bootstrap.css">
<link rel="stylesheet" href="https://cdn.jsdelivr.net/npm/bootstrap@4.1.3/dist/css/bootstrap.min.css" integrity="sha384-MCw98/SFnGE8fJT3GXWEOngsV7Zt2NXFaoApmY8liuXoPkFOJ8ERdknLPMO" crossorigin="anonymous">
<link rel="preconnect" href="https://fonts.googleapis.com">
<link rel="preconnect" href="https://fonts.gstatic.com" crossorigin="anonymous">
<link href="https://fonts.googleapis.com/css2?family=Poppins:wght@400,700&display=swap" rel="stylesheet">

<script src="uts.js"></script>
</head>
<body>
<form class="login-form" action="aksi_login.php" method="POST">
<div class="shadow-lg p-3 mb-5 bg-body rounded">
<center>
<h1>ADMIN LOGIN</h1><br><br>
</center>
<div class="form-group">
<input type="text" name="username" class="form-control" id="username" aria-describedby="emailHelp" placeholder="Username">
</div>
<br>

```

Screenshot Javascript

The screenshot shows the Visual Studio Code interface with the file `script.js` open in the editor. The code contains a jQuery script that handles the visibility of a "Read more" button and its associated text. It uses `$(document).ready` to initialize the function and `myFunction` to toggle the display of a "dots" element and the button's innerHTML.

```
$(document).ready(function () {
    moreText.style.display = "none";
    btnText.style.display = "none";
})
function myFunction() {
    var dots = document.getElementById("dots");
    var moreText = document.getElementById("more");
    var btnText = document.getElementById("myBtn");

    if (dots.style.display === "none") {
        dots.style.display = "inline";
        btnText.innerHTML = "Read more";
        moreText.style.display = "none";
    } else {
        dots.style.display = "none";
        btnText.innerHTML = "Read less";
        moreText.style.display = "inline";
    }
}
```

Screenshot Database

The image consists of two screenshots of a Windows desktop environment.

The top screenshot shows the Visual Studio Code interface. The Explorer sidebar on the left lists files and folders for a project named "UAS". The main editor window displays a MySQL dump file named "uas.sql". The code in the file includes standard MySQL header comments and a series of SQL commands for creating a database and tables. The status bar at the bottom right shows the date and time as 12/26/2022, 12:28 AM.

The bottom screenshot shows the phpMyAdmin interface running in a web browser. The address bar indicates the URL is "localhost/phpmyadmin/index.php?route=/database/structure&db=uas". The left sidebar shows the database structure with the "uas" database selected. The main content area displays the "Tabel" (Tables) section, listing two tables: "crud" and "login". The "crud" table has 11 rows and 4 columns. The "login" table has 1 row and 4 columns. Both tables are InnoDB type with utf8mb4_general_ci encoding. Below the table list, there is a "Create new table" form with fields for "Nama tabel" (Table name) and "Jumlah kolom" (Number of columns), currently set to 4. The status bar at the bottom right shows the date and time as 12/26/2022, 12:29 AM.