



ACID

(Atomicity, Consistency, Isolation, Durability)

.NET CORE


ACID (atomicity, consistency, isolation, durability) is a set of properties of database transactions intended to guarantee validity even in the event of errors or power failures.

[HTTPS://EN.WIKIPEDIA.ORG/WIKI/ACID](https://en.wikipedia.org/wiki/ACID)

ACID – Atomicity

<https://docs.microsoft.com/en-us/windows/win32/cosssdk/acid-properties>


- A *transaction* must execute exactly once and must be *atomic* (either all of the work is done or none of it is).
- By performing only a subset of interdependent operations, the overall intent of a *transaction* would be compromised.
- *Atomicity* eliminates the chance of processing only a subset of operations.

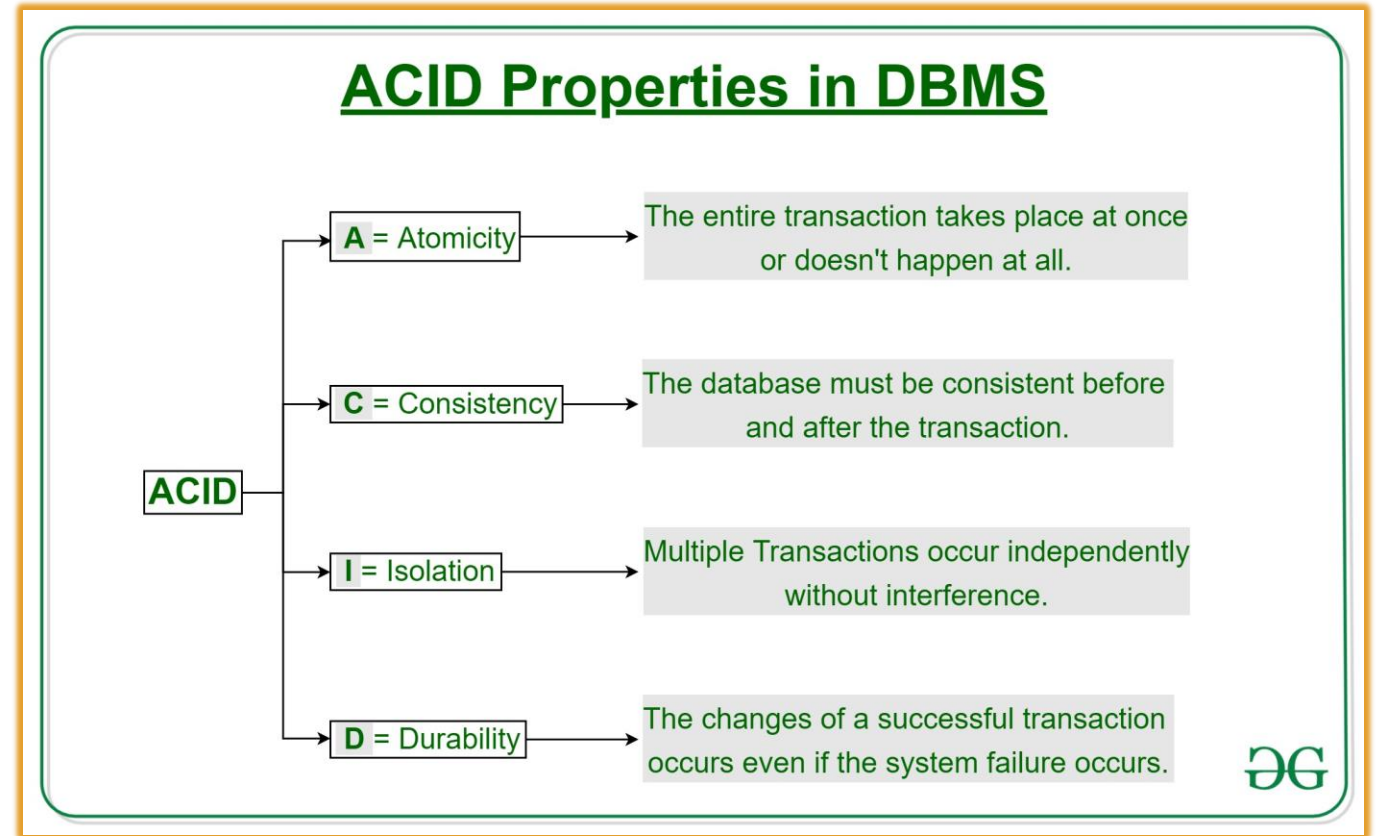

ACID – Consistency

<https://docs.microsoft.com/en-us/windows/win32/cos-sdk/acid-properties>


- A **transaction** must transform data from one **consistent** state to another **consistent** state.
- The responsibility for maintaining **consistency** falls to the application developer.
- **Referential Integrity** must be maintained when transforming one consistent state of data into another consistent state of data.

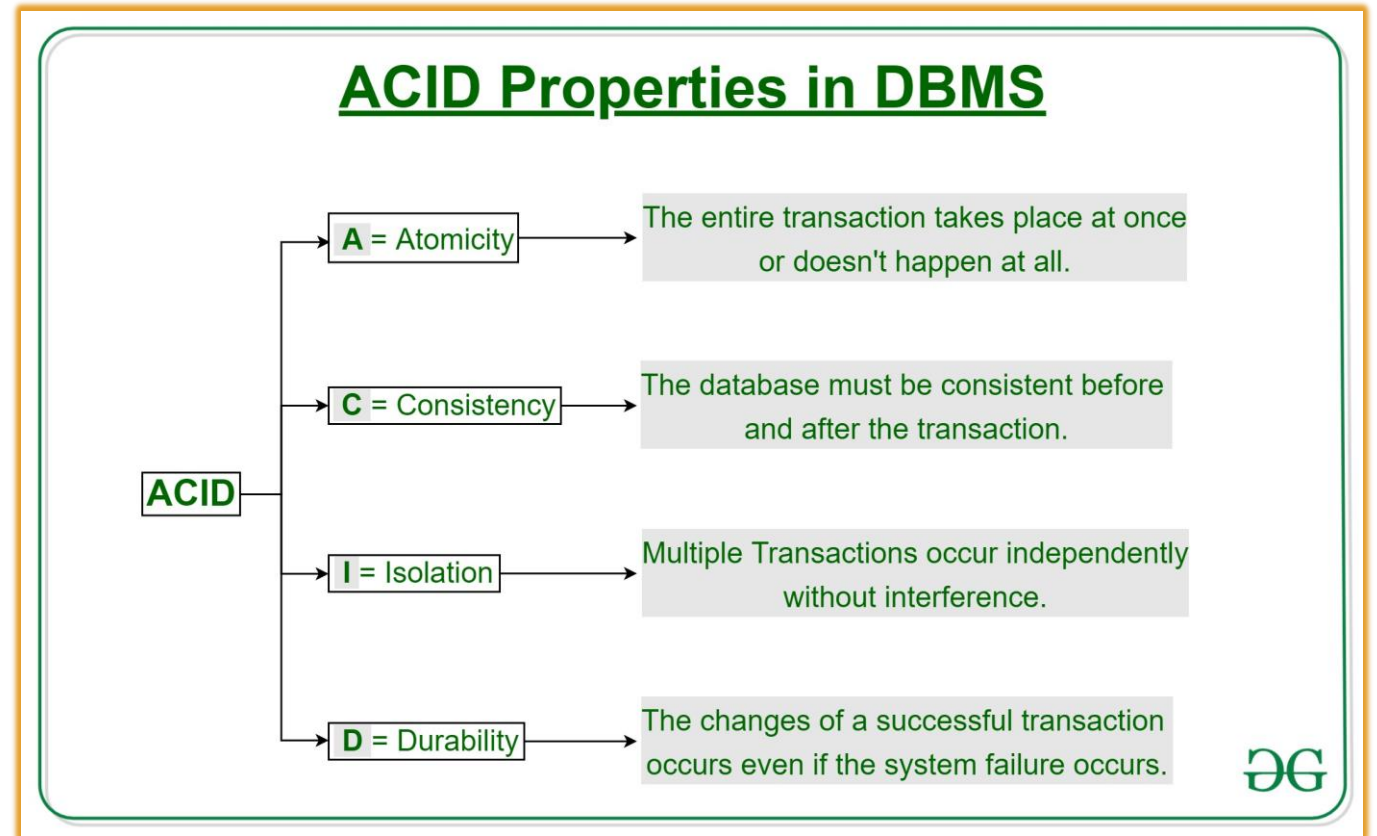

ACID – Isolation

<https://docs.microsoft.com/en-us/windows/win32/cos-sdk/acid-properties>

- A *transaction* must be completed in isolation.
- **Concurrent Transactions** should behave as if each were the only *transaction* running in the system.
- A high degree of *isolation* can limit the number of *concurrent transactions*.

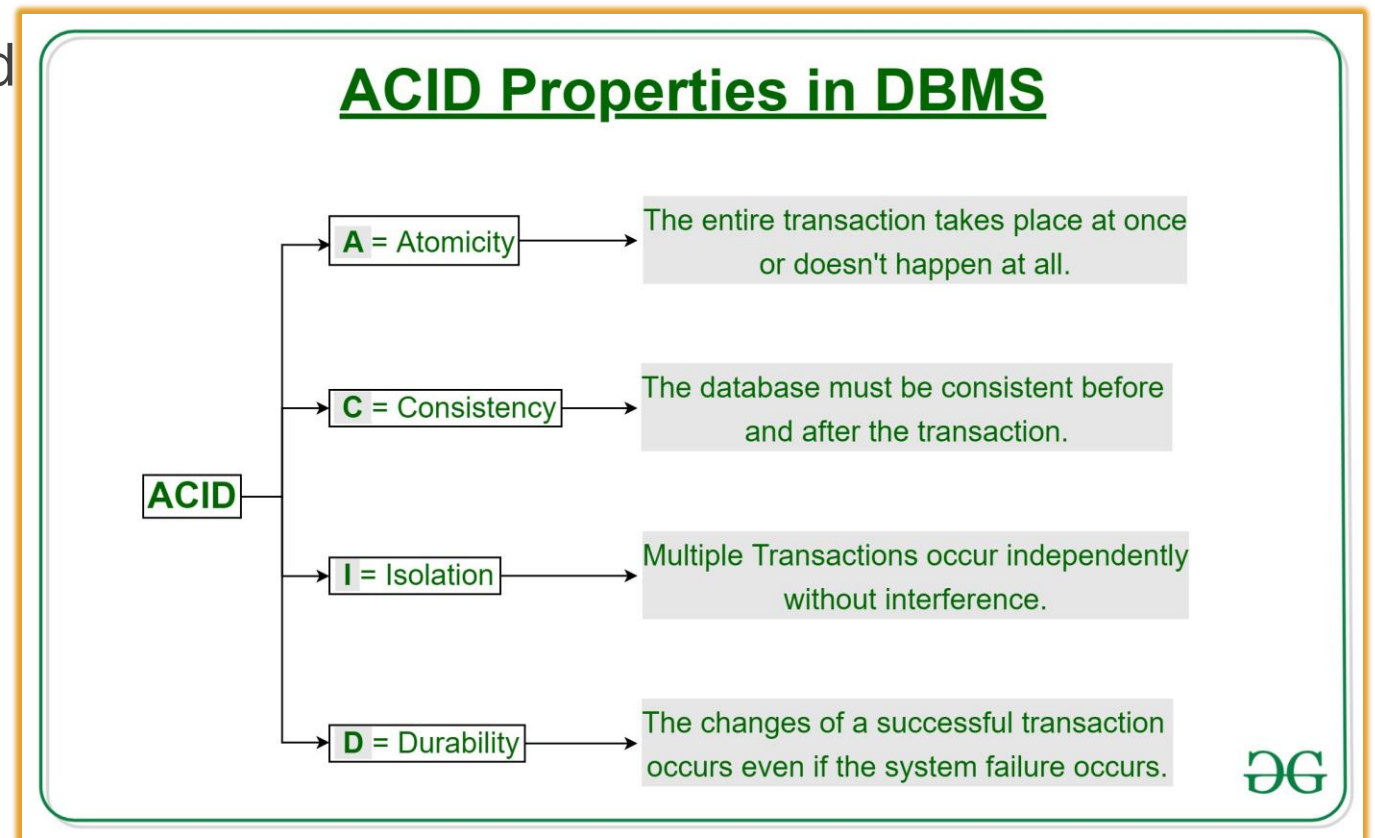

ACID – Durability

<https://docs.microsoft.com/en-us/windows/win32/cos-sdk/acid-properties>

- A **transaction** must have durability (be recoverable).
- If a **transaction commits**, its updates will **persist** even if the system fails immediately after.
- Specialized logging allows the system's restart procedure to complete unfinished operations required by the **transaction**. This makes the **transaction durable**.

