

Packet Tracer - Configure Initial Switch Settings

Objectives

Part 1: Verify the Default Switch Configuration

Part 2: Configure a Basic Switch Configuration

Part 3: Configure a MOTD Banner

Part 4: Save Configuration Files to NVRAM

Part 5: Configure S2

Background / Scenario

In this activity, you will perform basic switch configuration tasks. You will secure access to the command-line interface (CLI) and console ports using encrypted and plain text passwords. You will also learn how to configure messages for users logging into the switch. These message banners are also used to warn unauthorized users that access is prohibited.

Note: In Packet Tracer, the Catalyst 2960 switch uses IOS version 12.2 by default. If required, the IOS version can be updated from a file server in the Packet Tracer topology. The switch can then be configured to boot to IOS version 15.0, if that version is required.

Instructions


Part 1: Verify the Default Switch Configuration

Step 1: Enter privileged EXEC mode.

You can access all switch commands from privileged EXEC mode. However, because many of the privileged commands configure operating parameters, privileged access should be password-protected to prevent unauthorized use.

The privileged EXEC command set includes the commands available in user EXEC mode, many additional commands, and the **configure** command through which access to the configuration modes is gained.

- a. Click S1 and then the CLI tab. Press Enter.

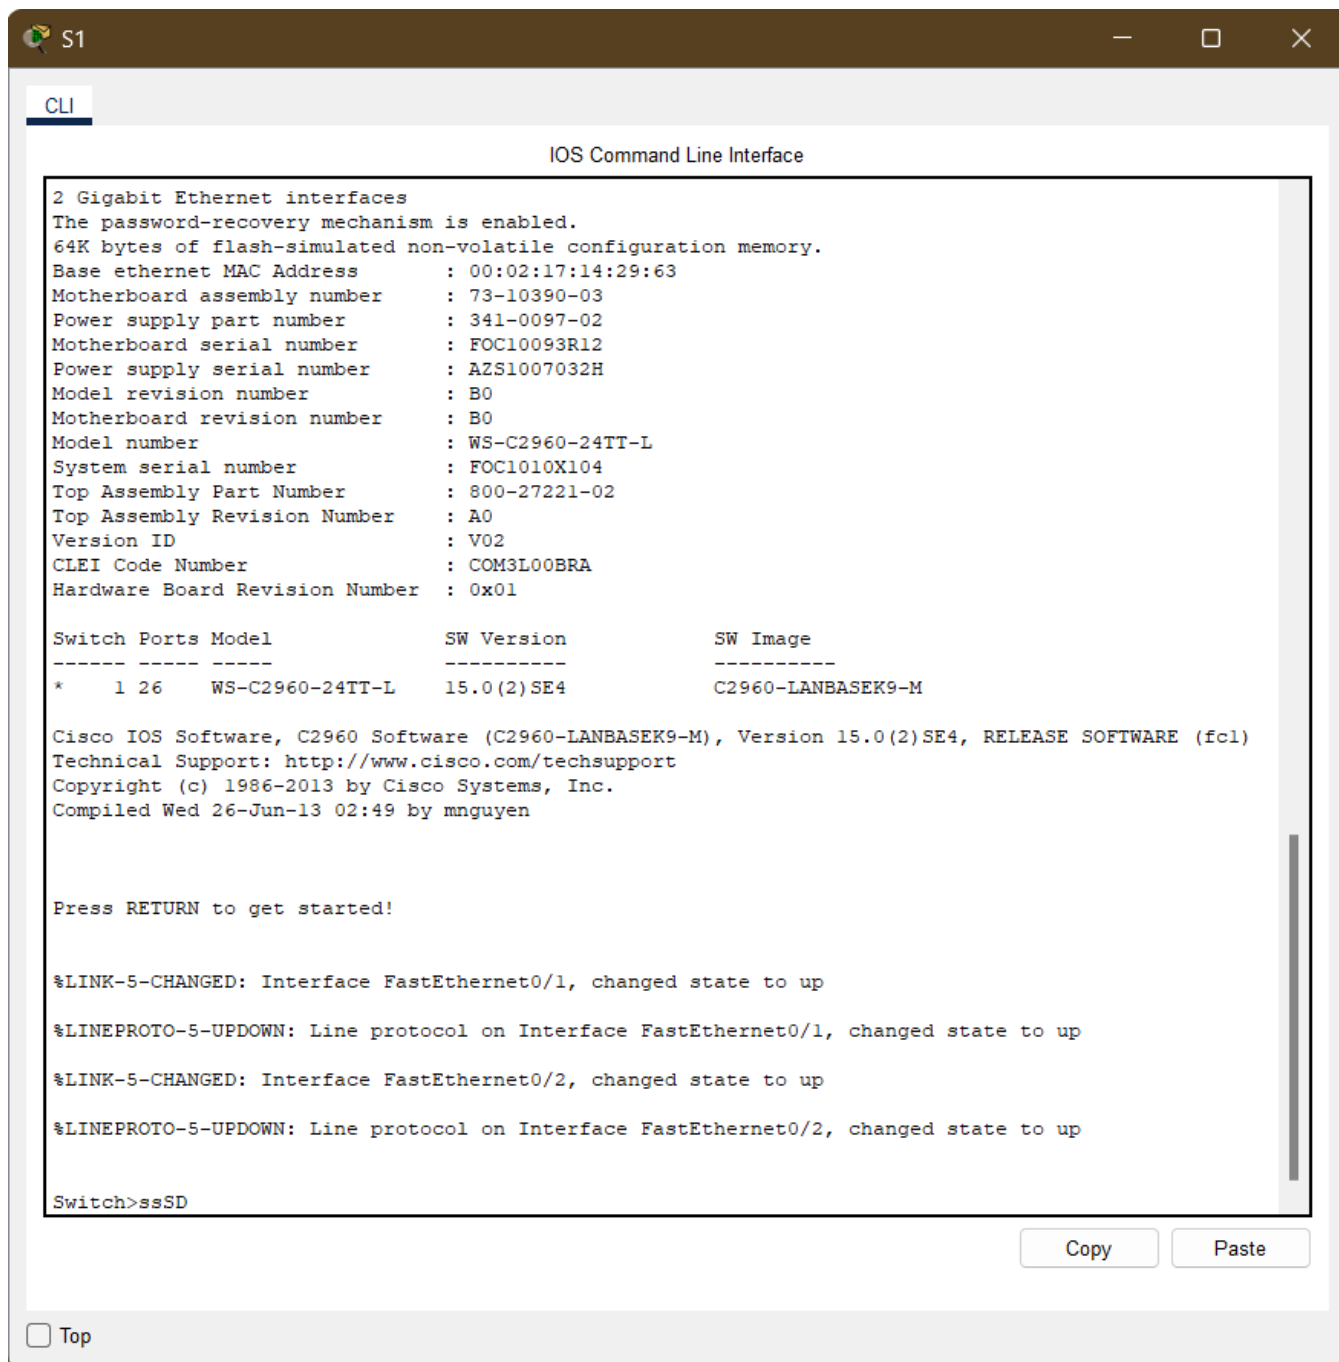

- b. Enter privileged EXEC mode by entering the enable command:

```
Switch> enable
Switch#
```

Notice that the prompt changed to reflect privileged EXEC mode.

```
Switch>enable
Switch#
```

Step 2: Examine the current switch configuration.

Enter the show running-config command.

```
Switch# show running-config
```

Answer the following questions:

How many Fast Ethernet interfaces does the switch have?

- 24

How many Gigabit Ethernet interfaces does the switch have?

- 2

What is the range of values shown for the vty lines?

- 0 to 15

Which command will display the current contents of non-volatile random-access memory (NVRAM)?

- show startup-configuration

Why does the switch respond with “startup-config is not present?”

- This error is displayed as a result of the configuration file not being saved to NVRAM. It is only found in RAM currently.

Part 2: Create a Basic Switch Configuration

Step 1: Assign a name to a switch.

To configure parameters on a switch, you may be required to move between various configuration modes. Notice how the prompt changes as you navigate through the switch.

```
Switch# configure terminal
Switch(config)# hostname S1
S1(config)# exit
S1#

Switch# config t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#hostname S1
S1(config)#exit
S1#
%SYS-5-CONFIG_I: Configured from console by console
S1#
```

Step 2: Secure access to the console line.

To secure access to the console line, access config-line mode and set the console password to **letmein**.

```
S1# configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
S1(config)# line console 0
S1(config-line)# password letmein
S1(config-line)# login
S1(config-line)# exit
S1(config)# exit
%SYS-5-CONFIG_I: Configured from console by console
S1#
```

Why is the **login** command required?

- The login and password commands are both necessary for the password checking process to function.

Step 3: Verify that console access is secured.

Exit privileged mode to verify that the console port password is in effect.

```
S1# exit
Switch con0 is now available
Press RETURN to get started.
```

```
User Access Verification
Password:
S1>
```

Note: If the switch did not prompt you for a password, then you did not configure the **login** parameter in Step 2.

Step 4: Secure privileged mode access.

Set the **enable** password to **c1\$c0**. This password protects access to privileged mode.

Note: The **0** in **c1\$c0** is a zero, not a capital O. This password will not grade as correct until after you encrypt it in Step 8.

```
S1> enable
S1# configure terminal
S1(config)# enable password c1$c0
S1(config)# exit
%SYS-5-CONFIG_I: Configured from console by console
S1#
```

Step 5: Verify that privileged mode access is secure.

- Enter the **exit** command again to log out of the switch.
- Press **<Enter>** and you will now be asked for a password:

```
User Access Verification
Password:
```
- The first password is the console password you configured for **line con 0**. Enter this password to return to user EXEC mode.
- Enter the command to access privileged mode.
- Enter the second password you configured to protect privileged EXEC mode.
- Verify your configuration by examining the contents of the running-configuration file:

```
S1# show running-config
```

```
Switch1# show running-config
Building configuration...

Current configuration : 1131 bytes
!
version 15.0
no service timestamps log datetime msec
no service timestamps debug datetime msec
no service password-encryption
!
hostname S1
!
enable password c1$c0
!
line con 0
password letmein
login
```

Notice that the console and enable passwords are both in plain text. This could pose a security risk if someone is looking over your shoulder or obtains access to config files stored in a backup location.

Step 6: Configure an encrypted password to secure access to privileged mode.

The **enable password** should be replaced with the newer encrypted secret password using the **enable secret** command. Set the enable secret password to **itsasecret**.

```
S1# config t
S1(config)# enable secret itsasecret
S1(config)# exit
S1#
```

Note: The **enable secret** password overrides the **enable** password. If both are configured on the switch, you must enter the **enable secret** password to enter privileged EXEC mode.

Step 7: Verify that the enable secret password is added to the configuration file.

Enter the **show running-config** command again to verify the new enable secret password is configured.

Note: You can abbreviate **show running-config** as

```
S1# show run
```

What is displayed for the enable secret password?

```
- $1$mERr$ILwq/b7kc.7X/ejA4Aosn0
:
hostname S1
!
!
enable secret 5 $1$mERr$ILwq/b7kc.7X/ejA4Aosn0
enable password c1$c0
-
```

Why is the enable secret password displayed differently from what we configured?

- The enable password is displayed in plain language, while the enable secret is shown in encrypted form.

Step 8: Encrypt the enable and console passwords.

As you noticed in Step 7, the **enable secret** password was encrypted, but the **enable** and **console** passwords were still in plain text. We will now encrypt these plain text passwords using the **service password-encryption** command.

```
S1# config t
S1(config)# service password-encryption
S1(config)# exit
```

If you configure any more passwords on the switch, will they be displayed in the configuration file as plain text or in encrypted form? Explain.

- All present and future passwords are encrypted using the service password-encryption command.

Part 3: Configure a MOTD Banner

Step 1: Configure a message of the day (MOTD) banner.

The Cisco IOS command set includes a feature that allows you to configure messages that anyone logging onto the switch sees. These messages are called message of the day, or MOTD banners. Enclose the banner text in quotations or use a delimiter different from any character appearing in the MOTD string.

```
S1# config t
S1(config)# banner motd "This is a secure system. Authorized Access Only!"
S1(config)# exit
%SYS-5-CONFIG_I: Configured from console by console
S1#
```

When will this banner be displayed?

- When someone connects to the switch via the console port, the message will be shown.

Why should every switch have a MOTD banner?

- Every switch needs a banner to alert unauthorized users that access is restricted, but it can also be used to communicate with network staff or technicians

Part 4: Save and Verify Configuration Files to NVRAM

Step 1: Verify that the configuration is accurate using the show run command.

Save the configuration file. You have completed the basic configuration of the switch. Now back up the running configuration file to NVRAM to ensure that the changes made are not lost if the system is rebooted or loses power.

```
S1# copy running-config startup-config
Destination filename [startup-config]? [Enter]
Building configuration...
[OK]
```

What is the shortest, abbreviated version of the **copy running-config startup-config** command?

- Cop r s

Examine the startup configuration file.

Which command will display the contents of NVRAM?

- show startup-config

Are all the changes that were entered recorded in the file?

- Yes, It is identical to the running configuration

Part 5: Configure S2

You have completed the configuration on S1. You will now configure S2. If you cannot remember the commands, refer to Parts 1 to 4 for assistance.

Configure S2 with the following parameters:

- Device name: **S2**
- Protect access to the console using the **letmein** password.
- Configure an enable password of **c1\$c0** and an enable secret password of **itsasecret**.
- Configure an appropriate message to those logging into the switch.
- Encrypt all plain text passwords.
- Ensure that the configuration is correct.
- Save the configuration file to avoid loss if the switch is powered down.

Answer:

- Switch> enable
- Switch# config t
- Switch(config)# hostname S2
- S2(config)# line console 0
- S2(config-line)# password letmein
- S2(config-line)# login
- S2(config-line)# enable password c1\$c0
- S2(config)# enable secret itsasecret
- S2(config)# banner motd \$ Authorized Access Only! Violators will be punished \$
- S2(config)# service password-encryption
- S2(config)# do copy running-config startup-config

Packet Tracer - Configure Initial Switch Settings

Cisco Packet Tracer - C:\Users\Admin\Downloads\New folder\MP1\Magistrado - 2.5.5 Packet Tracer - Configure Initial Switch Settings.pka - Guest - 2023-05-08...

File Edit Options View Tools Extensions Window Help

Activity Results Time Elapsed: 00:30:08

Congratulations Guest! You completed the activity.

Overall Feedback **Assessment Items** Connectivity Tests

Expand/Collapse All Show Incorrect Items

Assessment Items	Status	Points	Component(s)	Feedback
Network				
S1				
Banner MOTD	Correct	6	Basic Security Co...	
Console Line				
Login	Correct	4	Basic Security Co...	
Password	Correct	4	Basic Security Co...	
Enable Password	Correct	4	Basic Security Co...	
Enable Secret	Correct	4	Basic Security Co...	
Host Name	Correct	5	Hostname Config...	
Service Password Encryption	Correct	4	Basic Security Co...	
Startup Config	Correct	5	Configuration Man...	
S2				
Banner MOTD	Correct	6	Basic Security Co...	
Console Line				
Login	Correct	4	Basic Security Co...	
Password	Correct	4	Basic Security Co...	
Enable Password	Correct	4	Basic Security Co...	
Enable Secret	Correct	4	Basic Security Co...	
Host Name	Correct	5	Hostname Config...	
Service Password Encryption	Correct	4	Basic Security Co...	
Startup Config	Correct	5	Configuration Man...	

Component	Items/Total	Score
Basic Security Configuration	12/12	52/52
Configuration Management	2/2	10/10
Hostname Configuration	2/2	10/10