
Migrating openfire HSQLDB database to mysql

Version 1.0 13/08/2012


Sorry for my English, but come on.

Follow the steps as it was executed.


1. With MySQL installed to create a database called Public and tables with the script located in the folder "c:\Program Files\Openfire\resources\database" just running the script "openfire_mysql.sql" with a workbench or using manipulation software data in mysql. Note: if you have any openfire plugin installed and check the tables and use mysql recreates them in a simple way to solve the problem is making a new installation and add the plugin, then remove the table data to receive data migration.
2. Stop the openfire and copy the folder "c:\Program Files\Openfire\embedded-db" to a known location.
3. Download and install MySQL GUI Tools Bundle containing the Migration Toolkit http://dev.mysql.com/downloads/gui-tools/5.0.html
4. go to "c:\Program Files\Openfire\lib" and copy the file "hsqldb.jar" to "C:\Program Files\MySQL\MySQL Tools for 5.0\java\lib"
5. If the original database file is too large you will need a PC with enough memory to run the MySQL Migration Toolkit. If you have lack of memory error, use the command line and add the value "-Xmx660m". On my machine with 6Gb RAM used this configuration for a database file of approximately 200MB.
6. Running Mysql Migration Toolkit:

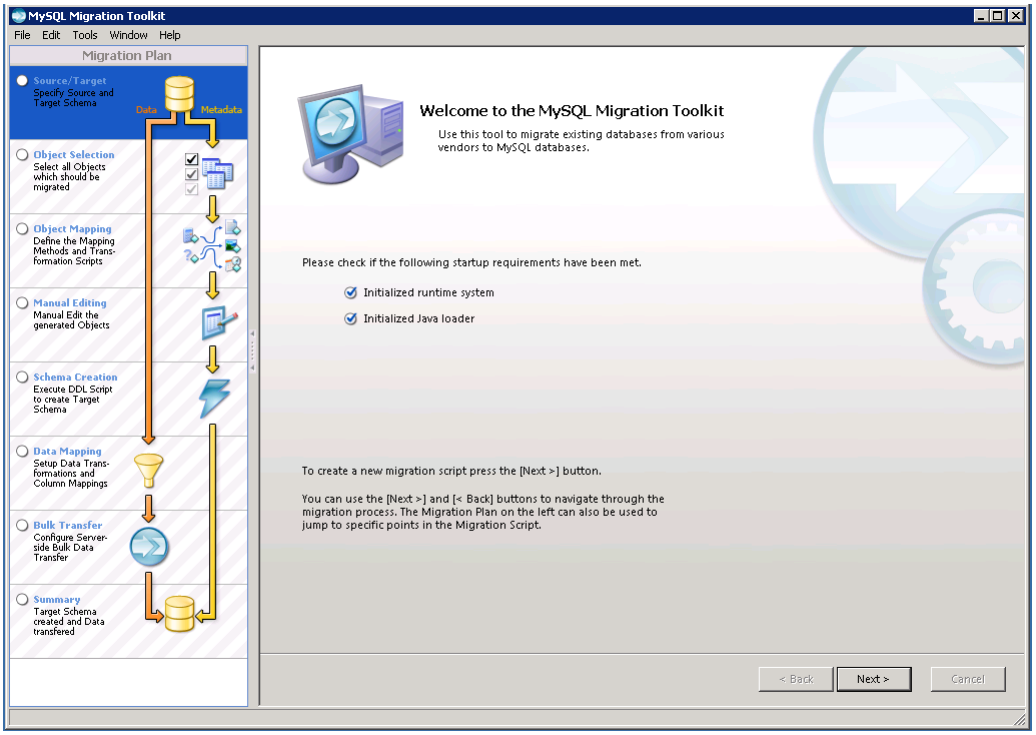


7. Next:

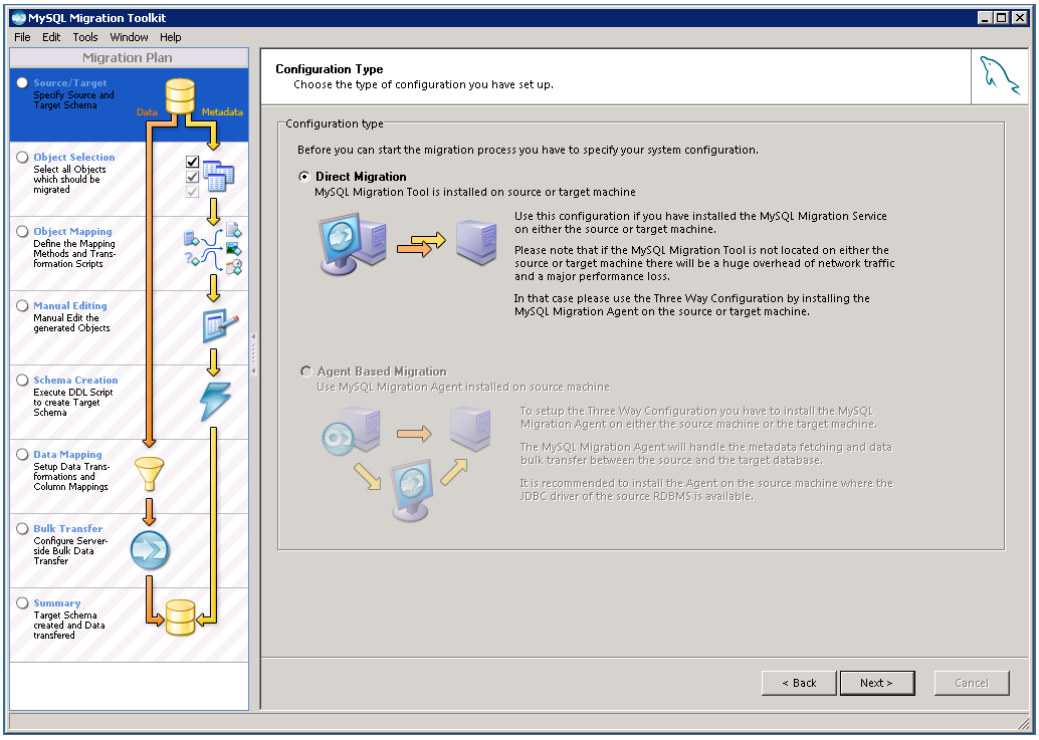


8. Next and fill the database of origin of the form below by placing the path where the embedded-db folder:

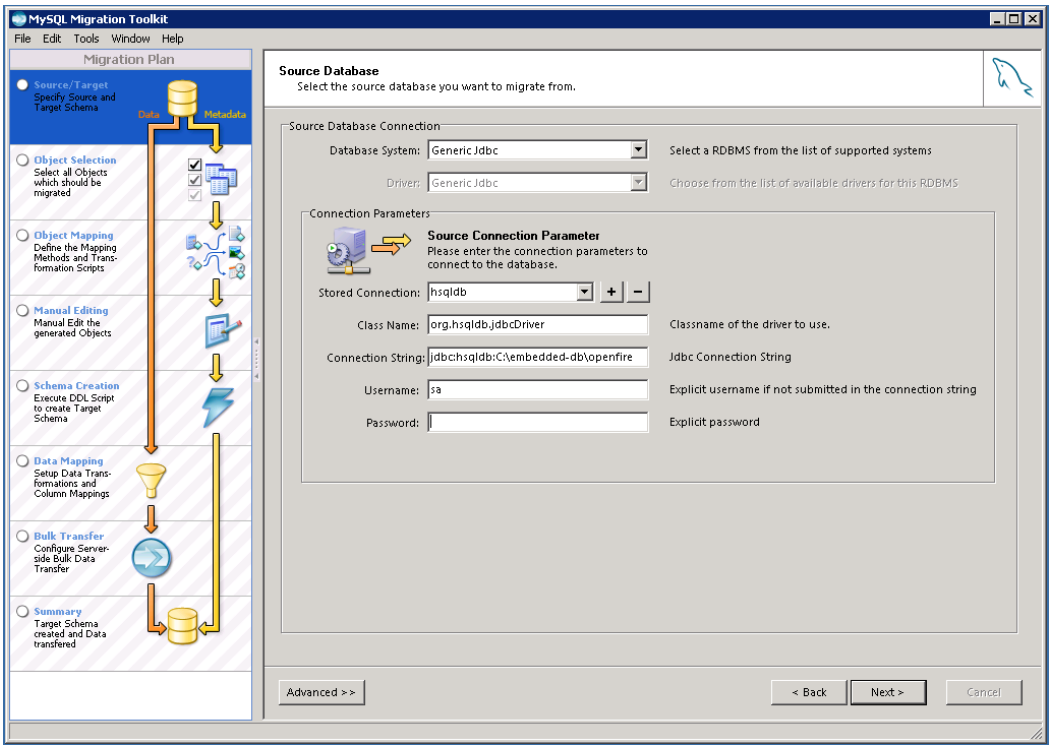


9. Complete Database Target:

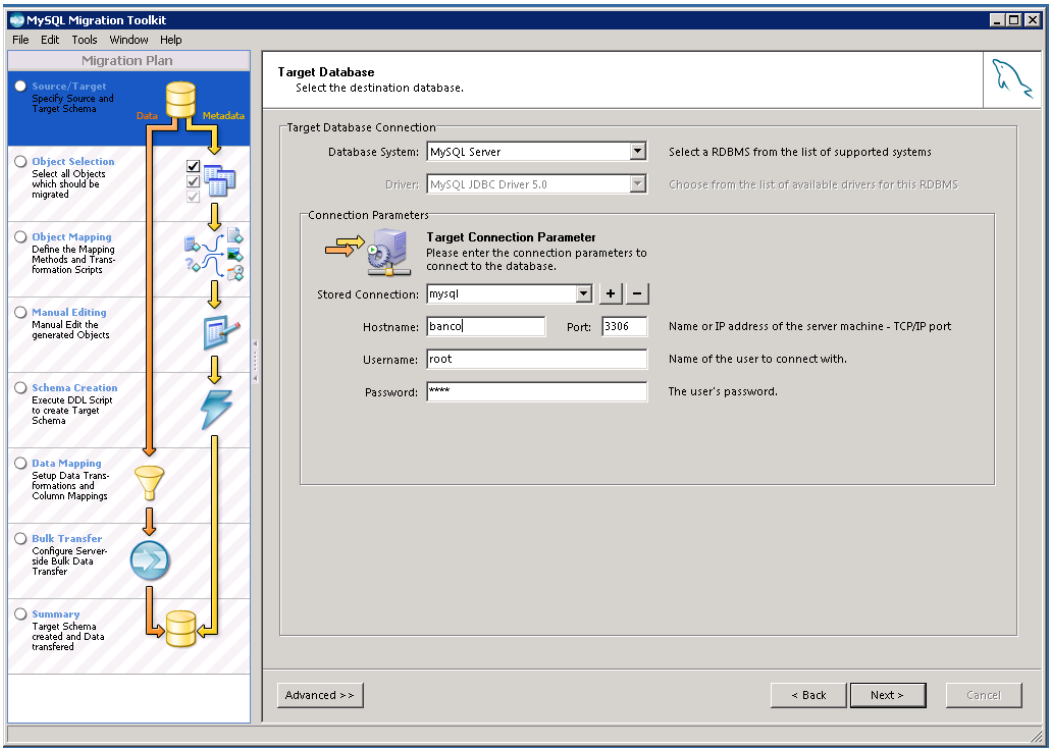


10. Next:

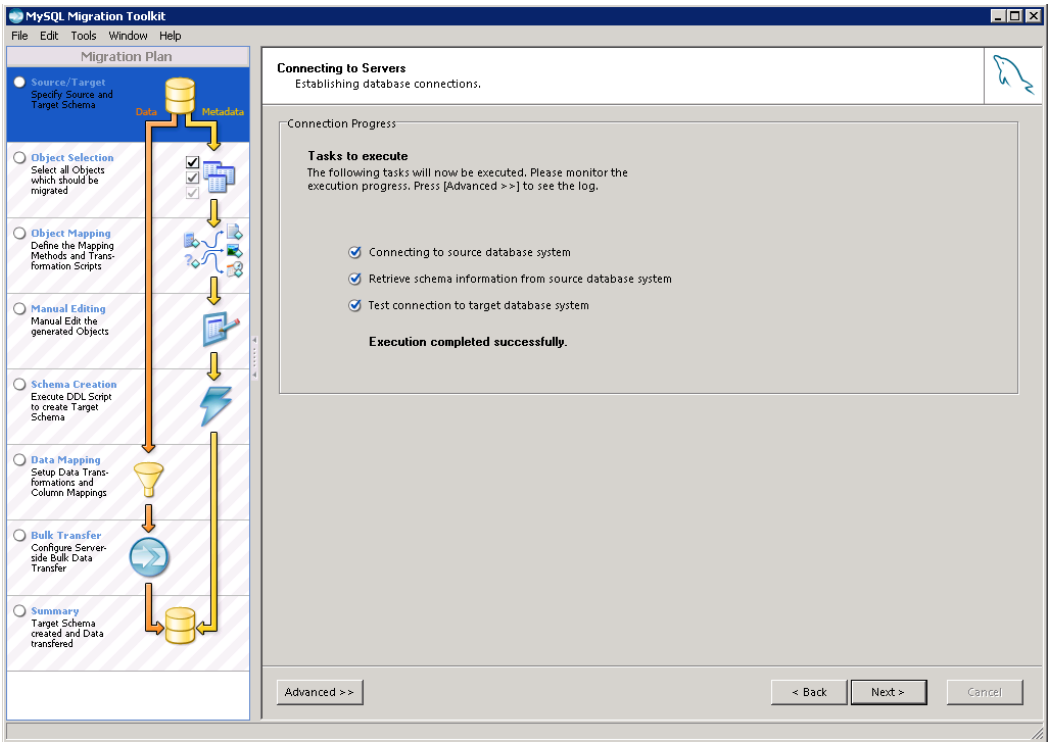


11. Choose Public schema and next:

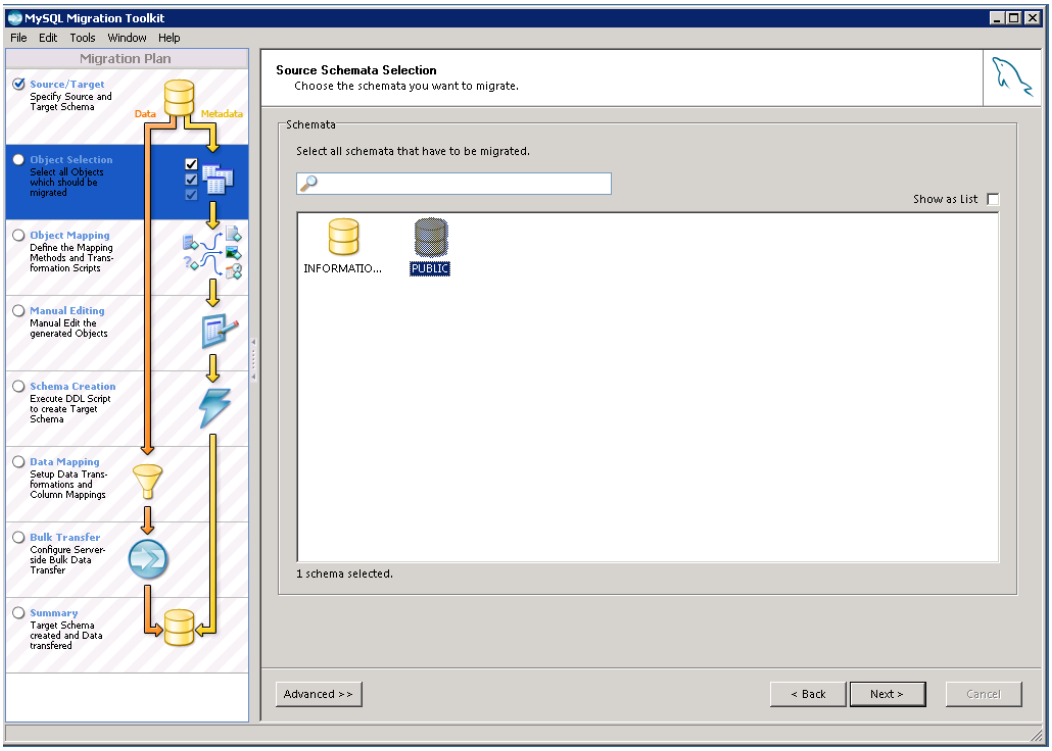


12. Next:

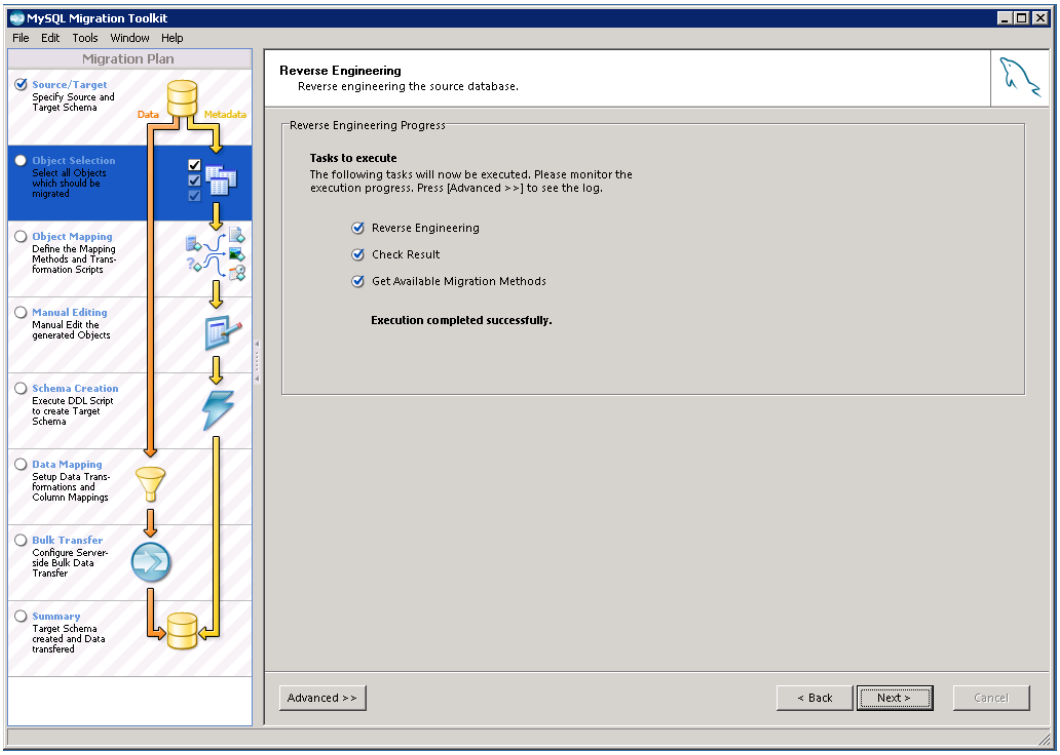


13. Next:

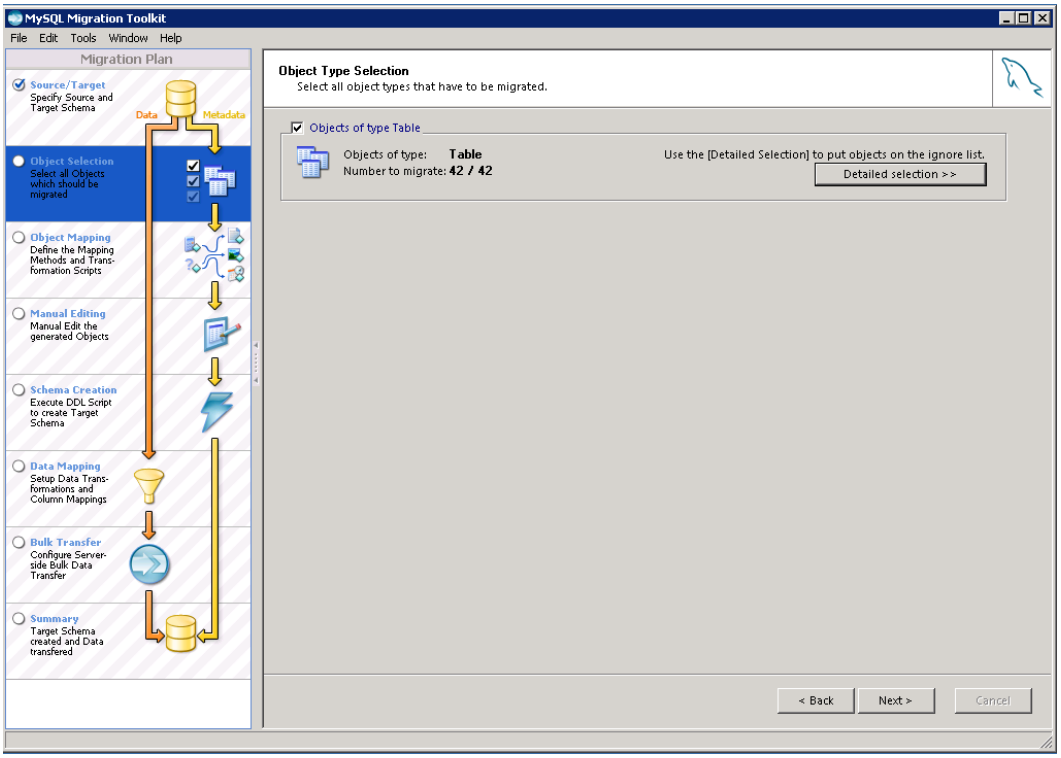


14. Next:

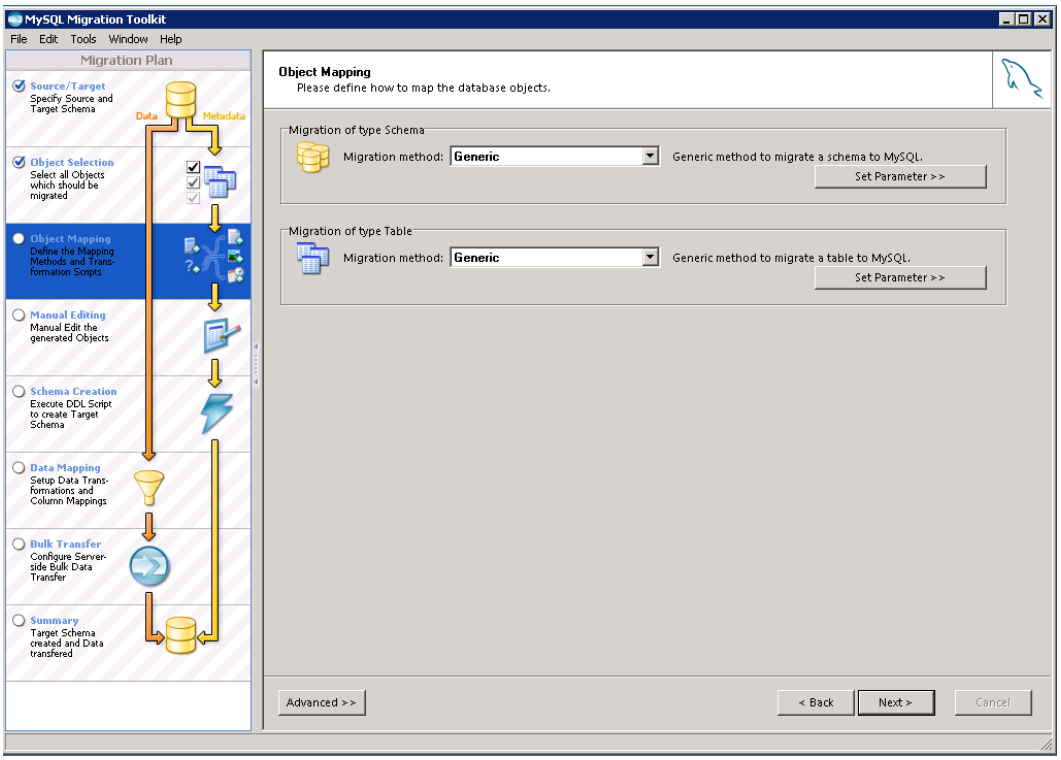


15. Next:

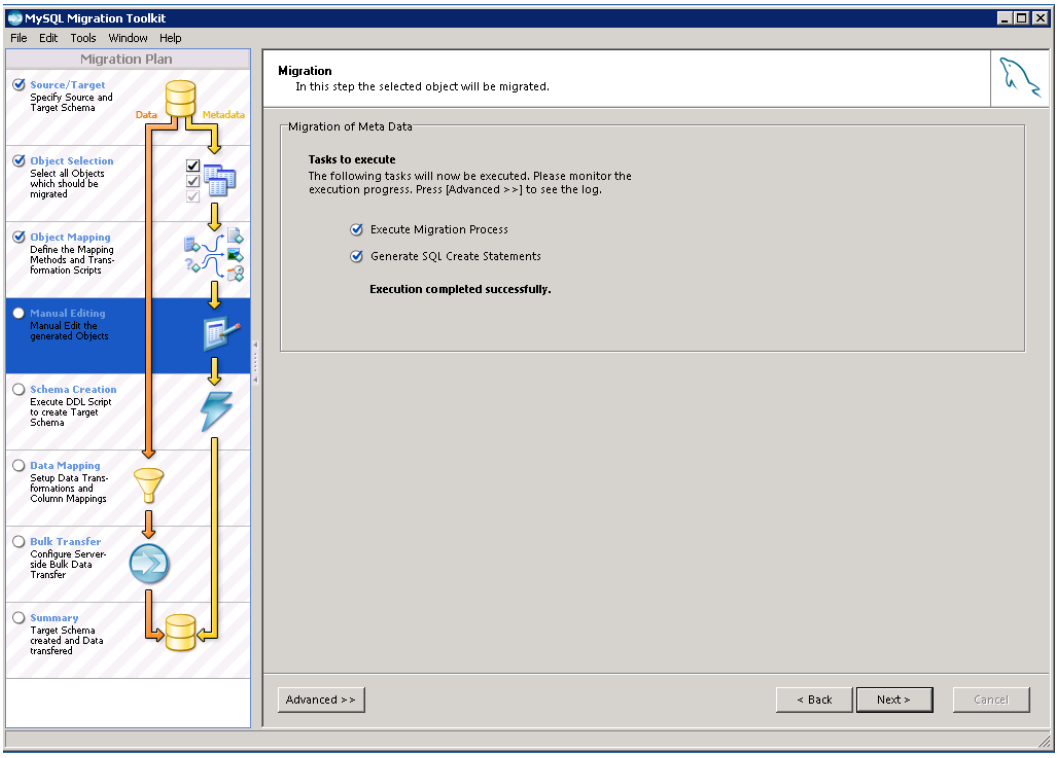


16. Request to show "all objects" and use "advanved" check "comment out" and apply to all tables. This program will not try to recreate the tables already created previously:

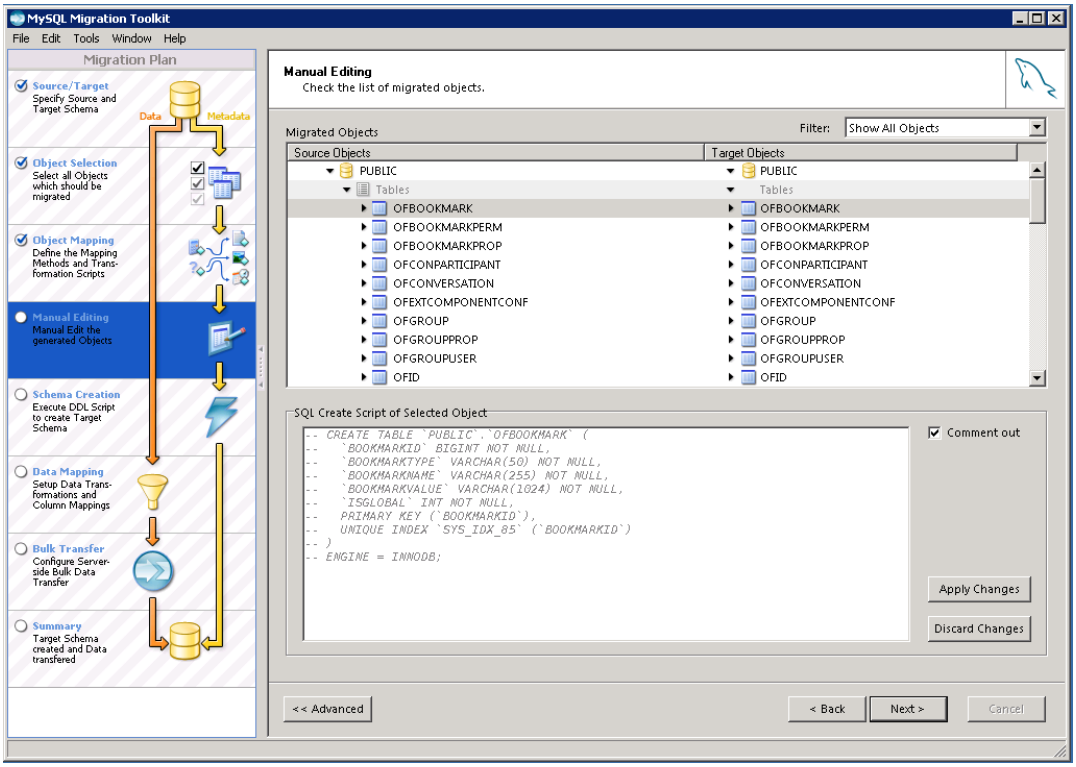


17. Next:

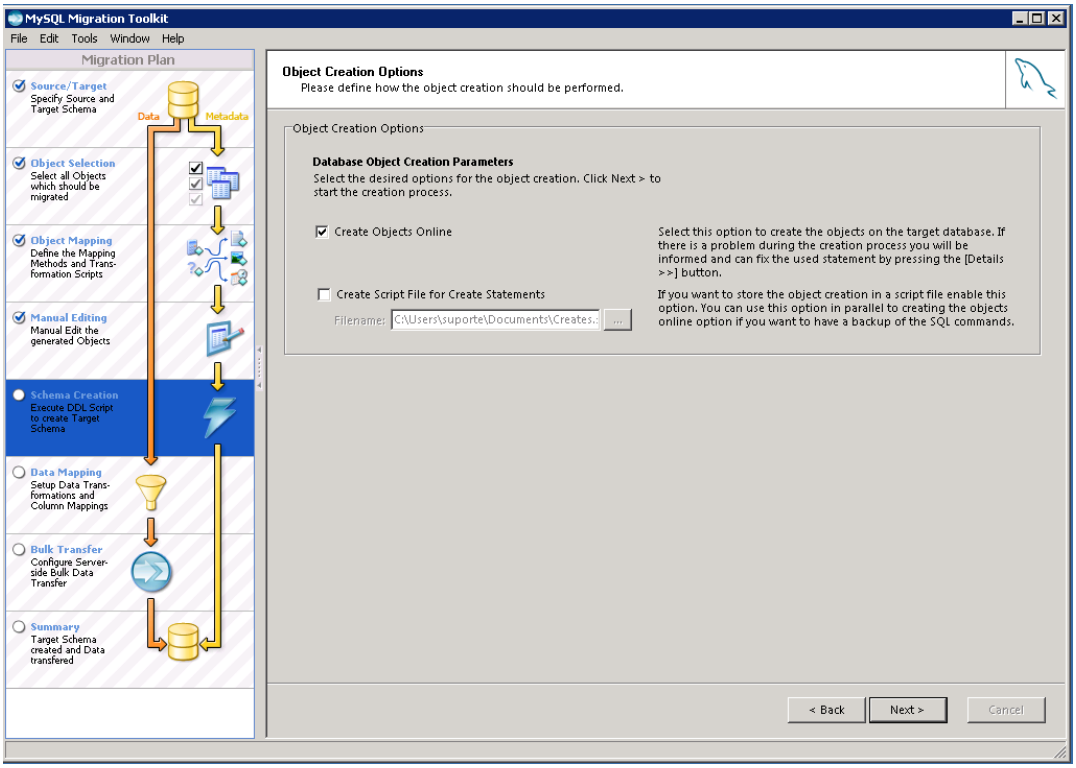


18. Next:

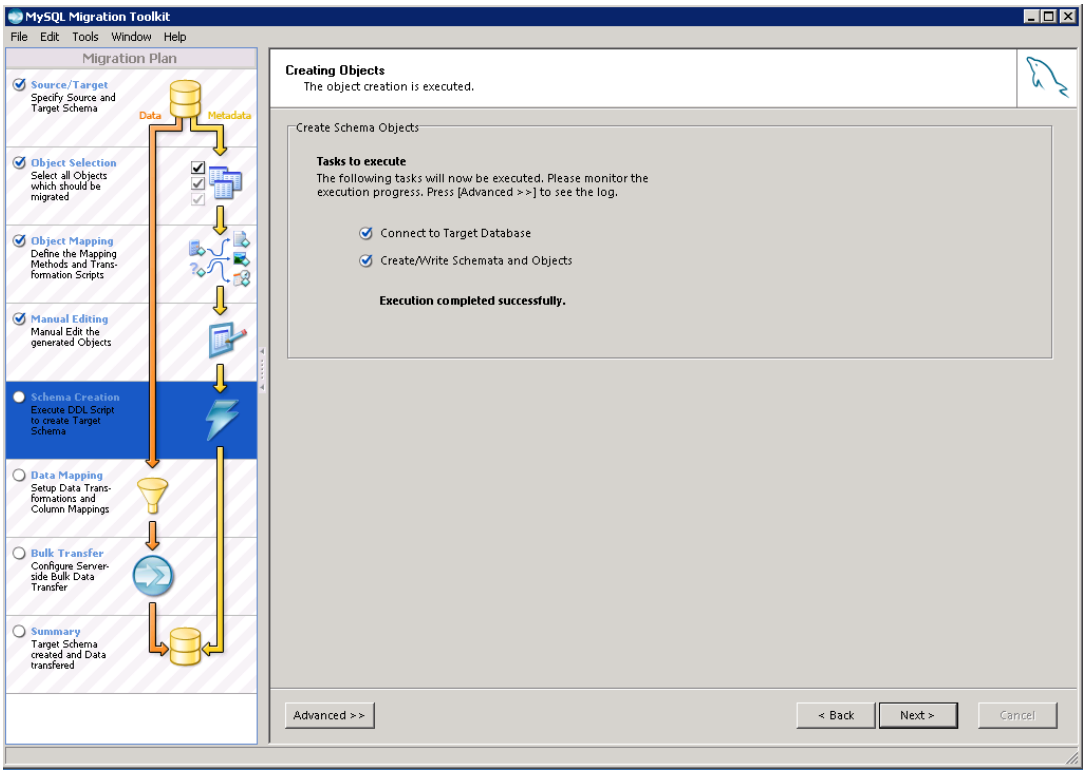


19. Next and verify that no error occurred:

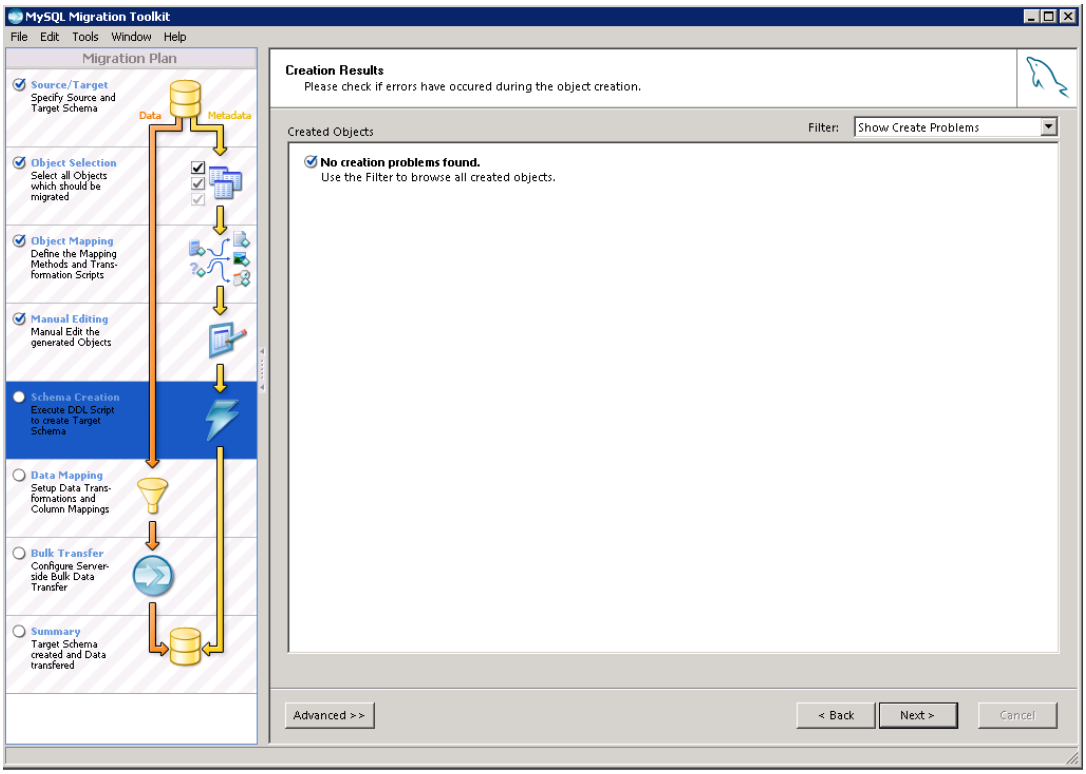


20. Next:

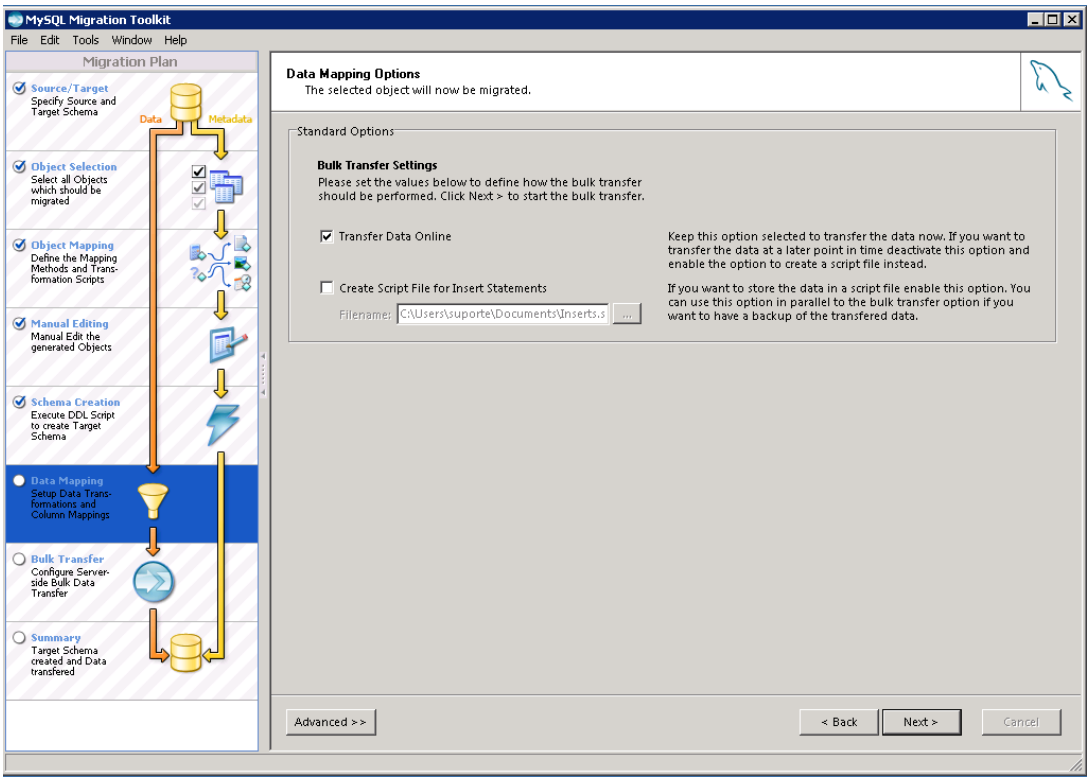


21. Transferring Data:

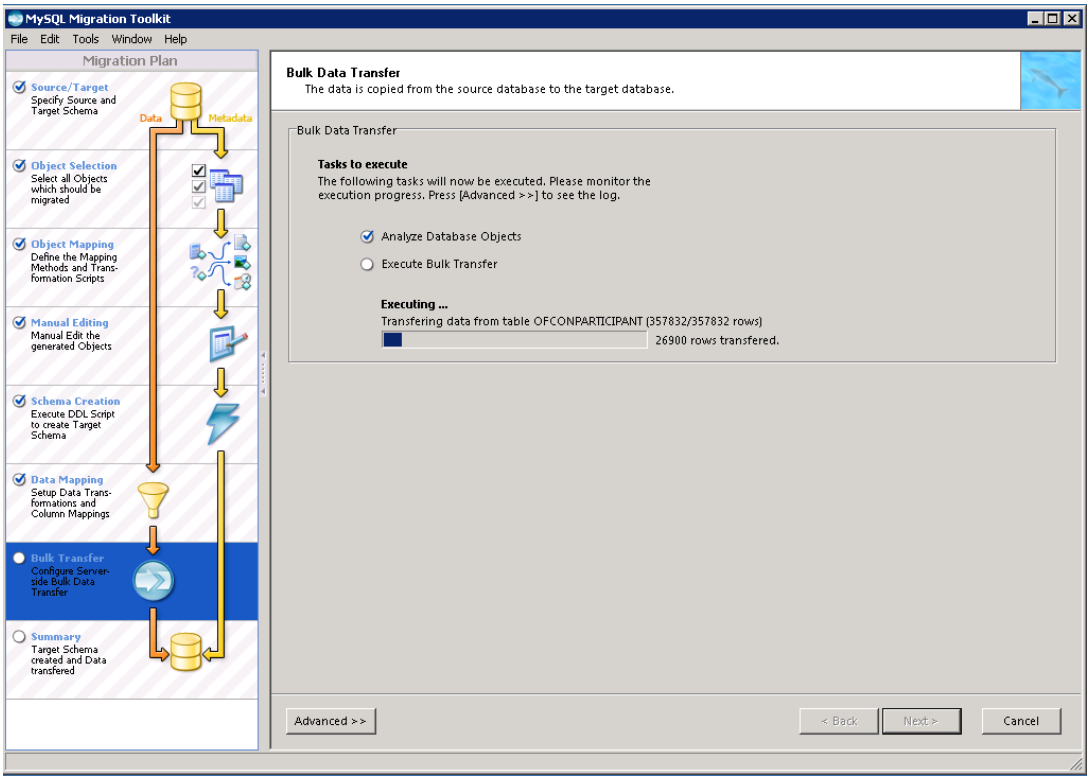

22. Next:

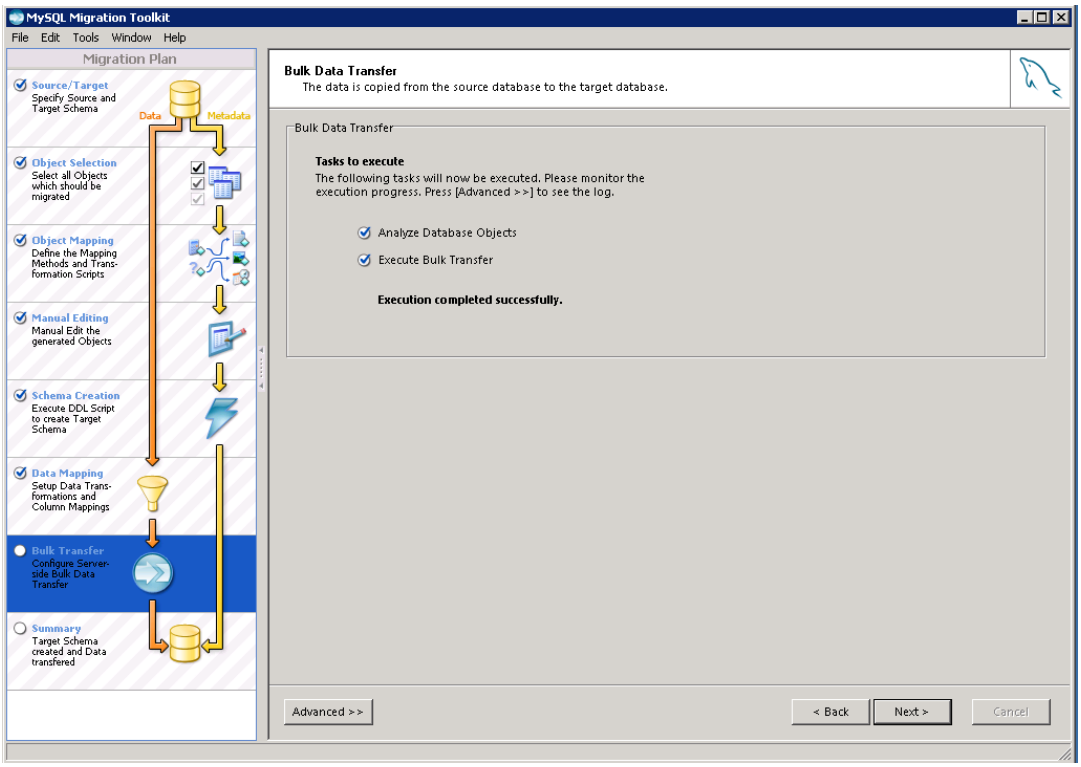

23. Check the overview for errors:

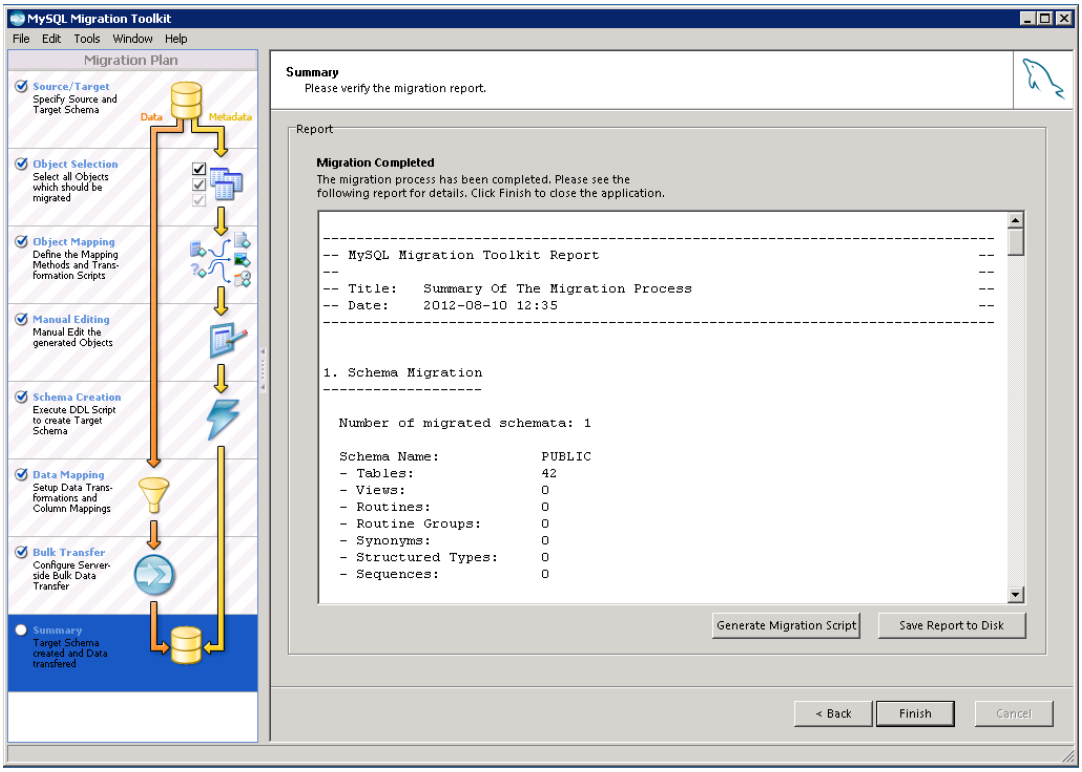

24. When finished edit the file c:\Program Files\Openfire\conf\openfire.xml replacing the line below:

    Replace:
    <adminConsole>**
    By:
    <adminConsole>

    Replace:
    <connectionProvider>
    <className>org.jivesoftware.database.EmbeddedConnectionProvider</className>
    </connectionProvider>
    By:
    <connectionProvider>
    <className>org.jivesoftware.database.DefaultConnectionProvider</className>
    </connectionProvider>
    <database>
    <defaultProvider>
    <driver>com.mysql.jdbc.Driver</driver>
    <serverURL>jdbc:mysql://SERVER-IP:3306/public</serverURL>
    <username>username</username>
    <password>pass</password>
    <testSQL>select 1</testSQL>
    <testBeforeUse>true</testBeforeUse>
    <testAfterUse>true</testAfterUse>
    <minConnections>5</minConnections>
    <maxConnections>25</maxConnections>
    <connectionTimeout>1.0</connectionTimeout>
    </defaultProvider>
    </database>
25. Run openfire.
26. Next document will illustrate the MySQL database migration to Oracle.