



nick@NICK: ~



```
nick@NICK:~$ sudo mysql -u root
```

```
nick@NICK:~$ sudo mysql -u root
Welcome to the MySQL monitor. Commands end with ; or \g.
Your MySQL connection id is 12
Server version: 8.0.22-0ubuntu0.20.04.3 (Ubuntu)

Copyright (c) 2000, 2020, Oracle and/or its affiliates. All rights reserved.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> 
```



nick@NICK: ~

```
nick@NICK:~$ sudo mysql -u root
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 12
Server version: 8.0.22-0ubuntu0.20.04.3 (Ubuntu)
```



Copyright (c) 2000, 2020, Oracle and/or its affiliates. All rights reserved.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

```
mysql> create database tennis;
Query OK, 1 row affected (0.02 sec)
```

```
mysql> 
```



```
nick@NICK:~$ sudo mysql -u root
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 12
Server version: 8.0.22-0ubuntu0.20.04.3 (Ubuntu)

Copyright (c) 2000, 2020, Oracle and/or its affiliates. All rights reserved.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> create database tennis;
Query OK, 1 row affected (0.02 sec)


mysql> show databases;
+-----+
| Database |
+-----+
| information_schema |
| mysql |
| performance_schema |
| sys |
| tennis |
+-----+
5 rows in set (0.00 sec)

mysql> 
```

```

1 -- phpMyAdmin SQL Dump
2 -- version 4.5.4.1deb2ubuntu2
3 -- http://www.phpmyadmin.net
4 --
5 -- Host: localhost
6 -- Generation Time: Apr 10, 2018 at 11:59 AM
7 -- Server version: 5.7.21-0ubuntu0.16.04.1
8 -- PHP Version: 7.0.28-0ubuntu0.16.04.1
9
10 SET SQL_MODE = "NO_AUTO_VALUE_ON_ZERO";
11 SET time_zone = "+00:00";
12
13
14 /*!40101 SET @OLD_CHARACTER_SET_CLIENT=@@CHARACTER_SET_CLIENT */;
15 /*!40101 SET @OLD_CHARACTER_SET_RESULTS=@@CHARACTER_SET_RESULTS */;
16 /*!40101 SET @OLD_COLLATION_CONNECTION=@@COLLATION_CONNECTION */;
17 /*!40101 SET NAMES utf8mb4 */;
18
19 --
20 -- Database: `CL2`
21 --
22
23 --
24
25 --
26 -- Table structure for table `CountryCodes`
27 --
28
29 CREATE TABLE `CountryCodes` (
30   `Code` varchar(3) DEFAULT NULL,
31   `Country` varchar(100) DEFAULT NULL
32 ) ENGINE=InnoDB DEFAULT CHARSET=latin1;
33
34 --
35 -- Dumping data for table `CountryCodes`
36 --
37
38 INSERT INTO `CountryCodes` (`Code`, `Country`) VALUES
39 ('AFG', 'Afghanistan'),
40 ('AHO', 'Netherlands Antilles'),
41 ('ALB', 'Albania'),
42 ('ALG', 'Algeria'),
43 ('AND', 'Andorra'),
44 ('ANG', 'Angola'),
45 ('ANT', 'Antigua-Barbuda'),
46 ('ARG', 'Argentina'),
47 ('ARM', 'Armenia'),
48 ('ARU', 'Aruba'),
49 ('ASA', 'American Samoa'),
50 ('AUS', 'Australia'),
51 ('AUT', 'Austria'),
52 ('AZE', 'Azerbaijan'),
53 ('BAH', 'Bahamas').

```

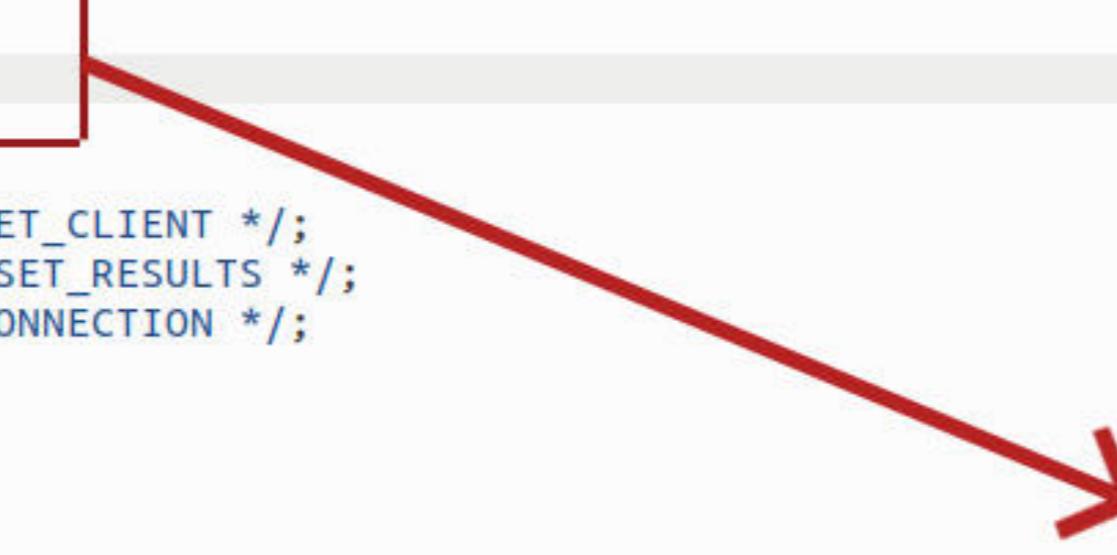

```

nick@NICK: ~
+-----+
| information_schema |
| mysql |
| performance_schema |
| sys |
| tennist |
+-----+
5 rows in set (0.00 sec)

mysql> use tennist;
Database changed
mysql> SET SQL_MODE = "NO_AUTO_VALUE_ON_ZERO";
Query OK, 0 rows affected (0.01 sec)

mysql> SET time_zone = "+00:00";
Query OK, 0 rows affected (0.01 sec)

mysql>

```

Open



Save



tennis.sql

tennismysql.sql

```

1 -- phpMyAdmin SQL Dump
2 -- version 4.5.4.1deb2ubuntu2
3 -- http://www.phpmyadmin.net
4 --
5 -- Host: localhost
6 -- Generation Time: Apr 10, 2018 at 11:59 AM
7 -- Server version: 5.7.21-0ubuntu0.16.04.1
8 -- PHP Version: 7.0.28-0ubuntu0.16.04.1
9
10 SET SQL_MODE = "NO_AUTO_VALUE_ON_ZERO";
11 SET time_zone = "+00:00";
12
13
14 /*!40101 SET @OLD_CHARACTER_SET_CLIENT=@@CHARACTER_SET_CLIENT */;
15 /*!40101 SET @OLD_CHARACTER_SET_RESULTS=@@CHARACTER_SET_RESULTS */;
16 /*!40101 SET @OLD_COLLATION_CONNECTION=@@COLLATION_CONNECTION */;
17 /*!40101 SET NAMES utf8mb4 */;
18
19 --
20 -- Database: `CL2`
21 --
22
23 -----
24
25 --
26 -- Table structure for table `CountryCodes`:
27 --
28
29 CREATE TABLE `CountryCodes` (
30   `Code` varchar(3) DEFAULT NULL,
31   `Country` varchar(100) DEFAULT NULL
32 ) ENGINE=InnoDB DEFAULT CHARSET=latin1;
33
34 --
35 -- Dumping data for table `CountryCodes`
36 --
37
38 INSERT INTO `CountryCodes` (`Code`, `Country`) VALUES
39 ('AFG', 'Afghanistan'),
40 ('AHO', 'Netherlands Antilles'),
41 ('ALB', 'Albania'),
42 ('ALG', 'Algeria'),
43 ('AND', 'Andorra'),
44 ('ANG', 'Angola'),
45 ('ANT', 'Antigua-Barbuda'),
46 ('ARG', 'Argentina'),
47 ('ARM', 'Armenia'),
48 ('ARU', 'Aruba'),
49 ('ASA', 'American Samoa'),
50 ('AUS', 'Australia'),
51 ('AUT', 'Austria'),
52 ('AZE', 'Azerbaijan'),
53 ('BAH', 'Bahamas').

```

The screenshot shows a MySQL terminal window titled 'nick@NICK: ~'. It displays the results of a 'SHOW DATABASES' command, which lists the databases: information_schema, mysql, performance_schema, sys, and tennis. Below this, it shows the results of several 'SET' statements: setting SQL_MODE to 'NO_AUTO_VALUE_ON_ZERO', changing the time zone to '+00:00', and switching to the 'tennis' database. Finally, it shows the creation of the 'CountryCodes' table with two columns: 'Code' and 'Country', and the insertion of 53 rows of data.

```

+-----+
| information_schema |
| mysql |
| performance_schema |
| sys |
| tennis |
+-----+
5 rows in set (0.00 sec)

mysql> use tennis;
Database changed
mysql> SET SQL_MODE = "NO_AUTO_VALUE_ON_ZERO";
Query OK, 0 rows affected (0.01 sec)

mysql> SET time_zone = "+00:00";
Query OK, 0 rows affected (0.01 sec)

mysql> /*!40101 SET @OLD_CHARACTER_SET_CLIENT=@@CHARACTER_SET_CLIENT */;
Query OK, 0 rows affected (0.01 sec)

mysql> /*!40101 SET @OLD_CHARACTER_SET_RESULTS=@@CHARACTER_SET_RESULTS */;
Query OK, 0 rows affected (0.00 sec)

mysql> /*!40101 SET @OLD_COLLATION_CONNECTION=@@COLLATION_CONNECTION */;
Query OK, 0 rows affected (0.00 sec)

mysql> /*!40101 SET NAMES utf8mb4 */;
Query OK, 0 rows affected (0.00 sec)

mysql> 

```

Open



Save



tennis.sql

tennismysql.sql

```

1 -- phpMyAdmin SQL Dump
2 -- version 4.5.4.1deb2ubuntu2
3 -- http://www.phpmyadmin.net
4 --
5 -- Host: localhost
6 -- Generation Time: Apr 10, 2018 at 11:59 AM
7 -- Server version: 5.7.21-0ubuntu0.16.04.1
8 -- PHP Version: 7.0.28-0ubuntu0.16.04.1
9
10 SET SQL_MODE = "NO_AUTO_VALUE_ON_ZERO";
11 SET time_zone = "+00:00";
12
13 /*!40101 SET @OLD_CHARACTER_SET_CLIENT=@@CHARACTER_SET_CLIENT */;
14 /*!40101 SET @OLD_CHARACTER_SET_RESULTS=@@CHARACTER_SET_RESULTS */;
15 /*!40101 SET @OLD_COLLATION_CONNECTION=@@COLLATION_CONNECTION */;
16 /*!40101 SET NAMES utf8mb4 */;
17
18 --
19 -- Database: `CL2`
20
21 --
22
23 -----
24
25 --
26 -- Table structure for table `CountryCodes`
27
28
29 CREATE TABLE `CountryCodes` (
30   `Code` varchar(3) DEFAULT NULL,
31   `Country` varchar(100) DEFAULT NULL
32 ) ENGINE=InnoDB DEFAULT CHARSET=latin1;
33
34 --
35 -- Dumping data for table `CountryCodes`
36
37
38 INSERT INTO `CountryCodes` (`Code`, `Country`) VALUES
39 ('AFG', 'Afghanistan'),
40 ('AHO', 'Netherlands Antilles'),
41 ('ALB', 'Albania'),
42 ('ALG', 'Algeria'),
43 ('AND', 'Andorra'),
44 ('ANG', 'Angola'),
45 ('ANT', 'Antigua-Barbuda'),
46 ('ARG', 'Argentina'),
47 ('ARM', 'Armenia'),
48 ('ARU', 'Aruba'),
49 ('ASA', 'American Samoa'),
50 ('AUS', 'Australia'),
51 ('AUT', 'Austria'),
52 ('AZE', 'Azerbaijan'),
53 ('BAH', 'Bahamas').

```

nick@NICK: ~

```

+-----+
5 rows in set (0.00 sec)

mysql> use tennis;
Database changed
mysql> SET SQL_MODE = "NO_AUTO_VALUE_ON_ZERO";
Query OK, 0 rows affected (0.01 sec)

mysql> SET time_zone = "+00:00";
Query OK, 0 rows affected (0.01 sec)

mysql> /*!40101 SET @OLD_CHARACTER_SET_CLIENT=@@CHARACTER_SET_CLIENT */;
Query OK, 0 rows affected (0.01 sec)

mysql> /*!40101 SET @OLD_CHARACTER_SET_RESULTS=@@CHARACTER_SET_RESULTS */;
Query OK, 0 rows affected (0.00 sec)

mysql> /*!40101 SET @OLD_COLLATION_CONNECTION=@@COLLATION_CONNECTION */;
Query OK, 0 rows affected (0.00 sec)

mysql> /*!40101 SET NAMES utf8mb4 */;
Query OK, 0 rows affected (0.00 sec)

mysql> CREATE TABLE `CountryCodes` (
    ->   `Code` varchar(3) DEFAULT NULL,
    ->   `Country` varchar(100) DEFAULT NULL
    -> ) ENGINE=Innodb DEFAULT CHARSET=latin1;
Query OK, 0 rows affected (0.06 sec)

mysql> 
```

Open



Save



tennis.sql

tennismysql.sql

```
26 -- Table structure for table `CountryCodes`  
27 --  
28  
29 CREATE TABLE `CountryCodes` (  
30   `Code` varchar(3) DEFAULT NULL,  
31   `Country` varchar(100) DEFAULT NULL  
32 ) ENGINE=InnoDB DEFAULT CHARSET=latin1;  
33  
34 --  
35 -- Dumping data for table `CountryCodes`  
36 --  
37  
38 INSERT INTO `CountryCodes` (`Code`, `Country`) VALUES  
39 ('AFG', 'Afghanistan'),  
40 ('AHO', 'Netherlands Antilles'),  
41 ('ALB', 'Albania'),  
42 ('ALG', 'Algeria'),  
43 ('AND', 'Andorra'),  
44 ('ANG', 'Angola'),  
45 ('ANT', 'Antigua-Barbuda'),  
46 ('ARG', 'Argentina'),  
47 ('ARM', 'Armenia'),  
48 ('ARU', 'Aruba'),  
49 ('ASA', 'American Samoa'),  
50 ('AUS', 'Australia'),  
51 ('AUT', 'Austria'),  
52 ('AZE', 'Azerbaijan'),  
53 ('BAH', 'Bahamas'),  
54 ('BAN', 'Bangladesh'),  
55 ('BAR', 'Barbados'),  
56 ('BDI', 'Burundi'),  
57 ('BEL', 'Belgium'),  
58 ('BEN', 'Benin'),  
59 ('BER', 'Bermuda'),  
60 ('BHU', 'Bhutan'),  
61 ('BIH', 'Bosnia and Herzegovina'),  
62 ('BIZ', 'Belize'),  
63 ('BLR', 'Belarus'),  
64 ('BOL', 'Bolivia'),  
65 ('BOT', 'Botswana'),  
66 ('BRA', 'Brazil'),  
67 ('BRN', 'Bahrain'),  
68 ('BRU', 'Brunei Darussalam'),  
69 ('BUL', 'Bulgaria'),  
70 ('BUR', 'Burkina Faso'),  
71 ('CAF', 'Central African Republic'),  
72 ('CAM', 'Cambodia'),  
73 ('CAN', 'Canada'),  
74 ('CAY', 'Cayman Islands'),  
75 ('CGO', 'Congo'),  
76 ('CHA', 'Chad'),  
77 ('CHI', 'Chile'),
```

```
nick@NICK: ~  
Query OK, 0 rows affected (0.00 sec)  
  
mysql> CREATE TABLE `CountryCodes` (  
->   `Code` varchar(3) DEFAULT NULL,  
->   `Country` varchar(100) DEFAULT NULL  
-> ) ENGINE=InnoDB DEFAULT CHARSET=latin1;  
Query OK, 0 rows affected (0.06 sec)  
  
mysql> INSERT INTO `CountryCodes` (`Code`, `Country`) VALUES  
-> ('AFG', 'Afghanistan'),  
-> ('AHO', 'Netherlands Antilles'),  
-> ('ALB', 'Albania'),  
-> ('ALG', 'Algeria'),  
-> ('AND', 'Andorra'),  
-> ('ANG', 'Angola'),  
-> ('ANT', 'Antigua-Barbuda'),  
-> ('ARG', 'Argentina'),  
-> ('ARM', 'Armenia'),  
-> ('ARU', 'Aruba'),  
-> ('ASA', 'American Samoa'),  
-> ('AUS', 'Australia'),  
-> ('AUT', 'Austria'),  
-> ('AZE', 'Azerbaijan'),  
-> ('BAH', 'Bahamas'),  
-> ('BAN', 'Bangladesh'),  
-> ('BAR', 'Barbados'),  
-> ('BDI', 'Burundi'),  
-> ('BEL', 'Belgium'),  
-> ('BEN', 'Benin'),  
-> ('BER', 'Bermuda'),
```

Open ▾

+

Save

☰

-

□

X

26 -- Table structure for table `CountryCodes`
27 --
28
29 CREATE TABLE `CountryCodes` (
30 `Code` varchar(3) DEFAULT NULL,
31 `Country` varchar(100) DEFAULT NULL
32) ENGINE=InnoDB DEFAULT CHARSET=latin1;
33
34 --
35 -- Dumping data for table `CountryCodes`
36 --
37
38 INSERT INTO `CountryCodes` (`Code`, `Country`) VALUES
39 ('AFG', 'Afghanistan'),
40 ('AHO', 'Netherlands Antilles'),
41 ('ALB', 'Albania'),
42 ('ALG', 'Algeria'),
43 ('AND', 'Andorra'),
44 ('ANG', 'Angola'),
45 ('ANT', 'Antigua-Barbuda'),
46 ('ARG', 'Argentina'),
47 ('ARM', 'Armenia'),
48 ('ARU', 'Aruba'),
49 ('ASA', 'American Samoa'),
50 ('AUS', 'Australia'),
51 ('AUT', 'Austria'),
52 ('AZE', 'Azerbaijan'),
53 ('BAH', 'Bahamas'),
54 ('BAN', 'Bangladesh'),
55 ('BAR', 'Barbados'),
56 ('BDI', 'Burundi'),
57 ('BEL', 'Belgium'),
58 ('BEN', 'Benin'),
59 ('BER', 'Bermuda'),
60 ('BHU', 'Bhutan'),
61 ('BIH', 'Bosnia and Herzegovina'),
62 ('BIZ', 'Belize'),
63 ('BLR', 'Belarus'),
64 ('BOL', 'Bolivia'),
65 ('BOT', 'Botswana'),
66 ('BRA', 'Brazil'),
67 ('BRN', 'Bahrain'),
68 ('BRU', 'Brunei Darussalam'),
69 ('BUL', 'Bulgaria'),
70 ('BUR', 'Burkina Faso'),
71 ('CAF', 'Central African Republic'),
72 ('CAM', 'Cambodia'),
73 ('CAN', 'Canada'),
74 ('CAY', 'Cayman Islands'),
75 ('CGO', 'Congo'),
76 ('CHA', 'Chad'),
77 ('CHI', 'Chile'),

nick@NICK: ~

```
-> ('TGA', 'Tonga'),
-> ('THA', 'Thailand'),
-> ('TJK', 'Tajikistan'),
-> ('TKM', 'Turkmenistan'),
-> ('TKS', 'Turks and Caicos Islands'),
-> ('TLS', 'Timor-Leste'),
-> ('TOG', 'Togo'),
-> ('TPE', 'Chinese Taipei'),
-> ('TRI', 'Trinidad-Tobago'),
-> ('TUN', 'Tunisia'),
-> ('TUR', 'Turkey'),
-> ('TUV', 'Tuvalu'),
-> ('UAE', 'United Arab Emirates'),
-> ('UGA', 'Uganda'),
-> ('UKR', 'Ukraine'),
-> ('URU', 'Uruguay'),
-> ('USA', 'United States'),
-> ('UZB', 'Uzbekistan'),
-> ('VAN', 'Vanuatu'),
-> ('VEN', 'Venezuela'),
-> ('VIE', 'Vietnam'),
-> ('VIN', 'Saint Vincent and the Grenadines'),
-> ('YEM', 'Yemen'),
-> ('YUG', 'Yugoslavia'),
-> ('ZAI', 'Zaire'),
-> ('ZAM', 'Zambia'),
-> ('ZIM', 'Zimbabwe');

Query OK, 212 rows affected (0.02 sec)
Records: 212  Duplicates: 0  Warnings: 0
```

Open



Save



tennis.sql

tennismysql.sql

```

244 ('VIE', 'Vietnam'),
245 ('VIN', 'Saint Vincent and the Grenadines'),
246 ('YEM', 'Yemen'),
247 ('YUG', 'Yugoslavia'),
248 ('ZAI', 'Zaire'),
249 ('ZAM', 'Zambia'),
250 ('ZIM', 'Zimbabwe');
251 --
252 -- -----
253 --
254 --
255 -- Table structure for table `Matches`
256 --
257
258 CREATE TABLE `Matches` (
259   `MID` int(11) DEFAULT NULL,
260   `TID` int(11) DEFAULT NULL,
261   `Round` int(11) DEFAULT NULL,
262   `RegistrNum1` int(11) DEFAULT NULL,
263   `RegistrNum2` int(11) DEFAULT NULL
264 ) ENGINE=InnoDB DEFAULT CHARSET=latin1;
265
266 --
267 -- Dumping data for table `Matches`
268 --
269
270 INSERT INTO `Matches` (`MID`, `TID`, `Round`, `RegistrNum1`, `RegistrNum2`)
271 (0, 0, 1, 0, 1),
272 (1, 0, 1, 2, 3),
273 (10, 0, 1, 20, 21),
274 (100, 0, 3, 32, 36),
275 (101, 0, 3, 46, 40),
276 (102, 0, 3, 48, 54),
277 (103, 0, 3, 62, 56),
278 (104, 0, 3, 64, 70),
279 (105, 0, 3, 78, 72),
280 (106, 0, 3, 80, 86),
281 (107, 0, 3, 94, 90),
282 (108, 0, 3, 96, 102),
283 (109, 0, 3, 110, 104),
284 (11, 0, 1, 22, 23),
285 (110, 0, 3, 112, 116),
286 (111, 0, 3, 126, 120),
287 (112, 0, 4, 0, 14),
288 (113, 0, 4, 30, 22),
289 (114, 0, 4, 32, 46),
290 (115, 0, 4, 62, 48),
291 (116, 0, 4, 78, 64),
292 (117, 0, 4, 94, 80),
293 (118, 0, 4, 110, 96),
294 (119, 0, 4, 126, 112),
295 (12, 0, 1, 24, 25),
296 (120, 0, 5, 0, 30),

```

nick@NICK: ~

```

-> ('TUR', 'Turkey'),
-> ('TUV', 'Tuvalu'),
-> ('UAE', 'United Arab Emirates'),
-> ('UGA', 'Uganda'),
-> ('UKR', 'Ukraine'),
-> ('URU', 'Uruguay'),
-> ('USA', 'United States'),
-> ('UZB', 'Uzbekistan'),
-> ('VAN', 'Vanuatu'),
-> ('VEN', 'Venezuela'),
-> ('VIE', 'Vietnam'),
-> ('VIN', 'Saint Vincent and the Grenadines'),
-> ('YEM', 'Yemen'),
-> ('YUG', 'Yugoslavia'),
-> ('ZAI', 'Zaire'),
-> ('ZAM', 'Zambia'),
-> ('ZIM', 'Zimbabwe');

Query OK, 212 rows affected (0.02 sec)
Records: 212  Duplicates: 0  Warnings: 0

mysql> CREATE TABLE `Matches` (
->   `MID` int(11) DEFAULT NULL,
->   `TID` int(11) DEFAULT NULL,
->   `Round` int(11) DEFAULT NULL,
->   `RegistrNum1` int(11) DEFAULT NULL,
->   `RegistrNum2` int(11) DEFAULT NULL
-> ) ENGINE=InnoDB DEFAULT CHARSET=latin1;
Query OK, 0 rows affected, 5 warnings (0.04 sec)

mysql> 
```

Open Save

tennis.sql tennismysql.sql
~/Downloads/MTech TA Lab

tennis.sql tennismysql.sql

255 -- Table structure for table `Matches`
256 --
257
258 CREATE TABLE `Matches` (
259 `MID` int(11) DEFAULT NULL,
260 `TID` int(11) DEFAULT NULL,
261 `Round` int(11) DEFAULT NULL,
262 `RegistrNum1` int(11) DEFAULT NULL,
263 `RegistrNum2` int(11) DEFAULT NULL
264) ENGINE=InnoDB DEFAULT CHARSET=latin1;
265 --
266 -- Dumping data for table `Matches`
267 --
268 --
269
270 INSERT INTO `Matches` (`MID`, `TID`, `Round`, `RegistrNum1`, `RegistrNum2`)
271 (0, 0, 1, 0, 1),
272 (1, 0, 1, 2, 3),
273 (10, 0, 1, 20, 21),
274 (100, 0, 3, 32, 36),
275 (101, 0, 3, 46, 40),
276 (102, 0, 3, 48, 54),
277 (103, 0, 3, 62, 56),
278 (104, 0, 3, 64, 70),
279 (105, 0, 3, 78, 72),
280 (106, 0, 3, 80, 86),
281 (107, 0, 3, 94, 90),
282 (108, 0, 3, 96, 102),
283 (109, 0, 3, 110, 104),
284 (11, 0, 1, 22, 23),
285 (110, 0, 3, 112, 116),
286 (111, 0, 3, 126, 120),
287 (112, 0, 4, 0, 14),
288 (113, 0, 4, 30, 22),
289 (114, 0, 4, 32, 46),
290 (115, 0, 4, 62, 48),
291 (116, 0, 4, 78, 64),
292 (117, 0, 4, 94, 80),
293 (118, 0, 4, 110, 96),
294 (119, 0, 4, 126, 112),
295 (12, 0, 1, 24, 25),
296 (120, 0, 5, 0, 30),
297 (121, 0, 5, 62, 32),
298 (122, 0, 5, 78, 94),
299 (123, 0, 5, 110, 126),
300 (124, 0, 6, 0, 62),
301 (125, 0, 6, 110, 78),
302 (126, 0, 7, 0, 110),
303 (127, 1, 1, 128, 129),
304 (128, 1, 1, 130, 131),
305 (129, 1, 1, 132, 133),
306 (13, 0, 1, 26, 27),

nick@NICK: ~

-> ('ZAM', 'Zambia'),
-> ('ZIM', 'Zimbabwe');
Query OK, 212 rows affected (0.02 sec)
Records: 212 Duplicates: 0 Warnings: 0

mysql> CREATE TABLE `Matches` (
-> `MID` int(11) DEFAULT NULL,
-> `TID` int(11) DEFAULT NULL,
-> `Round` int(11) DEFAULT NULL,
-> `RegistrNum1` int(11) DEFAULT NULL,
-> `RegistrNum2` int(11) DEFAULT NULL
->) ENGINE=InnoDB DEFAULT CHARSET=latin1;
Query OK, 0 rows affected, 5 warnings (0.04 sec)

mysql> INSERT INTO `Matches` (`MID`, `TID`, `Round`, `RegistrNum1`, `RegistrNum2`) VALUES
-> (0, 0, 1, 0, 1),
-> (1, 0, 1, 2, 3),
-> (10, 0, 1, 20, 21),
-> (100, 0, 3, 32, 36),
-> (101, 0, 3, 46, 40),
-> (102, 0, 3, 48, 54),
-> (103, 0, 3, 62, 56),
-> (104, 0, 3, 64, 70),
-> (105, 0, 3, 78, 72),
-> (106, 0, 3, 80, 86),
-> (107, 0, 3, 94, 90),
-> (108, 0, 3, 96, 102),
, -> (109, 0, 3, 110, 104),
-> (11, 0, 1, 22, 23),
-> (110, 0, 3, 112, 116),

Open ▾ + Save ⌂ ⌄ ⌅ ⌆ ⌇ ⌈ ⌉ ⌋

tennismysql.sql
~/Downloads/MTech TA Lab

tennis.sql

tennismysql.sql

```
1206 (940, 15, 2, 957, 959),  
1207 (941, 15, 3, 949, 947),  
1208 (942, 15, 3, 955, 957),  
1209 (943, 15, 4, 949, 955),  
1210 (95, 0, 2, 126, 124),  
1211 (96, 0, 3, 0, 6),  
1212 (97, 0, 3, 14, 10),  
1213 (98, 0, 3, 22, 18),  
1214 (99, 0, 3, 30, 24);  
1215  
1216 -- -----  
1217  
1218 --  
1219 -- Table structure for table `MatchResults`  
1220 --  
1221  
1222 CREATE TABLE `MatchResults` (  
1223   `MID` int(11) DEFAULT NULL,  
1224   `Winner` int(11) DEFAULT NULL,  
1225   `NumSets` int(11) DEFAULT NULL  
1226 ) ENGINE=InnoDB DEFAULT CHARSET=latin1;  
1227  
1228 --  
1229 -- Dumping data for table `MatchResults`  
1230 --  
1231  
1232 INSERT INTO `MatchResults` (`MID`, `Winner`, `NumSets`) VALUES  
1233 (0, 0, 3),  
1234 (1, 2, 5),  
1235 (10, 20, 3),  
1236 (100, 32, 1),  
1237 (101, 46, 5),  
1238 (102, 48, 3),  
1239 (103, 62, 4),  
1240 (104, 64, 5),  
1241 (105, 78, 3),  
1242 (106, 80, 3),  
1243 (107, 94, 3),  
1244 (108, 96, 3),  
1245 (109, 110, 4),  
1246 (11, 22, 3),  
1247 (110, 112, 3),  
1248 (111, 126, 3),  
1249 (112, 0, 3),  
1250 (113, 30, 4),  
1251 (114, 32, 4),  
1252 (115, 62, 5),  
1253 (116, 78, 4),  
1254 (117, 94, 4),  
1255 (118, 110, 3),  
1256 (119, 126, 5),  
1257 (12, 24, 4),  
1258 (13, 0, 3)
```

nick@NICK: ~

```
-> (943, 15, 4, 949, 955),  
-> (95, 0, 2, 126, 124),  
-> (96, 0, 3, 0, 6),  
-> (97, 0, 3, 14, 10),  
-> (98, 0, 3, 22, 18),  
-> (99, 0, 3, 30, 24);  
Query OK, 944 rows affected (0.05 sec)  
Records: 944 Duplicates: 0 Warnings: 0  
  
mysql> CREATE TABLE `MatchResults` (  
->   `MID` int(11) DEFAULT NULL,  
->   `Winner` int(11) DEFAULT NULL,  
->   `NumSets` int(11) DEFAULT NULL  
-> ) ENGINE=InnoDB DEFAULT CHARSET=latin1;  
Query OK, 0 rows affected, 3 warnings (0.05 sec)  
  
mysql> INSERT INTO `MatchResults` (`MID`, `Winner`, `NumSets`) VALUES  
-> (0, 0, 3),  
-> (1, 2, 5),  
-> (10, 20, 3),  
-> (100, 32, 1),  
-> (101, 46, 5),  
-> (102, 48, 3),  
-> (103, 62, 4),  
-> (104, 64, 5),  
-> (105, 78, 3),  
-> (106, 80, 3),  
-> (107, 94, 3),  
-> (108, 96, 3),  
-> (109, 110, 4),  
-> (11, 22, 3),  
-> (110, 112, 3),  
-> (111, 126, 3),  
-> (112, 0, 3),  
-> (113, 30, 4),  
-> (114, 32, 4),  
-> (115, 62, 5),  
-> (116, 78, 4),  
-> (117, 94, 4),  
-> (118, 110, 3),  
-> (119, 126, 5),  
-> (12, 24, 4),  
-> (13, 0, 3)
```

SQL ▾ Tab Width: 8 ▾ Ln 2176, Col 13 ▾ INS

The screenshot shows a terminal window titled "tennismysql.sql" with the path "~/Downloads/MTech TA Lab". The window contains the following text:

```
nick@NICK: ~
-> (925, 943, 2),
-> (926, 917, 2),
-> (927, 935, 2),
-> (928, 917, 3),
-> (929, 945, 3),
-> (93, 116, 4),
-> (930, 947, 2),
-> (931, 949, 2),
-> (932, 951, 2),
-> (933, 953, 3),
-> (934, 955, 3),
-> (935, 957, 3),
-> (936, 959, 2),
-> (937, 947, 2),
-> (938, 949, 3),
-> (939, 955, 2),
-> (94, 120, 3),
-> (940, 957, 3),
-> (941, 949, 3),
-> (942, 955, 2),
-> (943, 949, 2),
-> (95, 126, 4),
-> (96, 0, 3),
-> (97, 14, 4),
-> (98, 22, 4),
-> (99, 30, 4);
Query OK, 944 rows affected (0.04 sec)
Records: 944  Duplicates: 0  Warnings: 0
mysql>
```

The screenshot shows a terminal window titled "tennismysql.sql" with the command "nick@NICK: ~". The terminal displays the following MySQL session:

```
-> (931, 949, 2),
-> (932, 951, 2),
-> (933, 953, 3),
-> (934, 955, 3),
-> (935, 957, 3),
-> (936, 959, 2),
-> (937, 947, 2),
-> (938, 949, 3),
-> (939, 955, 2),
-> (94, 120, 3),
-> (940, 957, 3),
-> (941, 949, 3),
-> (942, 955, 2),
-> (943, 949, 2),
-> (95, 126, 4),
-> (96, 0, 3),
-> (97, 14, 4),
-> (98, 22, 4),
-> (99, 30, 4);

Query OK, 944 rows affected (0.04 sec)
Records: 944  Duplicates: 0  Warnings: 0

mysql> CREATE TABLE `PlayedIn` (
->   `TID` int(11) DEFAULT NULL,
->   `RegistrNum` int(11) DEFAULT NULL,
->   `Seed` int(11) DEFAULT NULL
-> ) ENGINE=InnoDB DEFAULT CHARSET=latin1;
Query OK, 0 rows affected, 3 warnings (0.06 sec)

mysql> 
```

Below the terminal, a code editor window titled "tennis.sql" is open, showing the SQL script used to generate the data. The "PlayedIn" table creation and its data insertion are highlighted with a red background.

```
2172 (95, 126, 4),
2173 (96, 0, 3),
2174 (97, 14, 4),
2175 (98, 22, 4),
2176 (99, 30, 4);
2177
2178 -- -----
2179
2180 --
2181 -- Table structure for table `PlayedIn`
2182 --
2183
2184 CREATE TABLE `PlayedIn` (
2185   `TID` int(11) DEFAULT NULL,
2186   `RegistrNum` int(11) DEFAULT NULL,
2187   `Seed` int(11) DEFAULT NULL
2188 ) ENGINE=InnoDB DEFAULT CHARSET=latin1;
2189
2190 --
2191 -- Dumping data for table `PlayedIn`
2192 --
2193
2194 INSERT INTO `PlayedIn` (`TID`, `RegistrNum`, `Seed`) VALUES
2195 (0, 0, 1),
2196 (0, 1, NULL),
2197 (0, 10, NULL),
2198 (0, 100, NULL),
2199 (0, 101, NULL),
2200 (0, 102, NULL),
2201 (0, 103, 32),
2202 (0, 104, 19),
2203 (0, 105, NULL),
2204 (0, 106, NULL),
2205 (0, 107, NULL),
2206 (0, 108, NULL),
2207 (0, 109, NULL),
2208 (0, 11, NULL),
2209 (0, 110, 10),
2210 (0, 111, NULL),
2211 (0, 112, 15),
2212 (0, 113, NULL),
2213 (0, 114, NULL),
2214 (0, 115, NULL),
2215 (0, 116, NULL),
2216 (0, 117, NULL),
2217 (0, 118, 17),
2218 (0, 119, NULL),
2219 (0, 12, NULL),
2220 (0, 120, 31),
2221 (0, 121, NULL),
2222 (0, 122, NULL),
2223 (0, 123, NULL),
2224 (0, 124, NULL)
```

Open



Save



tennis.sql

```

2174 (97, 14, 4),
2175 (98, 22, 4),
2176 (99, 30, 4);
2177
2178 -- -----
2179
2180 --
2181 -- Table structure for table `PlayedIn`:
2182 --
2183
2184 CREATE TABLE `PlayedIn` (
2185   `TID` int(11) DEFAULT NULL,
2186   `RegistrNum` int(11) DEFAULT NULL,
2187   `Seed` int(11) DEFAULT NULL
2188 ) ENGINE=InnoDB DEFAULT CHARSET=latin1;
2189
2190 --
2191 -- Dumping data for table `PlayedIn`
2192 --
2193
2194 INSERT INTO `PlayedIn`(`TID`, `RegistrNum`, `Seed`) VALUES
2195 (0, 0, 1),
2196 (0, 1, NULL),
2197 (0, 10, NULL),
2198 (0, 100, NULL),
2199 (0, 101, NULL),
2200 (0, 102, NULL),
2201 (0, 103, 32),
2202 (0, 104, 19),
2203 (0, 105, NULL),
2204 (0, 106, NULL),
2205 (0, 107, NULL),
2206 (0, 108, NULL),
2207 (0, 109, NULL),
2208 (0, 11, NULL),
2209 (0, 110, 10),
2210 (0, 111, NULL),
2211 (0, 112, 15),
2212 (0, 113, NULL),
2213 (0, 114, NULL),
2214 (0, 115, NULL),
2215 (0, 116, NULL),
2216 (0, 117, NULL),
2217 (0, 118, 17),
2218 (0, 119, NULL),
2219 (0, 12, NULL),
2220 (0, 120, 31),
2221 (0, 121, NULL),
2222 (0, 122, NULL),
2223 (0, 123, NULL),
2224 (0, 124, NULL),
2225 (0, 125, NULL),
2226 (0, 126, 2)

```

nick@NICK: ~

```

-> (97, 14, 4),
-> (98, 22, 4),
-> (99, 30, 4);
Query OK, 944 rows affected (0.04 sec)
Records: 944 Duplicates: 0 Warnings: 0

mysql> CREATE TABLE `PlayedIn` (
->   `TID` int(11) DEFAULT NULL,
->   `RegistrNum` int(11) DEFAULT NULL,
->   `Seed` int(11) DEFAULT NULL
-> ) ENGINE=InnoDB DEFAULT CHARSET=latin1;
Query OK, 0 rows affected, 3 warnings (0.06 sec)

mysql> INSERT INTO `PlayedIn`(`TID`, `RegistrNum`, `Seed`) VALUES
-> (0, 0, 1),
-> (0, 1, NULL),
-> (0, 10, NULL),
-> (0, 100, NULL),
-> (0, 101, NULL),
(1  -> (0, 102, NULL),
-> (0, 103, 32),
-> (0, 104, 19),
-> (0, 105, NULL),
-> (0, 106, NULL),
L  -> (0, 107, NULL),
-> (0, 108, NULL),
-> (0, 109, NULL),
-> (0, 11, NULL),
-> (0, 110, 10),
-> (0, 111, NULL),
-> (0, 112, 15),
-> (0, 113, NULL),
-> (0, 114, NULL),
-> (0, 115, NULL),
-> (0, 116, NULL),
-> (0, 117, NULL),
-> (0, 118, 17),
-> (0, 119, NULL),
-> (0, 12, NULL),
-> (0, 120, 31),
-> (0, 121, NULL),
-> (0, 122, NULL),
-> (0, 123, NULL),
-> (0, 124, NULL),
-> (0, 125, NULL),
-> (0, 126, 2)

```

Open ▾ Save

tennis.sql tennismysql.sql

~Downloads/MTech TA Lab

nick@NICK: ~

SQL ▾ Tab Width: 8 ▾ Ln 3156, Col 1 ▾ INS

```
2174 (97, 14, 4),
2175 (98, 22, 4),
2176 (99, 30, 4);
2177
2178 -- -----
2179
2180 --
2181 -- Table structure for table `PlayedIn`
2182 --
2183
2184 CREATE TABLE `PlayedIn` (
2185   `TID` int(11) DEFAULT NULL,
2186   `RegistrNum` int(11) DEFAULT NULL,
2187   `Seed` int(11) DEFAULT NULL
2188 ) ENGINE=InnoDB DEFAULT CHARSET=latin1;
2189
2190 --
2191 -- Dumping data for table `PlayedIn`
2192 --
2193
2194 INSERT INTO `PlayedIn` (`TID`, `RegistrNum`, `Seed`) VALUES
2195 (0, 0, 1),
2196 (0, 1, NULL),
2197 (0, 10, NULL),
2198 (0, 100, NULL),
2199 (0, 101, NULL),
2200 (0, 102, NULL),
2201 (0, 103, 32),
2202 (0, 104, 19),
2203 (0, 105, NULL),
2204 (0, 106, NULL),
2205 (0, 107, NULL),
2206 (0, 108, NULL),
2207 (0, 109, NULL),
2208 (0, 11, NULL),
2209 (0, 110, 10),
2210 (0, 111, NULL),
2211 (0, 112, 15),
2212 (0, 113, NULL),
2213 (0, 114, NULL),
2214 (0, 115, NULL),
2215 (0, 116, NULL),
2216 (0, 117, NULL),
2217 (0, 118, 17),
2218 (0, 119, NULL),
2219 (0, 12, NULL),
2220 (0, 120, 31),
2221 (0, 121, NULL),
2222 (0, 122, NULL),
2223 (0, 123, NULL),
2224 (0, 124, NULL),
2225 (0, 125, NULL),
2226 (0, 126, 2)
```

```
-> (8, 791, NULL),
-> (8, 792, NULL),
-> (8, 793, 6),
-> (8, 794, NULL),
-> (8, 795, NULL),
-> (8, 796, NULL),
-> (8, 797, NULL),
-> (8, 798, 2),
-> (8, 799, NULL),
-> (9, 800, 1),
-> (9, 801, NULL),
-> (9, 802, NULL),
-> (9, 803, NULL),
-> (9, 804, NULL),
-> (9, 805, 4),
-> (9, 806, NULL),
-> (9, 807, NULL),
-> (9, 808, NULL),
-> (9, 809, NULL),
-> (9, 810, NULL),
-> (9, 811, 3),
-> (9, 812, NULL),
-> (9, 813, NULL),
-> (9, 814, NULL),
-> (9, 815, 2),
-> (9, 816, NULL);

Query OK, 961 rows affected (0.03 sec)
Records: 961  Duplicates: 0  Warnings: 0
```

mysql>

Open



Save



tennis.sql

tennismysql.sql

```

3140 (9, 801, NULL),
3141 (9, 802, NULL),
3142 (9, 803, NULL),
3143 (9, 804, NULL),
3144 (9, 805, 4),
3145 (9, 806, NULL),
3146 (9, 807, NULL),
3147 (9, 808, NULL),
3148 (9, 809, NULL),
3149 (9, 810, NULL),
3150 (9, 811, 3),
3151 (9, 812, NULL),
3152 (9, 813, NULL),
3153 (9, 814, NULL),
3154 (9, 815, 2),
3155 (9, 816, NULL);
3156
3157 -- -----
3158
3159 --
3160 -- Table structure for table `Player`
3161 --
3162
3163 CREATE TABLE `Player` (
3164   `PID` int(11) DEFAULT NULL,
3165   `Name` varchar(30) DEFAULT NULL,
3166   `Gender` char(1) DEFAULT NULL,
3167   `CCode` varchar(3) DEFAULT NULL
3168 ) ENGINE=InnoDB DEFAULT CHARSET=latin1;
3169
3170 --
3171 -- Dumping data for table `Player`
3172 --
3173
3174 INSERT INTO `Player` (`PID`, `Name`, `Gender`, `CCode`) VALUES
3175 (0, 'Roger Federer', 'M', 'SUI'),
3176 (1, 'Rafael Nadal', 'M', 'ESP'),
3177 (10, 'Marcos Baghdatis', 'M', 'CYP'),
3178 (100, 'Igor Kunitsyn', 'M', 'RUS'),
3179 (101, 'Gilles Muller', 'M', 'LUX'),
3180 (102, 'Gaston Gaudio', 'M', 'ARG'),
3181 (103, 'Sergio Roitman', 'M', 'ARG'),
3182 (104, 'Carlos Moya', 'M', 'ESP'),
3183 (105, 'Alex Kuznetsov', 'M', 'USA'),
3184 (106, 'Peter Luczak', 'M', 'AUS'),
3185 (107, 'Michael Zverev', 'M', 'GER'),
3186 (108, 'Michael Berrer', 'M', 'GER'),
3187 (109, 'Robby Ginepri', 'M', 'USA'),
3188 (11, 'Tommy Haas', 'M', 'GER'),
3189 (110, 'Michael Russell', 'M', 'USA'),
3190 (111, 'Frank Dancevic', 'M', 'CAN'),
3191 (112, 'Victor Hanescu', 'M', 'ROU'),

```

nick@NICK: ~

```

-> (8, 799, NULL),
-> (9, 800, 1),
-> (9, 801, NULL),
-> (9, 802, NULL),
-> (9, 803, NULL),
-> (9, 804, NULL),
-> (9, 805, 4),
-> (9, 806, NULL),
-> (9, 807, NULL),
-> (9, 808, NULL),
-> (9, 809, NULL),
-> (9, 810, NULL),
-> (9, 811, 3),
-> (9, 812, NULL),
-> (9, 813, NULL),
-> (9, 814, NULL),
-> (9, 815, 2),
-> (9, 816, NULL);

Query OK, 961 rows affected (0.03 sec)
Records: 961 Duplicates: 0 Warnings: 0

mysql> CREATE TABLE `Player` (
->   `PID` int(11) DEFAULT NULL,
->   `Name` varchar(30) DEFAULT NULL,
->   `Gender` char(1) DEFAULT NULL,
->   `CCode` varchar(3) DEFAULT NULL
-> ) ENGINE=InnoDB DEFAULT CHARSET=latin1;
Query OK, 0 rows affected, 1 warning (0.05 sec)

mysql> 

```

Open



Save



tennis.sql

tennismysql.sql

```

3157 --
3158 --
3159 -- Table structure for table `Player`
3160 --
3161 --
3162 
3163 CREATE TABLE `Player` (
3164   `PID` int(11) DEFAULT NULL,
3165   `Name` varchar(30) DEFAULT NULL,
3166   `Gender` char(1) DEFAULT NULL,
3167   `CCode` varchar(3) DEFAULT NULL
3168 ) ENGINE=InnoDB DEFAULT CHARSET=latin1;
3169 --
3170 --
3171 -- Dumping data for table `Player`
3172 --
3173 
3174 INSERT INTO `Player` (`PID`, `Name`, `Gender`, `CCode`) VALUES
3175 (0, 'Roger Federer', 'M', 'SUI'),
3176 (1, 'Rafael Nadal', 'M', 'ESP'),
3177 (10, 'Marcos Baghdatis', 'M', 'CYP'),
3178 (100, 'Igor Kunitsyn', 'M', 'RUS'),
3179 (101, 'Gilles Muller', 'M', 'LUX'),
3180 (102, 'Gaston Gaudio', 'M', 'ARG'),
3181 (103, 'Sergio Roitman', 'M', 'ARG'),
3182 (104, 'Carlos Moya', 'M', 'ESP'),
3183 (105, 'Alex Kuznetsov', 'M', 'USA'),
3184 (106, 'Peter Luczak', 'M', 'AUS'),
3185 (107, 'Michael Zverev', 'M', 'GER'),
3186 (108, 'Michael Berrer', 'M', 'GER'),
3187 (109, 'Robby Ginepri', 'M', 'USA'),
3188 (11, 'Tommy Haas', 'M', 'GER'),
3189 (110, 'Michael Russell', 'M', 'USA'),
3190 (111, 'Frank Dancevic', 'M', 'CAN'),
3191 (112, 'Victor Hanescu', 'M', 'ROU'),
3192 (113, 'Juan Martin del Potro', 'M', 'ARG'),
3193 (114, 'Alessio di Mauro', 'M', 'ITA'),
3194 (115, 'Evgeni Korolev', 'M', 'RUS'),
3195 (116, 'Alberto Martin', 'M', 'ESP'),
3196 (117, 'Fernando Verdasco', 'M', 'ESP'),
3197 (118, 'Paul-Henri Mathieu', 'M', 'FRA'),
3198 (119, 'Juan Ignacio Chela', 'M', 'ARG'),
3199 (12, 'Tomas Berdych', 'M', 'CZE'),
3200 (120, 'Potito Starace', 'M', 'ITA'),
3201 (121, 'Paul Goldstein', 'M', 'USA'),
3202 (122, 'Kevin Kim', 'M', 'USA'),
3203 (123, 'Paul Capdeville', 'M', 'CHI'),
3204 (124, 'Julien Benneteau', 'M', 'FRA'),
3205 (125, 'Philipp Kohlschreiber', 'M', 'GER'),
3206 (126, 'Kristof Vliegen', 'M', 'BEL'),
3207 (127, 'Robert Kendrick', 'M', 'USA'),
3208 (128, 'Bob Bryan', 'M', 'USA'),

```

nick@NICK: ~

```

-> (9, 810, NULL),
-> (9, 811, 3),
-> (9, 812, NULL),
-> (9, 813, NULL),
-> (9, 814, NULL),
-> (9, 815, 2),
-> (9, 816, NULL);
Query OK, 961 rows affected (0.03 sec)
Records: 961 Duplicates: 0 Warnings: 0

mysql> CREATE TABLE `Player` (
->   `PID` int(11) DEFAULT NULL,
->   `Name` varchar(30) DEFAULT NULL,
->   `Gender` char(1) DEFAULT NULL,
->   `CCode` varchar(3) DEFAULT NULL
-> ) ENGINE=InnoDB DEFAULT CHARSET=latin1;
Query OK, 0 rows affected, 1 warning (0.05 sec)

mysql> INSERT INTO `Player` (`PID`, `Name`, `Gender`, `CCode`) VALUES
-> (0, 'Roger Federer', 'M', 'SUI'),
-> (1, 'Rafael Nadal', 'M', 'ESP'),
-> (10, 'Marcos Baghdatis', 'M', 'CYP'),
-> (100, 'Igor Kunitsyn', 'M', 'RUS'),
-> (101, 'Gilles Muller', 'M', 'LUX'),
-> (102, 'Gaston Gaudio', 'M', 'ARG'),
-> (103, 'Sergio Roitman', 'M', 'ARG'),
-> (104, 'Carlos Moya', 'M', 'ESP'),
-> (105, 'Alex Kuznetsov', 'M', 'USA'),
-> (106, 'Peter Luczak', 'M', 'AUS'),
-> (107, 'Michael Zverev', 'M', 'GER'),
-> (108, 'Michael Berrer', 'M', 'GER'),
-> (109, 'Robby Ginepri', 'M', 'USA'),
-> (11, 'Tommy Haas', 'M', 'GER'),
-> (110, 'Michael Russell', 'M', 'USA'),
-> (111, 'Frank Dancevic', 'M', 'CAN'),
-> (112, 'Victor Hanescu', 'M', 'ROU'),
-> (113, 'Juan Martin del Potro', 'M', 'ARG'),
-> (114, 'Alessio di Mauro', 'M', 'ITA'),
-> (115, 'Evgeni Korolev', 'M', 'RUS'),
-> (116, 'Alberto Martin', 'M', 'ESP'),
-> (117, 'Fernando Verdasco', 'M', 'ESP'),
-> (118, 'Paul-Henri Mathieu', 'M', 'FRA'),
-> (119, 'Juan Ignacio Chela', 'M', 'ARG'),
-> (12, 'Tomas Berdych', 'M', 'CZE'),
-> (120, 'Potito Starace', 'M', 'ITA'),
-> (121, 'Paul Goldstein', 'M', 'USA'),
-> (122, 'Kevin Kim', 'M', 'USA'),
-> (123, 'Paul Capdeville', 'M', 'CHI'),
-> (124, 'Julien Benneteau', 'M', 'FRA'),
-> (125, 'Philipp Kohlschreiber', 'M', 'GER'),
-> (126, 'Kristof Vliegen', 'M', 'BEL'),
-> (127, 'Robert Kendrick', 'M', 'USA'),
-> (128, 'Bob Bryan', 'M', 'USA'),

```

Open



Save



tennis.sql

tennismysql.sql

```

3157 --
3158 --
3159 -- Table structure for table `Player`
3160 --
3161 --
3162 CREATE TABLE `Player` (
3163   `PID` int(11) DEFAULT NULL,
3164   `Name` varchar(30) DEFAULT NULL,
3165   `Gender` char(1) DEFAULT NULL,
3166   `CCode` varchar(3) DEFAULT NULL
3167 ) ENGINE=InnoDB DEFAULT CHARSET=latin1;
3168 
3169 --
3170 --
3171 -- Dumping data for table `Player`
3172 --
3173 
3174 INSERT INTO `Player` (`PID`, `Name`, `Gender`, `CCode`) VALUES
3175 (0, 'Roger Federer', 'M', 'SUI'),
3176 (1, 'Rafael Nadal', 'M', 'ESP'),
3177 (10, 'Marcos Baghdatis', 'M', 'CYP'),
3178 (100, 'Igor Kunitsyn', 'M', 'RUS'),
3179 (101, 'Gilles Muller', 'M', 'LUX'),
3180 (102, 'Gaston Gaudio', 'M', 'ARG'),
3181 (103, 'Sergio Roitman', 'M', 'ARG'),
3182 (104, 'Carlos Moya', 'M', 'ESP'),
3183 (105, 'Alex Kuznetsov', 'M', 'USA'),
3184 (106, 'Peter Luczak', 'M', 'AUS'),
3185 (107, 'Michael Zverev', 'M', 'GER'),
3186 (108, 'Michael Berrer', 'M', 'GER'),
3187 (109, 'Robby Ginepri', 'M', 'USA'),
3188 (11, 'Tommy Haas', 'M', 'GER'),
3189 (110, 'Michael Russell', 'M', 'USA'),
3190 (111, 'Frank Dancevic', 'M', 'CAN'),
3191 (112, 'Victor Hănescu', 'M', 'ROU'),
3192 (113, 'Juan Martín del Potro', 'M', 'ARG'),
3193 (114, 'Alessio di Mauro', 'M', 'ITA'),
3194 (115, 'Evgeni Korolev', 'M', 'RUS'),
3195 (116, 'Alberto Martín', 'M', 'ESP'),
3196 (117, 'Fernando Verdasco', 'M', 'ESP'),
3197 (118, 'Paul-Henri Mathieu', 'M', 'FRA'),
3198 (119, 'Juan Ignacio Chela', 'M', 'ARG'),
3199 (12, 'Tomas Berdych', 'M', 'CZE'),
3200 (120, 'Potito Starace', 'M', 'ITA'),
3201 (121, 'Paul Goldstein', 'M', 'USA'),
3202 (122, 'Kevin Kim', 'M', 'USA'),
3203 (123, 'Paul Capdeville', 'M', 'CHI'),
3204 (124, 'Julien Benneteau', 'M', 'FRA'),
3205 (125, 'Philipp Kohlschreiber', 'M', 'GER'),
3206 (126, 'Kristof Vliegen', 'M', 'BEL'),
3207 (127, 'Robert Kendrick', 'M', 'USA'),
3208 (128, 'Bob Bryan', 'M', 'USA'),

```

nick@NICK: ~

```

-> (76, 'Paradorn Srichaphan', 'M', 'THA'),
-> (77, 'Marc Gicquel', 'M', 'FRA'),
-> (78, 'Alun Jones', 'M', 'AUS'),
-> (79, 'Jo-Wilfried Tsonga', 'M', 'FRA'),
-> (8, 'Mario Ancic', 'M', 'CRO'),
-> (80, 'Janko Tipsarevic', 'M', 'SRB'),
-> (81, 'Nicolas Lapentti', 'M', 'ECU'),
-> (82, 'Alan Mackin', 'M', 'GBR'),
-> (83, 'Olivier Rochus', 'M', 'BEL'),
-> (84, 'Chris Guccione', 'M', 'AUS'),
-> (85, 'Christophe Rochus', 'M', 'BEL'),
-> (86, 'Florian Mayer', 'M', 'GER'),
-> (87, 'Andreas Seppi', 'M', 'ITA'),
-> (88, 'Bobby Reynolds', 'M', 'USA'),
-> (89, 'Ilija Bozoljac', 'M', 'SRB'),
-> (9, 'Fernando Gonzalez', 'M', 'CHI'),
-> (90, 'Marin Cilic', 'M', 'CRO'),
-> (91, 'Albert Montanes', 'M', 'ESP'),
-> (92, 'Hyung-Taik Lee', 'M', 'KOR'),
-> (93, 'Robert Smeets', 'M', 'AUS'),
-> (94, 'Lukas Lacko', 'M', 'SVK'),
-> (95, 'Max Mirnyi', 'M', 'BLR'),
-> (96, 'Luis Horna', 'M', 'PER'),
-> (97, 'Alexander Waske', 'M', 'GER'),
-> (98, 'Arnaud Clement', 'M', 'FRA'),
-> (99, 'Fabrice Santoro', 'M', 'FRA');

Query OK, 309 rows affected (0.02 sec)
Records: 309  Duplicates: 0  Warnings: 0

mysql> 

```

Terminal ▾ Jan 30 13:18

Open ▾ + Save ⌂ ×

tennis.sql tennismysql.sql ~/Downloads/MTech TA Lab

tennis.sql tennismysql.sql

nick@NICK: ~

```
3477 (93, 'Robert Smeets', 'M', 'AUS'),  
3478 (94, 'Lukas Lacko', 'M', 'SVK'),  
3479 (95, 'Max Mirnyi', 'M', 'BLR'),  
3480 (96, 'Luis Horna', 'M', 'PER'),  
3481 (97, 'Alexander Waske', 'M', 'GER'),  
3482 (98, 'Arnaud Clement', 'M', 'FRA'),  
3483 (99, 'Fabrice Santoro', 'M', 'FRA');  
3484  
3485 -- -----  
3486  
3487 --  
3488 -- Table structure for table `Registration`  
3489 --  
3490 CREATE TABLE `Registration` (  
3491   `RegistrNum` int(11) DEFAULT NULL,  
3492   `PID` int(11) DEFAULT NULL  
3493 ) ENGINE=InnoDB DEFAULT CHARSET=latin1;  
3494  
3495 --  
3496 -- Dumping data for table `Registration`  
3497 --  
3498 --  
3499 INSERT INTO `Registration`(`RegistrNum`, `PID`) VALUES  
3501 (0, 0),  
3502 (1, 32),  
3503 (10, 39),  
3504 (100, 107),  
3505 (101, 108),  
3506 (102, 109),  
3507 (103, 31),  
3508 (104, 18),  
3509 (105, 110),  
3510 (106, 111),  
3511 (107, 112),  
3512 (108, 113),  
3513 (109, 114),  
3514 (11, 40),  
3515 (110, 9),  
3516 (111, 115),  
3517 (112, 14),  
3518 (113, 116),  
3519 (114, 117),  
3520 (115, 118),  
3521 (116, 119),  
3522 (117, 120),  
3523 (118, 16),  
3524 (119, 121),  
3525 (12, 41),  
3526 (120, 30),  
3527 (121, 122),  
3528 (122, 123),  
3529 (123, 124)
```

-> (82, 'Alan Mackin', 'M', 'GBR'),
-> (83, 'Olivier Rochus', 'M', 'BEL'),
-> (84, 'Chris Guccione', 'M', 'AUS'),
-> (85, 'Christophe Rochus', 'M', 'BEL'),
-> (86, 'Florian Mayer', 'M', 'GER'),
-> (87, 'Andreas Seppi', 'M', 'ITA'),
-> (88, 'Bobby Reynolds', 'M', 'USA'),
-> (89, 'Ilija Bozoljac', 'M', 'SRB'),
-> (9, 'Fernando Gonzalez', 'M', 'CHI'),
-> (90, 'Marin Cilic', 'M', 'CRO'),
-> (91, 'Albert Montanes', 'M', 'ESP'),
-> (92, 'Hyung-Taik Lee', 'M', 'KOR'),
-> (93, 'Robert Smeets', 'M', 'AUS'),
-> (94, 'Lukas Lacko', 'M', 'SVK'),
-> (95, 'Max Mirnyi', 'M', 'BLR'),
-> (96, 'Luis Horna', 'M', 'PER'),
-> (97, 'Alexander Waske', 'M', 'GER'),
-> (98, 'Arnaud Clement', 'M', 'FRA'),
-> (99, 'Fabrice Santoro', 'M', 'FRA');

Query OK, 309 rows affected (0.02 sec)
Records: 309 Duplicates: 0 Warnings: 0

mysql>
mysql> CREATE TABLE `Registration` (
-> `RegistrNum` int(11) DEFAULT NULL,
-> `PID` int(11) DEFAULT NULL
->) ENGINE=InnoDB DEFAULT CHARSET=latin1;
Query OK, 0 rows affected, 2 warnings (0.05 sec)

mysql> []

SQL ▾ Tab Width: 8 ▾ Ln 3490, Col 1 ▾ INS

Terminal ▾ Jan 30 13:20

Open ▾ + Save ⌂ ×

tennis.sql

tennismysql.sql
~/Downloads/MTech TA Lab

tennis.sql

tennismysql.sql

nick@NICK: ~

```
3490
3491 CREATE TABLE `Registration` (
3492   `RegistrNum` int(11) DEFAULT NULL,
3493   `PID` int(11) DEFAULT NULL
3494 ) ENGINE=InnoDB DEFAULT CHARSET=latin1;
3495 --
3496 -- Dumping data for table `Registration`
3497 -- 
3498 --
3499
3500 INSERT INTO `Registration` (`RegistrNum`, `PID`) VALUES
3501 (0, 0),
3502 (1, 32),
3503 (10, 39),
3504 (100, 107),
3505 (101, 108),
3506 (102, 109),
3507 (103, 31),
3508 (104, 18),
3509 (105, 110),
3510 (106, 111),
3511 (107, 112),
3512 (108, 113),
3513 (109, 114),
3514 (11, 40),
3515 (110, 9),
3516 (111, 115),
3517 (112, 14),
3518 (113, 116),
3519 (114, 117),
3520 (115, 118),
3521 (116, 119),
3522 (117, 120),
3523 (118, 16),
3524 (119, 121),
3525 (12, 41),
3526 (120, 30),
3527 (121, 122),
3528 (122, 123),
3529 (123, 124),
3530 (124, 125),
3531 (125, 126),
3532 (126, 1),
3533 (127, 127),
3534 (128, 128),
3535 (128, 129),
3536 (129, 153),
3537 (129, 78),
3538 (13, 42),
3539 (130, 37),
3540 (130, 71),
3541 (131, 21),
3542 (131, 46),
```

```
-> (94, 'Lukas Lacko', 'M', 'SVK'),
-> (95, 'Max Mirnyi', 'M', 'BLR'),
-> (96, 'Luis Horna', 'M', 'PER'),
-> (97, 'Alexander Waske', 'M', 'GER'),
-> (98, 'Arnaud Clement', 'M', 'FRA'),
-> (99, 'Fabrice Santoro', 'M', 'FRA');
Query OK, 309 rows affected (0.02 sec)
Records: 309 Duplicates: 0 Warnings: 0

mysql>
mysql> CREATE TABLE `Registration` (
->   `RegistrNum` int(11) DEFAULT NULL,
->   `PID` int(11) DEFAULT NULL
-> ) ENGINE=InnoDB DEFAULT CHARSET=latin1;
Query OK, 0 rows affected, 2 warnings (0.05 sec)

mysql> INSERT INTO `Registration` (`RegistrNum`, `PID`) VALUES
-> (0, 0),
-> (1, 32),
-> (10, 39),
44, 9 -> (100, 107),
-> (101, 108),
-> (102, 109),
) -> (103, 31),
8 -> (104, 18),
5 -> (105, 110),
-> (106, 111),
-> (107, 112),
-> (108, 113),
-> (109, 114),
```

Terminal ▾ Jan 30 13:21

Open ▾ + Save ⌂ ×

tennismysql.sql
~/Downloads/MTech TA Lab

tennis.sql

4739 (939, 308),
4740 (94, 2),
4741 (940, 218),
4742 (941, 43),
4743 (942, 65),
4744 (943, 12),
4745 (944, 86),
4746 (945, 246),
4747 (945, 305),
4748 (946, 142),
4749 (946, 97),
4750 (947, 182),
4751 (947, 19),
4752 (948, 183),
4753 (948, 74),
4754 (949, 125),
4755 (949, 24),
4756 (95, 103),
4757 (950, 158),
4758 (950, 168),
4759 (951, 10),
4760 (951, 16),
4761 (952, 188),
4762 (952, 304),
4763 (953, 27),
4764 (953, 98),
4765 (954, 212),
4766 (954, 52),
4767 (955, 146),
4768 (955, 38),
4769 (956, 144),
4770 (956, 151),
4771 (957, 60),
4772 (957, 83),
4773 (958, 148),
4774 (958, 65),
4775 (959, 150),
4776 (959, 44),
4777 (96, 4),
4778 (960, 141),
4779 (960, 178),
4780 (97, 104),
4781 (98, 105),
4782 (99, 106);
4783
4784 -- -----
4785
4786 --
4787 -- Table structure for table `RetiredMatch`
4788 --
4789
4790 CREATE TABLE `RetiredMatch` (
4791 `MTO` int(11) DEFAULT NULL

nick@NICK: ~

-> (950, 158),
-> (950, 168),
-> (951, 10),
-> (951, 16),
-> (952, 188),
-> (952, 304),
-> (953, 27),
-> (953, 98),
-> (954, 212),
-> (954, 52),
-> (955, 146),
-> (955, 38),
-> (956, 144),
-> (956, 151),
-> (957, 60),
-> (957, 83),
-> (958, 148),
-> (958, 65),
-> (959, 150),
-> (959, 44),
-> (96, 4),
-> (960, 141),
-> (960, 178),
-> (97, 104),
-> (98, 105),
-> (99, 106);
Query OK, 1282 rows affected (0.05 sec)
Records: 1282 Duplicates: 0 Warnings: 0

mysql> []

SQL ▾ Tab Width: 8 ▾ Ln 4782, Col 11 ▾ INS

Terminal ▾ Jan 30 13:21

Open ▾ + Save ⌂ ⌓ X

tennismysql.sql
~/Downloads/MTech TA Lab

tennis.sql

tennismysql.sql

nick@NICK: ~

```
4760 (951, 10),  
4761 (952, 188),  
4762 (952, 304),  
4763 (953, 27),  
4764 (953, 98),  
4765 (954, 212),  
4766 (954, 52),  
4767 (955, 146),  
4768 (955, 38),  
4769 (956, 144),  
4770 (956, 151),  
4771 (957, 60),  
4772 (957, 83),  
4773 (958, 148),  
4774 (958, 65),  
4775 (959, 150),  
4776 (959, 44),  
4777 (96, 4),  
4778 (960, 141),  
4779 (960, 178),  
4780 (97, 104),  
4781 (98, 105),  
4782 (99, 106);  
4783  
4784 -----  
4785  
4786 --  
4787 -- Table structure for table `RetiredMatch`  
4788 --  
4789  
4790 CREATE TABLE `RetiredMatch` (  
    `MID` int(11) DEFAULT NULL  
) ENGINE=InnoDB DEFAULT CHARSET=latin1;  
4791  
4792  
4793  
4794 --  
4795 -- Dumping data for table `RetiredMatch`  
4796 --  
4797  
4798 INSERT INTO `RetiredMatch` (`MID`) VALUES  
4799 (100),  
4800 (195),  
4801 (196),  
4802 (197),  
4803 (207),  
4804 (220),  
4805 (25),  
4806 (250),  
4807 (252),  
4808 (296),  
4809 (32),  
4810 (35),  
4811 (382),  
4812 (390),  
    -> (952, 304),  
    -> (953, 27),  
    -> (953, 98),  
    -> (954, 212),  
    -> (954, 52),  
    -> (955, 146),  
    -> (955, 38),  
    -> (956, 144),  
    -> (956, 151),  
    -> (957, 60),  
    -> (957, 83),  
    -> (958, 148),  
    -> (958, 65),  
    -> (959, 150),  
    -> (959, 44),  
    -> (96, 4),  
    -> (960, 141),  
    -> (960, 178),  
    -> (97, 104),  
    -> (98, 105),  
    -> (99, 106);  
Query OK, 1282 rows affected (0.05 sec)  
Records: 1282 Duplicates: 0 Warnings: 0  
  
mysql> CREATE TABLE `RetiredMatch` (  
    -> `MID` int(11) DEFAULT NULL  
    -> ) ENGINE=InnoDB DEFAULT CHARSET=latin1;  
Query OK, 0 rows affected, 1 warning (0.05 sec)  
  
mysql> [ ]
```

SQL ▾ Tab Width: 8 ▾ Ln 4790, Col 1 ▾ INS

Terminal ▾ Jan 30 13:22

Open ▾ + Save ⌂ ×

tennis.sql

4782 (99, 106);
4783
4784 -- -----
4785
4786 --
4787 -- Table structure for table `RetiredMatch`
4788 --
4789
4790 CREATE TABLE `RetiredMatch` (
4791 `MID` int(11) DEFAULT NULL
4792) ENGINE=InnoDB DEFAULT CHARSET=latin1;
4793
4794 --
4795 -- Dumping data for table `RetiredMatch`
4796 --
4797
4798 INSERT INTO `RetiredMatch` (`MID`) VALUES
4799 (100),
4800 (195),
4801 (196),
4802 (197),
4803 (207),
4804 (220),
4805 (25),
4806 (250),
4807 (252),
4808 (296),
4809 (32),
4810 (35),
4811 (382),
4812 (390),
4813 (4),
4814 (406),
4815 (451),
4816 (453),
4817 (475),
4818 (493),
4819 (508),
4820 (57),
4821 (580),
4822 (612),
4823 (695),
4824 (725),
4825 (751),
4826 (854),
4827 (872),
4828 (91),
4829 (910);
4830
4831 -- -----
4832
4833 --

tennismysql.sql
~/Downloads/MTech TA Lab

nick@NICK: ~

-> (99, 106);
Query OK, 1282 rows affected (0.05 sec)
Records: 1282 Duplicates: 0 Warnings: 0

mysql> CREATE TABLE `RetiredMatch` (
-> `MID` int(11) DEFAULT NULL
->) ENGINE=InnoDB DEFAULT CHARSET=latin1;
Query OK, 0 rows affected, 1 warning (0.05 sec)

mysql> INSERT INTO `RetiredMatch` (`MID`) VALUES
-> (100),
-> (195),
-> (196),
-> (197),
-> (207),
-> (220),
-> (25),
-> (250),
-> (252),
-> (296),
-> (32),
-> (35),
-> (382),
-> (390),
-> (4),
-> (406),
-> (451),
-> (453),
-> (475),
-> (493),

SQL ▾ Tab Width: 8 ▾ Ln 4829, Col 7 ▾ INS

Terminal ▾ Jan 30 13:22

Open ▾ + Save ⌂ ×

tennis.sql

4782 (99, 106);
4783
4784 -- -----
4785
4786 --
4787 -- Table structure for table `RetiredMatch`
4788 --
4789
4790 CREATE TABLE `RetiredMatch` (
4791 `MID` int(11) DEFAULT NULL
4792) ENGINE=InnoDB DEFAULT CHARSET=latin1;
4793 --
4794 -- Dumping data for table `RetiredMatch`
4795 --
4796 --
4797
4798 INSERT INTO `RetiredMatch` (`MID`) VALUES
4799 (100),
4800 (195),
4801 (196),
4802 (197),
4803 (207),
4804 (220),
4805 (25),
4806 (250),
4807 (252),
4808 (296),
4809 (32),
4810 (35),
4811 (382),
4812 (390),
4813 (4),
4814 (406),
4815 (451),
4816 (453),
4817 (475),
4818 (493),
4819 (508),
4820 (57),
4821 (580),
4822 (612),
4823 (695),
4824 (725),
4825 (751),
4826 (854),
4827 (872),
4828 (91),
4829 (910);
4830
4831 -- -----
4832
4833 --

tennismysql.sql

nick@NICK: ~

-> (220),
-> (25),
-> (250),
-> (252),
-> (296),
-> (32),
-> (35),
-> (382),
-> (390),
-> (4),
-> (406),
-> (451),
-> (453),
-> (475),
-> (493),
-> (508),
-> (57),
-> (580),
-> (612),
-> (695),
-> (725),
-> (751),
-> (854),
-> (872),
-> (91),
-> (910);
Query OK, 31 rows affected (0.02 sec)
Records: 31 Duplicates: 0 Warnings: 0

mysql> []

SQL ▾ Tab Width: 8 ▾ Ln 4829, Col 7 ▾ INS

Terminal ▾ Jan 30 13:22

Open ▾ + Save ⌂ ×

tennis.sql

tennismysql.sql
~/Downloads/MTech TA Lab

tennis.mysql.sql

nick@NICK: ~

```
4825 (751),
4826 (854),
4827 (872),
4828 (91),
4829 (910);
4830
4831 -- -----
4832
4833 --
4834 -- Table structure for table `SetScore`
4835 --
4836
4837 CREATE TABLE `SetScore` (
4838   `MID` int(11) DEFAULT NULL,
4839   `SetNum` int(11) DEFAULT NULL,
4840   `WinnerGames` int(11) DEFAULT NULL,
4841   `LoserGames` int(11) DEFAULT NULL
4842 ) ENGINE=InnoDB DEFAULT CHARSET=latin1;
4843
4844 --
4845 -- Dumping data for table `SetScore`
4846 --
4847
4848 INSERT INTO `SetScore` (`MID`, `SetNum`, `WinnerGames`, `LoserGames`) VALUES
4849 (0, 1, 7, 5),
4850 (0, 2, 6, 0),
4851 (0, 3, 6, 4),
4852 (1, 1, 5, 7),
4853 (1, 2, 4, 6),
4854 (1, 3, 6, 0),
4855 (1, 4, 6, 1),
4856 (1, 5, 6, 2),
4857 (10, 1, 6, 3),
4858 (10, 2, 6, 0),
4859 (10, 3, 6, 2),
4860 (100, 1, 3, 0),
4861 (101, 1, 6, 7),
4862 (101, 2, 4, 6),
4863 (101, 3, 6, 0),
4864 (101, 4, 6, 4),
4865 (101, 5, 6, 3),
4866 (102, 1, 6, 3),
4867 (102, 2, 6, 2),
4868 (102, 3, 6, 1),
4869 (103, 1, 7, 6),
4870 (103, 2, 2, 6),
4871 (103, 3, 6, 4),
4872 (103, 4, 7, 6),
4873 (104, 1, 5, 7),
4874 (104, 2, 4, 6),
4875 (104, 3, 7, 6),
4876 (104, 4, 6, 4),
```

-> (390),
-> (4),
-> (406),
-> (451),
-> (453),
-> (475),
-> (493),
-> (508),
-> (57),
-> (580),
-> (612),
-> (695),
-> (725),
-> (751),
-> (854),
-> (872),
-> (91),
-> (910);

Query OK, 31 rows affected (0.02 sec)
Records: 31 Duplicates: 0 Warnings: 0

```
mysql> CREATE TABLE `SetScore` (
->   `MID` int(11) DEFAULT NULL,
->   `SetNum` int(11) DEFAULT NULL,
->   `WinnerGames` int(11) DEFAULT NULL,
->   `LoserGames` int(11) DEFAULT NULL
-> ) ENGINE=InnoDB DEFAULT CHARSET=latin1;
Query OK, 0 rows affected, 4 warnings (0.05 sec)
```

mysql> []

SQL ▾ Tab Width: 8 ▾ Ln 4837, Col 1 ▾ INS

Terminal ▾ Jan 30 13:27

Open ▾ + Save ⌂ ×

tennis.sql ~/Downloads/MTech TA Lab

tennis.sql

4825 (751),
4826 (854),
4827 (872),
4828 (91),
4829 (910);
4830
4831 -- -----
4832
4833 --
4834 -- Table structure for table `SetScore`
4835 --
4836
4837 CREATE TABLE `SetScore` (
4838 `MID` int(11) DEFAULT NULL,
4839 `SetNum` int(11) DEFAULT NULL,
4840 `WinnerGames` int(11) DEFAULT NULL,
4841 `LoserGames` int(11) DEFAULT NULL
4842) ENGINE=InnoDB DEFAULT CHARSET=latin1;
4843
4844 --
4845 -- Dumping data for table `SetScore`
4846 --
4847
4848 INSERT INTO `SetScore`(`MID`, `SetNum`, `WinnerGames`, `LoserGames`) VALUES
4849 (0, 1, 7, 5),
4850 (0, 2, 6, 0),
4851 (0, 3, 6, 4),
4852 (1, 1, 5, 7),
4853 (1, 2, 4, 6),
4854 (1, 3, 6, 0),
4855 (1, 4, 6, 1),
4856 (1, 5, 6, 2),
4857 (10, 1, 6, 3),
4858 (10, 2, 6, 0),
4859 (10, 3, 6, 2),
4860 (100, 1, 3, 0),
4861 (101, 1, 6, 7),
4862 (101, 2, 4, 6),
4863 (101, 3, 6, 0),
4864 (101, 4, 6, 4),
4865 (101, 5, 6, 3),
4866 (102, 1, 6, 3),
4867 (102, 2, 6, 2),
4868 (102, 3, 6, 1),
4869 (103, 1, 7, 6),
4870 (103, 2, 2, 6),
4871 (103, 3, 6, 4),
4872 (103, 4, 7, 6),
4873 (104, 1, 5, 7),
4874 (104, 2, 4, 6),
4875 (104, 3, 7, 6),
4876 (104, 4, 6, 4),
4877 (104, 5, 6, 1),

nick@NICK: ~

-> (751),
-> (854),
-> (872),
-> (91),
-> (910);
Query OK, 31 rows affected (0.02 sec)
Records: 31 Duplicates: 0 Warnings: 0

mysql> CREATE TABLE `SetScore` (
-> `MID` int(11) DEFAULT NULL,
-> `SetNum` int(11) DEFAULT NULL,
-> `WinnerGames` int(11) DEFAULT NULL,
-> `LoserGames` int(11) DEFAULT NULL
->) ENGINE=InnoDB DEFAULT CHARSET=latin1;
Query OK, 0 rows affected, 4 warnings (0.05 sec)

mysql> INSERT INTO `SetScore`(`MID`, `SetNum`, `WinnerGames`, `LoserGames`) VALUES
-> (0, 1, 7, 5),
-> (0, 2, 6, 0),
-> (0, 3, 6, 4),
-> (1, 1, 5, 7),
-> (1, 2, 4, 6),
-> (1, 3, 6, 0),
-> (1, 4, 6, 1),
-> (1, 5, 6, 2),
-> (10, 1, 6, 3),
-> (10, 2, 6, 0),
-> (10, 3, 6, 2),
-> (100, 1, 3, 0),
-> (101 1 6 7)

SQL ▾ Tab Width: 8 ▾ Ln 7751, Col 1 ▾ INS

Terminal ▾ Jan 30 13:27

Open ▾ + Save ⌂ ×

tennis.sql

tennismysql.sql
~/Downloads/MTech TA Lab

nick@NICK: ~

Query OK, 2902 rows affected (0.10 sec)
Records: 2902 Duplicates: 0 Warnings: 0

mysql> []

SQL ▾ Tab Width: 8 ▾ Ln 7751, Col 1 ▾ INS

```
7712 (937, 1, 6, 1),  
7713 (937, 2, 7, 5),  
7714 (938, 1, 1, 6),  
7715 (938, 2, 6, 4),  
7716 (938, 3, 10, 5),  
7717 (939, 1, 6, 2),  
7718 (939, 2, 6, 4),  
7719 (94, 1, 6, 4),  
7720 (94, 2, 6, 3),  
7721 (94, 3, 6, 2),  
7722 (940, 1, 6, 7),  
7723 (940, 2, 7, 6),  
7724 (940, 3, 10, 3),  
7725 (941, 1, 4, 6),  
7726 (941, 2, 6, 3),  
7727 (941, 3, 10, 8),  
7728 (942, 1, 6, 3),  
7729 (942, 2, 6, 4),  
7730 (943, 1, 6, 1),  
7731 (943, 2, 6, 4),  
7732 (95, 1, 7, 5),  
7733 (95, 2, 6, 3),  
7734 (95, 3, 4, 6),  
7735 (95, 4, 6, 2),  
7736 (96, 1, 6, 3),  
7737 (96, 2, 6, 3),  
7738 (96, 3, 7, 6),  
7739 (97, 1, 6, 3),  
7740 (97, 2, 6, 4),  
7741 (97, 3, 5, 7),  
7742 (97, 4, 6, 1),  
7743 (98, 1, 6, 0),  
7744 (98, 2, 4, 6),  
7745 (98, 3, 7, 5),  
7746 (98, 4, 6, 3),  
7747 (99, 1, 6, 4),  
7748 (99, 2, 6, 7),  
7749 (99, 3, 6, 2),  
7750 (99, 4, 6, 1);  
7751 -- -----  
7752 --  
7753 --  
7754 --  
7755 -- Table structure for table `Tiebreaker`  
7756 --  
7757  
7758 CREATE TABLE `Tiebreaker` (  
7759   `MID` int(11) DEFAULT NULL,  
7760   `SetNum` int(11) DEFAULT NULL,  
7761   `WinnerTB` int(11) DEFAULT NULL,  
7762   `LoserTB` int(11) DEFAULT NULL  
7763 ) ENGINE=InnoDB DEFAULT CHARSET=latin1;
```

The screenshot shows a MySQL terminal window titled "tennismysql.sql" with the path "/Downloads/MTech TA Lab". The terminal is connected to the host "nick@NICK: ~". The session output is as follows:

```
nick@NICK: ~
-> (95, 2, 6, 3),
-> (95, 3, 4, 6),
-> (95, 4, 6, 2),
-> (96, 1, 6, 3),
-> (96, 2, 6, 3),
-> (96, 3, 7, 6),
-> (97, 1, 6, 3),
-> (97, 2, 6, 4),
-> (97, 3, 5, 7),
-> (97, 4, 6, 1),
-> (98, 1, 6, 0),
-> (98, 2, 4, 6),
-> (98, 3, 7, 5),
-> (98, 4, 6, 3),
-> (99, 1, 6, 4),
-> (99, 2, 6, 7),
-> (99, 3, 6, 2),
-> (99, 4, 6, 1);
Query OK, 2902 rows affected (0.10 sec)
Records: 2902 Duplicates: 0 Warnings: 0

mysql> CREATE TABLE `Tiebreaker` (
-> `MID` int(11) DEFAULT NULL,
-> `SetNum` int(11) DEFAULT NULL,
-> `WinnerTB` int(11) DEFAULT NULL,
-> `LoserTB` int(11) DEFAULT NULL
-> ) ENGINE=InnoDB DEFAULT CHARSET=latin1;
Query OK, 0 rows affected, 4 warnings (0.06 sec)

mysql> [REDACTED]
```

The terminal window also displays the contents of the "tennis.sql" file, which includes the creation of the "Tiebreaker" table and the insertion of data from a dump file. The "CREATE TABLE" command is highlighted in red.

Terminal ▾ Jan 30 13:28

Open + Save ⌂ ⌂ X

tennis.sql tennismysql.sql
~/Downloads/MTech TA Lab

tennis.sql tennismysql.sql

7747 (99, 1, 6, 4),
7748 (99, 2, 6, 7),
7749 (99, 3, 6, 2),
7750 (99, 4, 6, 1);
7751
7752 -- -----
7753
7754 --
7755 -- Table structure for table `Tiebreaker`
7756 --
7757
7758 CREATE TABLE `Tiebreaker` (
7759 `MID` int(11) DEFAULT NULL,
7760 `SetNum` int(11) DEFAULT NULL,
7761 `WinnerTB` int(11) DEFAULT NULL,
7762 `LoserTB` int(11) DEFAULT NULL
7763) ENGINE=InnoDB DEFAULT CHARSET=latin1;
7764
7765 --
7766 -- Dumping data for table `Tiebreaker`
7767 --
7768
7769 INSERT INTO `Tiebreaker` (`MID`, `SetNum`, `WinnerTB`, `LoserTB`) VALUES
7770 (101, 1, 5, 7),
7771 (103, 1, 7, 2),
7772 (103, 4, 7, 2),
7773 (104, 3, 7, 4),
7774 (105, 1, 7, 3),
7775 (107, 1, 7, 1),
7776 (108, 1, 9, 7),
7777 (114, 2, 7, 4),
7778 (117, 4, 7, 5),
7779 (118, 3, 7, 4),
7780 (119, 1, 3, 7),
7781 (12, 1, 2, 7),
7782 (120, 2, 7, 2),
7783 (126, 1, 7, 2),
7784 (131, 1, 8, 10),
7785 (131, 3, 7, 4),
7786 (132, 3, 7, 5),
7787 (133, 2, 7, 9),
7788 (135, 1, 7, 1),
7789 (14, 3, 8, 6),
7790 (140, 2, 7, 5),
7791 (143, 1, 8, 6),
7792 (144, 2, 7, 5),
7793 (146, 2, 9, 7),
7794 (147, 2, 2, 7),
7795 (148, 3, 7, 2),
7796 (152, 1, 7, 5),
7797 (152, 2, 6, 8),
7798 (153, 2, 4, 7),
7799 (156, 2, 7, 1)

nick@NICK: ~

-> (98, 3, 7, 5),
-> (98, 4, 6, 3),
-> (99, 1, 6, 4),
-> (99, 2, 6, 7),
-> (99, 3, 6, 2),
-> (99, 4, 6, 1);
Query OK, 2902 rows affected (0.10 sec)
Records: 2902 Duplicates: 0 Warnings: 0

mysql> CREATE TABLE `Tiebreaker` (
-> `MID` int(11) DEFAULT NULL,
-> `SetNum` int(11) DEFAULT NULL,
-> `WinnerTB` int(11) DEFAULT NULL,
-> `LoserTB` int(11) DEFAULT NULL
->) ENGINE=InnoDB DEFAULT CHARSET=latin1;
Query OK, 0 rows affected, 4 warnings (0.06 sec)

mysql> INSERT INTO `Tiebreaker` (`MID`, `SetNum`, `WinnerTB`, `LoserTB`) VALUES
-> (101, 1, 5, 7),
(-> (103, 1, 7, 2),
-> (103, 4, 7, 2),
-> (104, 3, 7, 4),
-> (105, 1, 7, 3),
(5 -> (107, 1, 7, 1),
-> (108, 1, 9, 7),
-> (114, 2, 7, 4),
-> (117, 4, 7, 5),
, -> (118, 3, 7, 4),
-> (119, 1, 3, 7),
-> (12, 1, 2, 7),

SQL ▾ Tab Width: 8 ▾ Ln 8245, Col 15 ▾ INS

Terminal ▾ Jan 30 13:29

Open ▾ + Save ⌂ X

tennis.sql ~/Downloads/MTech TA Lab

tennis.sql

8216 (895, 2, 7, 4),
8217 (897, 1, 7, 5),
8218 (899, 1, 7, 5),
8219 (9, 1, 7, 2),
8220 (9, 2, 9, 11),
8221 (9, 4, 7, 5),
8222 (900, 2, 7, 5),
8223 (902, 1, 7, 5),
8224 (903, 2, 5, 7),
8225 (904, 1, 7, 4),
8226 (905, 1, 7, 3),
8227 (907, 3, 7, 5),
8228 (908, 1, 8, 6),
8229 (91, 1, 9, 7),
8230 (91, 3, 3, 7),
8231 (916, 1, 7, 9),
8232 (917, 1, 7, 5),
8233 (917, 2, 7, 5),
8234 (919, 1, 7, 4),
8235 (919, 2, 7, 3),
8236 (92, 1, 7, 4),
8237 (922, 2, 7, 5),
8238 (923, 2, 7, 5),
8239 (924, 2, 7, 5),
8240 (932, 2, 7, 5),
8241 (934, 1, 7, 4),
8242 (940, 1, 5, 7),
8243 (940, 2, 8, 6),
8244 (96, 3, 7, 5),
8245 (99, 2, 5, 7);
8246
8247 -- -----
8248
8249 --
8250 -- Table structure for table `Tournament`
8251 --
8252
8253 CREATE TABLE `Tournament` (
8254 `TID` int(11) DEFAULT NULL,
8255 `Name` varchar(20) DEFAULT NULL,
8256 `Location` varchar(30) DEFAULT NULL,
8257 `StartDate` varchar(50) DEFAULT NULL,
8258 `EndDate` varchar(50) DEFAULT NULL,
8259 `NumRounds` int(11) DEFAULT NULL,
8260 `TType` varchar(7) DEFAULT NULL,
8261 `Surface` varchar(10) DEFAULT NULL
8262) ENGINE=InnoDB DEFAULT CHARSET=latin1;
8263
8264 --
8265 -- Dumping data for table `Tournament`
8266 --
8267

tennismysql.sql nick@NICK: ~

-> (9, 2, 9, 11),
-> (9, 4, 7, 5),
-> (900, 2, 7, 5),
-> (902, 1, 7, 5),
-> (903, 2, 5, 7),
-> (904, 1, 7, 4),
-> (905, 1, 7, 3),
-> (907, 3, 7, 5),
-> (908, 1, 8, 6),
-> (91, 1, 9, 7),
-> (91, 3, 3, 7),
-> (916, 1, 7, 9),
-> (917, 1, 7, 5),
-> (917, 2, 7, 5),
-> (919, 1, 7, 4),
-> (919, 2, 7, 3),
-> (92, 1, 7, 4),
-> (922, 2, 7, 5),
-> (923, 2, 7, 5),
-> (924, 2, 7, 5),
-> (932, 2, 7, 5),
-> (934, 1, 7, 4),
-> (940, 1, 5, 7),
-> (940, 2, 8, 6),
-> (96, 3, 7, 5),
-> (99, 2, 5, 7);
Query OK, 476 rows affected (0.02 sec)
Records: 476 Duplicates: 0 Warnings: 0

mysql> []

SQL ▾ Tab Width: 8 ▾ Ln 8245, Col 15 ▾ INS

Terminal ▾ Jan 30 13:29

Open + Save ⌂ ⌂ X

tennis.sql tennismysql.sql
~/Downloads/MTech TA Lab

tennis.sql tennismysql.sql

8232 (917, 1, 7, 5),
8233 (917, 2, 7, 5),
8234 (919, 1, 7, 4),
8235 (919, 2, 7, 3),
8236 (92, 1, 7, 4),
8237 (922, 2, 7, 5),
8238 (923, 2, 7, 5),
8239 (924, 2, 7, 5),
8240 (932, 2, 7, 5),
8241 (934, 1, 7, 4),
8242 (940, 1, 5, 7),
8243 (940, 2, 8, 6),
8244 (96, 3, 7, 5),
8245 (99, 2, 5, 7);
8246
8247 -- -----
8248
8249 --
8250 -- Table structure for table `Tournament`
8251 --
8252
8253 CREATE TABLE `Tournament` (
8254 `TID` int(11) DEFAULT NULL,
8255 `Name` varchar(20) DEFAULT NULL,
8256 `Location` varchar(30) DEFAULT NULL,
8257 `StartDate` varchar(50) DEFAULT NULL,
8258 `EndDate` varchar(50) DEFAULT NULL,
8259 `NumRounds` int(11) DEFAULT NULL,
8260 `TType` varchar(7) DEFAULT NULL,
8261 `Surface` varchar(10) DEFAULT NULL
8262) ENGINE=InnoDB DEFAULT CHARSET=latin1;
8263
8264 --
8265 -- Dumping data for table `Tournament`
8266 --
8267
8268 insert into Tournament values(0, 'Australian Open', 'Melbourne, Australia', '15-January-2007', '28-January-2007', 7, 'Singles', 'Hard');
8269 insert into Tournament values(1, 'Australian Open', 'Melbourne, Australia', '15-January-2007', '28-January-2007', 6, 'Doubles', 'Hard');
8270 insert into Tournament values(10, 'Brasil Open 2007', 'Costa do Sauipe, Brasil', '12-February-2007', '18-February-2007', 5, 'Singles', 'Clay');
8271 insert into Tournament values(11, 'Brasil Open 2007', 'Costa do Sauipe, Brasil', '12-February-2007', '18-February-2007', 4, 'Doubles', 'Clay');
8272 insert into Tournament values(12, 'Countrywide Classic', 'Los Angeles, CA, USA', '16-July-2007', '22-July-2007', 5, 'Singles', 'Hard');
8273 insert into Tournament values(13, 'Countrywide Classic', 'Los Angeles, CA, USA', '16-July-2007', '22-July-2007', 4, 'Doubles', 'Hard');
8274 insert into Tournament values(14, 'BMW Open', 'Munich, Germany', '30-April-2007', '6-May-2007', 5, 'Singles', 'Clay');
8275 insert into Tournament values(15, 'BMW Open', 'Munich, Germany', '30-April-2007', '6-May-2007', 4, 'Doubles', 'Clay');
8276 insert into Tournament values(2, 'French Open', 'Roland Garros, Paris, France', '26-May-2007', '10-June-2007', 7, 'Singles', 'Clay');
8277 insert into Tournament values(3, 'French Open', 'Roland Garros, Paris, France', '26-May-2007', '10-June-2007', 6, 'Doubles', 'Clay');
8278 insert into Tournament values(4, 'US Open', 'Flushing Meadows, NY, USA', '27-August-2007', '9-September-2007', 7, 'Singles', 'Hard');
8279 insert into Tournament values(5, 'US Open', 'Flushing Meadows, NY, USA', '27-August-2007', '9-September-2007', 6, 'Doubles', 'Hard');
8280 insert into Tournament values(6, 'Wimbledon', 'London, Great Britain', '25-June-2007', '8-July-2007', 7, 'Singles', 'Grass');
8281 insert into Tournament values(7, 'Wimbledon', 'London, Great Britain', '25-June-2007', '8-July-2007', 6, 'Doubles', 'Grass');
8282 insert into Tournament values(8, 'Heineken Open', 'Auckland, New Zealand', '8-January-2007', '14-January-2007', 5, 'Singles', 'Hard');
8283 insert into Tournament values(9, 'Heineken Open', 'Auckland, New Zealand', '8-January-2007', '14-January-2007', 4, 'Doubles', 'Hard');

nick@NICK: ~

-> (917, 1, 7, 5),
-> (917, 2, 7, 5),
-> (919, 1, 7, 4),
-> (919, 2, 7, 3),
-> (92, 1, 7, 4),
-> (922, 2, 7, 5),
-> (923, 2, 7, 5),
-> (924, 2, 7, 5),
-> (932, 2, 7, 5),
-> (934, 1, 7, 4),
-> (940, 1, 5, 7),
-> (940, 2, 8, 6),
-> (96, 3, 7, 5),
-> (99, 2, 5, 7);

Query OK, 476 rows affected (0.02 sec)
Records: 476 Duplicates: 0 Warnings: 0

mysql> CREATE TABLE `Tournament` (
-> `TID` int(11) DEFAULT NULL,
-> `Name` varchar(20) DEFAULT NULL,
-> `Location` varchar(30) DEFAULT NULL,
-> `StartDate` varchar(50) DEFAULT NULL,
-> `EndDate` varchar(50) DEFAULT NULL,
-> `NumRounds` int(11) DEFAULT NULL,
-> `TType` varchar(7) DEFAULT NULL,
-> `Surface` varchar(10) DEFAULT NULL
->) ENGINE=InnoDB DEFAULT CHARSET=latin1;

Query OK, 0 rows affected, 2 warnings (0.04 sec)

mysql> []

SQL ▾ Tab Width: 8 ▾ Ln 8253, Col 1 ▾ INS

Terminal ▾ Jan 30 13:29

Open + Save ⌂ ×

tennis.sql x tennismysql.sql ~/Downloads/MTech TA Lab

tennis.sql x tennismysql.sql nick@NICK: ~

Q ⌂ - ×

```
8235 (919, 2, 7, 3),
8236 (92, 1, 7, 4),
8237 (922, 2, 7, 5),
8238 (923, 2, 7, 5),
8239 (924, 2, 7, 5),
8240 (932, 2, 7, 5),
8241 (934, 1, 7, 4),
8242 (940, 1, 5, 7),
8243 (940, 2, 8, 6),
8244 (96, 3, 7, 5),
8245 (99, 2, 5, 7);
8246
8247 -- -----
8248
8249 --
8250 -- Table structure for table `Tournament`
8251 --
8252
8253 CREATE TABLE `Tournament` (
8254   `TID` int(11) DEFAULT NULL,
8255   `Name` varchar(20) DEFAULT NULL,
8256   `Location` varchar(30) DEFAULT NULL,
8257   `StartDate` varchar(50) DEFAULT NULL,
8258   `EndDate` varchar(50) DEFAULT NULL,
8259   `NumRounds` int(11) DEFAULT NULL,
8260   `TType` varchar(7) DEFAULT NULL,
8261   `Surface` varchar(10) DEFAULT NULL
8262 ) ENGINE=InnoDB DEFAULT CHARSET=latin1;
8263
8264 --
8265 -- Dumping data for table `Tournament`
8266 --
8267
8268 insert into Tournament values(0, 'Australian Open', 'Melbourne, Australia', '15-January-2007', '28-January-2007', 7,
8269 insert into Tournament values(1, 'Australian Open', 'Melbourne, Australia', mysql> insert into Tournament values(12, 'Countrywide Classic', 'Los Angeles, CA, USA', '16-July-2007', '22-July-2007', 5,
8270 insert into Tournament values(10, 'Brasil Open 2007', 'Costa do Sauipe, Brasil', '12-February-2007', '18-February-2007', 5, 'Singles', 'Clay');
8271 insert into Tournament values(11, 'Brasil Open 2007', 'Costa do Sauipe, Brasil', '12-February-2007', '18-February-2007', 4, 'Doubles', 'Clay');
8272 insert into Tournament values(12, 'Countrywide Classic', 'Los Angeles, CA, USA', '16-July-2007', '22-July-2007', 5, 'Singles', 'Hard');
8273 insert into Tournament values(13, 'Countrywide Classic', 'Los Angeles, CA, USA', '16-July-2007', '22-July-2007', 4, 'Doubles', 'Hard');
8274 insert into Tournament values(14, 'BMW Open', 'Munich, Germany', '30-April-2007', '6-May-2007', 5, 'Singles', 'Clay');
8275 insert into Tournament values(15, 'BMW Open', 'Munich, Germany', '30-April-2007', '6-May-2007', 4, 'Doubles', 'Clay');
8276 insert into Tournament values(2, 'French Open', 'Roland Garros, Paris, France', '26-May-2007', '10-June-2007', 7, 'Singles', 'Clay');
8277 insert into Tournament values(3, 'French Open', 'Roland Garros, Paris, France', '26-May-2007', '10-June-2007', 6, 'Doubles', 'Clay');
8278 insert into Tournament values(4, 'US Open', 'Flushing Meadows, NY, USA', '27-August-2007', '9-September-2007', 7, 'Singles', 'Hard');
8279 insert into Tournament values(5, 'US Open', 'Flushing Meadows, NY, USA', '27-August-2007', '9-September-2007', 6, 'Doubles', 'Hard');
8280 insert into Tournament values(6, 'Wimbledon', 'London, Great Britain', '25-June-2007', '8-July-2007', 7, 'Singles', 'Grass');
8281 insert into Tournament values(7, 'Wimbledon', 'London, Great Britain', '25-June-2007', '8-July-2007', 6, 'Doubles', 'Grass');
8282 insert into Tournament values(8, 'Heineken Open', 'Auckland, New Zealand', '8-January-2007', '14-January-2007', 5, 'Singles', 'Hard');
8283 insert into Tournament values(9, 'Heineken Open', 'Auckland, New Zealand', '8-January-2007', '14-January-2007', 4, 'Doubles', 'Hard');
8284
8285 /*!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT */;
8286 /*!40101 SET CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */;
8287 /*!40101 SET COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */;
```

Terminal ▾ Jan 30 13:29

Open Save

tennis.sql tennismysql.sql

~ /Downloads/MTech TA Lab

tennis.sql

8235 (919, 2, 7, 3),
8236 (92, 1, 7, 4),
8237 (922, 2, 7, 5),
8238 (923, 2, 7, 5),
8239 (924, 2, 7, 5),
8240 (932, 2, 7, 5),
8241 (934, 1, 7, 4),
8242 (940, 1, 5, 7),
8243 (940, 2, 8, 6),
8244 (96, 3, 7, 5),
8245 (99, 2, 5, 7);
8246
8247 -- -----
8248
8249 --
8250 -- Table structure for table `Tournament`
8251 --
8252
8253 CREATE TABLE `Tournament` (
8254 `TID` int(11) DEFAULT NULL,
8255 `Name` varchar(20) DEFAULT NULL,
8256 `Location` varchar(30) DEFAULT NULL,
8257 `StartDate` varchar(50) DEFAULT NULL,
8258 `EndDate` varchar(50) DEFAULT NULL,
8259 `NumRounds` int(11) DEFAULT NULL,
8260 `TType` varchar(7) DEFAULT NULL,
8261 `Surface` varchar(10) DEFAULT NULL
8262) ENGINE=InnoDB DEFAULT CHARSET=latin1;
8263
8264 --
8265 -- Dumping data for table `Tournament`
8266 --
8267
8268 insert into Tournament values(0, 'Australian Open', 'Melbourne, Australia',
8269 insert into Tournament values(1, 'Australian Open', 'Melbourne, Australia', mysql> []
8270 insert into Tournament values(10, 'Brasil Open 2007', 'Costa do Sauipe, Brasil', '12-February-2007', '18-February-2007', 5, 'Singles', 'Clay');
8271 insert into Tournament values(11, 'Brasil Open 2007', 'Costa do Sauipe, Brasil', '12-February-2007', '18-February-2007', 4, 'Doubles', 'Clay');
8272 insert into Tournament values(12, 'Countrywide Classic', 'Los Angeles, CA, USA', '16-July-2007', '22-July-2007', 5, 'Singles', 'Hard');
8273 insert into Tournament values(13, 'Countrywide Classic', 'Los Angeles, CA, USA', '16-July-2007', '22-July-2007', 4, 'Doubles', 'Hard');
8274 insert into Tournament values(14, 'BMW Open', 'Munich, Germany', '30-April-2007', '6-May-2007', 5, 'Singles', 'Clay');
8275 insert into Tournament values(15, 'BMW Open', 'Munich, Germany', '30-April-2007', '6-May-2007', 4, 'Doubles', 'Clay');
8276 insert into Tournament values(2, 'French Open', 'Roland Garros, Paris, France', '26-May-2007', '10-June-2007', 7, 'Singles', 'Clay');
8277 insert into Tournament values(3, 'French Open', 'Roland Garros, Paris, France', '26-May-2007', '10-June-2007', 6, 'Doubles', 'Clay');
8278 insert into Tournament values(4, 'US Open', 'Flushing Meadows, NY, USA', '27-August-2007', '9-September-2007', 7, 'Singles', 'Hard');
8279 insert into Tournament values(5, 'US Open', 'Flushing Meadows, NY, USA', '27-August-2007', '9-September-2007', 6, 'Doubles', 'Hard');
8280 insert into Tournament values(6, 'Wimbledon', 'London, Great Britain', '25-June-2007', '8-July-2007', 7, 'Singles', 'Grass');
8281 insert into Tournament values(7, 'Wimbledon', 'London, Great Britain', '25-June-2007', '8-July-2007', 6, 'Doubles', 'Grass');
8282 insert into Tournament values(8, 'Heineken Open', 'Auckland, New Zealand', '8-January-2007', '14-January-2007', 5, 'Singles', 'Hard');
8283 insert into Tournament values(9, 'Heineken Open', 'Auckland, New Zealand', '8-January-2007', '14-January-2007', 4, 'Doubles', 'Hard');
8284
8285 /*!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT */;
8286 /*!40101 SET CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */;
8287 /*!40101 SET COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */;

nick@NICK: ~

mysql> insert into Tournament values(3, 'French Open', 'Roland Garros, Paris, France', '26-May-2007', '10-June-2007', 6, 'Doubles', 'Clay');
Query OK, 1 row affected (0.01 sec)

mysql> insert into Tournament values(4, 'US Open', 'Flushing Meadows, NY, USA', '27-August-2007', '9-September-2007', 7, 'Singles', 'Hard');
Query OK, 1 row affected (0.00 sec)

mysql> insert into Tournament values(5, 'US Open', 'Flushing Meadows, NY, USA', '27-August-2007', '9-September-2007', 6, 'Doubles', 'Hard');
Query OK, 1 row affected (0.01 sec)

mysql> insert into Tournament values(6, 'Wimbledon', 'London, Great Britain', '25-June-2007', '8-July-2007', 7, 'Singles', 'Grass');
Query OK, 1 row affected (0.00 sec)

mysql> insert into Tournament values(7, 'Wimbledon', 'London, Great Britain', '25-June-2007', '8-July-2007', 6, 'Doubles', 'Grass');
Query OK, 1 row affected (0.01 sec)

mysql> insert into Tournament values(8, 'Heineken Open', 'Auckland, New Zealand', '8-January-2007', '14-January-2007', 5, 'Singles', 'Hard');
Query OK, 1 row affected (0.01 sec)

mysql> insert into Tournament values(9, 'Heineken Open', 'Auckland, New Zealand', '8-January-2007', '14-January-2007', 4, 'Doubles', 'Hard');
Query OK, 1 row affected (0.02 sec)

SQL ▾ Tab Width: 8 ▾ Ln 8268, Col 1 ▾ INS

Terminal ▾ Jan 30 13:30

Open ▾ Save ▾

tennis.sql

tennismysql.sql
~/Downloads/MTech TA Lab

tennis.sql

tennismysql.sql

```

8235 (919, 2, 7, 3),
8236 (92, 1, 7, 4),
8237 (922, 2, 7, 5),
8238 (923, 2, 7, 5),
8239 (924, 2, 7, 5),
8240 (932, 2, 7, 5),
8241 (934, 1, 7, 4),
8242 (940, 1, 5, 7),
8243 (940, 2, 8, 6),
8244 (96, 3, 7, 5),
8245 (99, 2, 5, 7);
8246
8247 -- -----
8248
8249 --
8250 -- Table structure for table `Tournament`
8251 --
8252
8253 CREATE TABLE `Tournament` (
8254   `TID` int(11) DEFAULT NULL,
8255   `Name` varchar(20) DEFAULT NULL,
8256   `Location` varchar(30) DEFAULT NULL,
8257   `StartDate` varchar(50) DEFAULT NULL,
8258   `EndDate` varchar(50) DEFAULT NULL,
8259   `NumRounds` int(11) DEFAULT NULL,
8260   `TType` varchar(7) DEFAULT NULL,
8261   `Surface` varchar(10) DEFAULT NULL
8262 ) ENGINE=InnoDB DEFAULT CHARSET=latin1;
8263
8264 --
8265 -- Dumping data for table `Tournament`
8266 --
8267
8268 insert into Tournament values(0, 'Australian Open', 'Melbourne, Australia');
8269 insert into Tournament values(1, 'Australian Open', 'Melbourne, Australia');
8270 insert into Tournament values(10, 'Brasil Open 2007', 'Costa do Sauipe, Brasil', '12-February-2007', '18-February-2007', 5, 'Singles', 'Clay');
8271 insert into Tournament values(11, 'Brasil Open 2007', 'Costa do Sauipe, Brasil', '12-February-2007', '18-February-2007', 4, 'Doubles', 'Clay');
8272 insert into Tournament values(12, 'Countrywide Classic', 'Los Angeles, CA, USA', '16-July-2007', '22-July-2007', 5, 'Singles', 'Hard');
8273 insert into Tournament values(13, 'Countrywide Classic', 'Los Angeles, CA, USA', '16-July-2007', '22-July-2007', 4, 'Doubles', 'Hard');
8274 insert into Tournament values(14, 'BMW Open', 'Munich, Germany', '30-April-2007', '6-May-2007', 5, 'Singles', 'Clay');
8275 insert into Tournament values(15, 'BMW Open', 'Munich, Germany', '30-April-2007', '6-May-2007', 4, 'Doubles', 'Clay');
8276 insert into Tournament values(2, 'French Open', 'Roland Garros, Paris, France', '26-May-2007', '10-June-2007', 7, 'Singles', 'Clay');
8277 insert into Tournament values(3, 'French Open', 'Roland Garros, Paris, France', '26-May-2007', '10-June-2007', 6, 'Doubles', 'Clay');
8278 insert into Tournament values(4, 'US Open', 'Flushing Meadows, NY, USA', '27-August-2007', '9-September-2007', 7, 'Singles', 'Hard');
8279 insert into Tournament values(5, 'US Open', 'Flushing Meadows, NY, USA', '27-August-2007', '9-September-2007', 6, 'Doubles', 'Hard');
8280 insert into Tournament values(6, 'Wimbledon', 'London, Great Britain', '25-June-2007', '8-July-2007', 7, 'Singles', 'Grass');
8281 insert into Tournament values(7, 'Wimbledon', 'London, Great Britain', '25-June-2007', '8-July-2007', 6, 'Doubles', 'Grass');
8282 insert into Tournament values(8, 'Heineken Open', 'Auckland, New Zealand', '8-January-2007', '14-January-2007', 5, 'Singles', 'Hard');
8283 insert into Tournament values(9, 'Heineken Open', 'Auckland, New Zealand', '8-January-2007', '14-January-2007', 4, 'Doubles', 'Hard');
8284
8285 /*!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT */;
8286 /*!40101 SET CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */;
8287 /*!40101 SET COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */;
```

nick@NICK: ~

```

mysql> insert into Tournament values(5, 'US Open', 'Flushing Meadows, NY, USA', '27-August-2007', '9-September-2007', 6, 'Doubles', 'Hard');
Query OK, 1 row affected (0.01 sec)

mysql> insert into Tournament values(6, 'Wimbledon', 'London, Great Britain', '25-June-2007', '8-July-2007', 7, 'Singles', 'Grass');
Query OK, 1 row affected (0.00 sec)

mysql> insert into Tournament values(7, 'Wimbledon', 'London, Great Britain', '25-June-2007', '8-July-2007', 6, 'Doubles', 'Grass');
Query OK, 1 row affected (0.01 sec)

mysql> insert into Tournament values(8, 'Heineken Open', 'Auckland, New Zealand', '8-January-2007', '14-January-2007', 5, 'Singles', 'Hard');
Query OK, 1 row affected (0.01 sec)

mysql> insert into Tournament values(9, 'Heineken Open', 'Auckland, New Zealand', '8-January-2007', '14-January-2007', 4, 'Doubles', 'Hard');
Query OK, 1 row affected (0.02 sec)

mysql> /*!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT */;
Query OK, 0 rows affected (0.00 sec)

mysql> /*!40101 SET CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */;
Query OK, 0 rows affected (0.00 sec)

mysql> /*!40101 SET COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */;
Query OK, 0 rows affected (0.00 sec)
```

Terminal ▾ Jan 30 13:56

SQL Presentation.pdf 92.9% ▾

8

Tennis Database 9

Tables 10

CountryCodes 11

Player 12

PalyedIN 13

Tournament 14

Registration 15

MatchResults 16

RetiredMatch 17

Tiebreaker 18

SetScore 19

Match 20

MatchResults 21

RetiredMatch 22

Tiebreaker 23

SetScore 24

Table viewer

nick@NICK: ~

```
mysql> show tables;
+-----+
| Tables_in_tennis |
+-----+
| CountryCodes
| MatchResults
| Matches
| PlayedIn
| Player
| Registration
| RetiredMatch
| SetScore
| Tiebreaker
| Tournament
+-----+
10 rows in set (0.00 sec)

mysql>
```