

Phase 3 SQL operations

3.1 Insert records from 42_District_wise_crimes_committed_against_women_2001_2012.csv into a table

The screenshot shows the MySQL Workbench interface. The 'Query' tab is active, displaying a SQL query: `SELECT * FROM capstone_42_district_wise_crimes_committed_against_women_2001_2012;`. The 'Result Grid' shows the following data:

UT	DISTRICT	Year	Rape	Kidnapping and Abduction	Dowry Deaths	Assault on women with intent to outrage her modesty	Insult to modesty of Women	Cruelty by Husband Relatives
PRADESH	ADILABAD	2001	50	30	16	149	34	175
PRADESH	ANANTAPUR	2001	23	30	7	118	24	154
PRADESH	CHITTOOR	2001	27	34	14	112	83	186
PRADESH	CUDDAPAH	2001	20	20	17	126	38	57
PRADESH	EAST GODAVARI	2001	23	26	12	109	58	247
PRADESH	GUNTAKAL RLY.	2001	0	0	0	1	0	0
PRADESH	GUNTUR	2001	54	51	7	139	129	378
PRADESH	HYDERABAD CITY	2001	37	39	24	118	27	746
PRADESH	KARIMNAGAR	2001	56	49	62	414	81	224
PRADESH	KHAMMAM	2001	47	30	17	180	336	172
PRADESH	KRISHNA	2001	37	21	10	208	72	265
PRADESH	KURNOOL	2001	29	47	13	141	107	92

The 'Output' tab shows the execution of the query, with the following messages:

#	Time	Action	Message	Duration / Fetch
3	00:48:55	SHOW DATABASES	OK	0.000 sec
4	00:49:34	SHOW SESSION VARIABLES LIKE 'lower_case_table_names'	OK	0.000 sec
5	00:49:40	CREATE TABLE 'capstone'.'42_district_wise_crimes_committed_against_women_2001_2012' ('STATE/UT' text, 'DISTRICT' text, 'Year' int, 'Rape' int, 'Kidnapping and Abduction' int)	OK	0.000 sec
6	00:49:40	PREPARE stmt FROM 'INSERT INTO 'capstone'.'42_district_wise_crimes_committed_against_women_2001_2012' ('STATE/UT', 'DISTRICT', 'Year', 'Rape', 'Kidnapping and Abduction', 'Dowry Deaths', 'Assault on women with intent to outrage her modesty', 'Insult to modesty of Women', 'Cruelty by Husband Relatives') VALUES ('PRADESH', 'ADILABAD', 2001, 50, 30, 16, 149, 34, 175), ('PRADESH', 'ANANTAPUR', 2001, 23, 30, 7, 118, 24, 154), ('PRADESH', 'CHITTOOR', 2001, 27, 34, 14, 112, 83, 186), ('PRADESH', 'CUDDAPAH', 2001, 20, 20, 17, 126, 38, 57), ('PRADESH', 'EAST GODAVARI', 2001, 23, 26, 12, 109, 58, 247), ('PRADESH', 'GUNTAKAL RLY.', 2001, 0, 0, 0, 1, 0, 0, 0), ('PRADESH', 'GUNTUR', 2001, 54, 51, 7, 139, 129, 378), ('PRADESH', 'HYDERABAD CITY', 2001, 37, 39, 24, 118, 27, 746), ('PRADESH', 'KARIMNAGAR', 2001, 56, 49, 62, 414, 81, 224), ('PRADESH', 'KHAMMAM', 2001, 47, 30, 17, 180, 336, 172), ('PRADESH', 'KRISHNA', 2001, 37, 21, 10, 208, 72, 265), ('PRADESH', 'KURNOOL', 2001, 29, 47, 13, 141, 107, 92);	OK	0.000 sec


Query for that

Import the excel file and to see all the records type this

`SELECT * FROM 42_district_wise_crimes_committed_against_women_2001_2012;`

3.2

Write SQL query to find the highest number of rapes & Kidnappings that happened in which state, District, and year

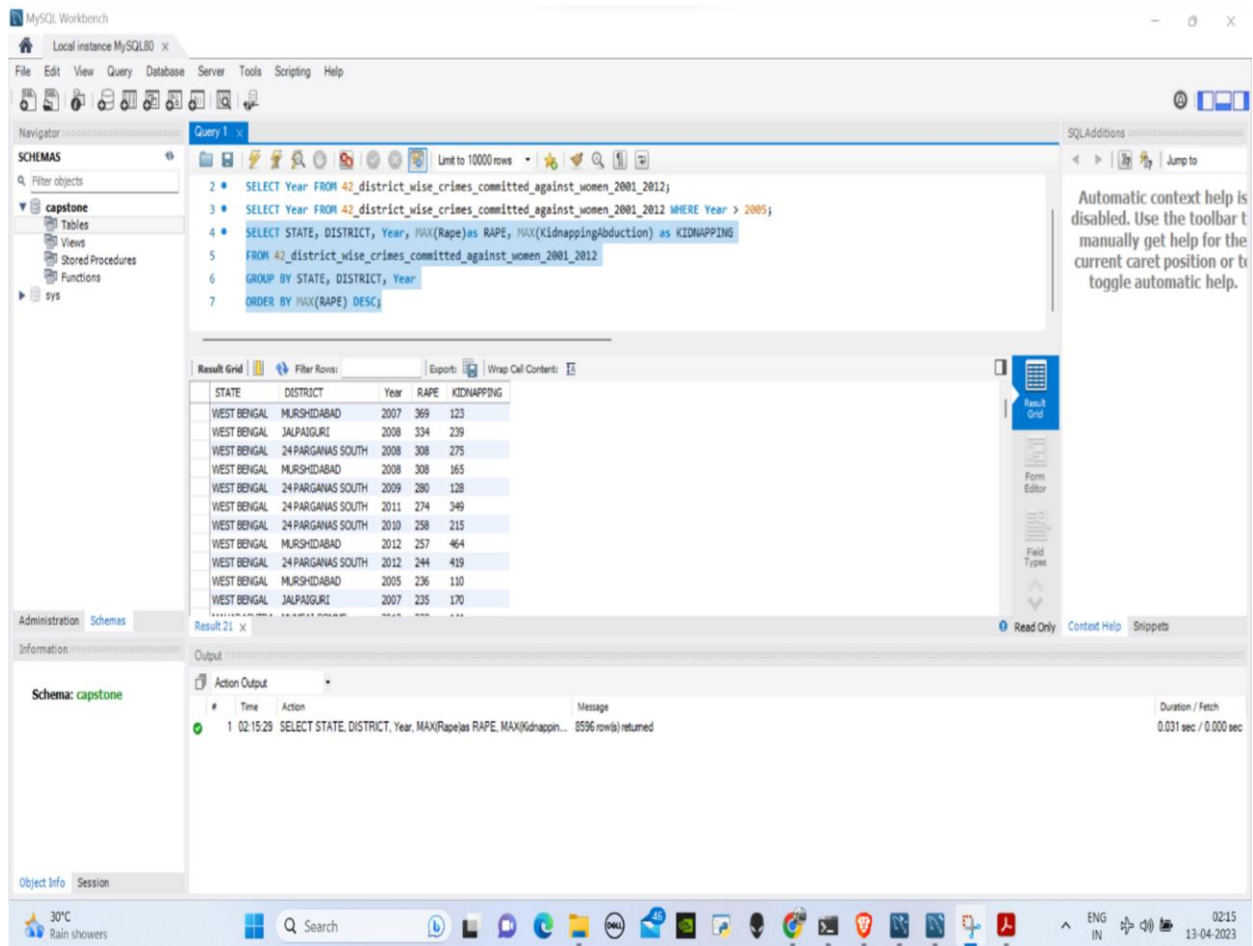

The screenshot shows the MySQL Workbench interface. The SQL editor contains the following query:

```
2 • SELECT Year FROM 42_district_wise_crimes_committed_against_women_2001_2012;  
3 • SELECT Year FROM 42_district_wise_crimes_committed_against_women_2001_2012 WHERE Year > 2005;  
4 • SELECT STATE, DISTRICT, Year, MAX(Rape)as RAPE, MAX(KidnappingAbduction) as KIDNAPPING  
5 FROM 42_district_wise_crimes_committed_against_women_2001_2012  
6 GROUP BY STATE, DISTRICT, Year  
7 ORDER BY MAX(RAPE) DESC;
```

The Results Grid displays the following data:

STATE	DISTRICT	Year	RAPE	KIDNAPPING
WEST BENGAL	MURSHIDABAD	2007	369	123
WEST BENGAL	JALPAIGURI	2008	334	239
WEST BENGAL	24 PARGANAS SOUTH	2008	308	275
WEST BENGAL	MURSHIDABAD	2008	308	165
WEST BENGAL	24 PARGANAS SOUTH	2009	280	128
WEST BENGAL	24 PARGANAS SOUTH	2011	274	349
WEST BENGAL	24 PARGANAS SOUTH	2010	258	215
WEST BENGAL	MURSHIDABAD	2012	257	464
WEST BENGAL	24 PARGANAS SOUTH	2012	244	419
WEST BENGAL	MURSHIDABAD	2005	236	110
WEST BENGAL	JALPAIGURI	2007	235	170

The Action Output pane shows the execution of the query:

```
1 02:15:29 SELECT STATE, DISTRICT, Year, MAX(Rape)as RAPE, MAX(Kidnapping... 8596 row(s) returned 0.031 sec / 0.000 sec
```

Query for this question is

```
SELECT STATE, DISTRICT, Year, MAX(Rape)as RAPE, MAX(KidnappingAbduction) as KIDNAPPING
```

```
FROM 42_district_wise_crimes_committed_against_women_2001_2012
```

```
GROUP BY STATE, DISTRICT, Year
```

```
ORDER BY MAX(RAPE) DESC;
```

3.3

Write SQL query to find All the lowest number of rapes & Kidnappings that happened in which state, District, and year

The screenshot shows the MySQL Workbench interface. The query editor contains the following SQL query:

```
7 ORDER BY MAX(RAPE) DESC;
8
9 SELECT STATE, DISTRICT, Year, MIN(Rape)as RAPE, MIN(KidnappingAbduction) as KIDNAPPING
10 FROM 42_district_wise_crimes_committed_against_women_2001_2012
11 GROUP BY STATE, DISTRICT, Year
12 ORDER BY MIN(RAPE) ;
```

The Results Grid shows the following data:

STATE	DISTRICT	Year	RAPE	KIDNAPPING
MIZORAM	SADHA	2012	0	1
NAGALAND	KIPHRE	2012	0	0
NAGALAND	LONGLENG	2012	0	0
NAGALAND	PEREN	2012	0	0
ODISHA	SRP(CUTTACK)	2012	0	0
PUNJAB	G.R.P	2012	0	0
SIXIM	NORTH	2012	0	0
TAMIL NADU	CHENNAI RLY.	2012	0	2
TAMIL NADU	TRICHY RLY.	2012	0	1
TRIPURA	GRP	2012	0	0
WEST BENGAL	SEALDAH G.R.P.	2012	0	5

The Output pane shows the execution log with the following messages:

#	Time	Action	Message	Duration / Fetch
1	02:15:29	SELECT STATE, DISTRICT, Year, MAX(Rape)as RAPE, MAX(Kidnapping...	8596 row(s) returned	0.031 sec / 0.000 sec
2	02:17:07	SELECT STATE, DISTRICT, Year, MIN(Rape)as RAPE, MIN(Kidnapping...	8596 row(s) returned	0.031 sec / 0.000 sec
3	02:17:26	SELECT STATE, DISTRICT, Year, MAX(Rape)as RAPE, MAX(Kidnapping...	8596 row(s) returned	0.016 sec / 0.016 sec
4	02:17:38	SELECT STATE, DISTRICT, Year, MIN(Rape)as RAPE, MIN(Kidnapping...	8596 row(s) returned	0.015 sec / 0.016 sec
5	02:18:12	SELECT STATE, DISTRICT, Year, MIN(Rape)as RAPE, MIN(Kidnapping...	8596 row(s) returned	0.031 sec / 0.000 sec

Query for this question is

```
SELECT STATE, DISTRICT, Year, MIN(Rape)as RAPE, MIN(KidnappingAbduction) as KIDNAPPING
```

```
FROM 42_district_wise_crimes_committed_against_women_2001_2012
```

```
GROUP BY STATE, DISTRICT, Year
```

```
ORDER BY MIN(RAPE) ;
```

3.4

Insert records from
02_District_wise_crimes_committed_against_ST_2001_2012.csv into a new
table

The screenshot shows the MySQL Workbench interface. The 'Query 1' window displays the following SQL query:

```
SELECT * FROM capstone.02_01_district_wise_crimes_committed_against_sc_2001_2012;
```

The 'Result Grid' shows the following data:

STATE	DISTRICT	Year	Murder	Rape	KidnappingAbduction	Dacoity	Robbery	Arson	Hurt	Prevention_of_atroc
ANDHRA PRADESH	ADILABAD	2001	0	1	4	0	0	0	3	0
ANDHRA PRADESH	ANANTAPUR	2001	0	4	0	0	0	0	49	21
ANDHRA PRADESH	CHITTOOR	2001	3	3	0	0	0	0	38	36
ANDHRA PRADESH	CUDDAPAH	2001	0	3	0	0	0	0	20	52
ANDHRA PRADESH	EAST GODAVARI	2001	1	3	0	0	0	0	3	12
ANDHRA PRADESH	GUNTAKAL RLY.	2001	0	0	0	0	0	0	0	0
ANDHRA PRADESH	GUNTUR	2001	4	5	1	0	0	3	53	16
ANDHRA PRADESH	HYDERABAD CITY	2001	0	2	1	0	0	0	0	40
ANDHRA PRADESH	KARIMNAGAR	2001	8	1	3	3	1	0	52	72
ANDHRA PRADESH	KHAMMAM	2001	2	6	0	0	0	0	12	51

The 'Output' window shows the following messages:

```
6 02:34:16 SHOW SESSION VARIABLES LIKE lower_case_table_n... OK 0.000 sec
7 02:34:16 SHOW DATABASES OK 0.000 sec
8 02:34:17 SHOW SESSION VARIABLES LIKE lower_case_table_n... OK 0.000 sec
9 02:34:23 CREATE TABLE 'capstone'.02_01_district_wise_crimes... OK 0.000 sec
10 02:34:23 PREPARE stmt FROM 'INSERT INTO 'capstone'.02_01... OK 0.000 sec
11 02:35:13 DEALLOCATE PREPARE stmt OK 0.000 sec
12 02:36:13 SELECT * FROM capstone.02_01_district_wise_crimes... 8597 row(s) returned 0.000 sec / 0.016 sec
```


Query for that

Import the excel file and to see all the records type this

```
SELECT * FROM 02_01_district_wise_crimes_committed_against_sc_2001_2012;
```

Write SQL query to find the highest number of dacoity/robbery in which district.

3.5

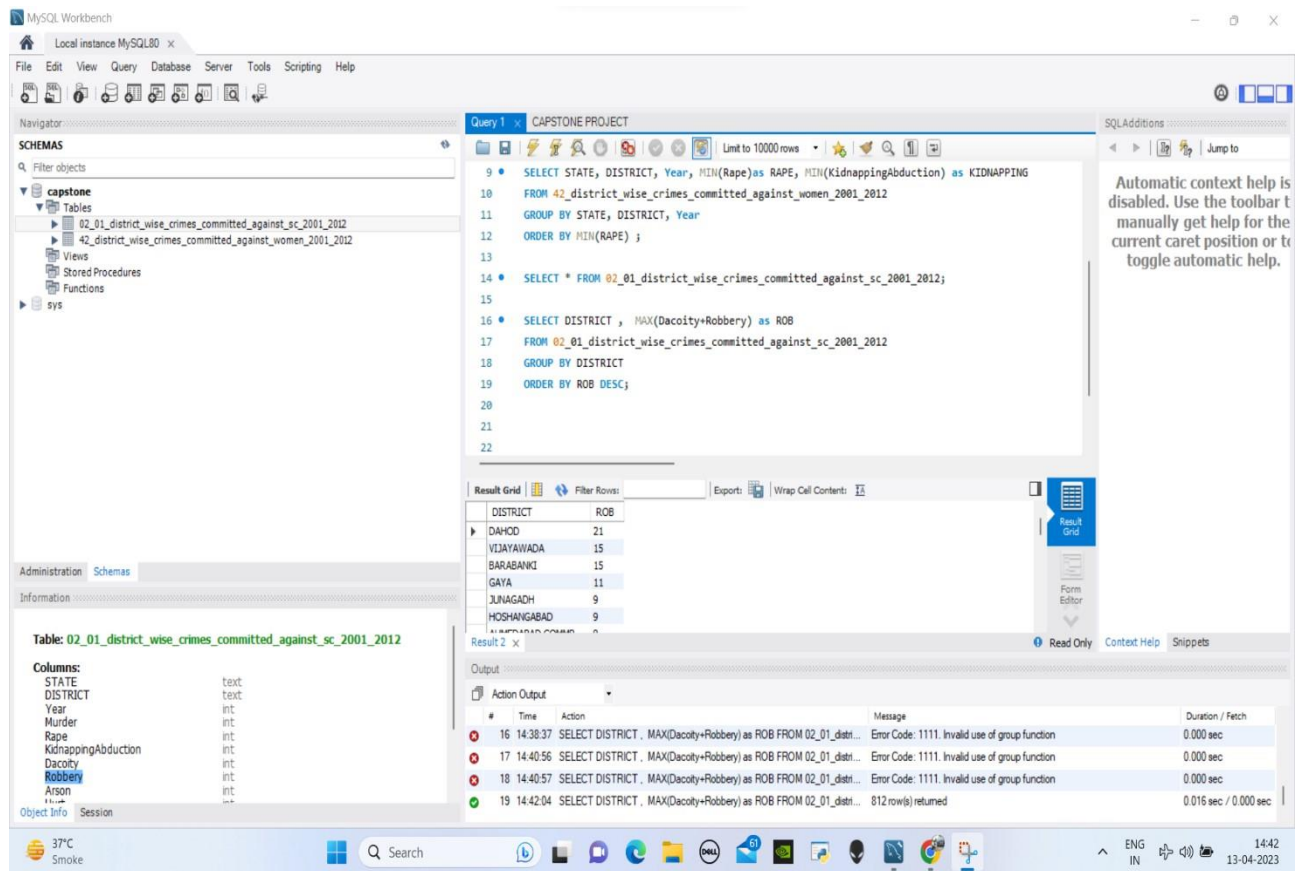

Query for this question is

SELECT DISTRICT , MAX(Dacoity+Robbery) as ROB


FROM 02_01_district_wise_crimes_committed_against_sc_2001_2012

GROUP BY DISTRICT

ORDER BY ROB DESC;

Write SQL query to find in which districts(All) the lowest number of murders happened.

3.6

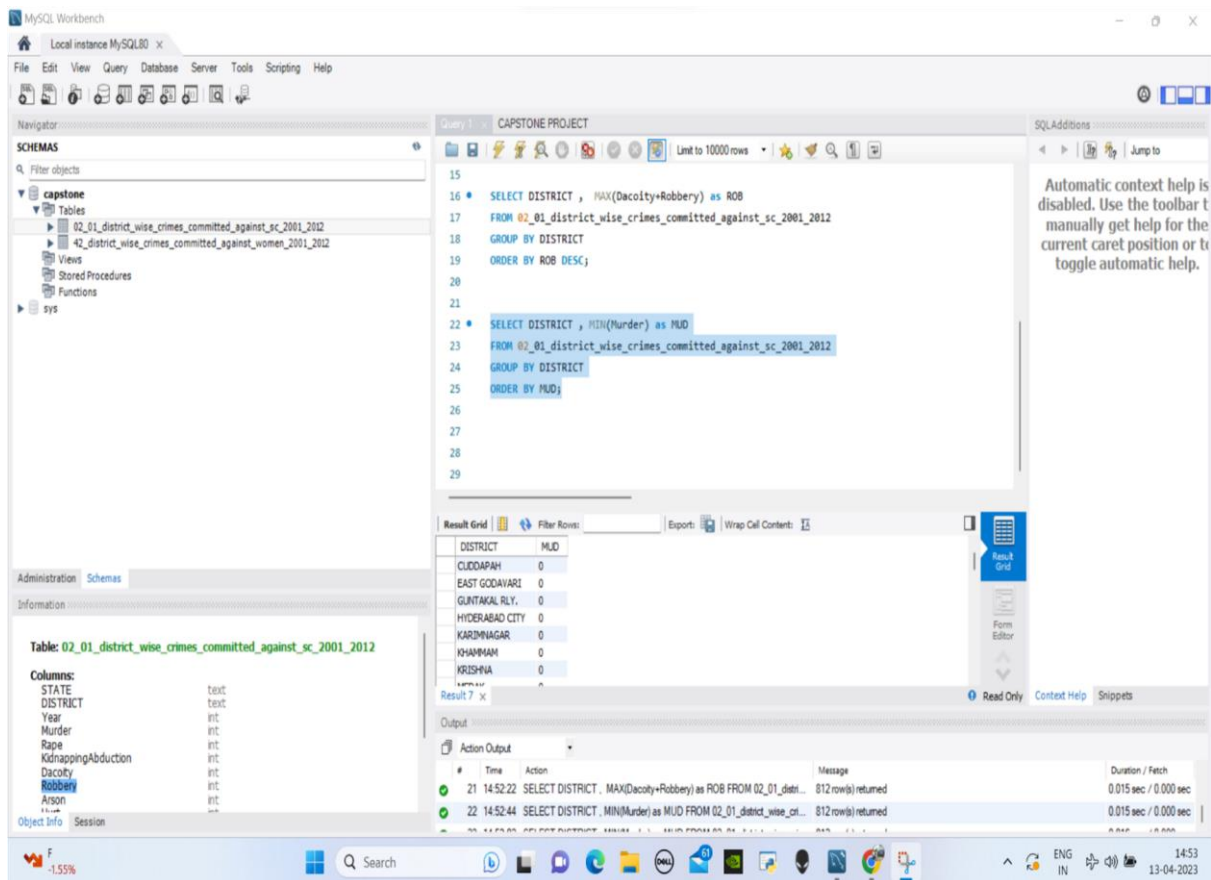

Query for this question is

SELECT DISTRICT , MIN(Murder) as MUD

FROM 02_01_district_wise_crimes_committed_against_sc_2001_2012

GROUP BY DISTRICT

ORDER BY MUD;

Write SQL query to find the number of murders in ascending order in district and yearwise.

3.7

The screenshot shows the MySQL Workbench interface. The 'Query Editor' window displays the following SQL query:

```
24 GROUP BY DISTRICT
25 ORDER BY MUD;
26
27
28 SELECT DISTRICT ,Year , MIN(Murder) AS MUD
29 FROM 02_01_district_wise_crimes_committed_against_sc_2001_2012
30 GROUP BY DISTRICT,Year;
31 ORDER BY MUD ;
32
33
```

The 'Result Grid' window shows the following data:

DISTRICT	Year	MUD
ALMORA	2008	0
CHAMOLI	2008	0
CHAMPAINIAT	2008	0
DEHRADUN	2008	0
HARIDWAR	2008	0
PAURI GARHWAL	2008	0
PITHORAGARH	2008	0
RUDRA PRAYAG	2008	0
TEHRU GARHWAL	2008	0
UTTARAKASHI	2008	0
24 PARGANAS N...	2008	0
24 PARGANAS S...	2008	0

The 'Table: 02_01_district_wise_crimes_committed_against_sc_2001_2012' is shown with the following columns:

Column	Type
STATE	Text
DISTRICT	Text
Year	Int
Murder	Int
Rape	Int
KidnappingAbduction	Int
Dacoity	Int
Robbery	Int
Arson	Int

The 'Output' window shows the execution of the query:

#	Time	Action	Message	Duration / Fetch
25	14:56:04	SELECT DISTRICT ,Year , MIN(Murder) AS MUD FROM 02_01_district_wi...	8407 row(s) returned	0.016 sec / 0.000 sec
26	14:56:17	SELECT DISTRICT ,Year , MIN(Murder) AS MUD FROM 02_01_district_wi...	8407 row(s) returned	0.016 sec / 0.000 sec
27	14:56:25	SELECT DISTRICT ,Year , MIN(Murder) AS MUD FROM 02_01_district_wi...	8407 row(s) returned	0.015 sec / 0.000 sec

Query for this question is


SELECT DISTRICT ,Year , MIN(Murder) AS MUD

FROM 02_01_district_wise_crimes_committed_against_sc_2001_2012

GROUP BY DISTRICT,Year

ORDER BY MUD ;

3.8.1 Insert records of STATE/UT, DISTRICT, YEAR, MURDER, ATTEMPT TO MURDER, and RAPE columns only from 01_District_wise_crimes_committed_IPC_2001_2012.csv into a new table

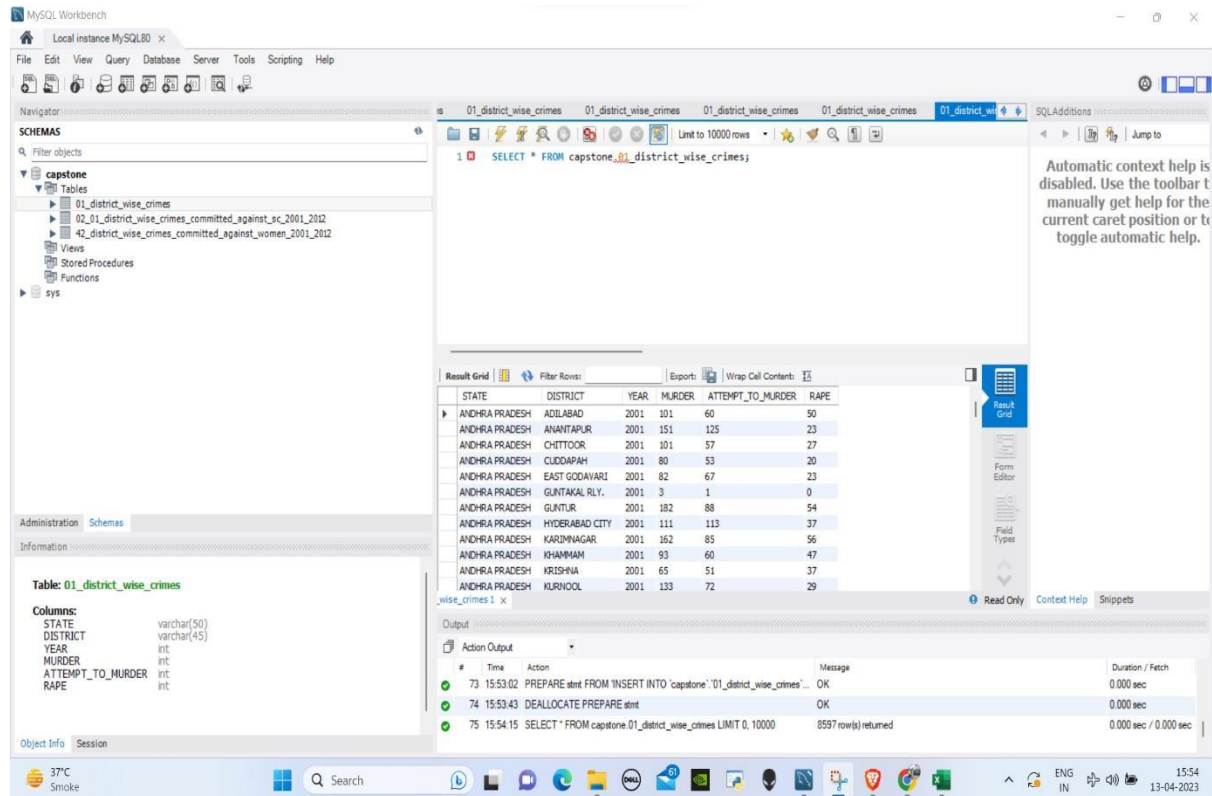

Query for that

Import the excel file with selected column which we want and to see all the records type this

`SELECT * FROM 01_district_wise_crimes;`

3.8.2 Write SQL query to find which District in each state/ut has the highest number of murders yearwise. Your output should show STATE/UT, YEAR, DISTRICT, and MURDERS.

The screenshot shows the MySQL Workbench interface. The left sidebar displays the 'SCHEMAS' tree with the 'capstone' database selected. The 'Tables' list includes '01_district_wise_crimes', '02_01_district_wise_crimes_committed_against_sc_2001_2012', and '02_district_wise_crimes_committed_against_women_2001_2012'. The main editor shows a SQL query for 'Query 1'.

```

30 GROUP BY DISTRICT,Year
31 ORDER BY MUD ;
32
33 • SELECT * FROM 01_district_wise_crimes;
34
35 • SELECT STATE, YEAR, DISTRICT, MAX(MURDER) AS MUD
36 FROM 01_district_wise_crimes
37 GROUP by STATE, DISTRICT, YEAR
38 ORDER BY MUD DESC;
39

```

The 'Result Grid' shows 13 rows of data:

STATE	YEAR	DISTRICT	MUD
BP-HAR	2004	PATNA	542
BP-HAR	2003	PATNA	484
BP-HAR	2002	PATNA	472
BP-HAR	2005	PATNA	436
BP-HAR	2001	PATNA	434
BP-HAR	2012	PATNA	356
BP-HAR	2008	PATNA	341
BP-HAR	2006	PATNA	338
UTTAR PRADESH	2001	MUZAFFARNAGAR	324
BP-HAR	2007	PATNA	317
BP-HAR	2009	PATNA	314
BP-HAR	2010	PATNA	304

The 'Output' pane at the bottom shows the execution log:

#	Time	Action	Message	Duration / Fetch
76	16:12:56	SELECT * FROM 01_district_wise_crimes LIMIT 0, 10000	8597 row(s) returned	0.000 sec / 0.016 sec
77	16:15:32	SELECT STATE, DISTRICT, YEAR, MAX(MURDER) AS MUD FROM 01_d...	8596 row(s) returned	0.016 sec / 0.000 sec
78	16:16:10	SELECT STATE, YEAR, DISTRICT, MAX(MURDER) AS MUD FROM 01_d...	8596 row(s) returned	0.015 sec / 0.000 sec

Query for this question is

SELECT STATE, YEAR, DISTRICT, MAX(MURDER) AS MUD

FROM 01_district_wise_crimes

GROUP by STATE, DISTRICT, YEAR

ORDER BY MUD DESC;

3.8.3 Store the above data (the result of 3.2) in DataFrame and analyze districts that appear 3 or more than 3 years and print the corresponding state/ut, district, murders, and year in descending order.

Query for this question is

```
SELECT * FROM answer;
```

```
SELECT STATE,DISTRICT,MUD,YEAR
```

```
FROM answer
```

```
WHERE DISTRICT IN (
```

```
    SELECT DISTRICT
```

```
    FROM answer
```

```
    GROUP BY DISTRICT
```

```
    HAVING COUNT(DISTINCT YEAR) >= 3
```

```
)
```

```
ORDER BY DISTRICT DESC , YEAR DESC;
```