Django's Authentication System

COMP 8347

Usama Mir

usamamir@uwindsor.ca

University of Windsor

Django Authentication

Topics

- Django's Authentication System
  - User Objects
  - Authentication
  - Login and Logout

- Permissions and Authorization

Authentication System

- Django's authentication system consists of:
  - *User* objects
  - A configurable password hashing system
  - Forms and view tools for logging in users, or restricting content.
  - **Permissions:** Binary (yes/no) flags designating whether a user may perform a certain task.
  - **Groups**: A generic way of applying labels and permissions to more than one user.

Installation

- Add these 2 items in INSTALLED_APPS setting:
    - 'django.contrib.auth' : contains the core of the authentication framework, and its default models.
    - 'django.contrib.contenttypes': allows permissions to be associated with models you create.
- Add these 2 items in MIDDLEWARE_CLASSES setting:
    - SessionMiddleware: manages sessions across requests.
    - AuthenticationMiddleware: associates users with requests using sessions.
- By default: already included in settings.py.

User Objects

- User objects are the core of the authentication system.
  - Typically represent people interacting with your site.
  - Used to enable things like restricting access, registering user profiles etc.
  - Only one class of user exists in Django's authentication framework
    - Different user types e.g., 'superusers' or admin 'staff' users are just user objects with special attributes set
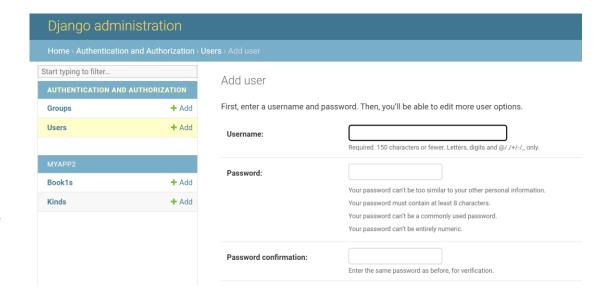   - not different classes of user objects.

University of Windsor

User Attributes

- The primary attributes of the default user are:
  - **Username**: Required. 30 characters or fewer.
    - May contain alphanumeric, _, @, +, . and - characters.
  - *first_name*: Optional. 30 characters or fewer.
  - *last_name*: Optional. 30 characters or fewer.
  - *Email*: Optional. Email address.
  - **Password**: Required.
    - A hash of, and metadata about, the password.
    - Django doesn't store the raw password.
    - <algorithm>$<iterations>$<salt>$<hash>
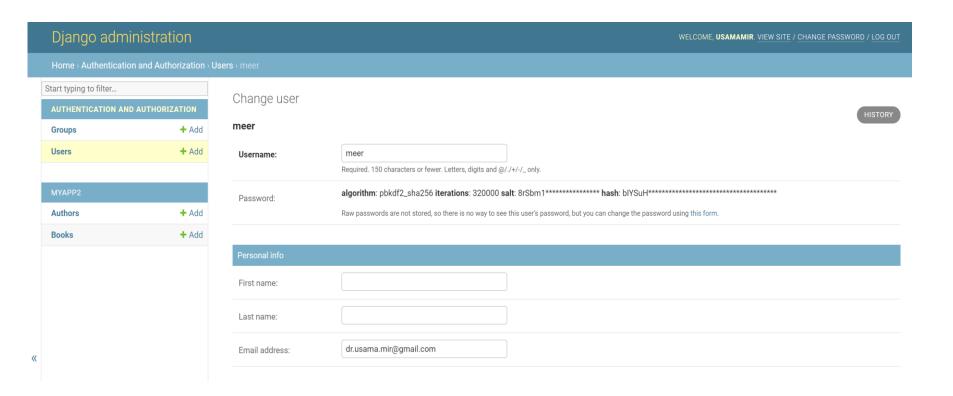   - Algorithm = PBKDF2, Hash = SHA256
    - Iteration = 640000

Using Admin Interface

- Admin module can be used to view and manage users, groups, and permissions.
  - Both django.contrib.admin and django.contrib.auth must be installed.
  - The "Add user" admin page requires you to choose a username and password before allowing you to edit the rest of the user's fields.
  - User passwords are **not** displayed in the admin (nor stored in the database).
    - a link to a password change form allows admins to change user passwords

University of Windsor

Using Admin Interface

Changing Passwords

- Django does not store raw (clear text) passwords on the user model,
  - It only stores a hash.
  - Do **<u>not</u>** manipulate the password attribute of the user directly.
    - **user.password = 'new password' # Don't do this!**
  - Passwords can be changed using **set_password()**

from django.contrib.auth.models import User
u = User.objects.get(username='john')
u.set_password('new password')
u.save()

University _{of} Windsor

Authenticating Users

- *authenticate()*: Takes credentials in the form of keyword arguments:

    - For the default configuration this is username and password

        - Returns a User object if the password is valid for the given username.
        - Returns None if the credentials are invalid.
        - **authenticate(**request=*None,* ****credentials)**

Authenticating Users

```python
from django.contrib.auth import authenticate
user = authenticate(username='john', password='secret')
if user is not None: # password verified for the user
    if user.is_active:
        print("User is valid, active and authenticated")
    else:
        print("The credentials are valid, but the account has been disabled!")
else: # unable to verify the username and password
    print("username and password did not match.")
```

Login

- ***login()*** *function*: used to attach an *authenticated* user to the current session.

    – It takes an HttpRequest object and a User object.
    - Associates the **user** with the current **request** object
    - Ex. login(request,user)

    – Any data set during the anonymous session is retained in the session after a user logs in.

    – ***login()*** function can be called from a view.

- Normally, authenticate() is used before login().

Logout

- Use django.contrib.auth.logout() within your view.
    - It takes an HttpRequest object and has no return value.
    - logout() does not throw any errors if the user wasn't logged in.
    - Cleans out the session data for the current request

from django.contrib.auth import logout

def logout_view(request):
    logout(request)
    # Redirect to a success page.

University of Windsor

Default Permissions

- 4 default permissions created for each Django model defined in one of your installed apps :
  - *Add*: Access to view the "add" form and add an object
    - limited to users with "add" permission for that type of object.
  - *Change*: Access to view the change list, view the "change" form and change objects
    - limited to users with the "change" permission for that type of object.
  - *Delete*: Access to delete objects
    - limited to users with the "delete" permission for that type of object.
  - *View:* Access to view objects

University of Windsor

Assign User Permissions

Groups

- Groups allow you to apply permissions to a group of users.
  - A user in a group automatically has the permissions granted to that group.
  - Also a convenient way to categorize users to give them some label, or extended functionality.

Change group

dummygroup

| Name: | dummygroup |

Permissions:

Available permissions ⍰		Chosen permissions ⍰
🔍 Filter		sessions | session | Can add session
admin | log entry | Can add log entry		sessions | session | Can change session
admin | log entry | Can change log entry		sessions | session | Can delete session
admin | log entry | Can delete log entry		sessions | session | Can view session
admin | log entry | Can view log entry		
auth | group | Can add group		
auth | group | Can change group		
auth | group | Can delete group		
auth | group | Can view group		
auth | permission | Can add permission		
auth | permission | Can change permission		
auth | permission | Can delete permission		
auth | permission | Can view permission		
auth | user | Can add user		

Choose all ⊘   Remove all ⊖

Hold down "Control", or "Command" on a Mac, to select more than one.

Create Users and Assign Them to Groups

dummy

Username:

> dummy

Required. 150 characters or fewer. Letters, digits and @/./+/-/_ only.

Password:

algorithm: pbkdf2_sha256 **iterations**: 320000 **salt**: jLe72y**************** **hash**: d7Au9f**

Raw passwords are not stored, so there is no way to see this user's password, but you can change the password using this form.

Permissions

☑ Active
Designates whether this user should be treated as active. Unselect this instead of deleting accounts.

☐ Staff status
Designates whether the user can log into this admin site.

☐ Superuser status
Designates that this user has all permissions without explicitly assigning them.

Groups:

Available groups ❓	Chosen groups ❓
🔍 Filter	
dummygroup	

References

- https://docs.djangoproject.com/en/5.0/topics/auth/

- https://docs.djangoproject.com/en/5.0/topics/auth/passwords/

- https://docs.djangoproject.com/en/5.0/topics/auth/customizing/

- https://docs.djangoproject.com/en/5.0/ref/contrib/contenttypes/

- https://docs.djangoproject.com/en/2.1/ref/urlresolvers/#reverse

- https://realpython.com/django-redirects/#the-httpresponseredirect-class

- https://www.youtube.com/watch?v=eBsc65jTKvw

- https://www.youtube.com/watch?v=dBctY3-Z5hY

- Python Web Development with Django, by J. Forcier et al.

- Slides from Dr. Arunita and Dr. Saja

University of Windsor