










Ashima Garg

Course: GATE
Computer Science Engineering(CS)

-  HOME
-  MY TEST
-  BOOKMARKS
-  MY PROFILE
- REPORTS
-  BUY PACKAGE
-  ASK AN EXPERT
-  OFFER
- EXCLUSIVE OFFER FOR OTS
STUDENTS ONLY ON BOOK
PACKAGES

SINGLE SUBJECT : COMPILER DESIGN (GATE - 2019) - REPORTS

OVERALL ANALYSIS

COMPARISON REPORT

SOLUTION REPORT

ALL(33)

CORRECT(22)

INCORRECT(8)

SKIPPED(3)

Q. 1

Which of the following statements is true?

[Have any Doubt ?](#)

A

Every regular grammar is LL(1).

B

Every regular language is LL(1).

C

$S \rightarrow abc|ad$, this grammar is not LL(1) but it is LL(2).

D

Both (b) and (c)

Your answer is **Correct**

Solution :

- (d)
- Every regular grammar need not to be LL(1) because regular grammar may contain recursion, left factoring, ambiguity.
 - Every regular language is LL(1), is true. Because at least there exist a regular grammar which is LL(1).
 - $S \rightarrow abc|ad$
IN LL(1), First (S) = {a}
Both production will enter in the same entry because left factoring in LL(1).
Hence not LL(1).
In LL(2), both production will enter into differ entry because no left factoring is present.
Hence it is LL(2).

QUESTION ANALYTICS

Q. 2

The resolution of externally defined symbols and functions associated with the program is performed by

[Have any Doubt ?](#)

A

Loader

B

Linker

Your answer is **Correct**

Solution :

- (b)
- C
- Compiler

D

Assembler



Ashima Garg

Course: GATE

Computer Science Engineering(CS)

HOME

MY TEST

BOOKMARKS

MY PROFILE

REPORTS

BUY PACKAGE

ASK AN EXPERT

OFFER

 EXCLUSIVE OFFER FOR OTS
STUDENTS ONLY ON BOOK
PACKAGES

Q. 3

Consider the following grammar G. Where X, Y and Z are non-terminals and remaining are terminals used:

 $X \rightarrow Y | Z$
 $Y \rightarrow a | b$
 $Z \rightarrow c | b$

Which of the following statements are correct?

 S_1 : SLR(1) can parse all the strings that are generated by grammar G.

 S_2 : LR(1) can parse all the strings that are generated by grammar G.

Have any Doubt ?

A

 Only S_1

B

 Only S_2

C


 Both S_1 and S_2

D

None of these

 Your answer is **Correct**
Solution :

(d)

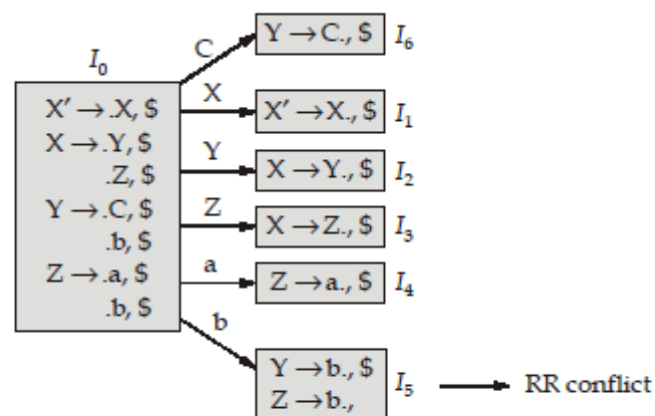
 In the above LR(1) parsers there is RR conflict in I_5 state.

It is not LR(1), it means it will also not be SLR(1).

QUESTION ANALYTICS

Q. 4

Assume input is scanned from left to right of the given expression during parsing. Which of the following derivations for a top down parser uses while parsing.

Have any Doubt ?

A

Right most derivation

B

Left most derivation

 Your answer is **Correct**
Solution :

(b)

Left most derivation is used.

C

Reverse of right most derivation


Ashima Garg

Course: GATE

Computer Science Engineering(CS)

HOME

MY TEST

BOOKMARKS

MY PROFILE

REPORTS

BUY PACKAGE

ASK AN EXPERT

OFFER

 EXCLUSIVE OFFER FOR OTS
STUDENTS ONLY ON BOOK
PACKAGES

QUESTION ANALYTICS

Q. 5

Consider the following SDT:

 $L \rightarrow E$
 $E \rightarrow \{\text{print}(' +')\} E_1 + T/T$
 $T \rightarrow \{\text{print}(' *')\} T_1 * F/F$
 $F \rightarrow (E)$
 $F \rightarrow \text{digit} \{\text{print}(\text{digit.val})\}$

Which of the following options is true?

[Have any Doubt ?](#)

A


Evaluating prefix expression

B

Infix to prefix

 Your answer is **Correct**
Solution :

(b)

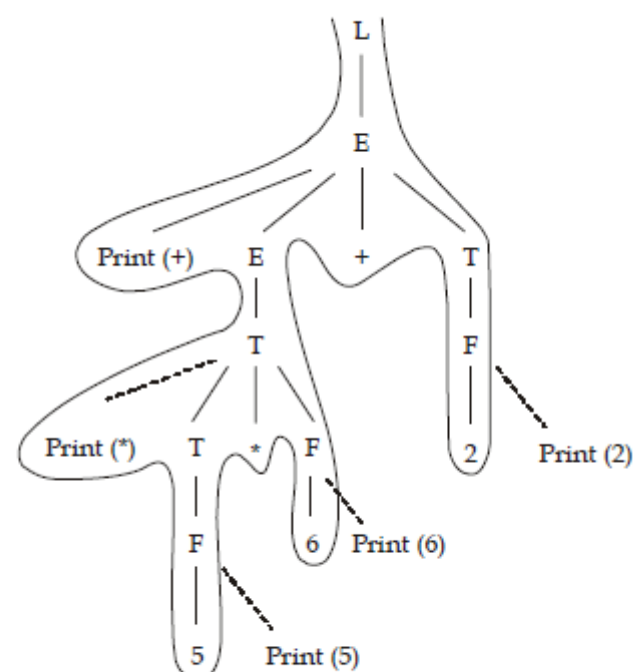 Let us take an expression $5 * 6 + 2$ and parse it.

Output: + * 5 6 2

It converts an infix expression to prefix expression.

C

Infix to postfix

D

Evaluating postfix expression

QUESTION ANALYTICS

Q. 6

Consider the following CFG:

 $X \rightarrow (Y) \mid Z$
 $Y \rightarrow XY'$
 $Y' \rightarrow \epsilon \mid *XY$

 Where X, Y, Y' are non-terminals and $*, Z$ are terminals. What is the FIRST and FOLLOW of Y ?

[Have any Doubt ?](#)

A

FIRST = { }, ϵ }



Ashima Garg

Course: GATE

Computer Science Engineering(CS)

- HOME
- MY TEST
- BOOKMARKS
- MY PROFILE
- REPORTS
- BUY PACKAGE
- ASK AN EXPERT
- OFFER
- EXCLUSIVE OFFER FOR OTS STUDENTS ONLY ON BOOK PACKAGES

FIRST = {(, ∈}

FOLLOW = {), ∈}

C

FIRST = {), *}

FOLLOW = {), ∈}

D

FIRST = {(, Z}

FOLLOW = {)}

Your answer is **Correct**

Solution :
(d)

FIRST (Y) = {(, Z}

FOLLOW (Y) = {)} ∪ FOLLOW (Y')

= {)} ∪ {)}

= {)}

QUESTION ANALYTICS

Q. 7

Which of the following sufficient to convert an arbitrary CFG to an LL(1) grammar?

[Have any Doubt ?](#)

A

Only left recursion

B

Only ambiguity

C

Both left recursion and left factoring

D

None of the above

Your answer is **Correct**

Solution :
(d)

A grammar is LL(1) if it does not contain
(a) Left recursion
(b) Ambiguity
(c) Left factoring
Hence to convert an arbitrary CFG to LL(1) grammar all three should be eliminated.

QUESTION ANALYTICS

Q. 8

Consider the grammar defined by the following production rules with 2 operators + and –

$X \rightarrow X + Y \mid Z$

$Y \rightarrow Y - Z \mid Z$

$Z \rightarrow id$

[Have any Doubt ?](#)

A

‘+’ is left associative while ‘–’ is right associative.


B




Ashima Garg

Course: GATE

Computer Science Engineering(CS)

HOME

MY TEST

BOOKMARKS


MY PROFILE

REPORTS

BUY PACKAGE

ASK AN EXPERT

OFFER

EXCLUSIVE OFFER FOR OTS
STUDENTS ONLY ON BOOK
PACKAGES

Both have not fixed associativity.

D

Both are left associative.

Your answer is **Correct**

Solution :

(d)

Both X and Y have left recursion.

So +, – both are left associative.

QUESTION ANALYTICS

Q. 9

Which of the following grammar is operator grammar with variables E, T, A, B are non-terminals and a, b, ϵ , id are terminals

Have any Doubt ?

A

$E \rightarrow E + E$

$E \rightarrow E * E$

$E \rightarrow id$

$E \rightarrow \epsilon$

B

$E \rightarrow EA$

$A \rightarrow b$

$A \rightarrow a$

$E \rightarrow id$

C

$E \rightarrow E + E$

$E \rightarrow E * E$

$E \rightarrow id$

$E \rightarrow a$

Your answer is **Correct**

Solution :

(c)

A grammar G is said to be operator grammar if

1. It does not contain null production.

2. It does not contain 2 adjacent variable on right hand side.

So, clearly option (a), (b) and (d) are incorrect.

D

$E \rightarrow T + B$

$B \rightarrow E + A$

$A \rightarrow a$

$B \rightarrow b$

$T \rightarrow \epsilon$

QUESTION ANALYTICS

Q. 10

In a bottom-up evaluation of a syntax directed definition, inherited attribute can

Have any Doubt ?

A

Always be evaluated.



Ashima Garg

Course: GATE
Computer Science Engineering(CS)

- HOME
- MY TEST
- BOOKMARKS
- MY PROFILE
- REPORTS
- BUY PACKAGE
- ASK AN EXPERT
- OFFER
- EXCLUSIVE OFFER FOR OTS STUDENTS ONLY ON BOOK PACKAGES

Solution :
(b)
A SDT is called S attributed if it has only synthesized attributed. L-attributed definitions contain both synthesized and inherited attributes.

C
Be evaluated only if the definition has synthesized attributes.

D
Never be evaluated.

QUESTION ANALYTICS

Q. 11

```
int main ( )  
{  
    int a, b; // initialize integer a, b  
    a = 10;  
    b = 15;  
    printf("a = %d, b = %d", a++, b--);  
}
```

The number of tokens in the above C program is _____.

See your Answers

29

Correct Option

Solution :
29

```
main ( )  
{  
    int a, b;      // initialize integer a, b  
    a = 10;  
    b = 15;  
    Printf("a = %d, b = %d", a++ , b--);  
}
```

Total 29 tokens are available in the above C program.

Your Answer is 28

QUESTION ANALYTICS

Q. 12

Let G be any grammar with the following productions:

- $X \rightarrow X + Y \mid Y$
- $Y \rightarrow Y * Z \mid Z$
- $Z \rightarrow (X)$
- $Z \rightarrow id$

If LR(1) parser is used to parse the above grammar, then total how many look-a-heads are present for the item $X \rightarrow .Y$ and $Z \rightarrow .id$ in the initial state _____.

Have any Doubt ?

3

Correct Option



Ashima Garg
Course: GATE
Computer Science Engineering(CS)

- HOME
- MY TEST
- BOOKMARKS
- MY PROFILE
- REPORTS
- BUY PACKAGE
- ASK AN EXPERT
- OFFER
- EXCLUSIVE OFFER FOR OTS STUDENTS ONLY ON BOOK PACKAGES

$X \rightarrow .X + Y, \{ \$, + \}$
 $X \rightarrow .Y, \{ \$ \}$... (i)
 $Y \rightarrow .Y * Z, \{ \$, * \}$
 $Y \rightarrow .Z, \{ \$, * \}$
 $Z \rightarrow .(X) \{ \$, * \}$
 $Z \rightarrow .id, \{ \$, * \}$... (ii)

So, total (3) look-a-heads are there.

Your Answer is 2

QUESTION ANALYTICS

Q. 13

Consider the following grammar G:

$S \rightarrow aXb \mid cd$
 $X \rightarrow a \mid b$


The number of DFA states in LR(0) construction is _____.

Have any Doubt ?

9

Your answer is Correct9

Solution :
9

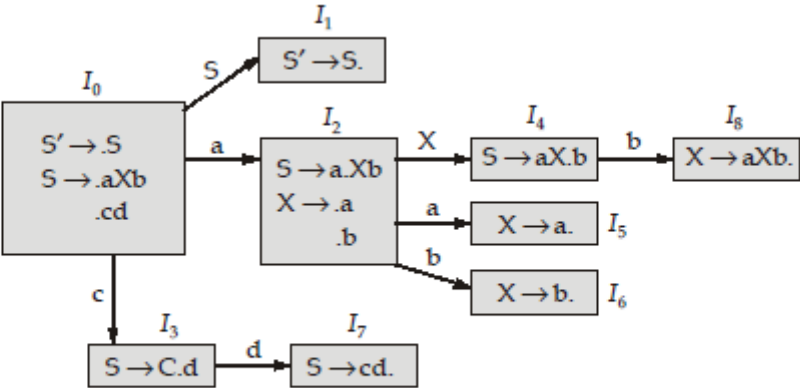

Total 9 states are there.

QUESTION ANALYTICS

Q. 14

Consider the following statements:

- S_1 : Static allocation binding do not change at runtime.
 - S_2 : Heap allocation allocates and de-allocates memory at runtime.
 - S_3 : Non-local data such as global constants are known during compile time and placed in static area.
- The number of correct statements are _____.

Have any Doubt ?

3

Correct Option

Solution :
3
All the above statements are correct.

Your Answer is 2

QUESTION ANALYTICS


Ashima Garg

Course: GATE

Computer Science Engineering(CS)

HOME

MY TEST

BOOKMARKS

MY PROFILE

REPORTS

BUY PACKAGE

ASK AN EXPERT

OFFER

 EXCLUSIVE OFFER FOR OTS
STUDENTS ONLY ON BOOK
PACKAGES

Consider the following statements:

 S_1 : Three address code is a linearized representation of syntax tree.

 S_2 : The syntax tree not depicts the natural hierarchical structure of source program.

How many number of statements are correct _____.

[Have any Doubt ?](#)

1

Correct Option

Solution :

1

- Three address code is linear representation of syntax tree in which each statement can have at most 3-address. So, S_1 is true.
- The syntax tree depicts the natural hierarchical representation of source program. So, S_2 is false. Hence only one statement is correct.

Your Answer is 2

QUESTION ANALYTICS

Q. 16

Let G be the following grammar:

 $S \rightarrow XYfg$
 $X \rightarrow XS_m \mid \epsilon$
 $Y \rightarrow XhS \mid \epsilon$

Variables S, X and Y are non-terminals and f, g, h, m are terminals. The number of productions will be in G after elimination of all the NULL productions are _____.

[Have any Doubt ?](#)

8

 Your answer is **Correct**8

Solution :

8

 Remove $X \rightarrow \epsilon$, then we get

 $S \rightarrow XYfg \mid Yfg$
 $X \rightarrow XS_m \mid S_m$
 $Y \rightarrow XhS \mid \epsilon \mid hS$

 Now remove $Y \rightarrow \epsilon$, then we get

 $S \rightarrow XYfg \mid Yfg \mid Xfg \mid fg$
 $X \rightarrow XS_m \mid S_m$
 $Y \rightarrow XhS \mid hS$

So, total 8 productions will be there after eliminating null productions.

QUESTION ANALYTICS

Q. 17

Consider the following grammar:

 $S \rightarrow XX$
 $X \rightarrow b$
 $X \rightarrow aX$

Where S and X are non-terminals and a, b are terminals. Which of the following can be the viable prefixes?

[Have any Doubt ?](#)

A

baab



Ashima Garg

Course: GATE

Computer Science Engineering(CS)

HOME

MY TEST

BOOKMARKS

MY PROFILE

REPORTS

BUY PACKAGE

ASK AN EXPERT

OFFER

 EXCLUSIVE OFFER FOR OTS
STUDENTS ONLY ON BOOK
PACKAGES

Correct Option

Solution :

(b)

Viable prefixes: Combination of non-terminal and terminal which can be in the stack during parsing is called viable prefix.

A handle $X \rightarrow b$ is available. So whenever terminal b is encountered it is popped out before inserting new element into the stack.

Option (a) is wrong because before popping 'b' element 'aab' is inserted.

Option (b) is correct after 'b' no element has been inserted.

So, option (c) and (d) are also incorrect.

C

aaabab

D

bbbaX

QUESTION ANALYTICS

Q. 18

Consider the following C program:

Program 1:

```
int main ()
{
    int a = 3;
    @_ /* hello world */
    return 0;
}
```

Program 3:

```
int main ()
{
    int x = 20;
    /* hello world
    if (x > 20)
    x = 10;
}
```

Program 2:

```
int main ()
{
    int x = 10;
    if (x > 20)
    x = 20;
}
```

Program 4:

```
int main ()
{
    int a = 09;
    /* hello world */
}
```

Assume programs are compiled same as given above. How many programs result in lexical error?

Have any Doubt ?

A

1

B

2

C

3

 Your answer is **Correct**

Solution :

(c)

Any symbols \$, ', @ like that gives lexical error in C if put anywhere outside of string and comment lines. They can not pass the lexer because the lexer can not recognize them as a valid token.

- Program 1 gives lexical error because "@" written outside comment.
- Program 2 having no lexical error but producing semantic error by syntax analyzer.
- Program 3 gives lexical error closing comment lines /* is missing.
- Program 4 gives lexical error because integer has been assigned an invalid octal number '09'.

D


Ashima Garg

Course: GATE

Computer Science Engineering(CS)

HOME

MY TEST

BOOKMARKS

MY PROFILE

REPORTS

BUY PACKAGE

ASK AN EXPERT

OFFER

 EXCLUSIVE OFFER FOR OTS
STUDENTS ONLY ON BOOK
PACKAGES

Q. 19

Which of the following statements holds true?

[Have any Doubt ?](#)


A

The precedence of operator always depends on the level at which they are defined.

 Your answer is **Correct**
Solution :

(a)

Let us take a grammar

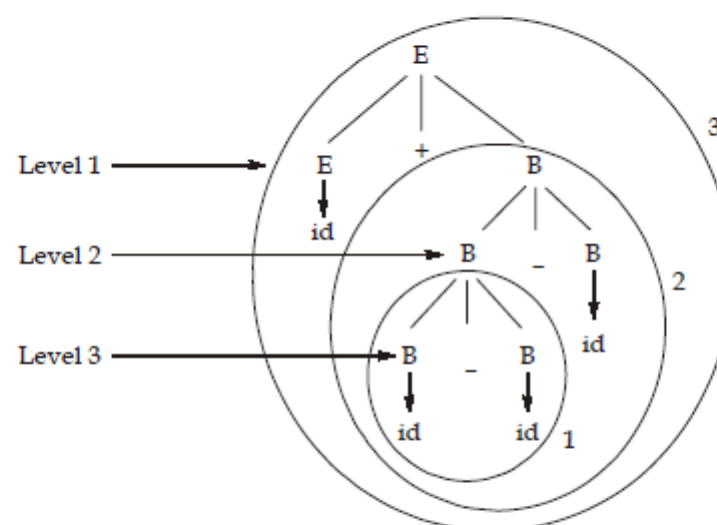 $E \rightarrow E + B \mid id$
 $B \rightarrow B - B \mid id$
Syntax tree:


- Statement (a) correct. In this grammar '-' operator is computed first because they are at higher level than '+' operator.
- Statement (b) is incorrect because precedence will be different at different level.
- Statement (c) is also wrong because, when the '-' operator encountered as shown in circle (1) and (2), operator inside circle (2) will be computed first because they are at higher level than circle (1). Here left associativity has computed first.

B

Precedence of operator '+' and '-' will be same, when they are at level 1 and level 2 respectively of syntax tree.

C

Associativity does not play role in higher precedence.

D

Both (a) and (b)

[QUESTION ANALYTICS](#)
Q. 20

Assume X, Y, Z represents the number of unfilled entries in the LR(0), SLR(1) and LR(1) table respectively. A common grammar G have been successfully parsed by all the three mentioned parsers. What is the relation over X, Y and Z?

[Have any Doubt ?](#)

A

 $X \leq Y \leq Z$

 Your answer is **Correct**
Solution :

(a)

 In general, number of unfilled entries in LR(0) \leq number of unfilled entries in SLR(1) \leq number of unfilled entries in LR(1).

So option (a) holds true.



Ashima Garg

Course: GATE
Computer Science Engineering(CS)

HOME

MY TEST

BOOKMARKS

MY PROFILE

REPORTS

BUY PACKAGE

ASK AN EXPERT

OFFER

EXCLUSIVE OFFER FOR OTS
STUDENTS ONLY ON BOOK
PACKAGES

X = Y = Z

C
X ≥ Y ≤ Z

D
X < Y < Z

QUESTION ANALYTICS

Q. 21

Consider the following code segment:

X = A/b
Y = C + D
Y = Y - X
X = D + Y
Z = F + Y
Z = Z + A

The minimum number of total variables required to convert the above code segment to static single assignment form is

Have any Doubt ?

A
9

B
10

C
11

Your answer is **Correct**

Solution :
(c)

In static single assignment, each assignment to variable should be specified with distinct name

$t_1 = t_2 / t_3$
 $t_4 = t_5 + t_6$
 $t_7 = t_4 - t_1$
 $t_8 = t_6 + t_7$
 $t_9 = t_{10} + t_7$
 $t_{11} = t_9 + t_2$

So total 11 variables.

D
12

QUESTION ANALYTICS

Q. 22

Consider the following statements:

- (i) Type checking is done during all the phases especially in syntax analysis phase.
- (ii) Target code generation phase is machine independent code generation.
- (iii) SDT with only synthesized attribute, always have a order of evaluation.
- (iv) Symbol table is constructed during analysis part of compiler

Which of the above is correct?

Have any Doubt ?

A
(i) and (ii) only

Your answer is **Wrong**



Ashima Garg

Course: GATE

Computer Science Engineering(CS)

HOME

MY TEST

BOOKMARKS

MY PROFILE

REPORTS

BUY PACKAGE

ASK AN EXPERT

OFFER

 EXCLUSIVE OFFER FOR OTS
STUDENTS ONLY ON BOOK
PACKAGES

Solution :

(b)

- Type checking is done during semantic analysis phase.
- Target code generation is machine specific.
- SDT with only synthesized attribute does not have any cyclic dependency. So always have order of evaluation.
- Symbol table is constructed during the lexical, syntax and semantic analysis phase.

C

(ii) and (iv)

D

(i) and (ii) only

QUESTION ANALYTICS

Q. 23

Consider the following two sets of LR(1) items of LR(1) grammar:

$A \rightarrow d., c$	$A \rightarrow d., b f$
$B \rightarrow d., b$	$B \rightarrow d., d \$$
$X \rightarrow .fx, g$	$X \rightarrow .fx, \$$
$Y \rightarrow .g, a$	$Y \rightarrow .g, \$$

Which of the following statement related to merging of the two sets in the corresponding parser is true?

- Can be merged but will result in S-R conflicts.
- Can be merged but will result in R-R conflicts.
- Can not be merged since goto of f is leading to SR conflict with $A \rightarrow d.,$
- Can not be merged since look ahead are different.

Have any Doubt ?

A

I only

B

III and IV only

 Your answer is **Wrong**


C

I, II and III only

Correct Option

Solution :

(c)

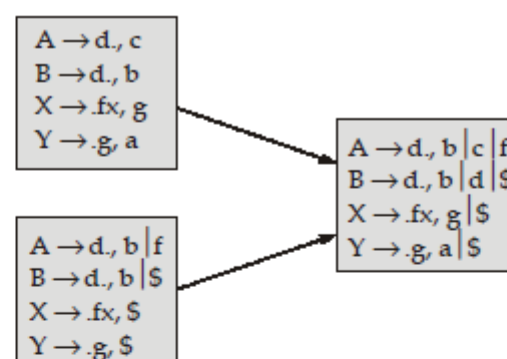

- Can be merged but will results in S-R conflict is true because of productions.

$A \rightarrow d., b c \textcircled{f}$
$X \rightarrow .\textcircled{f}x, g \$$

- Can be merged but will results in R-R conflict is true because of productions.

$A \rightarrow d., \textcircled{b} c f$
$B \rightarrow d., \textcircled{b} d \$$

2-different production will be in the same entry.









- Goto of f leading to SR conflict is true.

- Cannot be merged since look-a-heads are different false, because merging does not d



Ashima Garg

Course: GATE
Computer Science Engineering(CS)

-  HOME
-  MY TEST
-  BOOKMARKS
-  MY PROFILE
- REPORTS
-  BUY PACKAGE
-  ASK AN EXPERT
-  OFFER
-  EXCLUSIVE OFFER FOR OTS
STUDENTS ONLY ON BOOK
PACKAGES

I and II only

QUESTION ANALYTICS

Q. 24

Consider the given SDT having left recursion. Which of the following options is correct after elimination of left recursion from the SDT.

$$X \rightarrow XY \{X.x = f(X.x, Y.y)\}$$
$$X \rightarrow Z \{X.x = g(Z.z)\}$$

Have any Doubt ? 

A

$$X \rightarrow Z \{X.x = g(Z.z)\} X'$$
$$X' \rightarrow Y \{X'.x = f(X.x, Y.y)\} X'$$

B

$$X \rightarrow Z \{X.x = g(Z.z)\} R$$
$$R \rightarrow Y \{R.x = f(X.x, Y.y)\} R$$
$$R \rightarrow \epsilon$$

Your answer is **Correct**

Solution :

(b)

As we know,

$$A \rightarrow A\alpha \mid B$$

After eliminating LR

$$A \rightarrow BR$$

$$R \rightarrow \alpha R \mid \epsilon$$

In the given case

$$\alpha = Y \{X.x = f(X.x, Y.y)\}$$

Final production after eliminating will be

$$X \rightarrow Z \{X.x = g(Z.z)\} R$$

$$R \rightarrow Y \{R.x = f(X.x, Y.y)\} R$$

$$R \rightarrow \epsilon$$

So, option (b) is correct.

C

$$X \rightarrow Z \{X.x = g(Z.z)\} R$$
$$R \rightarrow \{R.x = f(X.x, Y.y)\} Y$$
$$R \rightarrow \epsilon$$

D

None of the above

QUESTION ANALYTICS

Q. 25

Consider the following grammar:

$$S \rightarrow XaXb \mid YbYa$$
$$X \rightarrow \epsilon$$
$$Y \rightarrow \epsilon$$

The above grammar is:

Have any Doubt ? 

A

LL(1) but not LR(1)

B



Ashima Garg

Course: GATE

Computer Science Engineering(CS)

HOME

MY TEST

BOOKMARKS

MY PROFILE

REPORTS

BUY PACKAGE

ASK AN EXPERT

OFFER

 EXCLUSIVE OFFER FOR OTS
STUDENTS ONLY ON BOOK
PACKAGES

Solution :


(b)

First (S) = {a, b}

First (X) = {ε}; FOLLOW (X) = {a, b}

First (Y) = {ε}; FOLLOW (Y) = {a, b}

→ Grammar is LL(1).

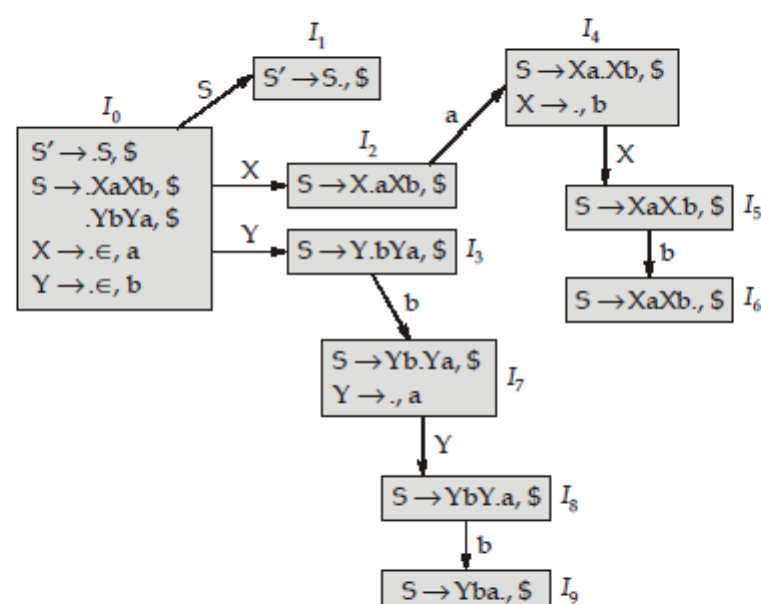

Grammar is not SLR(1) because of conflict at the state I_0 . Hence it will not be LR(0) also. The above grammar is LR(1).

Hence option (b) is correct.

C

LR(0) but not LL(1)

D

SLR(1) and LR(1)

QUESTION ANALYTICS

Q. 26

Consider the following statements and choose the option which are not correct about parsers.

Have any Doubt ?

A

Operator precedence parsers can parse some ambiguous grammars.

B

LR(1) grammars can not be LL(1) but can be LR(0).

C

CLR(1) don't have SR conflict.

D

Both (b) and (c)


Your answer is **Correct**

Solution :

(d)

Some LR(1) grammars can also be LL(1).

So option (b) is incorrect.

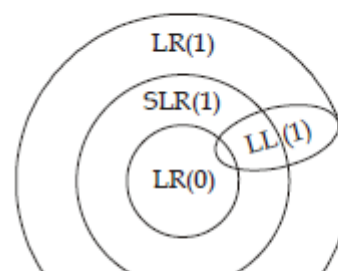





Ashima Garg

Course: GATE

Computer Science Engineering(CS)

HOME

MY TEST


BOOKMARKS


MY PROFILE

REPORTS

BUY PACKAGE

ASK AN EXPERT

OFFER

EXCLUSIVE OFFER FOR OTS
STUDENTS ONLY ON BOOK
PACKAGES

So, option (a) is correct.

QUESTION ANALYTICS

Q. 27

Consider the following statements with respect to LR parsers:

S_1 : To occur a conflict minimum 2 productions is required.

S_2 : At least one of the production should to reduce.

Which of the following is correct?

Have any Doubt ?

A
 S_1 and S_2 sufficient for conflict

B
 S_1 or S_2 alone sufficient for conflict

C
 S_1 and S_2 necessary to conflict

Your answer is **Correct**

Solution :

(c)

Statements S_1 and S_2 are the necessary conditions but not sufficient to occur conflict during par
So, option (c) is correct.

For eg: Consider the grammar

$S \rightarrow AA$

$A \rightarrow aA \mid b$

Both statements S_1 and S_2 are satisfying but still it has not any conflict and it is LR(0).

D
None of the above

QUESTION ANALYTICS

Q. 28

Consider the following SDT, with non-terminals $\{X, Y, Z, W, M\}$ and $\{*, id\}$ as terminals.

$X \rightarrow Y * Z$ {Print 3}

$Y \rightarrow Y * W$ {Print 3}

$Y \rightarrow W$ {Print 2}

$Z \rightarrow N + Z$ {Print 4}

$Z \rightarrow N$ {Print 2}

$N \rightarrow id$ {Print 1}

$W \rightarrow id$ {Print 1}

Using the above SDT, the output printed by a bottom-up parser for the input $id * id + id + id$ is:

Have any Doubt ?


A
121112443

Your answer is **Correct**

Solution :

(a)

Given input $id * id + id + id$

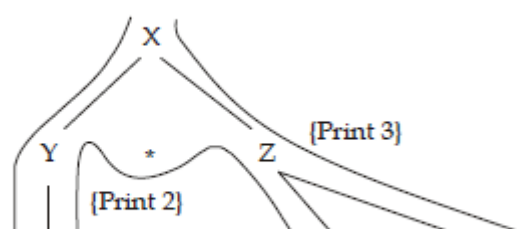

**Ashima Garg**

Course: GATE

Computer Science Engineering(CS)

HOME

MY TEST

BOOKMARKS


MY PROFILE

REPORTS

BUY PACKAGE

ASK AN EXPERT

OFFER

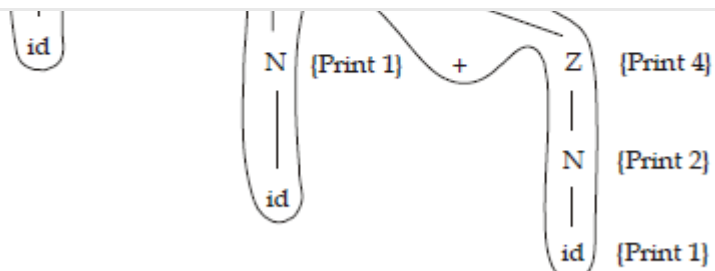 EXCLUSIVE OFFER FOR OTS
STUDENTS ONLY ON BOOK
PACKAGES**Output → 121112443**B
211112443C
421144331D
122114433

QUESTION ANALYTICS

Q. 29

Consider the intermediate code given below:


1. $i = 10$
2. $j = 1$
3. $a = i * j$
4. $b = i + j$
5. If $b \leq a$ goto 7
6. $a = a + 1$
7. $i = i - 1$ goto 3

X and Y are the number of nodes and edges in the control flow-graph constructed for the above code then the value of (X + Y) is _____.

[See your Answers](#)

15

Correct Option

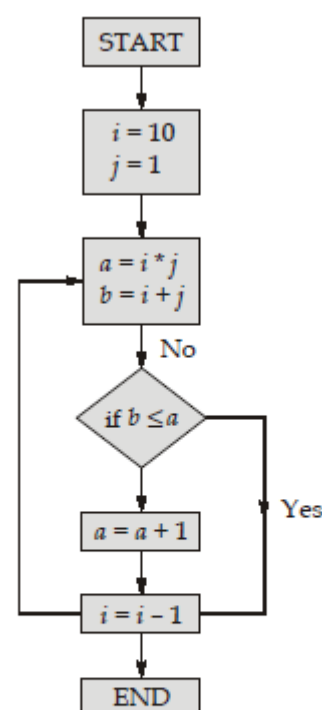Solution :
15

Number of nodes X = 7
Number of edges Y = 8
= X + Y = 15


Ashima Garg

Course: GATE

Computer Science Engineering(CS)

HOME

MY TEST

BOOKMARKS

MY PROFILE

REPORTS

BUY PACKAGE

ASK AN EXPERT

OFFER

 EXCLUSIVE OFFER FOR OTS
STUDENTS ONLY ON BOOK
PACKAGES

Q. 30

The attributes of four arithmetic operators with precedence and associativity is show in the table:

Operator	Precedence	Associativity
*	3	Left
-	4	Left
+	2	Right
↑	1	Right

Note: Higher number has higher precedence.

 The value of the expression $10 - 6 - 2 \uparrow 8 - 6 + 1 * 2 \uparrow 1 + 1$ is _____.

[Have any Doubt ?](#)

65536

 Your answer is **Correct**65536

Solution :

65536

Given expression:

$$\begin{aligned}
 & \textcircled{1} \\
 & \frac{((10 - 6) - 2)}{\textcircled{2}} \uparrow \frac{(8 - 6)}{\textcircled{3}} + 1 * 2 \uparrow 1 + 1 \\
 & \Rightarrow 2 \uparrow 2 + \frac{(1 * 2)}{\textcircled{4}} \uparrow 1 + 1 \\
 & \Rightarrow 2 \uparrow \frac{(2 + 2)}{\textcircled{6}} \uparrow \frac{(1 + 1)}{\textcircled{5}} \\
 & \Rightarrow \frac{(2 \uparrow (4 \uparrow 2))}{\textcircled{7}} \\
 & \textcircled{8} \\
 & \Rightarrow 2 \uparrow 16 \\
 & \Rightarrow 65536
 \end{aligned}$$

QUESTION ANALYTICS

Q. 31

Consider the given 3-address table for the set of instructions of a basic blocks.

Number	Instruction	Meaning
1	Load a, T_1	$T_1 \leftarrow a$
2	Load b, T_2	$T_2 \leftarrow b$
3	Add T_1, T_2, T_3	$T_3 \leftarrow T_1 + T_2$
4	Load c, T_4	$T_4 \leftarrow c$
5	MUL T_3, T_4, T_5	$T_5 \leftarrow T_3 \times T_4$
6	Store T_1, a	$a \leftarrow T_5$

The minimum number of register are required for the above basic block instructions with no memory spills is _____.

[Have any Doubt ?](#)

2

Correct Option

Solution :

2

$$\begin{aligned}
 R_1 & \leftarrow a \\
 R_2 & \leftarrow b \\
 R_2 & \leftarrow R_1 + R_2 \\
 R_1 & \leftarrow c \\
 R_1 & \leftarrow R_1 * R_2
 \end{aligned}$$



Ashima Garg

Course: GATE

Computer Science Engineering(CS)

HOME

MY TEST

BOOKMARKS

MY PROFILE

REPORTS

BUY PACKAGE

ASK AN EXPERT

OFFER

 EXCLUSIVE OFFER FOR OTS
STUDENTS ONLY ON BOOK
PACKAGES

Your Answer is 3

QUESTION ANALYTICS

Q. 32

A grammar that has not any epsilon productions and also free from unit productions. The maximum number of reduce moves that can be taken during bottom up evaluation of 25 token string by bottom up parsers is _____.

[Have any Doubt ?](#)

49

Correct Option

Solution :

49

$$\text{Maximum number of reduce moves for } n \text{ token} = 2n - 1$$

$$\text{So, for 25 tokens} = 2 \times 25 - 1 = 49$$

QUESTION ANALYTICS

Q. 33

Consider the following grammar:

$$X \rightarrow YY \mid aXb$$

$$Y \rightarrow dY \mid f$$

The total number of inadequate states in SLR(1) parsing table of the above grammar are _____.


[Have any Doubt ?](#)

0

 Your answer is **Correct**0

Solution :

0

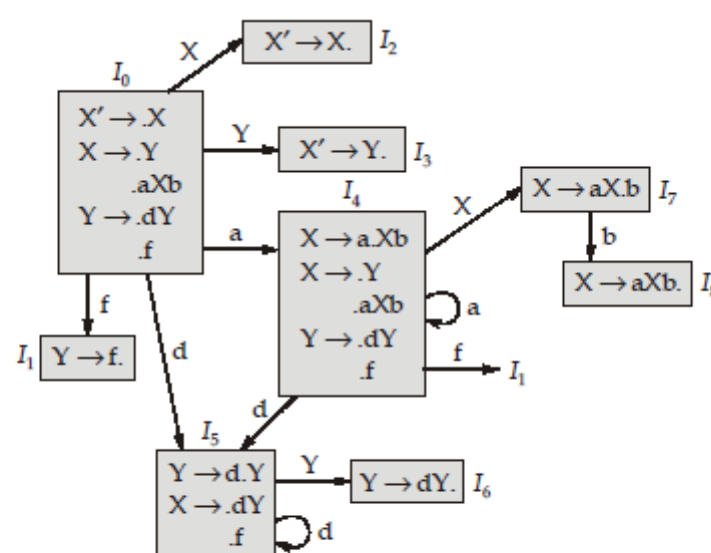

Inadequate state = Number of S-R conflict or RR conflict states
 Number of inadequate state = 0

QUESTION ANALYTICS