


1 Mobile Time Recording

1.1 General

Employees can use the application *Time and attendance* to make clockings optionally at stationary PZE terminals or on a smartphone, tablet or the web.

1.2 Overview

If you call the application, the following screen opens:

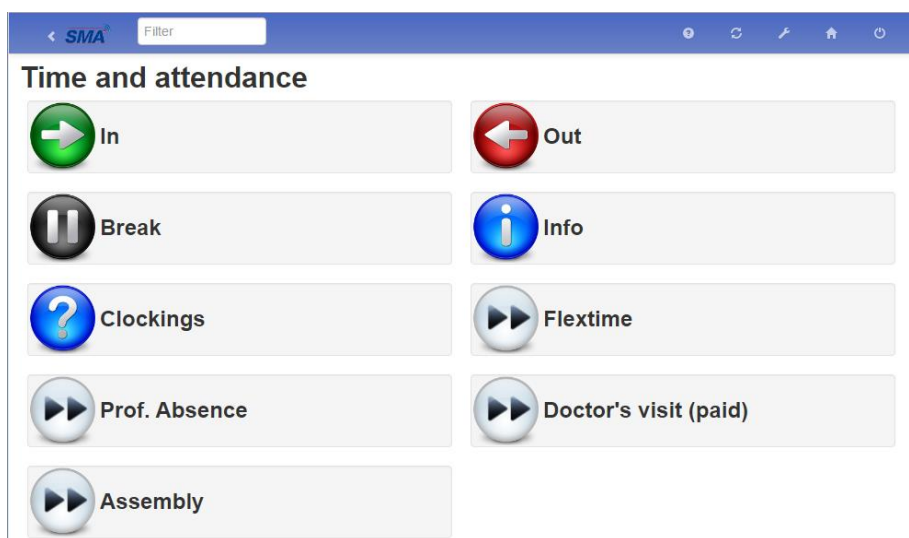

In the HYDRA standard, the terminal number 254 is stored in the SMA settings. This way, the SMA *Time and attendance* uses the selection of absence reasons and label texts for keys specified for terminal 254 in the terminal configuration (MOC). If you want to specify a different selection of absence reasons or different label texts on a specific PC used for SMA, then you must store an additional terminal configuration (MOC). Use terminal number 255, for example. For the PC in question, store the terminal number 255 in the SMA settings. The configuration of terminal 255 is then used for this PC.

If you change SMA settings, this change is stored for each Windows user separately. If you change the terminal configuration (MOC), these changes are applied when a person logs in the next time.

The screenshot shows the 'Settings' tab of the application. Under the 'System' section, there is a dropdown menu showing 'MW40-CLONE:8080'. Below this are three checked checkboxes: 'Terminal mode', 'Show "person" field', and 'Show "badge" field'. At the bottom, there is a 'Terminal' label above a text input field containing the number '254'. This input field is highlighted with a red rectangular border.

Note: For information on the terminal configuration on the MOC, refer to the documentation of the SMA implementation.

When you configure the terminal on the MOC, you must be careful to use **terminal type 254 (not terminal number !)**. This terminal type specifies the terminal as SMA terminal. This terminal type is not used when the licenses (e.g. AIP-HRF) are calculated and when system parameters for terminals are identified. This specification ensures that the number of required licenses is correctly calculated.

Making a clocking

To make a clocking, the following dialog opens:


The screenshot shows a 'Clocking' dialog box. At the top left is a back arrow and the 'SMA' logo. The title 'Clocking' is centered at the top. The dialog contains the following fields: 'Time' with the value '16:19', 'Status' with the value 'In', 'Cost center' with an empty field and a right arrow, 'Person' with the value '96665', 'Staff badge no.' with the value '6541', and 'Pin code' with an empty field. At the bottom are two buttons: 'OK' (blue) and 'Cancel' (gray).

If you click the field *Cost center*, a selection list opens. The time is then posted for the selected cost center. This field is only available if the option *Cost center posting* is activated in the settings.

Use the personnel number or the staff badge number and the pin code to identify the employee. The fields *Show "person" field* and *Show "badge" field* in the settings specify which of the two fields is available. If all three fields are not visible, the values stored in the settings are processed.

Info

Use the button with the symbol  to show the current account balances:

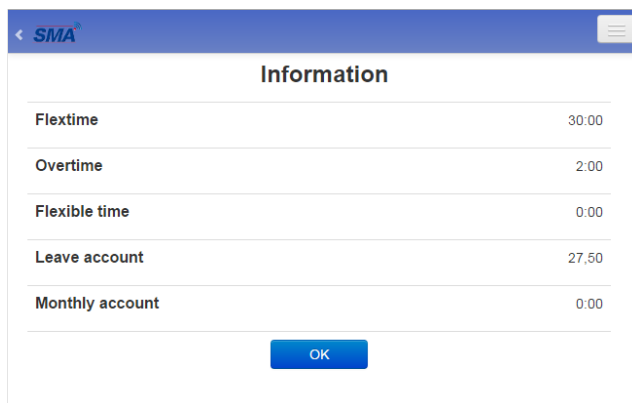


Information	
Flextime	30:00
Overtime	2:00
Flexible time	0:00
Leave account	27,50
Monthly account	0:00

OK

Displaying clockings

Use the button with the symbol  to show the clockings of the current day and of the last 7 days.

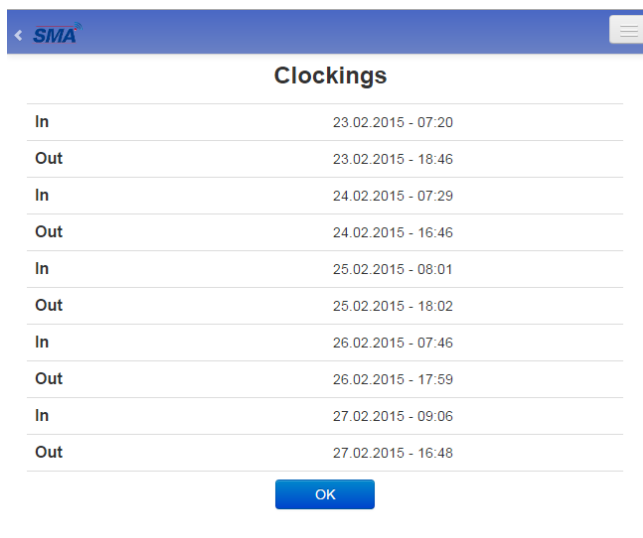

Clockings	
In	23.02.2015 - 07:20
Out	23.02.2015 - 18:46
In	24.02.2015 - 07:29
Out	24.02.2015 - 16:46
In	25.02.2015 - 08:01
Out	25.02.2015 - 18:02
In	26.02.2015 - 07:46
Out	26.02.2015 - 17:59
In	27.02.2015 - 09:06
Out	27.02.2015 - 16:48

OK