



# Object/Relational Mapper Entity Framework DbContext

---

.NET CORE

*An **object-relational mapper (O/RM)** enables developers to work with a database using objects. This eliminates the need for most of the data-access code they usually need to write. **EF Core** can serve as an ORM in .NET applications*

[HTTPS://DOCS.MICROSOFT.COM/EN-US/EF/CORE/](https://docs.microsoft.com/en-us/ef/core/)

# Object-Relational Mapping

[https://en.wikipedia.org/wiki/Object-relational\\_mapping](https://en.wikipedia.org/wiki/Object-relational_mapping)

---

*Object-relational mapping (ORM, O/RM, and O/R mapping tool)* is a programming technique for converting data between incompatible type systems using OOP languages.

A **scalar** value is a single number or string value. In OOP, data management acts on objects which have **non-scalar** values. For example, an address book contains objects that each represent a single person with attributes to hold the person's name, phone number, address, etc.

The address-book entry is treated as a single object by the programming language and it is referenced by a variable containing a pointer to the object.

fName	lName	Age	Pnum	Address
William	Rader	82	817364	432 M St.
Sally	Struthers	72	648214	434 N st.

# Object-Relational Mapping

[https://en.wikipedia.org/wiki/Object-relational\\_mapping](https://en.wikipedia.org/wiki/Object-relational_mapping)

---

Most DB's can only store and manipulate **scalar** (individual) values such as integers and strings organized within tables. **Object-Relational Mapping** implements a system in which the object values are converted into groups of simpler values for storage in the database and converted back upon retrieval.

The object values must be **atomic** (indivisible) to be stored in the database and preserve the properties of the objects and their relationships so that they can be reloaded as objects when needed.

When this functionality is implemented, data doesn't change between transactions. The objects are said to be persisted to the DB.

fName	lName	Age	Pnum	Address
William	Rader	82	817364	432 M St.
Sally	Struthers	72	648214	434 N st.

# Entity Framework(an O/RM)

## Overview

<https://docs.microsoft.com/en-us/ef/core/>

**Entity Framework (EF) Core** is a lightweight, extensible, open source and cross-platform version of the Entity Framework data access technology.

**EF Core** can serve as an **object-relational mapper (O/RM)**. It enables .NET developers to work with a database using .NET objects and eliminates the need for most of the data-access code they usually need to write.

With **EF Core**, data access is performed using a **Model**. A **Model** is made up of **entity classes** and a context object that represents a session with the database, allowing you to query and save data (for example, using **LINQ**). **EF Core** supports many database engines.





# Entity Framework - Overview

<https://docs.microsoft.com/en-us/ef/core/#the-model>

You can generate a *Model* from an existing database, use *EF Migrations* to create a new database from an existing *Model*, or hand-code a *Model* to match your existing database.

```
using Microsoft.EntityFrameworkCore;
using System.Collections.Generic;

namespace Intro
{
    public class BloggingContext : DbContext
    {
        public DbSet<Blog> Blogs { get; set; }
        public DbSet<Post> Posts { get; set; }

        protected override void OnConfiguring(DbContextOptionsBuilder optionsBuilder)
        {
            optionsBuilder.UseSqlServer(
                @"Server=(localdb)\mssqllocaldb;Database=Blogging;Integrated Security=True");
        }
    }

    public class Blog
    {
        public int BlogId { get; set; }
        public string Url { get; set; }
        public int Rating { get; set; }
        public List<Post> Posts { get; set; }
    }

    public class Post
    {
        public int PostId { get; set; }
        public string Title { get; set; }
        public string Content { get; set; }

        public int BlogId { get; set; }
        public Blog Blog { get; set; }
    }
}
```

# Code First Approach – EF Core DbSet<>

<https://docs.microsoft.com/en-us/ef/ef6/modeling/code-first/dbsets>

---

When using an EF Core **Code First** approach, you define a **DbContext** that represents your session with the database and exposes a **DbSet<>** for each **type** in your **Model**.

This will configure Classes sent as type arguments to the **DbSet<>** Class as entity types, as well as configuring other types reachable from those types.

```
public class BloggingContext : DbContext
{
    public DbSet<Blog> Blogs { get; set; }
    public DbSet<Post> Posts { get; set; }
}
```

# Entity Framework

## Querying DbContext and .SaveChanges();

<https://docs.microsoft.com/en-us/ef/core/#querying>

---

With a *DbContext*, instances of your entity classes are retrieved from the database using *Language Integrated Query (LINQ)*.

```
using (var db = new BloggingContext())
{
    var blogs = db.Blogs
        .Where(b => b.Rating > 3)
        .OrderBy(b => b.Url)
        .ToList();
}
```

Data is created, deleted, and modified in the database using instances of your entity classes. *.SaveChanges()* is used to persist (save) changes made.

```
using (var db = new BloggingContext())
{
    var blog = new Blog { Url = "http://sample.com" };
    db.Blogs.Add(blog);
    db.SaveChanges();
}
```



# Using Entity Framework Code-First Step by Step

<https://docs.microsoft.com/en-us/ef/core/get-started/?tabs=netcore-cli>

---

1. Make sure you've downloaded **.NET Core SDK**
2. Create your project.
  - `dotnet new console -o [projectName]`
3. With **Package Manager Console** (in VS), install the correct package for the EF Core DB Provider you want. (Here is for SQL-Lite)
  - `Install-Package Microsoft.EntityFrameworkCore.Sqlite`
4. Create the Class models and a class that inherits [DbContext](#) (put `using Microsoft.EntityFrameworkCore` at the top of each file.);
5. Add a **DbSet** for each model you created.
6. In **Package Manager Console**, install EF Tools
  - `Install-Package Microsoft.EntityFrameworkCore.Tools`


```
public class DbContextClass : DbContext
{
    public DbSet<Game> Games { get; set; }
    public DbSet<Round> Rounds { get; set; }
    public DbSet<Player> Players { get; set; }

    protected override void OnConfiguring
        (DbContextOptionsBuilder options)
    {
        if(!options.IsConfigured)
            options.UseSqlite("Data Source=logging.db");
    }
}
```

# Using Entity Framework Code-First Step by Step

<https://docs.microsoft.com/en-us/ef/core/get-started/?tabs=netcore-cli>

1. In **Package Manager Console**, create the initial set of tables for the model.
  - **Add-Migration InitialCreate**
2. In **Package Manager Console**, create the DB and apply the new migration to it.
  - **Update-database**
  - Look at the files created to verify that **EFCore** has correctly interpreted your models.
3. Create a context to use in Main() or in whichever class you need the **DbContext**.
  - **var db = new BloggingContext();**
4. Run the app.

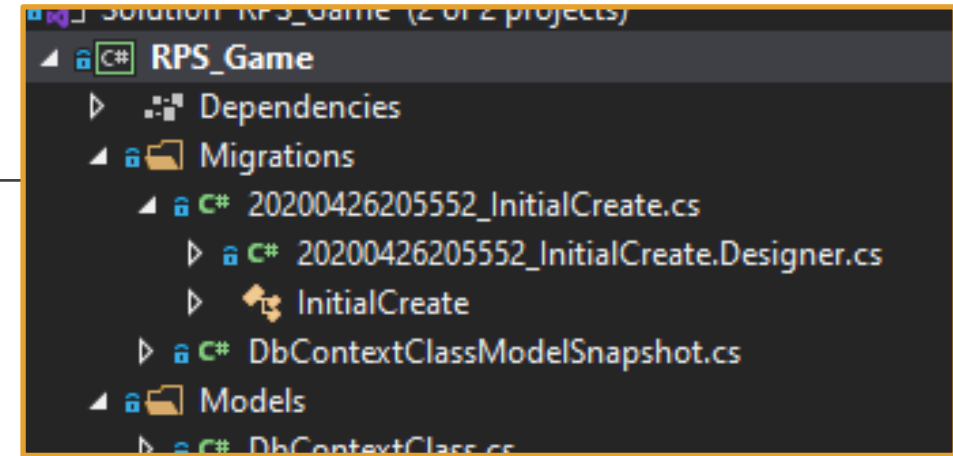

```
namespace RPS_Game.Migrations
{
    [DbContext(typeof(DbContextClass))]
    [Migration("20200426205552_InitialCreate")]
    partial class InitialCreate
    {
        protected override void BuildTargetModel(ModelBuilder modelBuilder)
        {
#pragma warning disable 612, 618
            modelBuilder
                .HasAnnotation("ProductVersion", "5.0.0-preview.3.20181.2");

            modelBuilder.Entity("RPS_Game.Models.Game", b =>
            {
                b.Property<int>("GameId")
                    .ValueGeneratedOnAdd()
                    .HasColumnType("INTEGER");

                b.Property<int?>("WinnerPlayerId")
                    .HasColumnType("INTEGER");

                b.Property<int?>("LoserPlayerId")
            }
        }
    }
}
```

# Migrations – Code First

## Create and Update the DB

<https://docs.microsoft.com/en-us/ef/core/managing-schemas/migrations/?tabs=dotnet-core-cli>

---

The *migrations* feature in **EF Core** provides a way to incrementally update the database schema to keep it in sync with the application's data *model* while preserving existing data in the database.

**Migrations** includes command-line tools and APIs that help with the following tasks:

- Create a *migration*. - Generate code that can update the database to sync it with a set of *model* changes.
- Update the database. - Apply pending *migrations* to update the database *schema*.
- Customize *migration* code. Sometimes the generated code needs to be modified or supplemented.
- Remove a *migration*. - Delete the generated code.
- Revert a *migration*. Undo the database changes.
- Generate SQL scripts. - You might need a script to update a production database or to troubleshoot *migration* code.
- Apply *migrations* at runtime. - When design-time updates and running scripts aren't the best options, call the `Migrate()` method.

# Migrations

<https://docs.microsoft.com/en-us/ef/core/managing-schemas/migrations/?tabs=dotnet-core-cli>

---

After you've defined your initial model, in the command line, create the database with:

- `dotnet ef migrations add InitialCreate`

Three files are added to your project under the Migrations directory:

- **XXXXXXXXXXXXXX\_InitialCreate.cs** – The main migrations file. Contains the operations necessary to apply the migration (in Up()) and to revert it (in Down()).
- **XXXXXXXXXXXXXX\_InitialCreate.Designer.cs** – The migrations metadata file. Contains information used by EF.
- **MyContextModelSnapshot.cs** – A snapshot of your current model. Used to determine what changed when adding the next migration.

The timestamp in the filename helps keep them ordered chronologically so you can see the progression of changes.

After making changes to the model, you will need to update the DB with:

- `dotnet ef migrations add AddProductReviews`

# Using Entity Framework with Sqlite

<https://docs.microsoft.com/en-us/ef/core/get-started/?tabs=visual-studio>

---

1. Open a 'Console app'
2. Install **Microsoft.EntityFrameworkCore.Sqlite** (for using the Sqlite DB), For an AzureDB install **Microsoft.EntityFrameworkCore**.
3. Create class(es) for the Model(s) in your Database.
4. Create a class for the **DbContext**
5. Install **Microsoft.EntityFrameworkCore.Tools**
6. In Package Manager Console, invoke EF Migrations with **Add-Migration InitialCreate**
7. Update the DB with the current Models with **Update-Database** (you'll do this every time there is a change)
8. In Program.cs, encase the part of the program where you need to use the DbContext in **using (var db = new BloggingContext())**
9. Double-Click the project and paste at the bottom of the **<PropertyGroup>** area **<StartWorkingDirectory>\$(MSBuildProjectDirectory)</StartWorkingDirectory>**.
10. This project shows how to download EFCore and use it with Sqlite.

# Activities

---

Group – As a group, create a fridge console program that will allow you to add certain pre-created fruits to the contents of the fridge. Then you should be able to get the contents of the fridge. Use Menus to make it work.

Individual – 5 quiz questions?



# Nicks Entity Framework Demo

<https://docs.microsoft.com/en-us/ef/core/>

---

He's building a demo project with Sqlite and Classes for Person and Address. He's got Sqlite working then he adds a column. The old DB needs to be updated. The solution is to delete the file where the DB is held.

1. We created an Azure DB with the lowest level and in the program switched from using .UseSqlite to using .UseSqlServer then we used the connection string provided by Azure to connect. (use the tutorial above)
2. We still needed to set the Azure firewall rule to allow us in. Click on "Set Server Firewall" to configure any computers to use the DB
3. Give a rule name. Get the Client IP address and paste it into both the Start IP and End IP BUT change the final 3 digits to .000 (for Start IP) and .255 (for End IP).
4. CLICK **SAVE**
5. Add the attribute [DatabaseGenerated(DatabaseGeneratedOption.None)] to the Id variable of the models (classes) to prevent SqlServer from forcing it to be the unique id.

# Connect to SQL Server from VS

<https://docs.microsoft.com/en-us/sql/relational-databases/lesson-1-connecting-to-the-database-engine?view=sql-server-ver15>

---

Still don't know! Nick says My (Marks) batch did it from Azure from the get-go.

David Aguilar got his DB first to work with SSMS

```
ve information in your connection string, you should move it out of source code. See http://go.microsoft.com/fwlink/?LinkId=2544327.  
r("Data Source=LAPTOP-765TLT6M\\SQLEXPRESS;Initial Catalog=joinspractice;Trusted_Connection=true");
```

Add the new C#8 *using* declaration