


Etherchannel Configuration:

<https://www.youtube.com/@techwithravish>

We have Two switches in between 4 links are connected with Fa0/1, Fa0/2, Fa0/3 and Fa0/4

Switch 0: Fa0/1, Fa0/2, Fa0/3 and Fa0/4

Switch 1: Fa0/1, Fa0/2, Fa0/3 and Fa0/4

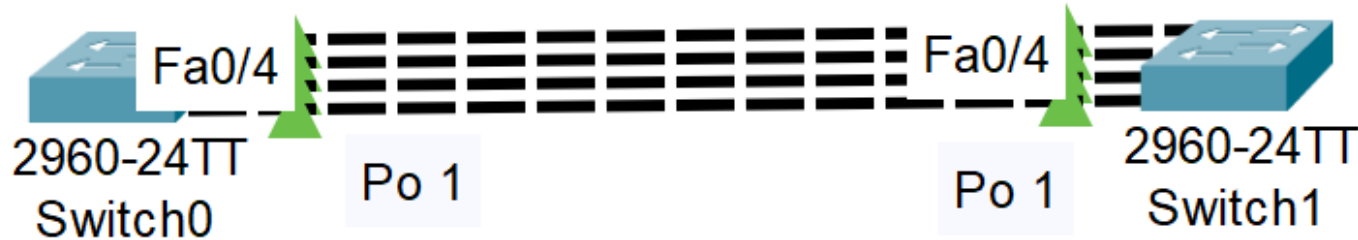

LACP Configuration:

Switch0#enable

Switch0(config)# interface range fa0/1-4

Switch0(config-if-range)# channel-group 1 mode active

Switch0(config-if-range)# exit

Switch0(config)# interface port-channel 1

Switch0(config-if)# switchport mode trunk

Switch0(config-if)# exit

Switch0(config)# end



Switch1#enable

Switch1(config)# interface range fa0/1-4

Switch1(config-if-range)# channel-group 1 mode passive

Switch1(config-if-range)# exit

Switch1(config)# interface port-channel 1

Switch1(config-if)# switchport mode trunk

Switch1(config-if)# exit

Switch1(config)# end



PAgP Configuration:

Switch0#enable

Switch0(config)# interface range fa0/1-4

Switch0(config-if-range)# channel-group 1 mode desirable

Switch0(config-if-range)# exit

Switch0(config)# interface port-channel 1

Switch0(config-if)# Switchport mode trunk

Switch0(config-if)# exit

Switch0(config)# end



Switch1#enable

Switch1(config)# interface range fa0/1-4

Switch1(config-if-range)# channel-group 1 mode auto

Switch1(config-if-range)# exit

Switch1(config)# interface port-channel 1

Switch1(config-if)# Switchport mode trunk


Switch1(config-if)# exit

Switch1(config)# end



Check Etherchannel Status:

Switch#show etherchannel summary

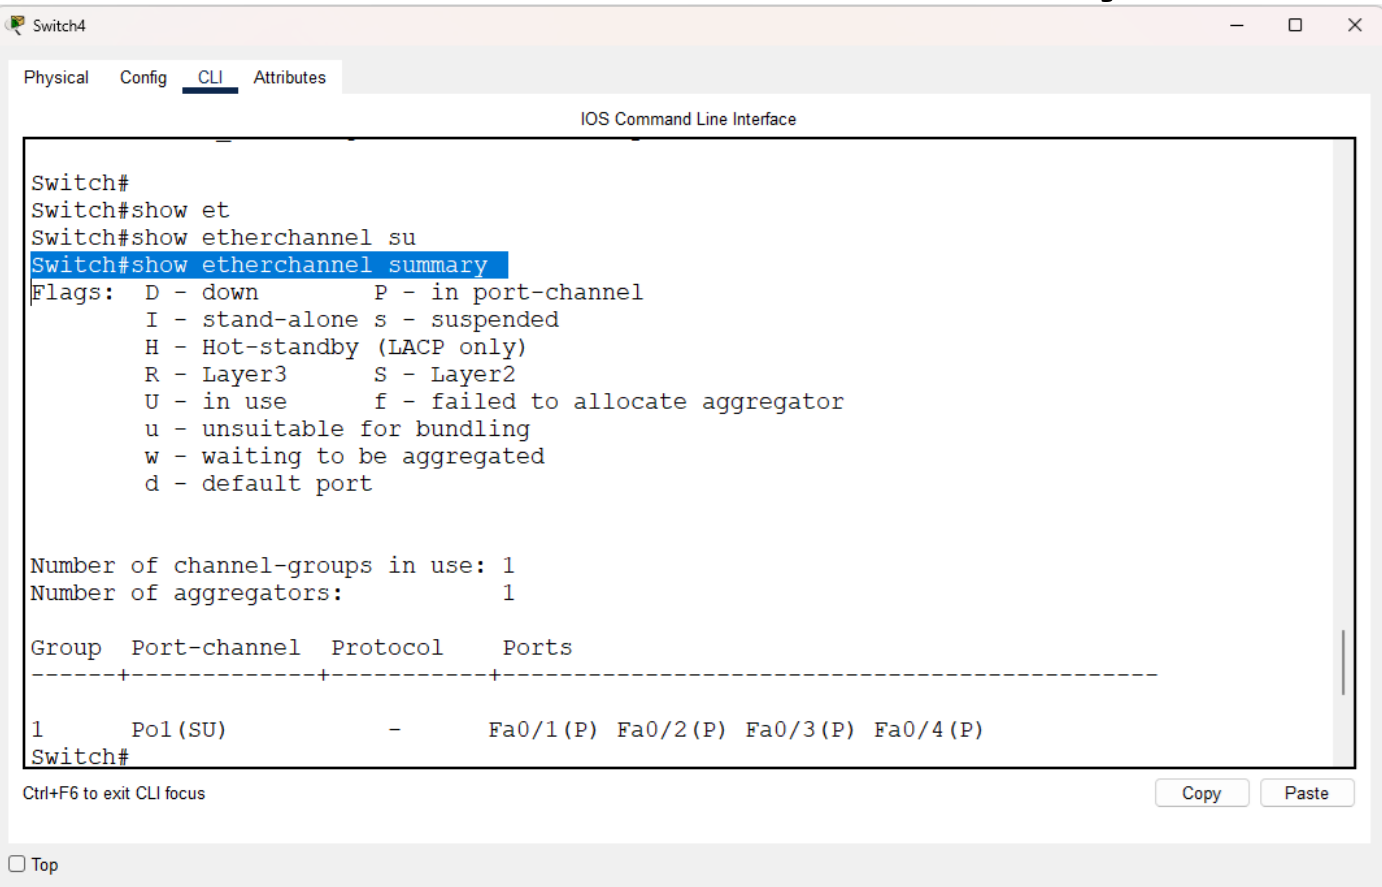

The screenshot shows a network switch CLI window titled "Switch4". The "CLI" tab is selected under the "Config" section. The command "Switch#show etherchannel summary" has been entered and executed. The output displays the status of the etherchannel, including flags, the number of channel-groups and aggregators, and a table of the channel group details.

```
Switch#
Switch#show et
Switch#show etherchannel su
Switch#show etherchannel summary
Flags: D - down          P - in port-channel
       I - stand-alone   s - suspended
       H - Hot-standby (LACP only)
       R - Layer3        S - Layer2
       U - in use        f - failed to allocate aggregator
       u - unsuitable for bundling
       w - waiting to be aggregated
       d - default port

Number of channel-groups in use: 1
Number of aggregators:          1

Group  Port-channel  Protocol    Ports
-----+-----+-----+-----
1      Po1 (SU)        -           Fa0/1 (P) Fa0/2 (P) Fa0/3 (P) Fa0/4 (P)
Switch#
```

At the bottom of the CLI window, there is a "Ctrl+F6 to exit CLI focus" message and two buttons: "Copy" and "Paste".