



Intelligent Security API

Developer Guide

About this Document

- This Document includes instructions for using and managing the Product. Pictures, charts, images and all other information hereinafter are for description and explanation only. Unless otherwise agreed, our company makes no warranties, express or implied.
- Please use this Document with the guidance and assistance of professionals trained in supporting the Product.

Trademarks Acknowledgment

All trademarks and logos mentioned are the properties of their respective owners.

LEGAL DISCLAIMER

- TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, THIS DOCUMENT AND THE PRODUCT DESCRIBED, WITH ITS HARDWARE, SOFTWARE AND FIRMWARE, ARE PROVIDED "AS IS" AND "WITH ALL FAULTS AND ERRORS". OUR COMPANY MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION, MERCHANTABILITY, SATISFACTORY QUALITY, OR FITNESS FOR A PARTICULAR PURPOSE. THE USE OF THE PRODUCT BY YOU IS AT YOUR OWN RISK. IN NO EVENT WILL OUR COMPANY BE LIABLE TO YOU FOR ANY SPECIAL, CONSEQUENTIAL, INCIDENTAL, OR INDIRECT DAMAGES, INCLUDING, AMONG OTHERS, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, OR LOSS OF DATA, CORRUPTION OF SYSTEMS, OR LOSS OF DOCUMENTATION, WHETHER BASED ON BREACH OF CONTRACT, TORT (INCLUDING NEGLIGENCE), PRODUCT LIABILITY, OR OTHERWISE, IN CONNECTION WITH THE USE OF THE PRODUCT, EVEN IF OUR COMPANY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES OR LOSS.
- YOU ACKNOWLEDGE THAT THE NATURE OF THE INTERNET PROVIDES FOR INHERENT SECURITY RISKS, AND OUR COMPANY SHALL NOT TAKE ANY RESPONSIBILITIES FOR ABNORMAL OPERATION, PRIVACY LEAKAGE OR OTHER DAMAGES RESULTING FROM CYBER-ATTACK, HACKER ATTACK, VIRUS INFECTION, OR OTHER INTERNET SECURITY RISKS; HOWEVER, OUR COMPANY WILL PROVIDE TIMELY TECHNICAL SUPPORT IF REQUIRED.
- YOU AGREE TO USE THIS PRODUCT IN COMPLIANCE WITH ALL APPLICABLE LAWS, AND YOU ARE SOLELY RESPONSIBLE FOR ENSURING THAT YOUR USE CONFORMS TO THE APPLICABLE LAW. ESPECIALLY, YOU ARE RESPONSIBLE, FOR USING THIS PRODUCT IN A MANNER THAT DOES NOT INFRINGE ON THE RIGHTS OF THIRD PARTIES, INCLUDING WITHOUT LIMITATION, RIGHTS OF PUBLICITY, INTELLECTUAL PROPERTY RIGHTS, OR DATA PROTECTION AND OTHER PRIVACY RIGHTS. YOU SHALL NOT USE THIS PRODUCT FOR ANY PROHIBITED END-USES, INCLUDING THE DEVELOPMENT OR PRODUCTION OF WEAPONS OF MASS DESTRUCTION, THE DEVELOPMENT OR PRODUCTION OF CHEMICAL OR BIOLOGICAL WEAPONS, ANY ACTIVITIES IN THE CONTEXT RELATED TO ANY NUCLEAR EXPLOSIVE OR UNSAFE NUCLEAR FUEL-CYCLE, OR IN SUPPORT OF HUMAN RIGHTS ABUSES.
- IN THE EVENT OF ANY CONFLICTS BETWEEN THIS DOCUMENT AND THE APPLICABLE LAW, THE LATTER PREVAILS.

1 Reading Guide

Chapter	Description
Overview	Includes the ISAPI overview, applicable products, terms and definitions, abbreviations, and update history.
ISAPI Framework	Read the chapter to take a quick look at the ISAPI framework and basic functions.
Quick Start Guide	Read the chapter to quickly understand the programming process of basic functions such as authentication, message parsing, real-time live view, playback, and event uploading.
API Reference	Start programming according to API definitions.
How-To Video Guidance	How-to videos demonstrate detailed steps of different integration tasks.

2 Overview


2.1 Introduction

Intelligent Security API (hereinafter referred to as ISAPI) is an application layer protocol based on [HTTP \(Hypertext Transfer Protocol\)](#) and adopts the REST (Representational State Transfer) architecture for communication between security devices (cameras, DVRs, NVRs, etc.) and the platform or client software.

Since established in 2013, ISAPI has included more than 11,000 APIs for different functions, including device management, vehicle recognition, parking lot management, intelligent facial application, access control management, interrogation management, and recording management. It is applicable to industries such as traffic, fire protection, education, and security inspection.

2.1.1 Application Scenario

When you integrate devices via ISAPI, the device acts as the server to listen on the fixed port and the user's application acts as the client to actively log in to the device for communication. To achieve the above goals, the device should be configured with a fixed IP address and the requests from the client can reach the server.

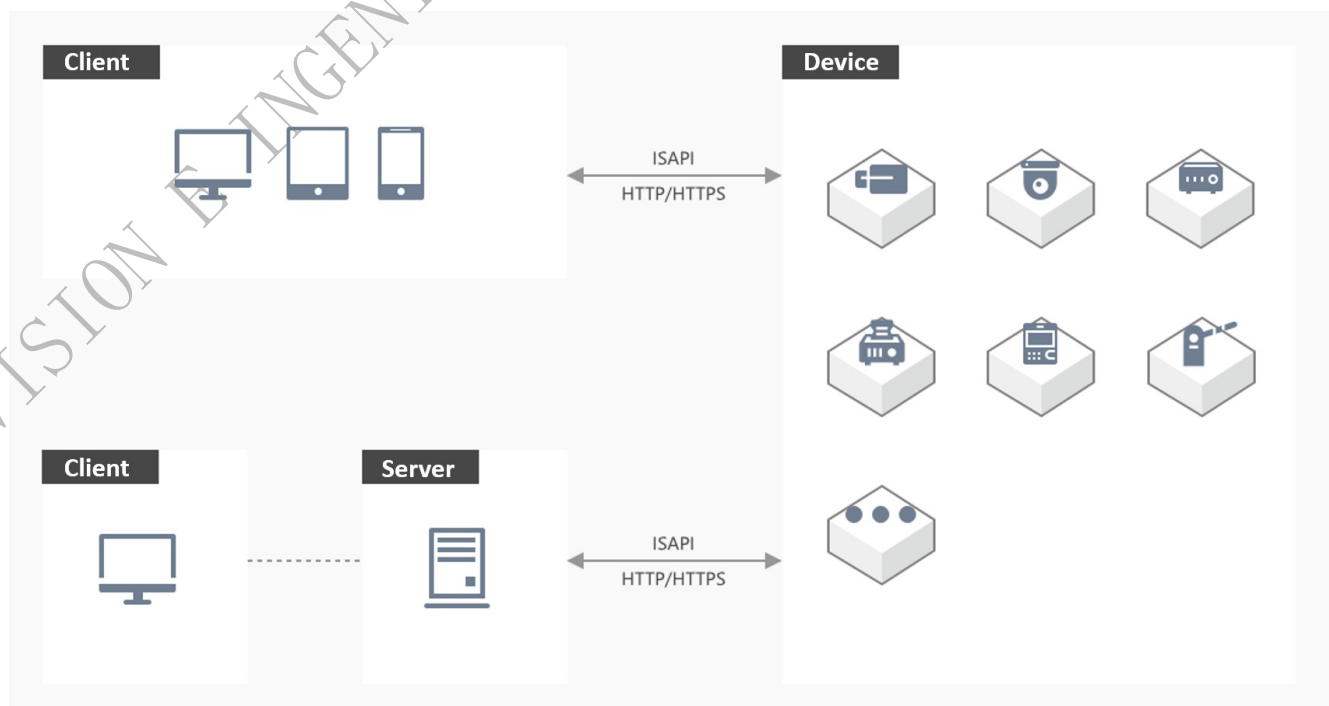

2.1.2 Layers in the Network Model

ISAPI is an application layer protocol based on HTTP, thereby it inherits all specifications and properties from HTTP.

Protocols frequently used along with ISAPI include SADP (Search Active Device Protocol) based on multicast for discovering and activating devices, [RTSP \(Real-Time Streaming Protocol\)](#) based on TCP/UDP for live view and video playback of devices, etc.

Application Layer	Device Discovery SADP	Signaling Interaction ISAPI (HTTP)	Media Stream RTSP/RTP
Transport Layer	MCAST	TCP	TCP/UDP
Network Layer	IP		
Network Interface	Hardware Drive Interface		

2.2 Product Scope

- Network Cameras

- Ultra Series(SmartIP)

DS-2CD30167G3-LIU(Y), DS-2CD30167G3-LIU/SL(Y), DS-2CD3021G0-I(UF), DS-2CD3021G0-IU, DS-2CD3021G2-IUF, DS-2CD3021G2-LIUF, DS-2CD3021G2E-I, DS-2CD3021G2E-LIU, DS-2CD3021G3-LIUF, DS-2CD3021G3E-LIU, DS-2CD3025G0-I, DS-2CD3025G0-I(B), DS-2CD3026G2-IS, DS-2CD3026G2-IU/SL, DS-2CD3027G0E-L(U), DS-2CD3027G0E-LUF, DS-2CD3027G2-LS, DS-2CD3027G2E-LIUF/SL, DS-2CD3027G2E-LUF, DS-2CD3027G3E-LIU, DS-2CD3027G3E-LIUF/SL, DS-2CD3041G0-I, DS-2CD3041G2-IUF, DS-2CD3041G2-LIUF/4G/SL, DS-2CD3041G2-LIUF, DS-2CD3041G2E-I, DS-2CD3041G2E-LIU, DS-2CD3041G3-LIU, DS-2CD3041G3-LIU(F), DS-2CD3045G0-I, DS-2CD3045G0-I(B), DS-2CD3046G2-IS, DS-2CD3046G2-IU/SL, DS-2CD3046G2H-LI(U), DS-2CD3046G2H-LIU/SL, DS-2CD3046G3-IU(Y), DS-2CD3046G3-IU/SL(Y), DS-2CD3046G3-LIU(Y), DS-2CD3046G3-LIU(Y)/SL, DS-2CD3047G0E-L(U), DS-2CD3047G0E-LUF, DS-2CD3047G2-LS, DS-2CD3047G2E-LIUF/SL, DS-2CD3047G2E-LUF, DS-2CD3047G3-LIU(Y), DS-2CD3047G3-LIU(Y)/SL, DS-2CD3047G3E-LIU, DS-2CD3047G3E-LIUF/SL, DS-2CD3047G3E-LIUF/SRB, DS-2CD3048G2-LI(U), DS-2CD3051G0-I(UF), DS-2CD3056G2-IS, DS-2CD3056G2-IU/SL, DS-2CD3061G2-LIUF, DS-2CD3061G2E-LIU, DS-2CD3066G2-IS, DS-2CD3066G2H-LI(U), DS-2CD3066G3-IU(Y), DS-2CD3066G3-IU/SL(Y), DS-2CD3066G3-LIU(Y), DS-2CD3066G3-LIU(Y)/SL, DS-2CD3067G2E-LIUF/SL, DS-2CD3067G3-LIU(Y), DS-2CD3067G3-LIU(Y)/SL, DS-2CD3067G3E-LIU, DS-2CD3067G3E-LIUF/SL, DS-2CD3067G3E-LIUF/SRB, DS-2CD3081G2-LIUF, DS-2CD3081G2E-LIU, DS-2CD3085G0-I(B), DS-2CD3085G1-I, DS-2CD3086G2-IS, DS-2CD3086G2H-LI(U), DS-2CD3086G2H-LIU/SL, DS-2CD3086G3-IU(Y), DS-2CD3086G3-IU/SL(Y), DS-2CD3086G3-LIU(Y), DS-2CD3086G3-LIU(Y)/SL, DS-2CD3087G2-LSU, DS-2CD3087G3-LIU(Y), DS-2CD3087G3-LIU(Y)/SL, DS-2CD3087G3-LIUY/SRB, DS-2CD30C7G3-LIU(Y), DS-2CD30C7G3-LIU/SL(Y), DS-2CD3121G0-I(SF), DS-2CD3121G2-ISF, DS-2CD3121G2-LIUF(/AB), DS-2CD3121G2E-I, DS-2CD3121G2E-LIU(/AB), DS-2CD3121G3-LIUF, DS-2CD3121G3E-LIU, DS-2CD3125G0-I, DS-2CD3125G0-IMS, DS-2CD3125G0-IS, DS-2CD3126G2-IS(U), DS-2CD3127G2E-LUF, DS-2CD3127G3E-LIU, DS-2CD3127G3E-LIUF, DS-2CD3141G0-I, DS-2CD3141G2-ISF, DS-2CD3141G2-LIUF(/AB), DS-2CD3141G2E-I, DS-2CD3141G2E-LIU(/AB), DS-2CD3141G3-LIU, DS-2CD3141G3-LIU(F), DS-2CD3145G0-IS, DS-2CD3146G2-IMS, DS-2CD3146G2-IS(U), DS-2CD3146G2H-LIS(U), DS-2CD3146G3-ISU(Y), DS-2CD3146G3-LISU(Y), DS-2CD3146G3-SU, DS-2CD3147G2E-LUF, DS-2CD3147G3-LISU(Y), DS-2CD3147G3E-LIU, DS-2CD3147G3E-LIUF, DS-2CD3148G2-LIS(U), DS-2CD3151G0-I(SF), DS-2CD3156G2-IS(U), DS-2CD3161G2-LIUF, DS-2CD3161G2E-LIU, DS-2CD3166G2-IS(U), DS-2CD3166G2H-LIS(U), DS-2CD3166G3-ISU(Y), DS-2CD3166G3-LISU(Y), DS-2CD3167G3-LISU(Y), DS-2CD3167G3E-LIU, DS-2CD3167G3E-LIUF, DS-2CD3181G2-LIUF, DS-2CD3181G2E-LIU, DS-2CD3185G0-I, DS-2CD3185G0-IMS, DS-2CD3185G0-IS, DS-2CD3186G2-IMS, DS-

2CD3186G2-IS(U), DS-2CD3186G2H-LISU, DS-2CD3186G3-ISU(Y), DS-2CD3186G3-LISU(Y), DS-
2CD3187G3-LISU(Y), DS-2CD33167G3-LISU(Y), DS-2CD33167G3-LISU/SL(Y), DS-2CD33167G3P-LIHSUY/SL,
DS-2CD3321G0-IU(F), DS-2CD3321G2-IUF, DS-2CD3321G2-LIUF(/AB), DS-2CD3321G2E-I, DS-2CD3321G2E-
LIU(/AB), DS-2CD3321G3-LIUF, DS-2CD3321G3E-LIU, DS-2CD3325G0-I, DS-2CD3325G0-I(B), DS-
2CD3326G2-IS(U), DS-2CD3326G2-ISU/SL, DS-2CD3327G0E-L(U), DS-2CD3327G0E-LUF, DS-2CD3327G1-
LS(U), DS-2CD3327G2-LS(U), DS-2CD3327G2E-LIUF/SL, DS-2CD3327G2E-LUF, DS-2CD3327G3E-LIU, DS-
2CD3327G3E-LIUF/SL, DS-2CD3341G2-IUF, DS-2CD3341G2-LIUF(/AB), DS-2CD3341G2E-I, DS-
2CD3341G2E-LIU(/AB), DS-2CD3341G3-LIU, DS-2CD3341G3-LIU(F), DS-2CD3345G0-I, DS-2CD3345G0-I(B),
DS-2CD3346G2-IS(U), DS-2CD3346G2-ISU/SL, DS-2CD3346G2/P-LSU/SL, DS-2CD3346G2H-LIS(U), DS-
2CD3346G2H-LISU/SL, DS-2CD3346G3-ISU(Y), DS-2CD3346G3-ISU/SL(Y), DS-2CD3346G3-LISU(Y), DS-
2CD3346G3-LISU/SL(Y), DS-2CD3347G0E-L(U), DS-2CD3347G0E-LUF, DS-2CD3347G1-LS(U), DS-
2CD3347G2-LS(U), DS-2CD3347G2E-LIUF/SL, DS-2CD3347G2E-LUF, DS-2CD3347G3-LISU(Y), DS-
2CD3347G3-LISU/SL(Y), DS-2CD3347G3E-LIU, DS-2CD3347G3E-LIUF/SL, DS-2CD3347G3E-LIUF/SRB, DS-
2CD3348G2-LIS(U), DS-2CD3351G0-IU(F), DS-2CD3356G2-IS(U), DS-2CD3356G2-ISU/SL, DS-2CD3361G2-
LIUF, DS-2CD3361G2E-LIU, DS-2CD3361G2P-LIUF/SL, DS-2CD3366G2-IS(U), DS-2CD3366G2H-LIS(U), DS-
2CD3366G3-ISU(Y), DS-2CD3366G3-ISU/SL(Y), DS-2CD3366G3-LISU(Y), DS-2CD3366G3-LISU/SL(Y), DS-
2CD3367G2E-LIUF/SL, DS-2CD3367G3-LISU(Y), DS-2CD3367G3-LISU/SL(Y), DS-2CD3367G3E-LIU, DS-
2CD3367G3E-LIUF/SL, DS-2CD3367G3E-LIUF/SRB, DS-2CD3367G3P-LIHSUY/SL, DS-2CD3381G2-LIUF, DS-
2CD3381G2E-LIU, DS-2CD3381G2P-LIUF/SL, DS-2CD3385G0-I, DS-2CD3385G0-I(B), DS-2CD3386G2-IS(U),
DS-2CD3386G2H-LIS(U), DS-2CD3386G2H-LISU/SL, DS-2CD3386G3-ISU(Y), DS-2CD3386G3-ISU/SL(Y), DS-
2CD3386G3-LISU(Y), DS-2CD3386G3-LISU/SL(Y), DS-2CD3387G2-LSU, DS-2CD3387G2P-LSU/SL, DS-
2CD3387G3-LISU(Y), DS-2CD3387G3-LISU/SL(Y), DS-2CD3387G3P-LIHSUY/SL, DS-2CD337G3-LISU(Y), DS-
2CD337G3-LISU/SL(Y), DS-2CD337G3P-LIHSUY/SL, DS-2CD3525G0-IS, DS-2CD3526G2-IS, DS-
2CD3545G0-IS, DS-2CD3546G2-IS, DS-2CD3546G3-IS(Y), DS-2CD3547G2-LS, DS-2CD3556G2-IS, DS-
2CD3566G2-IS, DS-2CD3566G3-IS(Y), DS-2CD3586G2-IS, DS-2CD3586G3-IS(Y), DS-2CD36167G3-
LIZSU/SL(Y), DS-2CD36167G3T-LIZSU(Y), DS-2CD3621G0-IZ(S), DS-2CD3621G2-IZS, DS-2CD3621G2-
LIZS(U), DS-2CD3625G0-IZS, DS-2CD3625G1-IZS, DS-2CD3626G2-IZS, DS-2CD3626G2T-IZS, DS-
2CD3641G0-IZS, DS-2CD3641G2-IZS, DS-2CD3641G2-LIZS(U), DS-2CD3645G0-IZS, DS-2CD3645G1-IZS,
DS-2CD3646G2-IZS, DS-2CD3646G2/P-IZS, DS-2CD3646G2/P-LZS, DS-2CD3646G2HT-LIZS(Y), DS-
2CD3646G2T-IZS(Y), DS-2CD3646G2T-LIDZSU/4G/SL(256G)(1T), DS-2CD3646G2T/P-IZSY, DS-2CD3646G3-
IZSU/SL(Y), DS-2CD3646G3-LIZSU(Y)/SL, DS-2CD3646G3T-IZSU(Y), DS-2CD3646G3T-LIZSU(Y), DS-
2CD3647G2-LZS, DS-2CD3647G2T-LZS, DS-2CD3647G3-LIZSU(Y)/SL, DS-2CD3647G3T-LIZSU(Y), DS-
2CD3648G2T-LIZS(Y), DS-2CD3651G0-IZS, DS-2CD3656G2-IZS, DS-2CD3656G2T-IZS, DS-2CD3656G2T-
IZSY, DS-2CD3661G2-LIZSU, DS-2CD3666G2-IZS, DS-2CD3666G2HT-LIZS(Y), DS-2CD3666G2T-IZS(Y), DS-
2CD3666G3-IZSU/SL(Y), DS-2CD3666G3-LIZSU(Y)/SL, DS-2CD3666G3T-IZSU(Y), DS-2CD3666G3T-LIZSU(Y),
DS-2CD3667G3-LIZSU(Y)/SL, DS-2CD3667G3T-LIZSU(Y), DS-2CD3681G2-LIZSU, DS-2CD3685G0-IZS, DS-
2CD3685G1-IZS, DS-2CD3686G2-IZS, DS-2CD3686G2HT-LIZS(Y), DS-2CD3686G2T-IZS(Y), DS-2CD3686G2T-
LIDZSU/4G/SL(256G)(1T), DS-2CD3686G3-IZSU/SL(Y), DS-2CD3686G3-LIZSU(Y)/SL, DS-2CD3686G3T-
IZSU(Y), DS-2CD3686G3T-LIZSU(Y), DS-2CD3687G2T-LZS, DS-2CD3687G3-LIZSU(Y)/SL, DS-2CD3687G3T-
LIZSU(Y), DS-2CD3688G2T-LIZS(Y), DS-2CD36C7G3-LIZSU/SL(Y), DS-2CD36C7G3T-LIZSU(Y), DS-
2CD37167G3-LIZSU/SL(PTRZ)(Y), DS-2CD37167G3T-LIZSU(Y), DS-2CD37167G3T-LIZSU/SL(PTRZ)(Y), DS-
2CD3721G0-IZ(S), DS-2CD3721G2-IZS, DS-2CD3721G2-LIZS(U), DS-2CD3725G0-IZS, DS-2CD3725G1-IZS,
DS-2CD3726G2-IZS, DS-2CD3726G2T-IZS, DS-2CD3741G0-IZS, DS-2CD3741G2-IZS, DS-2CD3741G2-
LIZS(U), DS-2CD3745G0-IZS, DS-2CD3745G1-IZS, DS-2CD3746G2-IZS, DS-2CD3746G2H-LIZSU(Y)(PTRZ),
DS-2CD3746G2H-LIZSU/SL(Y)(PTRZ), DS-2CD3746G2HT-LIZS(U)(Y), DS-2CD3746G2HT-LIZSU(Y)(PTRZ), DS-
2CD3746G2HT-LIZSU(Y)(SSD), DS-2CD3746G2HT-LIZSU/SL(Y)(PTRZ), DS-2CD3746G2T-IZS(Y), DS-
2CD3746G3-LIZSUY/SL(PTRZ), DS-2CD3746G3T-IZSU(Y), DS-2CD3746G3T-LIZSU(Y), DS-2CD3746G3T-
LIZSUY/SL(PTRZ), DS-2CD3747G2-LZSU, DS-2CD3747G2T-LZSU, DS-2CD3747G3-LIZSUY/SL(PTRZ), DS-
2CD3747G3T-LIZSU(Y), DS-2CD3747G3T-LIZSUY/SL(PTRZ), DS-2CD3748G2T-LIZS(U)(Y), DS-2CD3751G0-
IZS, DS-2CD3756G2-IZS, DS-2CD3756G2T-IZS, DS-2CD3756G2T-IZSY, DS-2CD3761G2-LIZSU, DS-
2CD3766G2-IZS, DS-2CD3766G2H-LIZSU(Y)(PTRZ), DS-2CD3766G2H-LIZSU/SL(Y)(PTRZ), DS-
2CD3766G2HT-LIZS(U)(Y), DS-2CD3766G2HT-LIZSU(Y)(PTRZ), DS-2CD3766G2HT-LIZSU/SL(Y)(PTRZ), DS-
2CD3766G2T-IZS(Y), DS-2CD3766G3-LIZSUY/SL(PTRZ), DS-2CD3766G3T-IZSU(Y), DS-2CD3766G3T-
LIZSU(Y), DS-2CD3766G3T-LIZSUY/SL(PTRZ), DS-2CD3767G3-LIZSUY/SL(PTRZ), DS-2CD3767G3T-LIZSU(Y),

DS-2CD3767G3T-LIZSU(Y)/SL(PTRZ), DS-2CD3781G2-LIZSU, DS-2CD3785G0-IZS, DS-2CD3785G1-IZS, DS-2CD3786G2-IZS, DS-2CD3786G2H-LIZSU(Y)(PTRZ), DS-2CD3786G2H-LIZSU/SL(Y)(PTRZ), DS-2CD3786G2HT-LIZSU(U)(Y), DS-2CD3786G2HT-LIZSU(Y)(PTRZ), DS-2CD3786G2HT-LIZSU/SL(Y)(PTRZ), DS-2CD3786G2T-IZS(Y), DS-2CD3786G3-LIZSU(Y)/SL(PTRZ), DS-2CD3786G3T-IZSU(Y), DS-2CD3786G3T-LIZSU(Y), DS-2CD3786G3T-LIZSU(Y)/SL(PTRZ), DS-2CD3787G2T-LIZSU, DS-2CD3787G3-LIZSU(Y)/SL(PTRZ), DS-2CD3787G3T-LIZSU(Y), DS-2CD3787G3T-LIZSU(Y)/SL(PTRZ), DS-2CD3788G2T-LIZSU(U)(Y), DS-2CD37C7G3-LIZSU/SL(PTRZ)(Y), DS-2CD37C7G3T-LIZSU(Y), DS-2CD37C7G3T-LIZSU/SL(PTRZ)(Y), DS-2CD3A26G2T-IZS, DS-2CD3A46G2-IZ(H)(S)(Y), DS-2CD3A46G2T-IZHS, DS-2CD3B26G2T-IZHS, DS-2CD3B26G2T-IZHS(Y), DS-2CD3B46G2T-IZHS, DS-2CD3B46G2T-IZHS(Y), DS-2CD3B86G2T-IZHS, DS-2CD3B86G2T-IZHS(Y), DS-2CD3D26G2T-IZHS(U), DS-2CD3D26G2T-IZHSU(Y), DS-2CD3D46G2T-IZHS(U), DS-2CD3D46G2T-IZHSU(Y), DS-2CD3D46G2T-IZMSU, DS-2CD3D86G2T-IZHS(U), DS-2CD3D86G2T-IZHSU(Y), DS-2CD3H167G3-LIZSU(Y), DS-2CD3H167G3-LIZSU/SL(Y), DS-2CD3H26G2-IZS, DS-2CD3H46G3-LIZSU(Y)/SL, DS-2CD3H47G3-LIZSU(Y)/SL, DS-2CD3H56G2-IZS, DS-2CD3H66G3-LIZSU(Y)/SL, DS-2CD3H67G3-LIZSU(Y)/SL, DS-2CD3H86G2-IZS, DS-2CD3H86G3-LIZSU(Y)/SL, DS-2CD3H87G3-LIZSU(Y)/SL, DS-2CD3HC7G3-LIZSU(Y), DS-2CD3HC7G3-LIZSU/SL(Y), DS-2CD3T167G3-LISU(Y), DS-2CD3T167G3-LISU/SL(Y), DS-2CD3T167G3P-LIHSUY/SL, DS-2CD3T21G0-IUF, DS-2CD3T21G2-IUF, DS-2CD3T21G2-LIUF, DS-2CD3T21G3-LIUF, DS-2CD3T25G0-4IS(B), DS-2CD3T25G0-I, DS-2CD3T26G2-4IS, DS-2CD3T26G2-ISU/SL, DS-2CD3T27G0E-LUF, DS-2CD3T27G1-LS, DS-2CD3T27G2E-LUF, DS-2CD3T27G3E-LIUF/SL, DS-2CD3T41G2-IUF, DS-2CD3T41G2-LIUF, DS-2CD3T41G3-LIUF, DS-2CD3T45G0-4IS(B), DS-2CD3T45G0-I, DS-2CD3T46G2-4IS(Y), DS-2CD3T46G2-ISU/SL, DS-2CD3T46G2-LIDSU/4G/SL, DS-2CD3T46G2/P-IS, DS-2CD3T46G2/P-LS, DS-2CD3T46G2H-LIS(Y), DS-2CD3T46G2H-LISU/SL, DS-2CD3T46G3-2ISU/4ISU(Y), DS-2CD3T46G3-ISU/SL(Y), DS-2CD3T46G3-LISU(Y), DS-2CD3T46G3-LISU/SL(Y), DS-2CD3T47G0E-LUF, DS-2CD3T47G1-LS, DS-2CD3T47G2E-LUF, DS-2CD3T47G3-LISU(Y), DS-2CD3T47G3-LISU/SL(Y), DS-2CD3T47G3E-LIUF/SL, DS-2CD3T47G3E-LIUF/SRB, DS-2CD3T48G2-LIS(Y), DS-2CD3T51G0-IUF, DS-2CD3T56G2-4IS, DS-2CD3T56G2-4ISY, DS-2CD3T56G2-ISU/SL, DS-2CD3T61G2-LIUF, DS-2CD3T61G2P-LIDUF/4G/SL, DS-2CD3T61G2P-LIUF/SL, DS-2CD3T66G2-4IS, DS-2CD3T66G2H-LIS(U)(Y), DS-2CD3T66G3-2ISU/4ISU(Y), DS-2CD3T66G3-ISU/SL(Y), DS-2CD3T66G3-LISU(Y), DS-2CD3T66G3-LISU/SL(Y), DS-2CD3T67G3-LISU(Y), DS-2CD3T67G3-LISU/SL(Y), DS-2CD3T67G3E-LIUF/SL, DS-2CD3T67G3E-LIUF/SRB, DS-2CD3T67G3P-LIHSUY/SL, DS-2CD3T81G2-LIUF, DS-2CD3T81G2P-LIDUF/4G/SL, DS-2CD3T81G2P-LIUF/SL, DS-2CD3T85G0-4IS(B), DS-2CD3T85G0-I, DS-2CD3T86G2-4IS, DS-2CD3T86G2-4IS(Y), DS-2CD3T86G2-LIDSU/4G/SL, DS-2CD3T86G2H-LIS(U)(Y), DS-2CD3T86G2H-LISU/SL, DS-2CD3T86G3-2ISU/4ISU(Y), DS-2CD3T86G3-ISU/SL(Y), DS-2CD3T86G3-LISU(Y), DS-2CD3T86G3-LISU/SL(Y), DS-2CD3T87G2P-LSU/SL, DS-2CD3T87G3-LISU(Y), DS-2CD3T87G3-LISU/SL(Y), DS-2CD3T87G3-LISUY/SRB, DS-2CD3T87G3P-LIHSUY/SL, DS-2CD3TC7G3-LISU(Y), DS-2CD3TC7G3-LISU/SL(Y), DS-2CD3TC7G3P-LIHSUY/SL, DS-2CD4026FWD-(A)(P)(/P), DS-2CD4026FWD-A(LF), DS-2CD4026FWD-A(P)(/P), DS-2CD4026FWD-AL, DS-2CD4026FWD-ASDI, DS-2CD4026FWD-ASDI(B), DS-2CD4026FWD-FC, DS-2CD4026FWD-L, DS-2CD4026FWD-SDI, DS-2CD4026FWD-SDI(B), DS-2CD4026FWD/E-H, DS-2CD4026FWD/E-HIR5(LF), DS-2CD4026FWD/E-IRA/IRA/IR5/HIRA/HIR5, DS-2CD4026FWD/E-L, DS-2CD4026FWD/P-(HIRA)(IR5)(IRA)(INRA), DS-2CD4026FWD/P-AI, DS-2CD4026FWD/P-L, DS-2CD4626FWD-IZ(H)(S)/P, DS-2CD4626FWD/P-IZ, DS-2CD4A24FWD-IZ(H)(S)(T), DS-2CD4A26FWD-IZ(H)(S)/P, DS-2CD4A26FWD-LZS/P, DS-2CD4A45G0-IZ(H)(S), DS-2CD4B16FWD-IZ(S), DS-2CD4B25G0-IZS, DS-2CD4B26FWD-IZ(S), DS-2CD4B36FWD-IZ(S), DS-2CD4B45G0-IZS, DS-2CD4C16FWD-(A)(P), DS-2CD4C26FWD(-AP), DS-2CD4C36FWD(-AP), DS-2CD4D16FWD-IZ(S)(/V), DS-2CD4D26FWD-IZ(S)(/V), DS-2CD4D26FWD-IZM, DS-2CD4D36FWD-IZ(S)

2.3 Terms And Definitions

2.3.1 Event

Event refers to the information uploaded by the device actively. Event needs to be uploaded by the device in real time for the immediate response from the platform. If the device is offline, the event can be stored in the cache first and then be uploaded again when the connection is restored.

2.3.2 Arming

Arming means that the client establishes connection with the device so that events can be uploaded to the client via the connection. The client can subscribe to some event types, and the device will upload the specified events only, otherwise the device will upload all types of events to the client.

2.3.3 Motion Detection

It can realize image changes recognition and moving objects detection of a specified area by camera. For example, if a person passes by or a camera is moved, the motion will be recognized and then an alarm will be uploaded for notifications, and the event can trigger recording and alarm output.

2.4 Symbols And Acronyms

HEOP: Embedded Open Platform

ISAPI: Intelligent Security API.

ISUP: Intelligent Security Uplink Protocol.

HTTP: Hypertext Transfer Protocol.

OSD: On-screen display

VMD: Motion Detection


PTZ: Pan-Tilt-Zoom

2.5 Update History

No update record

3 ISAPI Framework

3.1 Overview

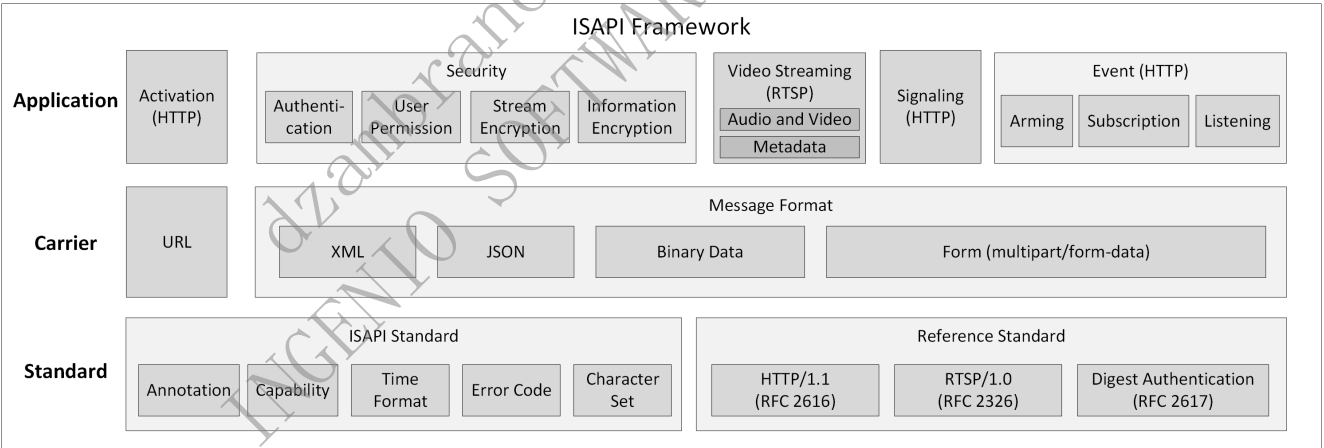

Notes:

In general, ISAPI refers to the communication protocol based on the HTTP standard. As ISAPI is usually used along with RTSP (Real-Time Streaming Protocol), the RTSP standard is brought into the ISAPI system.

The metadata scheme for transmitting additional information of the stream is extended based on the RTSP standard to transmit the video stream and the structured intelligent information of the stream simultaneously. It is compatible with the RTSP standard.


3.2 Activation

The purpose of activation is to ensure that the user can set the password for the device and the password meets the security requirement. After the device is activated, you can use the related functions.

ISAPI is a communication protocol running on the application layer. When activating the device via ISAPI, you should know the device's IP address and make sure that the device is connected to the client.

The web application built in the device supports activating the device via ISAPI. When you enter the device's IP address in the address bar of the web browser on the PC, you can activate the device according to the activation guide.

If you want to activate the device on your own application, you need to integrate the activation function via ISAPI. The API calling flow and related APIs are shown below.

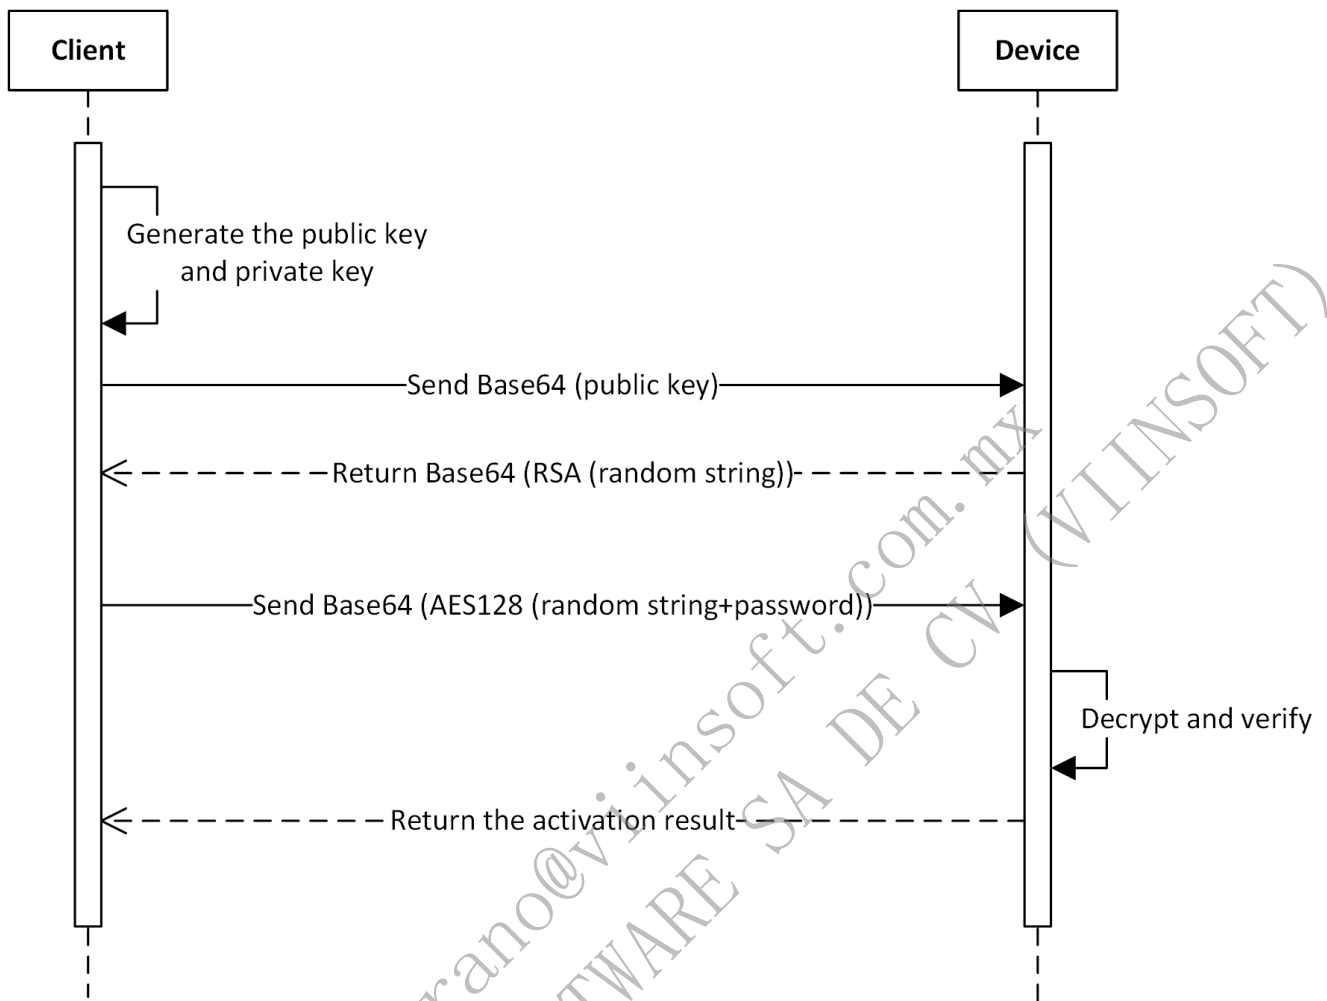

Firstly, two operations are defined:

- `bytesToHexString`: it is used to convert a byte array (the length is N) to a hexadecimal string (the length is 2N). For example, 127,10,23 -> 7f0a17
 - `hexStringToBytes`: it is used to convert a hexadecimal string (the length is 2N) to a byte array (the length is N). For example, 7f0a17 -> 127,10,23
1. The client generates a public and private key pair (1024 bits), and gets the 128-byte modulus in the public key (hereinafter referred to as public key modulus). If the length is longer than 128, the leading 0 needs to be removed.
 2. The client converts the public key modulus to a 256-byte public key string via `bytesToHexString` and sends the public key string to the device in XML message (related URI: `POST /ISAPI/Security/challenge`) after being encoded by Base64.
 3. The device parses the request to obtain a 256-byte public key string decoded by Base64 and converts it to a 128-byte public key modulus via `hexStringToBytes`. The complete public key is the combination of obtained public key modulus and public exponent (the default value is '010001').
 4. The device generates a 32-byte hexadecimal random string, calls the RSA API to encrypt the random string with the private key, converts the encrypted data to a string via `bytesToHexString`, encodes the string by Base64, and then sends it to the client.
 5. The client decodes the string from the device by Base64, converts it via `hexStringToBytes` to get the encrypted data, decrypts the encrypted data with the private key via RSA to obtain a 32-byte hexadecimal random string, converts the obtained string via `hexStringToBytes` to get a 16-byte AES key. Then the client uses the AES key to encrypt the "string consisting of the first 16 characters of the random string and the real password" by AES128 ECB mode (with zero-padding method) to get a ciphertext, and converts the ciphertext via `bytesToHexString`, encodes it by Base64, and sends it to the device in XML message (related URI: `PUT /ISAPI/System/activate`).

Note: If the first 16 characters of the random string are `aaaabbbbccccdddd` and the real password is `Abc12345`, the data before encryption is `aaaabbbbccccddddAbc12345`. This can ensure that the client uses the random string as the key for encryption.

6. The device decodes the string by Base64, converts it via `hexStringToBytes` to get the ciphertext, uses the AES key to decrypt the ciphertext by AES128 ECB mode, and gets the real password via removing the first 16 characters.
7. The device verifies the password and returns the activation result.

Notes:

- You can get the device's activation status by calling the URI `GET /SDK/activateStatus` which requires no authentication.
- Devices also support to be activated via SADP (Search Active Device Protocol) which is based on the communication protocol of the data link layer. With SADP, you do not have to know the IP address of the device but need to ensure that the device and the application running SADP are connected to the same router. SADP also supports discovering devices in the LAN, changing the password of the devices, and so on. The HCSadpSDK is provided for SADP integration, including the developer guide, plug-in, and sample demo which can be used as a simple SADP tool.

3.3 Security Mechanism

3.3.1 Authentication

When the client applications send requests to devices, they need to use digest authentication (see details in [RFC 7616](#)) for identity authentication.

Currently, all mainstream request class libraries of HTTP have encapsulated digest authentication. See details in [Authentication](#) of Quick Start Guide.

3.3.2 User Permission

There are three kinds of users with different permissions for access control and management.

Administrator: Has the permission to access all supported resources and should keep activated all the time. It is also known as "admin".

Operator: Has the permission to access general resources and a part of advanced resources.

Normal User: Only has the permission to access general resources.

3.3.3 Information Encryption

During ISAPI integration, the HTTPS service of devices is enabled by default. When the client applications communicate with devices via HTTPS, the information can be transmitted securely.

3.4 Video Streaming

3.4.1 Audio and Video Stream

ISAPI supports getting and setting stream media parameters of the device, such as video resolution, encoding format, and stream.

Cameras support standard RTSP (Real-Time Streaming Protocol, see details in [RFC 7826](#)). Client applications can get the stream from devices via RTSP.

For details about real-time streaming and video playback, refer to **Real-Time Live View** and **Playback** in Quick Start Guide.

3.4.2 Metadata

The metadata is the structured intelligent information generated by intelligent devices. When the client applications get the audio and/or video stream from devices via RTSP, the metadata will be returned by the device at the same time. For example, to display the face target frame, face information, vehicle target frame, license plate number, vehicle information, and other information on the video stream, the client applications can overlay the above information on

the video image.

Before using the metadata, you need to enable the metadata function of the device and then get the stream from the device via RTSP. Some devices support subscribing to the metadata by type. For details about the process of integrating the metadata function, refer to **Metadata Management**.

4 Quick Start Guide

4.1 Authentication

When the client applications send requests to the devices, they need to use digest authentication (see details in [RFC 7616](#)) for identity authentication.

Client applications only need to call APIs of the class library to implement the digest authentication. The sample code is shown below.

4.1.1 C/C++ (libcurl)

```
// #include <curl/curl.h>
// Callback Function
static size_t OnWriteData(void* buffer, size_t size, size_t nmemb, void* lpVoid)
{
    std::string* str = dynamic_cast<std::string*>((std::string *)lpVoid);
    if( NULL == str || NULL == buffer )
    {
        return -1;
    }

    char* pData = (char*)buffer;
    str->append(pData, size * nmemb);
    return nmemb;
}

std::string strUrl = "http://192.168.18.84:80/ISAPI/System/deviceInfo";
std::string strResponseData;
CURL *pCurlHandle = curl_easy_init();
curl_easy_setopt(pCurlHandle, CURLOPT_CUSTOMREQUEST, "GET");
curl_easy_setopt(pCurlHandle, CURLOPT_URL, strUrl.c_str());
// Set the user name and password
curl_easy_setopt(pCurlHandle, CURLOPT_USERPWD, "admin:admin12345");
// Set the authentication method to the digest authentication
curl_easy_setopt(pCurlHandle, CURLOPT_HTTPAUTH, CURLAUTH_DIGEST);
// Set the callback function
curl_easy_setopt(pCurlHandle, CURLOPT_WRITEFUNCTION, OnWriteData);
// Set the parameters of the callback function to get the returned information
curl_easy_setopt(pCurlHandle, CURLOPT_WRITEDATA, &strResponseData);
// Timeout settings for receiving the data. If receiving data is not completed within 5 seconds, the application will exit directly
curl_easy_setopt(pCurlHandle, CURLOPT_TIMEOUT, 5);
// Set the redirection times to avoid too many redirections
curl_easy_setopt(pCurlHandle, CURLOPT_MAXREDIRS, 1);
// Connection timeout duration. If the duration is too short, the client application will be disconnected before the data request sent by the application reaches the device
curl_easy_setopt(pCurlHandle, CURLOPT_CONNECTTIMEOUT, 5);
CURLcode nRet = curl_easy_perform(pCurlHandle);
if (0 == nRet)
{
    // Output the received message
    std::cout << strResponseData << std::endl;
}
curl_easy_cleanup(pCurlHandle);
```

4.1.2 C# (WebClient)

```
// using System.Net;
// using System.Net.Security;
try
{
    string strUrl = "http://192.168.18.84:80/ISAPI/System/deviceInfo";
    WebClient client = new WebClient();
    // Set the user name and password
    client.Credentials = new NetworkCredential("admin", "admin12345");
    byte[] responseData = client.DownloadData(strUrl);
    string strResponseData = Encoding.UTF8.GetString(responseData);
    // Output received information
    Console.WriteLine(strResponseData);
}
catch (Exception ex)
{
    Console.WriteLine(ex.Message);
}
```

4.1.3 Java (HttpClient)

```
// import org.apache.commons.httpclient.HttpClient;
String url = "http://192.168.18.84:80/ISAPI/System/deviceInfo";
HttpClient client = new HttpClient();
// Set the user name and password
UsernamePasswordCredentials creds = new UsernamePasswordCredentials("admin", "admin12345");
client.getState().setCredentials(AuthScope.ANY, creds);
GetMethod method = new GetMethod(url);
method.setDoAuthentication(true);
int statusCode = client.executeMethod(method);
byte[] responseData = method.getResponseBodyAsString().getBytes(method.getResponseCharSet());
String strResponseData = new String(responseData, "utf-8");
method.releaseConnection();
// Output received information
System.out.println(strResponseData);
```

4.1.4 Python (requests)

```
# - *- coding: utf-8 -*-

import requests
request_url = 'http://192.168.18.84:80/ISAPI/System/deviceInfo'
# Set the authentication information
auth = requests.auth.HTTPDigestAuth('admin', 'admin12345')
# Send the request and receive response
response = requests.get(request_url, auth=auth)
# Output response content
print(response.text)
```

4.2 Message Parsing

4.2.1 Message Format

During the process of communication and interaction via ISAPI, the request and response messages are often text data in XML or JSON format. Besides that, the data of firmware packages and configuration files is in binary format. A request can also be in form format with multiple formats of data (multipart/form-data).

4.2.1.1 XML

Generally, the Content-Type in the headers of the HTTP request is application/xml; charset="UTF-8".

Request and response messages in XML format are all encoded with UTF-8 standards in ISAPI.

The namespace `http://www.isapi.org/ver20/XMLSchema` and ISAPI version number `2.0` of XML messages are configured by default, see the example below.

```
<?xml version="1.0" encoding="UTF-8"?>
<NodeList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <Node>
    <id>1</id>
    <enabled>true</enabled>
    <nodeName>nodeName</nodeName>
    <level>level1</level>
  </Node>
</NodeList>
```

4.2.1.2 JSON

The **Content-Type** in the headers of the HTTP request is often **application/json**.

To distinguish between APIs with XML messages and those with JSON messages, ISAPI adds the query parameter **format=json** to all request URLs with JSON messages, e.g.,

<http://192.168.1.1:80/ISAPI/System/Sensor/thermometrySensor?format=json>. Messages of request URLs without the query parameter **format=json** are usually in XML format. However, there may be some exceptions, and the message format is subject to the API definition.

Request and response messages in JSON format are all encoded by UTF-8 in ISAPI.

4.2.1.3 Binary Data

For the firmware and configuration files, the **Content-Type** in the header of an HTTP request is often **application/octet-stream**.

4.2.1.4 Form (multipart/form-data)

When multiple pieces of data are submitted at the same time in an ISAPI request (e.g., the person information and face picture need to be submitted at the same time when a face record is added to the face picture library), the **Content-Type** in the header of the corresponding HTTP request is usually **multipart/form-data**, **boundary=AaB03x**, where the boundary is a variable used to separate the entire HTTP body into multiple units and each unit is a piece of data with its own headers and body. In **Content-Disposition** of form unit headers, the **name** property refers to the form unit name, which is required for all form units; the **filename** property refers to the file name of form unit body, which is required only when the form unit body is a file. In headers of form units, **Content-Length** refers to the body length, which starts after CRLF(\r\n) and ends before two hyphens (--) of next form. There should be a CRLF used as the delimiter of two form units before two hyphens (--), and the **Content-Length** of previous form unit does not include the CRLF length. For the detailed format description, refer to [RFC 1867 \(Form-Based File Upload in HTML\)](#). Pay attention to two hyphens (--) before and after the boundary.

Notes

- In RFC specifications, it is strongly recommended to contain the field **Content-Length** in the entity header, and there is no requirement that the field **Content-Length** should be contained in the header of each form element. The absence of field **Content-Length** in the header should be considered when the client and device programs parse the form data.
- To avoid the conflict between message content and boundary value, it is recommended to use a longer and more complex string as the boundary value.

The example of ISAPI form data submitted by a client to a device is as follows.

```

POST /ISAPI/Intelligent/FDLib/pictureUpload
Content-Type: multipart/form-data; boundary=e5c2f8c5461142aea117791dade6414d
Content-Length: 56789

--e5c2f8c5461142aea117791dade6414d
Content-Disposition: form-data; name="PictureUploadData";
Content-Type: application/xml
Content-Length: 1234

<PictureUploadData/>
--e5c2f8c5461142aea117791dade6414d
Content-Disposition: form-data; name="face_picture"; filename="face_picture.jpg";
Content-Type: image/jpeg
Content-Length: 34567

Picture Data
--e5c2f8c5461142aea117791dade6414d--

```

The example of ISAPI form data responded from a device to a client is as follows.

In ISAPI messages, when there are multiple form units, three nodes (pid, contentid, and filename) are used for linking form units. The corresponding relations are as follows:

Node Name	Form Field	Description
pid	name	pid in XML/JSON messages corresponds to the name property of Content-Disposition in form headers.
contentid	Content-ID	contentid in XML/JSON messages corresponds to Content-ID in form headers.
filename	filename	filename in XML/JSON messages corresponds to filename property of Content-Disposition in form headers.

```

HTTP/1.1 200 OK
Content-Type: multipart/form-data; boundary=136a73438ecc4618834b999409d05bb9
Content-Length: 56789

--136a73438ecc4618834b999409d05bb9
Content-Disposition: form-data; name="mixedTargetDetection";
Content-Type: application/json
Content-Length: 811

{
  "ipAddress": "172.6.64.7",
  "macAddress": "01:17:24:45:D9:F4",
  "channelID": 1,
  "dateTime": "2009-11-14T15:27+08:00",
  "eventType": "mixedTargetDetection",
  "eventDescription": "Mixed target detection",
  "deviceID": "123456789",
  "CaptureResult": [{
    "targetID": 1,
    "Human": {
      "Rect": {
        "height": 1.0,
        "width": 1.0,
        "x": 0.0,
        "y": 0.0
      },
      "contentID1": "humanImage", /*human body thumbnail*/
      "contentID2": "humanBackgroundImage", /*human body background picture*/
      "pId1": "9d48a26f7b8b4f2390c16808f93f3534", /*human body thumbnail ID */
      "pId2": "5EE7078E07BB47CF860DE8E4E9A85F28" /*ID of human body background picture*/
    }
  ]
}
--136a73438ecc4618834b999409d05bb9
Content-Disposition: form-data; name="9d48a26f7b8b4f2390c16808f93f3534"; filename="humanImage.jpg";
Content-Type: image/jpeg
Content-Length: 34567
Content-ID: humanImage

Picture Data
--136a73438ecc4618834b999409d05bb9
Content-Disposition: form-data; name="5EE7078E07BB47CF860DE8E4E9A85F28"; filename="humanBackgroundImage.jpg";
Content-Type: image/jpeg
Content-Length: 345678
Content-ID: humanBackgroundImage

Picture Data
--136a73438ecc4618834b999409d05bb9--

```

4.2.2 Annotation

The field descriptions of ISAPI request and response messages are marked as annotations in the example messages as shown below.

```

<?xml version="1.0" encoding="UTF-8"?>
<NodeList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, node list, attr:version{req, string, version No., range:[,]}-->
  <Node>
    <!--ro, opt, object, node information-->
    <id>
      <!--ro, req, int, node No., range:[,], step:, unit:, unitType:-->1
    </id>
    <enabled>
      <!--ro, opt, bool, whether to enable-->true
    </enabled>
    <nodeName>
      <!--ro, req, string, node name, range:[1,32]-->test
    </nodeName>
    <level>
      <!--ro, opt, enum, level, subType:string,
      [level1#Level 1,level2#Level 2,level3#Level 3]-->level1
    </level>
  </Node>
</NodeList>

```

```

{
  "name": "test",
  /*ro, req, string, name, range:[1,32]*/
  "type": "type1",
  /*ro, req, enum, type, subType:string, [type1#type 1,type2#type 2]*/
  "enabled": true,
  /*ro, opt, bool, enable or not, desc:xxxxxx*/
  "NodeList": {
    /*opt, object, node list, dep:and,{$.enabled,eq,true}*/
    "scene": 1,
    /*req, enum, scene, subType:int, [1#scene 1; 2#scene 2; 3#scene 3]*/
    "ID": 1
  }
  /*req, int, No., range:[1,8], step:, unit:, unitType:*/
}

```

Key annotations are shown in the table below.

Annotation	Description	Remark
ro	Attribute: Read-Only	This field can only be obtained and cannot be edited.
wo	Attribute: Write-Only	This field can only be edited and cannot be obtained.
req	Attribute: Required	This field is required for request messages sent to the device and response messages returned from the device.
opt	Attribute: Optional	This field is optional for request messages sent to the device and response messages returned from the device.
dep	Attribute: Dependent	This field is valid and required when specific conditions are satisfied.
object	Field Type: Object	The field of type object contains multiple sub-fields.
list	Field Type: List	The subType following it refers to the data type of sub-items in the list.
subType	Field Type: String	The range following it refers to the maximum and the minimum string size of the field.
int	Field Type: Int	The range following it refers to the maximum and the minimum value of the field.
float	Field Type: Float	The range following it refers to the maximum and the minimum value of the field.
bool	Field Type: Boolean	The value can be true or false.
enum	Field Type: Enumeration	The subType following it indicates that the enumerators are of type string or int. The [] following the subType contains all enumerators.
subType	Sub-Type of Field	When the type of field is list or enum, the value of subType is the data type of each sub-object.
desc	Field Description	The detailed description of the field.

4.2.3 Capability Set

ISAPI has designed capability sets for almost all functions, APIs, and fields. URLs for getting the capability set end with `/capabilities`. Some URLs may contain query parameters in the format: `/capabilities?format=json&type=xxx`.

There are two types of fields in the capability message of ISAPI: whether the device supports a function and the value range of a field in an API.

Whether the device supports a function: it is often in the format `isSupporttXXXXXXX`, which indicates that whether the device supports a function and a set of APIs for implementing this function.

The capability message example in JSON format is shown below:


```

{
  "isSupportMap": true,
  /*ro, opt, bool, whether it supports the e-map function, desc:/ISAPI/SDT/Management/map/capabilities?format=json*/
  "isSupportAlgTrainResourceInfo": true,
  /*ro, opt, bool, whether it supports only getting the resource information of the algorithm training platform,
  desc:/ISAPI/SDT/algorithmTraining/ResourceInfo?format=json*/
  "isSupportAlgTrainAuthInfo": true,
  /*ro, opt, bool, whether it supports only getting the authorization information of the algorithm training platform,
  desc:/ISAPI/SDT/algorithmTraining/SoftLock/AuthInfo?format=json*/
  "isSupportAlgTrainNodeList": true,
  /*ro, opt, bool, whether it supports only getting the node information of the algorithm training platform, desc:/ISAPI/SDT/algorithmTraining/NodeList?
  format=json*/
  "isSupportNAS": true
  /*ro, opt, bool, whether it supports mounting and unmounting NAS, desc:/ISAPI/SDT/Management/NAS/capabilities?format=json*/
}

```

The capability message example in XML format is shown below:

```

<isSupportNetworkStatus>
  <!--ro, opt, bool, whether it supports searching the network status, desc: reLated API (/ISAPI/System/Network/status?format=json)-->true
</isSupportNetworkStatus>

```

The value range of the field: the maximum value, minimum value, the maximum size, the minimum size, options, and so on of each field of the API.

The example of JSON format is shown below:

```

{
  "boolType": {
    /*req, object, example of the capability of type bool*/
    "@opt": [true, false]
    /*req, array, options, subType: bool*/
  },
  "integerType": {
    /*req, object, example of the capability of type integer*/
    "@min": 0,
    /*ro, req, int, the minimum value*/
    "@max": 100
    /*ro, req, int, the maximum value*/
  },
  "stringType": {
    /*req, object, example of the capability of type string*/
    "@min": 0,
    /*ro, req, int, the minimum string size*/
    "@max": 32
    /*ro, req, int, the maximum string size*/
  },
  "enumType": {
    /*req, object, capability example of type enum*/
    "@opt": ["enum1", "enum2", "enum3"]
    /*req, array, options, subType: string*/
  }
}

```

The example of XML format is shown below:

```

<boolType opt="true,false" def="true">
  <!--ro, opt, bool, example of the capability of type bool-->true
</boolType>
<integerType min="0" max="100">
  <!--ro, opt, int, example of the capability of type int-->50
</integerType>
<stringType min="0" max="64">
  <!--ro, opt, string, example of the capability of type string-->test
</stringType>
<enumType opt="red,white,black" def="red">
  <!--ro, opt, string, example of the capability of type enum-->white
</enumType>

```

Note: For the same capability set, devices of different models and versions may return different results. The values shown in this document are only examples for reference. The capability set actually returned by the device takes precedence.

4.2.4 Time Format

ISAPI adopts [ISO 8601 Standard Time Format](#), which is the same as [W3C Standard Date and Time Formats](#).

Format: YYYY-MM-DDThh:mm:ss.sTZD

YYYY = the year consisting of four decimal digits
MM = the month consisting of two decimal digits (01-January, 02-February, and so forth)
DD = the day consisting of two decimal digits (01 to 31)
hh = the hour consisting of two decimal digits (00 to 23, a.m. and p.m. are not allowed)
mm = the minute consisting of two decimal digits (00 to 59)
ss = the second consisting of two decimal digits (00 to 59)
s = one or more digits representing the fractional part of a second
TZD = time zone identifier (Z or +hh:mm or -hh:mm)

Example: 2017-08-16T20:17:06.123+08:00 refers to 20:17:06.123 on August 16, 2017 (local time which is 8 hours ahead of UTC). The plus sign (+) indicates that the local time is ahead of UTC, and the minus sign (-) means that the local time is behind UTC.

After the DST is enabled, the local time and time difference will change compared with UTC, and the values of related fields also need to be changed. Disabling the DST will bring into the opposite effect.

Example: In 1986, the DST was in effect from May 4 at 2:00 a.m. (GMT+8). During the DST period, the clocks were moved one hour ahead, which means that there was one less hour on that day. When the DST ends at 2:00 a.m. on September 14, 1986, the clocks were moved one hour back and there was an extra hour on that day. The changes of the time are as follows:

- DST Starts: 1986-05-04T02:00:00+08:00 --> 1986-05-04T03:00:00+09:00
- DST Ends: 1986-09-14T02:00:00+09:00 --> 1986-09-14T01:00:00+08:00

Notes:

- The time difference cannot be simply used to determine the time zone. Because when the DST starts, the time difference will change and it cannot represent the actual time zone.
- Both TZ (UTC time, e.g., 1986-05-03T18:00:00Z) and TD (local time and time difference, e.g., 1986-05-04T02:00:00+08:00) meet the time format standards of ISO 8601. In ISAPI, the TD format is recommended to be used in messages sent from the user applications and the devices.
- A few old-version devices will return the time in TZ format. For representing the time difference information and forward compatibility, an extra field `timeDiff` is added as shown in the example below. User applications need to support both TD format and TZ format when parsing the time in the messages returned by devices.

```
{
  "dateTime": "1986-05-03T18:00:00Z", /*device time. The value in TZ format is the UTC time and the value in TD format is the time difference between the
device's local time and UTC*/
  "timeDiff": "+08:00" /*optional, time difference between the local time and UTC time. If this field does not exist, the user application will convert
the dateTime into the local time for use*/
}
```

4.2.5 Character Set

To prevent characters not commonly used from resulting in exceptions in device programs and user applications, ISAPI limits the valid field values of type string to a specific range of characters. Character sets allowed to be used in the fields of type string in ISAPI are listed below.

- Single-byte character set: lowercase letters (a-z), uppercase letters (A-Z), digits (0-9), and special characters (see details in the table below).
- Multi-byte character set: language characters based on Unicode and encoded by UTF-8 (UTF-8 encoding is a transformation format of Unicode character set. For details, refer to [RFC 2044](#)).

No.	Name	Special Character	No.	Name	Special Character
1	Open Parenthesis	(	18	Dollar Sign	\$
2	Close Parenthesis	)	19	Percent Sign	%
3	Plus Sign	+	20	Ampersand	&
4	Comma	,	21	Close Single Quotation Mark	'
5	Minus Sign	-	22	Asterisk	*
6	Period	.	23	Slash	/
7	Semicolon	;	24	Smaller Than	<
8	Equal Sign	=	25	Greater Than	>
9	At Sign	@	26	Question Mark	?
10	Open Square Bracket	[	27	Caret	^
11	Close Square Bracket	]	28	Open Single Quotation Mark	'
12	Underscore	_	29	Vertical Bar	
13	Open Brace	{	30	Tilde	~
14	Close Brace	}	31	Double Quotation Marks	"
15	Space		32	Colon	:
16	Exclamation Mark	!	33	Backslash	\
17	Octothorpe	#			

The valid characters that can be used in some special fields are listed below.

- User name: lowercase letters (a-z), uppercase letters (A-Z), digits (0-9), and characters from No. 1 to No. 30 in the special character table.
- Password: User Name: lowercase letters (a-z), uppercase letters (A-Z), digits (0-9), and characters from No. 1 to No. 33 in the special character table.
- Names displayed on the UI (device name, person name, face picture library name, etc.): lowercase letters (a-z), uppercase letters (A-Z), digits (0-9), characters from No. 1 to No. 15 in the special character table, and multi-byte characters.
- Normal fields of type string support lowercase letters (a-z), uppercase letters (A-Z), digits (0-9), characters from No. 1 to No. 15 in the special character table, and multi-byte characters by default.

4.2.6 Error Processing

When requesting via ISAPI failed (the HTTP status code is not 200), the device will return the HTTP status code and ISAPI error code. For HTTP status codes, refer to 10 Status Code Definitions in [RFC 2616](#). For ISAPI error codes, refer to Error Code Dictionary.

Message Example:

```

HTTP/1.1 403 Forbidden
Content-Type: application/json; charset="UTF-8"
Date: Thu, 15 Jul 2021 20:43:30 GMT
Content-Length: 229
Connection: Keep-Alive

{
  "requestURL": "/ISAPI/Event/triggers/notifications/channels/whitelightAlarm",
  "statusCode": 4,
  "statusString": "Invalid Operation",
  "subStatusCode": "notSupport",
  "errorCode": 1073741825,
  "errorMsg": "notSupport"
}

```


4.3 Real-Time Live View

4.3.1 Introduction to the Function

Supports getting and setting stream media parameters of devices such as resolution, coding format, and stream type.

Supports streaming from products via RTSP (Real Time Streaming Protocol, see details in [RFC 7826](#)).

4.3.2 API Calling Flow

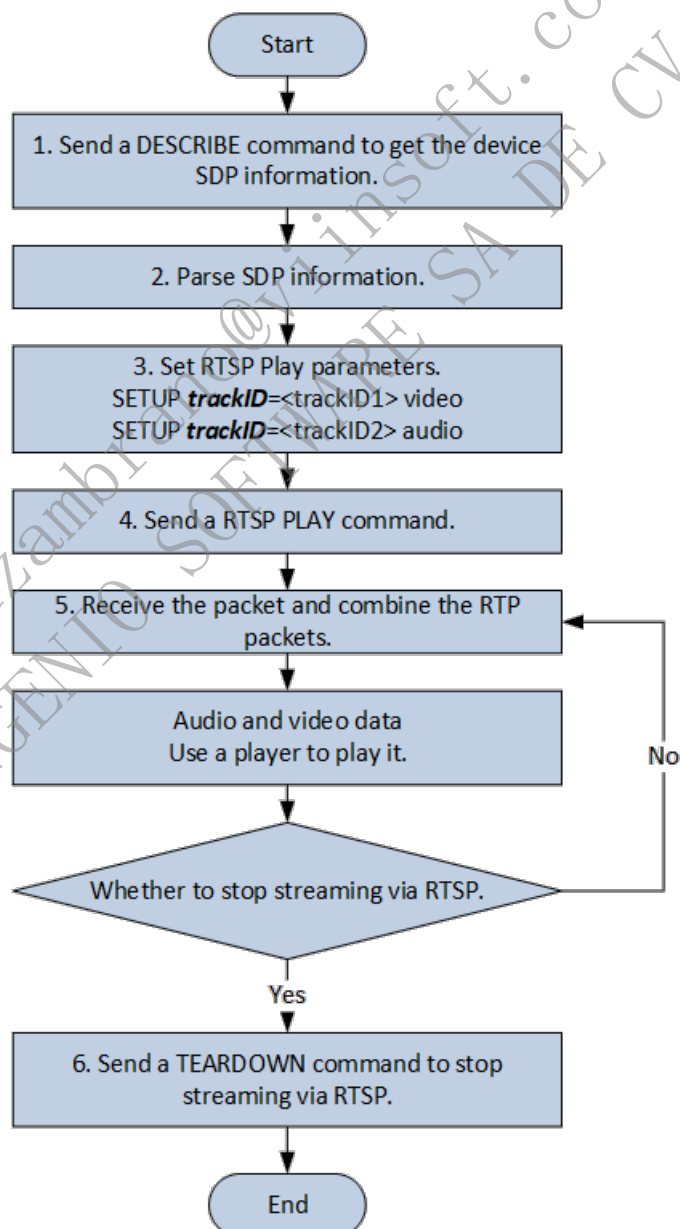

1. A client sends RTSP DESCRIBE commands such as `DESCRIBE /ISAPI/Streaming/channels/101 RTSP/1.0`. Digest authentication with devices is required before this step. 2. The client parses the media SDP information returned by the device. 3. Set RTSP play parameters, that is to set the track ID parsed from SDP information via SETUP commands. For

example, trackID=1 indicates videos while trackID=2 indicates audios. 4. The client sends an RTSP PLAY command, and the device will send audio stream, video stream, and metadata in the format of `PLAY /ISAPI/Streaming/channels/101 RTSP/1.0`. 5. The client receives the RTP packet sent by the device. Divided RTP packets should be assembled on the client before being parsed. 6. The client sends the command RTSP TEARDOWN to stop streaming.

Notes:

- Digest authentication is required in RTSP playback. The method is the same as that of ISAPI digest authentication.
- The address format for streaming from devices is `rtsp:// <host>[:port]/ISAPI/Streaming/channels/<ID>`, of which `<host>` is the device IP address; `[:port]` is optional, and 554 by default; `<ID>` is the device channel ID * 100 + stream type (1-main stream, 2-sub-stream, 3-third stream). For example, the IP address of the target device is 172.7.203.11, and the streaming address of main stream for channel 17 will be `rtsp://172.7.203.11:554/ISAPI/Streaming/channels/1701`.
- RTSP also supports containing user names and passwords in URL. The format is `rtsp://username:password@[address]:[port]/Streaming/Channels/[id](?parm1=value1&parm2-=value2...)`, such as `/Streaming/Channels/101?transportmode=unicast`.

4.3.3 Example

1. A client sends an RTSP DESCRIBE command.

```
DESCRIBE rtsp://10.21.84.147:554/ISAPI/Streaming/channels/101 RTSP/1.0
CSeq:0
Accept:application/sdp
User-Agent:NKPlayer-1.00.00.081112
```

2. Server responds that authentication is required.

```
RTSP/1.0 401 Unauthorized
CSeq: 0
WWW-Authenticate: Digest realm="3521781c29acb312330dd668", nonce="026019333", algorithm="MD5"
```

3. The client sends an RTSP DESCRIBE request with authentication information again.

```
DESCRIBE rtsp://10.21.84.147:554/ISAPI/Streaming/channels/101 RTSP/1.0
CSeq:1
Accept:application/sdp
Authorization: Digest username="admin", realm="3521781c29acb312330dd668", nonce="026019333", uri="rtsp://10.21.84.147:554/ISAPI/Streaming/channels/101",
response="76a2c9c5b8edbd49838013cf1cf27941"
User-Agent:NKPlayer-1.00.00.081112
```

4. The device responds to SDP information.

```
L-id=4D0014;packetization-mode=0
```

FO=494D4B4802010000020000011710110401F00000FA0000000000000000000000000000;

Is RTSP SETUP requests, and the server responds to them.

```
147:554/ISAPI/Streaming/channels/101/trackID=1 RTSP/1.0

username="admin", realm="3521781c29acb312330dd668", nonce="026019333", uri="rtsp://10.21.84.147:554/ISAPI/Streaming/channels/101",
eb028dd9b4932cc44201"
unicast;interleaved=0-1;ssrc=0
00.00.081112

meout=60
unicast;interleaved=0-1;ssrc=433122aa

eeking, Time-Progressing, Time-Duration=0
02:09:45 GMT
```

```
147:554/ISAPI/Streaming/channels/101/trackID=2 RTSP/1.0

username="admin", realm="3521781c29acb312330dd668", nonce="026019333", uri="rtsp://10.21.84.147:554/ISAPI/Streaming/channels/101",
eb028dd9b4932cc44201"
eout=60
unicast;interleaved=2-3;ssrc=0
00.00.081112
```

```
meout=60
;unicast;interleaved=0-1;ssrc=433122aa

eeking, Time-Progressing, Time-Duration=0
02:09:45 GMT

147:554/ISAPI/Streaming/channels/101/trackID=2 RTSP/1.0

username="admin", realm="3521781c29acb312330dd668", nonce="026019333", uri="rtsp://10.21.84.147:5
eb028dd9b4932cc44201"
eout=60
;unicast;interleaved=2-3;ssrc=0
00.00.081112

meout=60
;unicast;interleaved=2-3;ssrc=433122ab

eeking, Time-Progressing, Time-Duration=0
02:09:45 GMT
```

```
147:554/ISAPI/Streaming/channels/101/trackID=2 RTSP/1.0

username="admin", realm="3521781c29acb312330dd668", nonce="026019333", uri="rtsp://10.21.84.147:554/ISAPI/Streaming/channels/101",
cseq=1, method=PLAY,
cnonce="eb028dd9b4932cc44201",
to=10.00.000000000000,
from=10.00.000000000000,
out=60
unicast;interleaved=2-3;ssrc=0
00.00.081112

meout=60
unicast;interleaved=2-3;ssrc=433122ab

seeking, Time-Progressing, Time-Duration=0
02:09:45 GMT

Is an RTSP PLAY request.

147:554/ISAPI/Streaming/channels/101 RTSP/1.0

username="admin", realm="3521781c29acb312330dd668", nonce="026019333", uri="rtsp://10.21.84.147:554/ISAPI/Streaming/channels/101",
```

47:554/ISAPI/Streaming/channels/101 RTSP/
username="admin", realm="3521781c29acb312

00.00.081112

ds audio and video stream data.

```
RTSP/1.0 200 OK
Session: 1127293610
CSeq: 4
Date: Tue, 17 Nov 2020 02:09:45 GMT

$. ....d1.w....c....".T....g....).i.....a....7.S...~J.....X...X.
```

8. The client sends an RTSP TEARDOWN request, and the server responds to it.

```
TEARDOWN rtsp://10.21.84.147:554/ISAPI/Streaming/channels/101 RTSP/1.0
CSeq:5
Authorization: Digest username="admin", realm="3521781c29acb312330dd668", nonce="026019333", uri="rtsp://10.21.84.147:554/ISAPI/Streaming/channels/101",
response="24edf8a6ff3ef767f7c49d1c847200bd"
Session:1127293610;timeout=60
Range:npt=0.000000-0.000000
User-Agent:NKPlayer-1.00.00.081112
```


```
RTSP/1.0 200 OK
Session: 1127293610
CSeq: 5
Date: Tue, 17 Nov 2020 02:09:50 GMT
```

4.4 Playback

4.4.1 Introduction to the Function

Devices such as cameras and NVRs can store videos. Storage mediums such as SD card, TF card and HDDs are needed before recording videos. The process of playback starts with searching for footages and then getting video stream via RTSP (Real Time Streaming Protocol, see details in [RFC 7826](#)).

Below is an example of playback on a web client. The calendar in the bottom-left corner shows the results of searching for videos. Dates with videos are shown on the calendar and you can click a date to play back searched videos of the corresponding day.

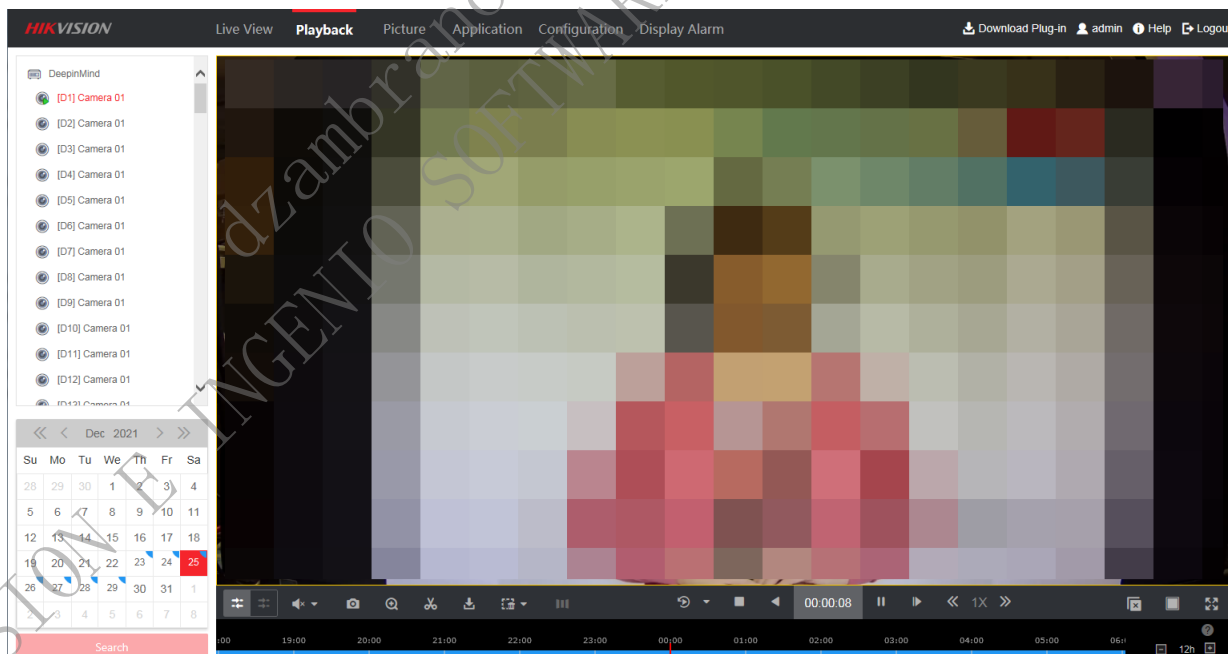

4.4.2 API Calling Flow

1. (Optional) Check the calendar to find dates with stored videos: `POST /ISAPI/ContentMgmt/record/tracks/<trackStreamID>/dailyDistribution`. `<trackStreamID>` = channel number * 100 + stream type (1-main stream, 2-sub-stream, 3-third stream). For example, The rackStreamID of the main stream for channel 17 is 1701.
2. Searching for videos by parsing the `playbackURI` of the device to get the RTSP address `POST /ISAPI/ContentMgmt/search`.

3. Play videos back via RTSP. Steps of playback via RTSP is the same as that of real-time live view. Refer to streaming via RTSP in real-time streaming. See details in [RFC 7826](#) (Real Time Streaming Protocol).

Notes:

- Playback via RTSP needs digest authentication. The method is the same as the one of ISAPI digest authentication.
- Send PAUSE command to pause playback. Send PLAY command to continue. If you want to perform fast forward and slow forward, you can send a PLAY command and set Scale in headers. See details in 10.6 PAUSE and 12.34 Scale in [RFC 7826](#) (Real Time Streaming Protocol).

4.4.3 Example

4.4.3.1 Search for Videos According to Calendar

Request from Client

```
POST /ISAPI/ContentMgmt/record/tracks/101/dailyDistribution HTTP/1.1
Host: 10.14.97.40
Connection: keep-alive
Content-Length: 119
Cache-Control: max-age=0
Accept: */*
X-Requested-With: XMLHttpRequest
If-Modified-Since: 0
User-Agent: Mozilla/5.0 (Windows NT 6.1; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/92.0.4515.131 Safari/537.36
Content-Type: application/x-www-form-urlencoded; charset=UTF-8
Origin: http://10.14.97.40
Referer: http://10.14.97.40/doc/index.html
Accept-Encoding: gzip, deflate
Accept-Language: zh-CN,zh;q=0.9
Cookie: WebSession_78aedfcc66=3b451c9d37cb637827da0815086e7ecfd9984b0095b3cb7198e8197a424a3279

<?xml version="1.0" encoding="utf-8"?>
<trackDailyParam>
  <year>2021</year>
  <monthOfYear>08</monthOfYear>
</trackDailyParam>
```

Response from Device


```
HTTP/1.1 200 OK
Vary: Accept-Encoding
X-Frame-Options: SAMEORIGIN
Content-Type: application/xml; charset="UTF-8"
X-Content-Type-Options: nosniff
Date: Wed, 18 Aug 2021 15:47:43 GMT
Content-Length: 2915
X-XSS-Protection: 1; mode=block
Connection: Keep-Alive
Accept-Ranges: bytes

<?xml version="1.0" encoding="UTF-8" ?>
<trackDailyDistribution version="2.0" xmlns="http://www.isapi.org/ver20/XMLSchema">
  <dayList>
    <day><id>1</id><dayOfMonth>1</dayOfMonth><record>true</record><recordType>time</recordType></day>
    <day><id>2</id><dayOfMonth>2</dayOfMonth><record>true</record><recordType>time</recordType></day>
    <day><id>3</id><dayOfMonth>3</dayOfMonth><record>true</record><recordType>time</recordType></day>
    <day><id>4</id><dayOfMonth>4</dayOfMonth><record>true</record><recordType>time</recordType></day>
    <day><id>5</id><dayOfMonth>5</dayOfMonth><record>true</record><recordType>time</recordType></day>
    <day><id>6</id><dayOfMonth>6</dayOfMonth><record>true</record><recordType>time</recordType></day>
    <day><id>7</id><dayOfMonth>7</dayOfMonth><record>true</record><recordType>time</recordType></day>
    <day><id>8</id><dayOfMonth>8</dayOfMonth><record>true</record><recordType>time</recordType></day>
    <day><id>9</id><dayOfMonth>9</dayOfMonth><record>true</record><recordType>time</recordType></day>
    <day><id>10</id><dayOfMonth>10</dayOfMonth><record>true</record><recordType>time</recordType></day>
    <day><id>11</id><dayOfMonth>11</dayOfMonth><record>true</record><recordType>time</recordType></day>
    <day><id>12</id><dayOfMonth>12</dayOfMonth><record>true</record><recordType>time</recordType></day>
    <day><id>13</id><dayOfMonth>13</dayOfMonth><record>true</record><recordType>time</recordType></day>
    <day><id>14</id><dayOfMonth>14</dayOfMonth><record>false</record></day>
    <day><id>15</id><dayOfMonth>15</dayOfMonth><record>false</record></day>
    <day><id>16</id><dayOfMonth>16</dayOfMonth><record>false</record></day>
    <day><id>17</id><dayOfMonth>17</dayOfMonth><record>false</record></day>
    <day><id>18</id><dayOfMonth>18</dayOfMonth><record>true</record><recordType>time</recordType></day>
    <day><id>19</id><dayOfMonth>19</dayOfMonth><record>false</record></day>
    <day><id>20</id><dayOfMonth>20</dayOfMonth><record>false</record></day>
    <day><id>21</id><dayOfMonth>21</dayOfMonth><record>false</record></day>
    <day><id>22</id><dayOfMonth>22</dayOfMonth><record>false</record></day>
    <day><id>23</id><dayOfMonth>23</dayOfMonth><record>false</record></day>
    <day><id>24</id><dayOfMonth>24</dayOfMonth><record>false</record></day>
    <day><id>25</id><dayOfMonth>25</dayOfMonth><record>false</record></day>
    <day><id>26</id><dayOfMonth>26</dayOfMonth><record>false</record></day>
    <day><id>27</id><dayOfMonth>27</dayOfMonth><record>false</record></day>
    <day><id>28</id><dayOfMonth>28</dayOfMonth><record>false</record></day>
    <day><id>29</id><dayOfMonth>29</dayOfMonth><record>false</record></day>
    <day><id>30</id><dayOfMonth>30</dayOfMonth><record>false</record></day>
    <day><id>31</id><dayOfMonth>31</dayOfMonth><record>false</record></day>
  </dayList>
</trackDailyDistribution>
```

4.4.3.2 Search for Videos

Request from Client

```
POST /ISAPI/ContentMgmt/search HTTP/1.1
Host: 10.14.97.40
Connection: keep-alive
Content-Length: 486
Cache-Control: max-age=0
Accept: */*
X-Requested-With: XMLHttpRequest
If-Modified-Since: 0
User-Agent: Mozilla/5.0 (Windows NT 6.1; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/92.0.4515.131 Safari/537.36
Content-Type: application/x-www-form-urlencoded; charset=UTF-8
Origin: http://10.14.97.40
Referer: http://10.14.97.40/doc/index.html
Accept-Encoding: gzip, deflate
Accept-Language: zh-CN, zh;q=0.9
Cookie: WebSession_78aedfcc66=3b451c9d37cb637827da0815086e7ecfd9984b0095b3cb7198e8197a424a3279
```

```
<?xml version="1.0" encoding="utf-8"?>
<CMSearchDescription>
  <searchID>88C2CD4D-D3FA-4AD4-BD80-555C18205DCC</searchID>
  <trackList>
    <trackID>101</trackID>
  </trackList>
  <timeSpanList>
    <timeSpan>
      <startTime>2021-08-16T00:00:00Z</startTime>
      <endTime>2021-08-18T23:59:59Z</endTime>
    </timeSpan>
  </timeSpanList>
  <maxResults>100</maxResults>
  <searchResultPosition>0</searchResultPosition>
  <metadataList>
    <metadataDescriptor>//recordType.meta.std-cgi.com</metadataDescriptor>
  </metadataList>
</CMSearchDescription>
```

Response from Device

```
HTTP/1.1 200 OK
Vary: Accept-Encoding
X-Frame-Options: SAMEORIGIN
Content-Type: application/xml; charset="UTF-8"
X-Content-Type-Options: nosniff
Date: Wed, 18 Aug 2021 15:19:13 GMT
Content-Length: 1021
X-XSS-Protection: 1; mode=block
Connection: Keep-Alive
Accept-Ranges: bytes

<?xml version="1.0" encoding="UTF-8" ?>
<CMSearchResult version="2.0" xmlns="http://www.isapi.org/ver20/XMLSchema">
  <searchID>{88c2cd4d-d3fa-4ad4-bd80-555c18205dcc}</searchID>
  <responseStatus>true</responseStatus>
  <responseStatusStrg>OK</responseStatusStrg>
  <numOfMatches>1</numOfMatches>
  <matchList>
    <searchMatchItem>
      <sourceID>{00000000-0000-0000-0000-000000000000}</sourceID>
      <trackID>101</trackID>
      <timeSpan>
        <startTime>2021-08-18T15:18:15Z</startTime>
        <endTime>2021-08-18T15:19:08Z</endTime>
      </timeSpan>
      <mediaSegmentDescriptor>
        <contentType>video</contentType>
        <codecType>H.264-BP</codecType>
        <playbackURI>rtsp://10.14.97.40/ISAPI/Streaming/tracks/101/?
starttime=20210818T151815Z&endtime=20210818T151908Z&name=00000004667000100&size=1400788</playbackURI>
        <lockStatus>unlock</lockStatus>
        <name>00000004667000100</name>
      </mediaSegmentDescriptor>
      <metadataMatches>
        <metadataDescriptor>recordType.meta..com/timing</metadataDescriptor>
      </metadataMatches>
    </searchMatchItem>
  </matchList>
</CMSearchResult>
```

4.4.3.3 Playback via RTSP

1. A client sends an RTSP DESCRIBE command.

```
DESCRIBE rtsp://10.14.97.40:554/ISAPI/Streaming/tracks/101/?starttime=20210818T151815Z&endtime=20210818T151908Z&name=00000004667000100&size=1400788 RTSP/1.0
CSeq: 4
Authorization: Digest username="", realm="323852ae0234c718f2d4198b", nonce="34e30476d", uri="rtsp://10.14.97.40:554/Streaming/tracks/101/?
starttime=20210818T151815Z&endtime=20210818T151908Z&name=00000004667000100&size=1400788", response="883546f4c19dd156fb3a490266c99715"
User-Agent: LibVLC/3.0.3 (LIVE555 Streaming Media v2016.11.28)
```

2. The server responds that authentication is required.

```
RTSP/1.0 401 Unauthorized
CSeq: 5
WWW-Authenticate: Digest realm="323852ae0234c718f2d4198b", nonce="55e5895b9", algorithm="MD5"
```

3. The client sends an RTSP DESCRIBE request with authentication information again.

```
DESCRIBE rtsp://10.14.97.40:554/ISAPI/Streaming/tracks/101/?starttime=20210818T151815Z&endtime=20210818T151908Z&name=00000004667000100&size=1400788 RTSP/1.0
CSeq: 7
Authorization: Digest username="admin", realm="323852ae0234c718f2d4198b", nonce="55e5895b9", uri="rtsp://10.14.97.40:554/Streaming/tracks/101/?
starttime=20210818T151815Z&endtime=20210818T151908Z&name=00000004667000100&size=1400788", response="cf33e4dc6b86a2fdd2e5b26d25e7b99d"
User-Agent: LibVLC/3.0.3 (LIVE555 Streaming Media v2016.11.28)
Accept: application/sdp
```

4. The server responds to SDP information.

Is RTSP SETUP commands two times, and the server responds to them.

```
10:554/ISAPI/Streaming/tracks/101/?
315Z&endtime=20210818T151908Z&name=00000004667000100&size=1400788/trackID=video RTSP/1.0

username="admin", realm="323852ae0234c718f2d4198b", nonce="55e5895b9", uri="rtsp://10.14.97.40:554/Streaming/tracks/101/?
315Z&endtime=20210818T151908Z&name=00000004667000100&size=1400788", response="44d97a3758b7f19f1a31fe042b1464b5"
.3 (LIVE555 Streaming Media v2016.11.28)
cast;client_port=61048-61049

out=60
cast;client_port=61048-61049;server_port=62000-62001;ssrc=d6d3ed5

om-Accept=1.0s, Unlimited, Immutable,Scales="1, 0.5, 0.25, 0.125,:1, 2, 4"
07:29:25 GMT

10:554/ISAPI/Streaming/tracks/101/?
315Z&endtime=20210818T151908Z&name=00000004667000100&size=1400788/trackID=audio RTSP/1.0

username="admin", realm="323852ae0234c718f2d4198b", nonce="55e5895b9", uri="rtsp://10.14.97.40:554/Streaming/tracks/101/?
315Z&endtime=20210818T151908Z&name=00000004667000100&size=1400788", response="44d97a3758b7f19f1a31fe042b1464b5"
.3 (LIVE555 Streaming Media v2016.11.28)
cast;client_port=61050-61051
```

```

eout=60
cast;client_port=61048-61049;server_port=62000-62001;ssrc=d6d3ed5
om-Access=1.0s, Unlimited, Immutable,Scales="-1, 0.5, 0.25, 0.125
07:29:25 GMT
40:554/ISAPI/Streaming/tracks/101/?
315Z&endtime=20210818T151908Z&name=00000004667000100&size=1400788
username="admin", realm="323852ae0234c718f2d4198b", nonce="55e589
315Z&endtime=20210818T151908Z&name=00000004667000100&size=1400788
.3 (LIVE555 Streaming Media v2016.11.28)
cast;client_port=61050-61051

```

```
40:554/ISAPI/Streaming/tracks/101/?
815Z&endtime=20210818T151908Z&name=00000004667000100&size=1400788/trackID=audio RTSP/1.0

username="admin", realm="323852ae0234c718f2d4198b", nonce="55e5895b9", uri="rtsp://10.14.97.40:554/Streaming/tracks/101/?
815Z&endtime=20210818T151908Z&name=00000004667000100&size=1400788", response="44d97a3758b7f19f1a31fe042b1464b5"
1.3 (LIVE555 Streaming Media v2016.11.28)

cast;client_port=61050-61051
```

```
out=60
cast;client_port=61050-61051;server_port=62002-62003;ssrc=d6d3ed6
om-Access=1.0s, Unlimited, Immutable,Scales="-1, 0.5, 0.25, 0.125,:1, 2, 4"
07:29:25 GMT
```

```

out=60
cast;client_port=61050-61051;server_port=62002-62003;ssrc=d6d3ed6
om-Access=1.0s, Unlimited, Immutable,Scales="-1, 0.5, 0.25, 0.125,:1, 2, 4"
07:29:25 GMT

```

```

out=60
cast;client_port=61050-61051;server_port=62002-62003;ssrc=d6d3ed6
om-Access=1.0s, Unlimited, Immutable,Scales="-1, 0.5, 0.25, 0.125,:1, 2, 4"
07:29:25 GMT

```

Is an RTSP PLAY request, and the server starts to push streams for playback.

```
0:554/ISAPI/Streaming/tracks/101/?starttime=20210818T151815Z&endtime=20210818T151908Z&name=00000004667000100&size=1400788 RTSP/1.0
username="admin", realm="323852ae0234c718f2d4198b", nonce="55e5895b9", uri="rtsp://10.14.97.40:554/Streaming/tracks/101/?
815Z&endtime=20210818T151908Z&name=00000004667000100&size=1400788", response="4d8b7ceb301c06b40a9ae411189a909f"
.3 (LIVE555 Streaming Media v2016.11.28)
```

```
RTSP/1.0 200 OK
Range: clock=20210818T151815Z-20210818T151908Z
Session: 225263317
CSeq: 10
Date: Wed, 18 Aug 2021 07:29:25 GMT
```

7. The client sends an RTSP TEARDOWN request to stop playback.

```
TEARDOWN rtsp://10.14.97.40:554/ISAPI/Streaming/tracks/101/?starttime=20210818T151815Z&endtime=20210818T151908Z&name=00000004667000100&size=1400788 RTSP/1.0
CSeq: 11
Authorization: Digest username="admin", realm="323852ae0234c718f2d4198b", nonce="55e5895b9", uri="rtsp://10.14.97.40:554/Streaming/tracks/101/?
starttime=20210818T151815Z&endtime=20210818T151908Z&name=00000004667000100&size=1400788", response="1d3f6f8d07d7087d341560b125445456"
User-Agent: LibVLC/3.0.3 (LIVE555 Streaming Media v2016.11.28)
Session: 225263317
```

```
RTSP/1.0 200 OK
CSeq: 11
Date: Wed, 18 Aug 2021 07:29:38 GMT
Session: 225263317
Connection: close
```

4.5 Event Uploading

When the rules configured on the device are triggered, the device will generate event messages (e.g., motion detection, etc.) and actively upload them to the client. ISAPI supports three methods to receive event messages uploaded by the device, that is, in arming mode, in listening mode, and via subscription.

4.5.1 Arming

The client establishes a HTTP persistent connection with the device to receive event messages from the device.

There are two methods (arming with subscription and arming without subscription) to receive events from the device. The arming without subscription is to get all event messages from the device via HTTP GET method, while the arming with subscription is to get messages of subscribed events via HTTP POST method.

Notes

- ISAPI arming (with or without subscription) uses the HTTP/HTTPS persistent connection. Due to the simplex channel communication mode of HTTP, after establishing the arming connection, the device will send event messages continuously, while it's not supported for clients to send any message to the device via the connection.
- When the heartbeat timed out and no message is received from the device, you should terminate the arming connection and try establishing a new one.

4.5.1.1 Arming without Subscription

1. Establish the connection of arming without subscription: `GET /ISAPI/Event/notification/alertStream` and keep the connection alive via configuring `Connection: keep-alive` in HTTP headers on the client.
2. Receive events sent by the device. The event message will be separated and parsed by boundary. For parsing details, see **Event Message Parsing** below.
3. Terminate the arming connection when no event message needs to be received.

Event Message Parsing:

```

GET /ISAPI/Event/notification/alertStream HTTP/1.1
Host: <data_gateway_ip>
Connection: Keep-Alive

HTTP/1.1 401 Unauthorized
Date: Sun, 01 Apr 2018 18:58:53 GMT
Server:
Content-Length: 178
Content-Type: text/html
Connection: keep-alive
Keep-Alive: timeout=10, max=99
WWW-Authenticate: Digest qop="auth", realm="IP Camera(C2183)", nonce="4e5468694e7a42694e7a4d364f4449354d7a6b354d54513d", stale="FALSE"

GET /ISAPI/Event/notification/alertStream HTTP/1.1
Authorization: Digest username="admin", realm="IP
Camera(C2183)", nonce="4e5468694e7a42694e7a4d364f4449354d7a6b354d54513d", uri="/ISAPI/Event/notification/alertStream", cnonce="3d183a245b8729121ae4ca3d41b90f18", nc=00000001, qop="auth", response="f2e0728991bb031f83df557a8f185178"
Host: 10.6.165.192

HTTP/1.1 200 OK
MIME-Version: 1.0
Connection: close
Content-Type: multipart/mixed; boundary=<frontier>

--<frontier>
Content-Type: application/xml; charset="UTF-8" <!--some event messages are uploaded in JSON format, and the upper layer needs to distinguish the message format according to Content-Type when parsing event messages-->
Content-Length: text_length


<EventNotificationAlert/>
--<frontier>
Content-Disposition: form-data; name="Picture_Name"
Content-Type: image/jpeg
Content-Length: image_length

[Picture Data]
--<frontier>

```

Note: <data_gateway_ip> and <frontier> are variables, [Picture Data] indicates the raw data of a picture.

4.5.1.2 Arming with Subscription

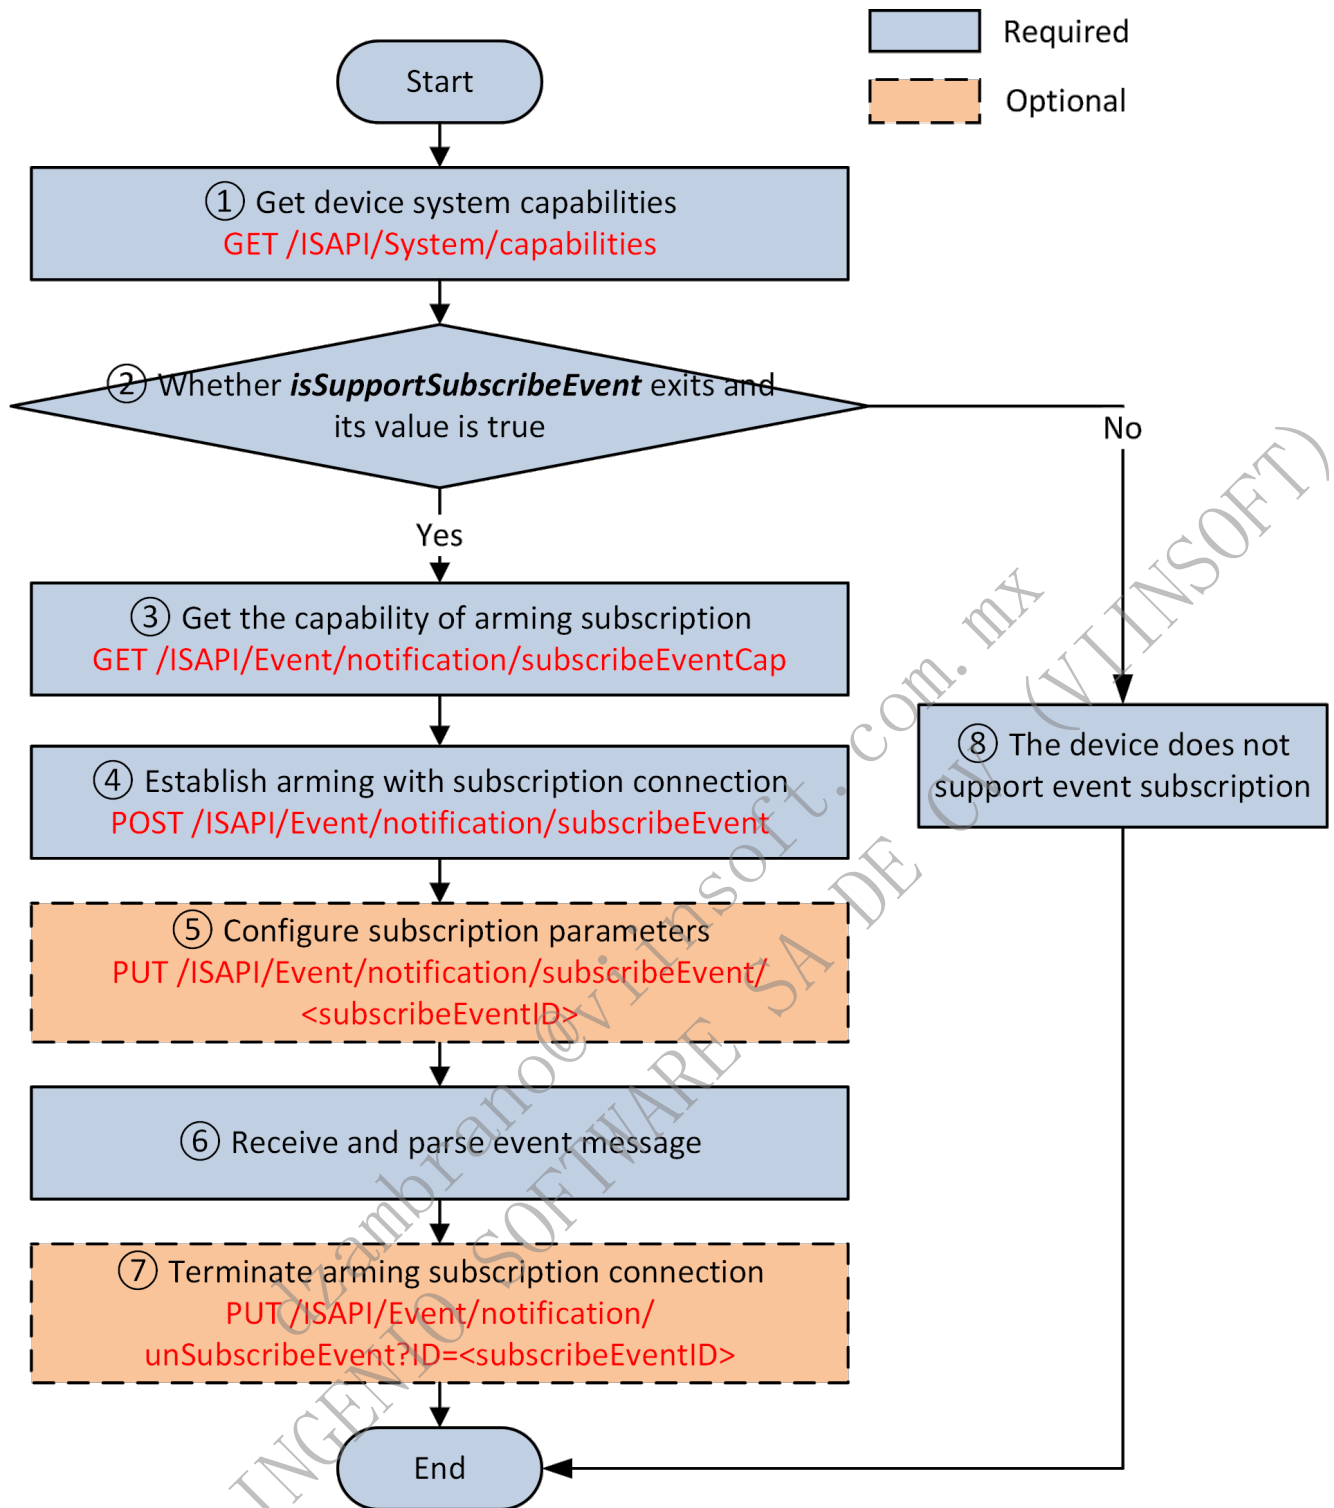

1. Get device system capabilities: GET /ISAPI/System/capabilities.

2. Check if event subscription is supported: isSupportSubscribeEvent exists and its value is true. When isSupportSubscribeEvent does not exist or its value is false, the device does not support event subscription.

3. Get the capability of arming with subscription: GET /ISAPI/Event/notification/subscribeEventCap.

4. Establish a connection of arming with subscription: POST /ISAPI/Event/notification/subscribeEvent. You need to set Connection: keep-alive in HTTP headers.

5. (Optional) Edit parameters of the existing subscription. You need to get the subscription parameters first: GET /ISAPI/Event/notification/subscribeEvent/<subscribeEventID>. Then, edit the parameters based on the existing subscription configurations: PUT /ISAPI/Event/notification/subscribeEvent/<subscribeEventID>.

6. Receive events sent by the device. The event messages will be separated and parsed by the boundary. For parsing description, see **Event Messages Parsing** below.

7. (Optional) Terminate the connection of arming with subscription: PUT
/ISAPI/Event/notification/unSubscribeEvent?ID=<subscribeEventID>. When communicating with the device via HTTP directly, there is no need to call this API. You can just terminate the connection.

Note:

Three types of data will be transmitted on the arming link: <SubscribeEventResponse/>, <EventNotificationAlert/>, and picture data. <SubscribeEventResponse/> is the data of first form sent by the device after arming established, see the response parameters of URL (POST /ISAPI/Event/notification/subscribeEvent) for details; and <EventNotificationAlert/> is the event content or heartbeat, you can identify the event type via field eventType, e.g., for heartbeat, the value of eventType is heartBeat.

Event Messages Parsing:

Client Creates Arming with Subscription

```
POST /ISAPI/Event/notification/subscribeEvent HTTP/1.1
Authorization: Digest username="admin", realm="IP
Camera(C2183)", nonce="4e5468694e7a42694e7a4d364f4449354d7a6b354d54513d", uri="/ISAPI/Event/notification/alertStream", cnonce="3d183a245b8729121ae4ca3d41b90f18", nc=00000001, qop="auth", response="f2e0728991bb031f83df557a8f185178"
Host: device_ip

<SubscribeEvent/>
```

Server Responds to Request and Push Event Message

When the client sends a request to the device for establishing an arming connection, the device sends data in HTTP form format (multipart/form-data). In HTTP request headers, the Content-Type is multipart/form-data, boundary=AaB03x, of which the boundary is a variable used to divide the HTTP body into multiple units, and each unit has its headers and body. For detailed format description, see [RFC 1867 \(Form-based File Upload in HTML\)](#). An example is shown below. Please note two hyphens -- before and after boundary. In normal conditions, devices will not close the arming link actively, and the end mark --AaB03x-- will not be sent on the arming link.

```
HTTP/1.1 200 OK
Content-Type: multipart/form-data; boundary=AaB03x
Connection: keep-alive
--AaB03x
Content-Disposition: form-data; name="ANPR.xml"; filename="ANPR.xml";
Content-Type: application/xml
Content-Length: 9

<ANPR/>
--AaB03x
Content-Disposition: form-data; name="licensePlatePicture.jpg"; filename="licensePlatePicture.jpg";
Content-Type: image/jpeg
Content-Length: 14

Picture Data
--AaB03x--
```

The description of some keywords are as follows:

Keyword	Example	Description
Content-Type	multipart/form-data; boundary=AaB03x	Content type. multipart/form-data means the message is in form format.
boundary	AaB03x	Delimiter of the form message. A form message which starts with --boundary and ends with --boundary--.
Content-Disposition	form-data; name="ANPR.xml"; filename="ANPR.xml";	Content description. form-data is a piece of form data.
name	"ANPR.xml"	Form name.
filename	"ANPR.xml"	File name of the form.
Content-Length	9	Content length, starting from the next \r\n to the next --boundary.

5 Device (General)

5.1 App Custom & Auto-Parsing Event(s)

5.1.1 Introduction to the Function

The HEOP's third-party app has the requirement of third-party platform communication. In order to improve the communication efficiency between third-party app and platforms, HEOP provides an event upload mode of reusing the existing communication link of HCNetSDK, ISAPI, ISUP, and OpenNetStream.

As the third-party apps are imported to the embedded devices, when apps reuse the existing communication link to upload events, the event content cannot be predicted by embedded devices. Therefore, it is necessary to constrain the events format uploaded by the third-party app to ensure the unified processing of embedded devices, and implement the auto-parsing and displaying of business platform.

This chapter mainly introduces the technical requirements and constraints on the content of events uploaded by third-party apps.

Two types of events are provided for uploading custom events of the third-party app.


1. Uploading the custom event: the data is in JSON format, and the data content is agreed between the device and the platform. Embedded devices have no constraints on the uploaded content.
2. Uploading the auto-parsing event: the data is in JSON format, third-party apps need to comply with constraints on auto-parsing, and embedded devices verify the format of data uploaded by third-party apps. It realize the automatic parsing of platforms.

If the third-party app needs to use the existing communication link, you need to know the type of supported event uploading before programming.

5.1.2 API Calling Flow

5.1.2.1 Custom Event(s)

API Calling Flow of Uploading Custom Events

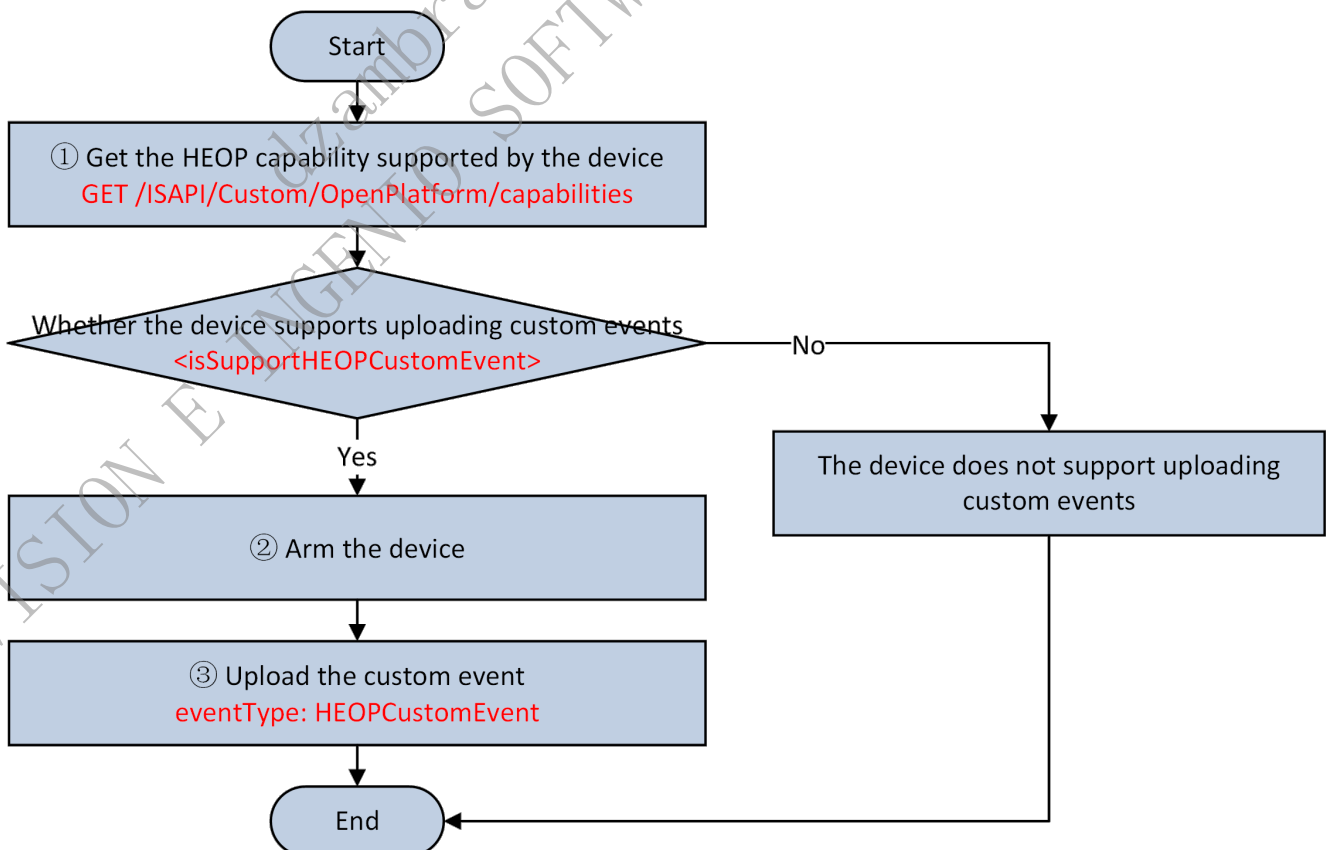


1. Get the HEOP capability supported by the device: GET /ISAPI/Custom/OpenPlatform/capabilities. If the node <isSupportHEOPCustomEvent> is returned in the capability and its value is true, it indicates that uploading custom

events is supported by the device.

2. Arm the device, see "Event Arming and Subscription Management" for details.
3. Upload the custom event (eventType: HEOPCustomEvent).


API Calling Flow of Searching for Custom Events

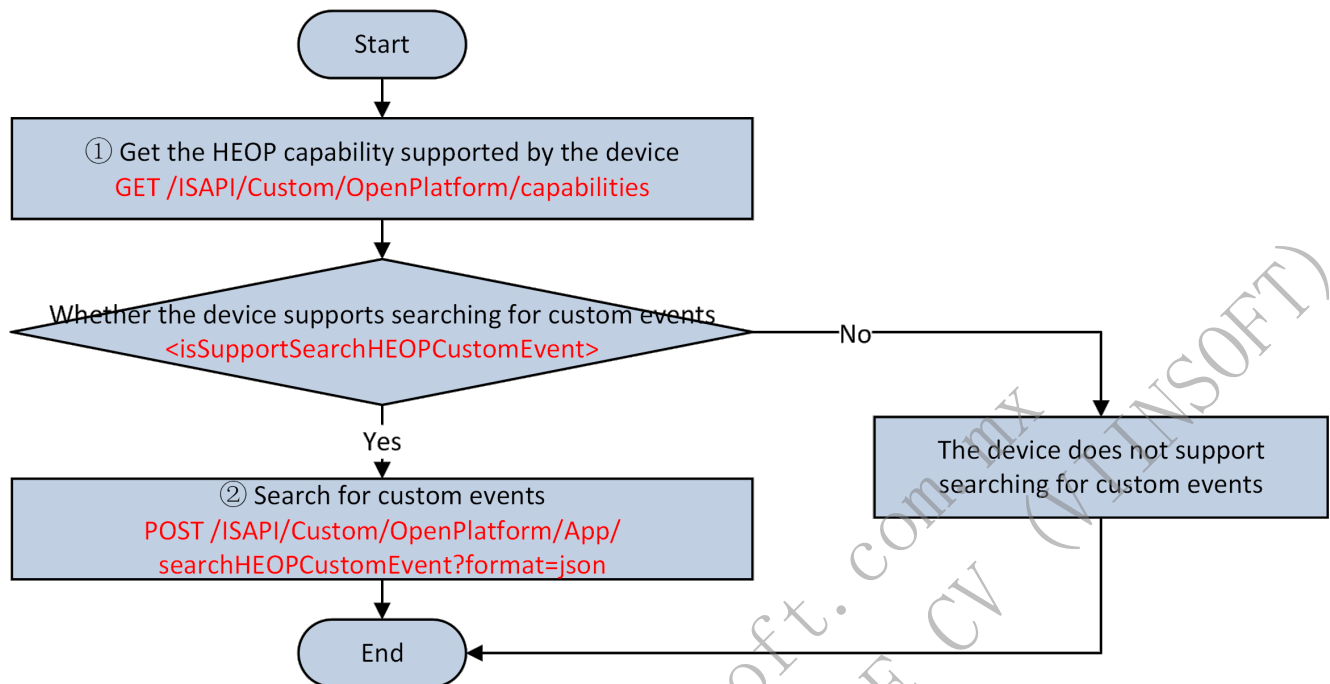

1. Get the HEOP capability supported by the device: GET /ISAPI/Custom/OpenPlatform/capabilities. If the node <isSupportSearchHEOPCustomEvent> is returned in the capability and its value is true, it indicates that searching for custom events is supported by the device.
2. Search for custom events: POST /ISAPI/Custom/OpenPlatform/App/searchHEOPCustomEvent?format=json.


5.1.2.2 Auto-Parsing Event(s)

API Calling Flow of Uploading Auto-Parsing Events

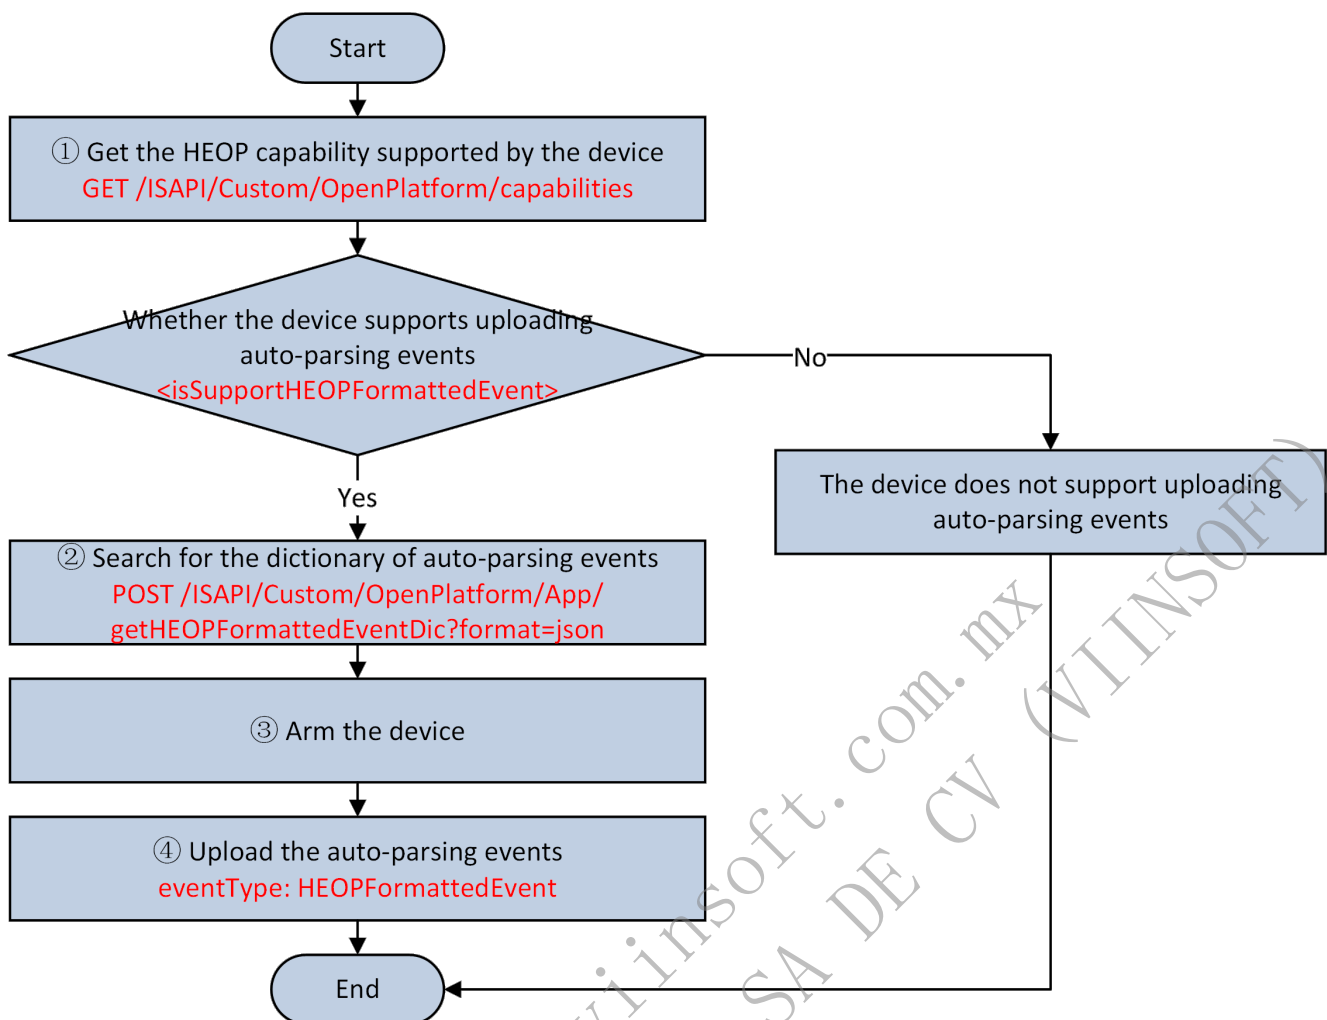

1. Get the HEOP capability supported by the device: GET /ISAPI/Custom/OpenPlatform/capabilities. If the node <isSupportHEOPFormattedEvent> is returned in the capability and its value is true, it indicates that uploading auto-parsing events is supported by the device.
2. Search for the dictionary of auto-parsing events: POST /ISAPI/Custom/OpenPlatform/App/getHEOPFormattedEventDic?format=json.
3. Arm the device, see "Event Arming and Subscription Management" for details.
4. Upload the auto-parsing event (event type: HEOPFormattedEvent).

API Calling Flow of Searching for Auto-Parsing Events

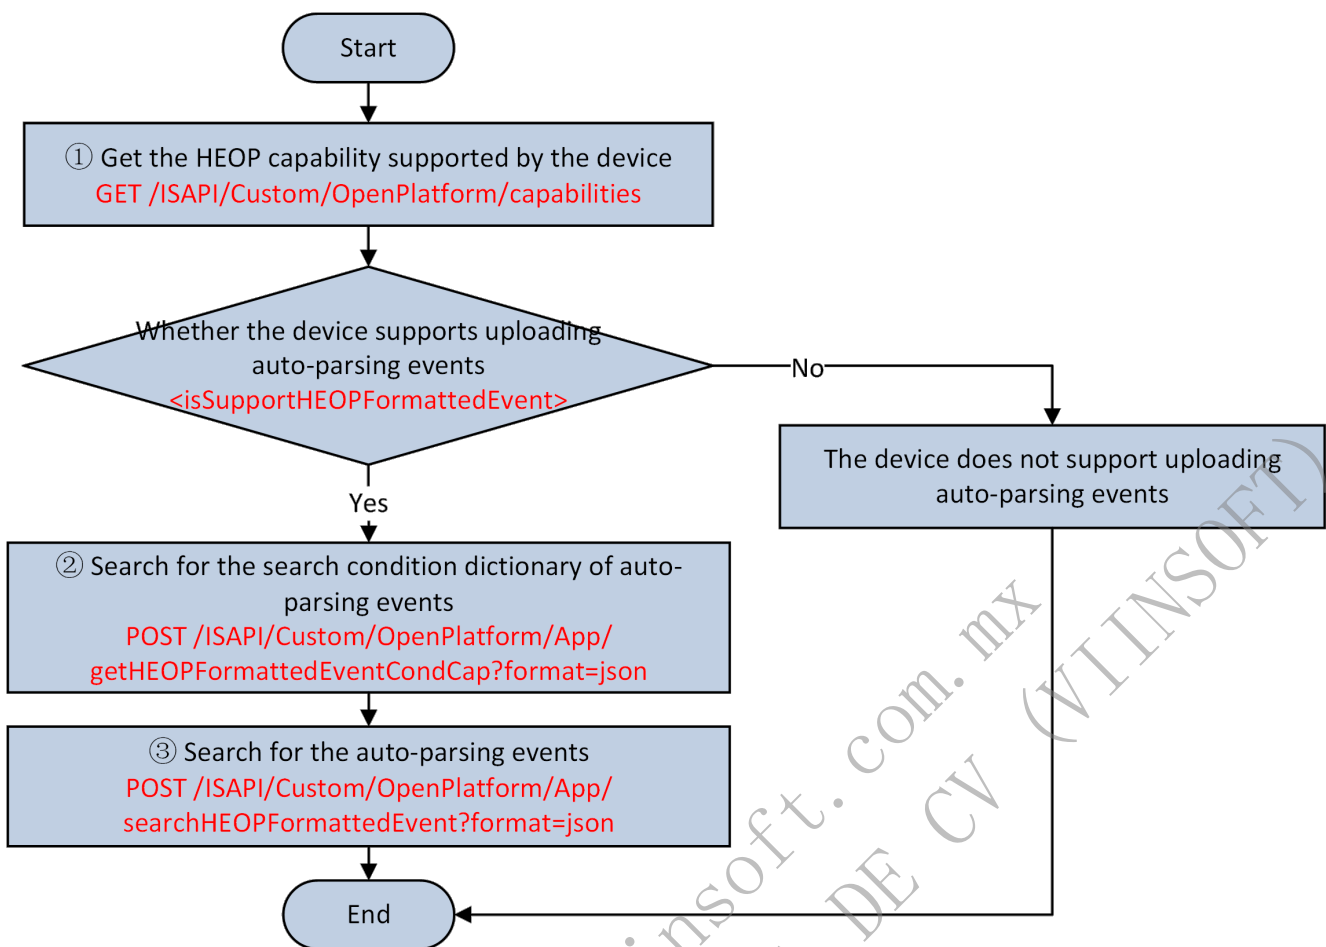

1. Get the HEOP capability supported by the device: GET /ISAPI/Custom/OpenPlatform/capabilities. If the node <isSupportSearchHEOPFormattedEvent> is returned in the capability and its value is true, it indicates that searching for auto-parsing events is supported by the device.
2. Search for the search condition dictionary of auto-parsing events: POST /ISAPI/Custom/OpenPlatform/App/getHEOPFormattedEventCondCap?format=json.
3. Search for auto-parsing event: POST /ISAPI/Custom/OpenPlatform/App/searchHEOPFormattedEvent?format=json.

5.1.2.3 Message Example and UI Example

1. Example of Searching for Auto-Parsing Events Dictionary

Request Message Example

```
{
  "AppID": "12345"
}
```

Response Message Example

```

{
  "HEOPFormattedEventDic": [
    {
      "subEventType": "faceInfo",
      "subEventTypeName": "Face Picture Information",
      "ParamsInfo": [
        {
          "paramName": "gender",
          "description": "Gender",
          "type": "enumValue",
          "enumValue": ["female", "male", "unknown"],
          "enumValueDescription": ["Female", "Male", "Unknown"]
        },
        {
          "paramName": "name",
          "description": "Name",
          "type": "int",
        },
        {
          "paramName": "age",
          "description": "Age",
          "type": "int",
        },
        {
          "paramName": "labels",
          "description": "Labels",
          "type": "stringArray",
        },
        {
          "paramName": "faceRect",
          "description": "Face Frame",
          "type": "Region",
        }
      ]
    },
    {
      "subEventType": "vehicleInfo",
      "subEventTypeName": "Vehicle Information",
      "ParamsInfo": [
        {
          "paramName": "plateNo",
          "description": "License Plate No.",
          "type": "string",
          "enumValue": [],
          "enumValueDescription": []
        }
      ]
    }
  ]
}

```

2. Example of Uploading Auto-Parsing Event

Complete Example

```
POST /HEOPFormattedEvent HTTP/1.1
Content-Type: multipart/form-data; boundary=7e13971310878
Content-Length: 1343


--7e13971310878
Content-Disposition: form-data; name="HEOPFormattedEvent.json";filename="HEOPFormattedEvent.json";
Content-Type: application/json
Content-Length: 997
```

```
{
  "ipAddress": "172.6.64.7",
  "portNo": 80,
  "protocol": "HTTP",
  "macAddress": "01:17:24:45:D9:F4",
  "channelID": 1,
  "dateTime": "2004-05-03T17:30:08+08:00",
  "activePostCount": 1,
  "eventType": "HEOPFormattedEvent",
  "eventState": "active",
  "eventDescription": "HEOP Custom Event",
  "channelName": "test",
  "deviceId": "test0123",
  "serialNumber": "test",
  "AppID": "12345",
  "subEventType": "faceInfo",
  "HEOPFormattedEvent": {
    "gender": "male",
    "name": "Tom",
    "age": 25,
    "labels": ["Young Artist", "Bank Staff"],
    "faceRect": [
      {
        "x": 0.234,
        "y": 0.234,
      },
      {
        "x": 0.234,
        "y": 0.456,
      },
      {
        "x": 0.456,
        "y": 0.456,
      },
      {
        "x": 0.456,
        "y": 0.234,
      }
    ]
  }
}
```

```
--7e13971310878
Content-Disposition: form-data; name="picture1";filename="picture1.jpg";
Content-Type: image/jpeg
Content-Length: 516876

.....JFIF.....
--7e13971310878--
```

3. Example of Result for Parsing Uploaded Auto-Parsing Event

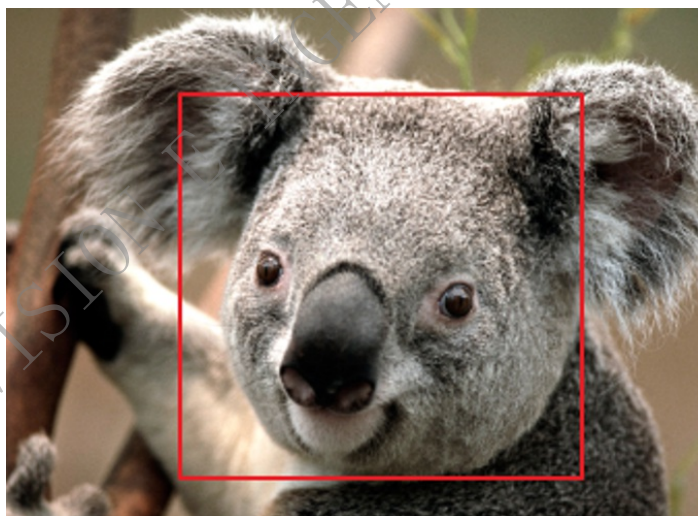

Face Frame

Name: Koala

Gender: Unknown

Age: 3

Lable: Artist, Bank Employee

4. Example of Searching for the Search Condition Dictionary of Auto-Parsing Events

Request Message Example

```
{
  "AppID": "12345"
}
```

Response Message Example

```
{
  "HEOPFormattedEventCondCap": [
    {
      "subEventType": "faceInfo",
      "subEventTypeName": "Face Picture Information",
      "ParamsInfo": [
        {
          "paramName": "gender",
          "description": "Gender",
          "type": "enumValueArray",
          "enumValueArrayCap": {
            "size": 3,
            "enumValue": ["female", "male", "unknown"],
            "enumValueDescription": ["Female", "Male", "Unknown"]
          }
        },
        {
          "paramName": "name",
          "description": "Name",
          "type": "string",
          "stringCap": {
            "size": 64
          }
        },
        {
          "paramName": "age",
          "description": "Age",
          "type": "intRange",
          "IntRangeCap": {
            "minRange": [0, 100],
            "maxRange": [0, 100]
          }
        }
      ]
    }
  ]
}
```

5. UI Example of Search Condition of Auto-Parsing Events

Gender ☒ Male ☒ Female ☐ Unknown

Name

Age —

6. Example of Searching for Auto-Parsing Event

Request Message Example

```

{
  "searchID": "123",
  "searchResultPostion": 1,
  "maxResults": 100,
  "startTime": "2020-01-01T08:00+08:00",
  "endTime": "2020-01-02T08:00+08:00",
  "AppID": "12345",
  "subEventType": "faceInfo",
  "HEOPFormattedEventCond": {
    "gender": ["female", "male"],
    "name": "Tom",
    "age": [25, 35]
  }
}

```

Response Message Example

```

{
  "searchID": "123",
  "responseStatusStrg": "OK",
  "numOfMatches": 1,
  "totalMatches": 1,
  "Results": [
    {
      "ipAddress": "172.6.64.7",
      "portNo": 80,
      "protocol": "HTTP",
      "macAddress": "01:17:24:45:D9:F4",
      "channelID": 1,
      "dateTime": "2004-05-03T17:30:08+08:00",
      "activePostCount": 1,
      "eventType": "HEOPFormattedEvent",
      "eventState": "active",
      "eventDescription": "HEOP Custom Event",
      "channelName": "test",
      "deviceId": "test0123",
      "serialNumber": "test",
      "AppID": "12345",
      "subEventType": "faceInfo",
      "HEOPFormattedEvent": {
        "gender": "male",
        "name": "Tom",
        "age": 25,
        "labels": ["Artist", "Bank Employee"],
        "faceRect": [
          {
            "x": 0.234,
            "y": 0.234
          },
          {
            "x": 0.234,
            "y": 0.456
          },
          {
            "x": 0.456,
            "y": 0.456
          },
          {
            "x": 0.456,
            "y": 0.234
          }
        ]
      }
    },
    {
      "picURL": "http://xxx.xxx.xxx/xxx",
      "URLCertificationType": "digest"
    }
  ]
}

```

5.2 Arming and Subscription

5.2.1 Introduction to the Function

With arming and subscription, the client can establish HTTP persistent connection with the device, and continuously receive the event messages from the device.

For ISAPI event arming, the client can receive all types of events by GET method, or receive the subscribed events only by POST method.

5.2.2 API Calling Flow

5.2.2.1 Without Subscription

1. Establish a connection for arming: GET /ISAPI/Event/notification/alertStream. You need to set Connection: keep-alive in HTTP Headers.
2. When receiving events sent by the device, the event messages can be separated and parsed by boundary. See "Parsing Event Messages" below for details.
3. Disable the arming connection when you do not need to receive event messages.

5.2.2.1.2 Syntax

```
GET /ISAPI/Event/notification/alertStream HTTP/1.1
Host: <data_gateway_ip>
Connection: Keep-Alive

HTTP/1.1 401 Unauthorized
Date: Sun, 01 Apr 2018 18:58:53 GMT
Server:
Content-Length: 178
Content-Type: text/html
Connection: keep-alive
Keep-Alive: timeout=10, max=99
WWW-Authenticate: Digest qop="auth", realm="IP Camera(C2183)", nonce="4e5468694e7a42694e7a4d364f4449354d7a6b354d54513d", stale="FALSE"

GET /ISAPI/Event/notification/alertStream HTTP/1.1
Authorization: Digest username="admin", realm="IP Camera(C2183)", nonce="4e5468694e7a42694e7a4d364f4449354d7a6b354d54513d",
uri="/ISAPI/Event/notification/alertStream", cnonce="3d183a245b8729121ae4ca3d41b90f18", nc=00000001, qop="auth", response="f2e0728991bb031f83df557a8f185178"
Host: 10.6.165.192

HTTP/1.1 200 OK
MIME-Version: 1.0
Connection: close
Content-Type: multipart/form-data; boundary=<frontier>

--<frontier>
Content-Type: application/xml; charset="UTF-8" <!-- Some alarms are in JSON format, so the upper layer should parse based on the Content-Type field -->
Content-Length: text_length


<EventNotificationAlert/>
--<frontier>
Content-Disposition: form-data; name="Picture_Name"
Content-Type: image/jpeg
Content-Length: image_length

[Image Data]
--<frontier>
```

Note: <data_gateway_ip> and <frontier> are variables, and [Image Data] is an abbreviated representation indicating the raw data of an image at this location.

5.2.2.2 Subscription

5.2.2.2.1 API Calling Flow

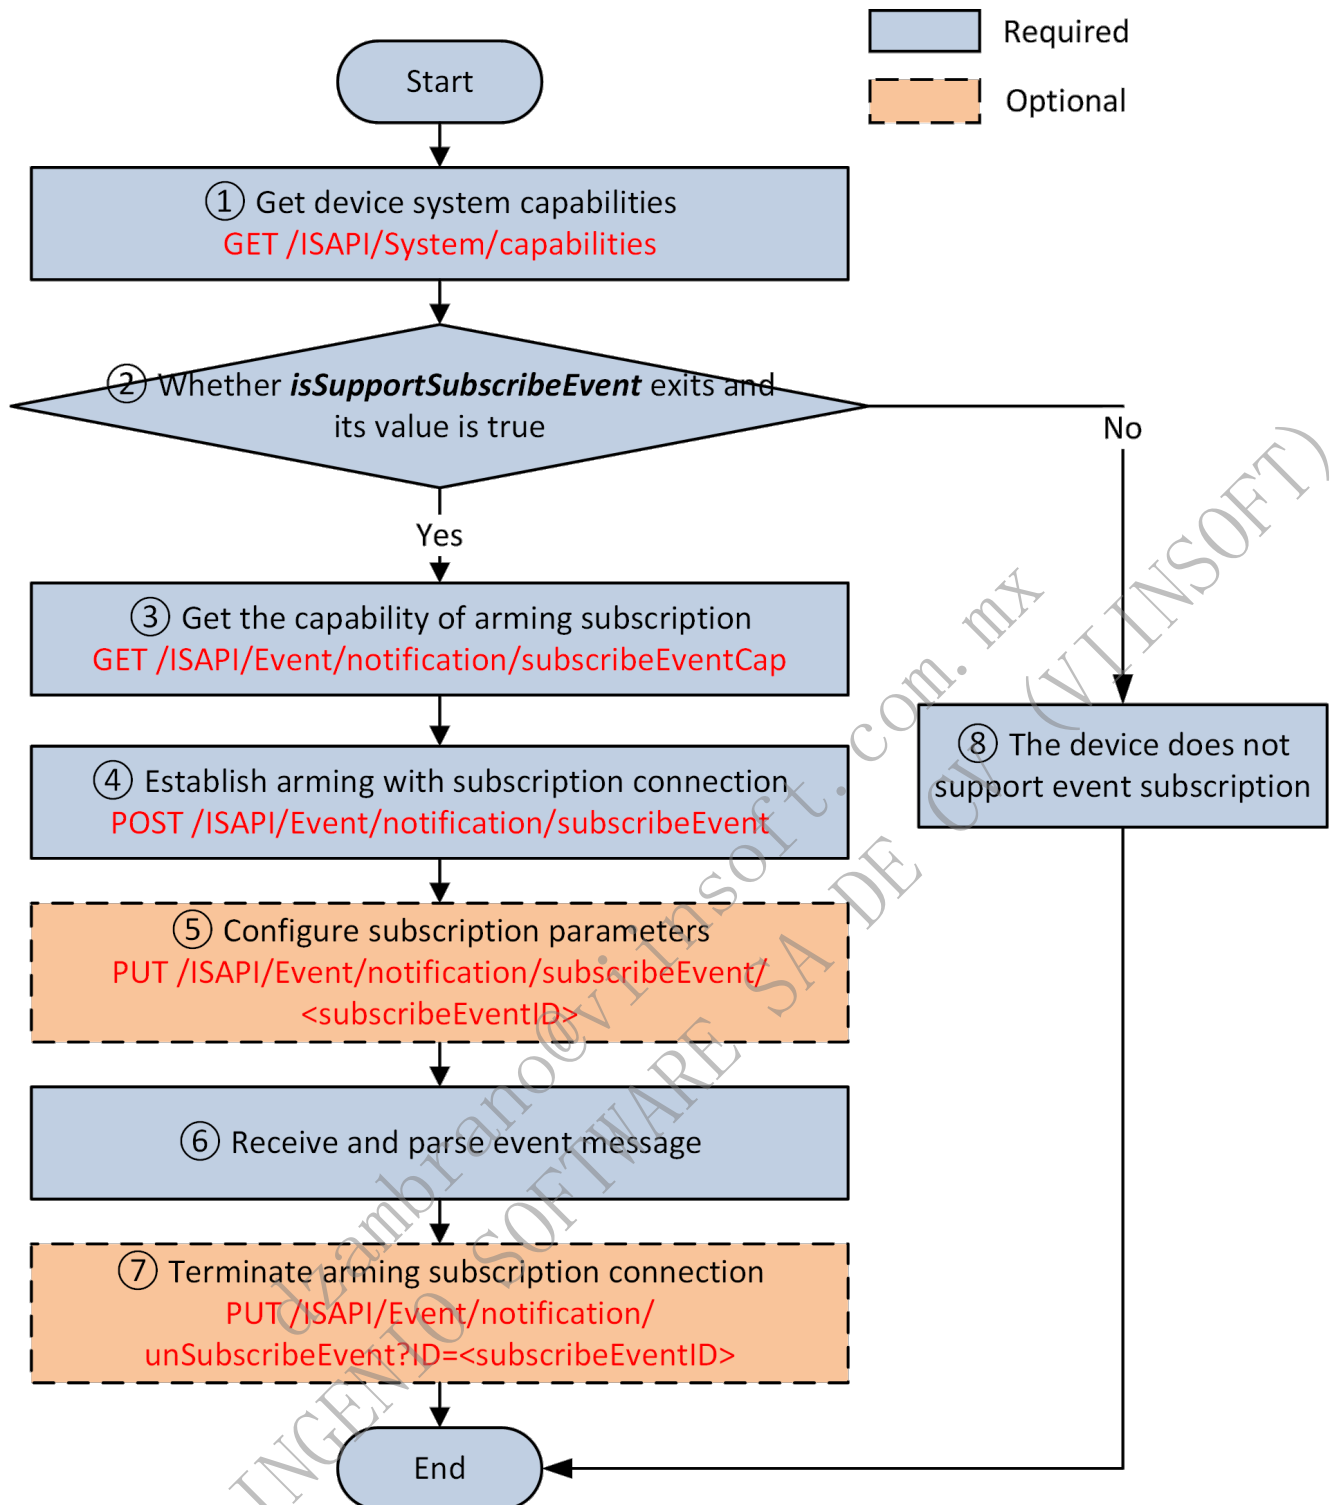

1. Get device system capabilities: GET /ISAPI/System/capabilities.

2. Check if event subscription is supported: `isSupportSubscribeEvent` exists and its value is `true`. When `isSupportSubscribeEvent` does not exist or its value is false, the device does not support event subscription.

3. Get the capability of arming with subscription: GET /ISAPI/Event/notification/subscribeEventCap.

4. Establish a connection of arming with subscription: POST /ISAPI/Event/notification/subscribeEvent. You need to set `Connection: keep-alive` in HTTP Headers.

5. (Optional) Edit parameters of the existing subscription. You need to get the subscription parameters first: GET /ISAPI/Event/notification/subscribeEvent/<subscribeEventID>. Then, edit the parameters based on the existing subscription configurations: PUT /ISAPI/Event/notification/subscribeEvent/<subscribeEventID>.

6. Receive events sent by the device. The event messages will be separated and parsed by boundary. For parsing description, see **Event Messages Parsing** below.

7. (Optional) Terminate the connection of arming with subscription: PUT
/ISAPI/Event/notification/unSubscribeEvent?ID=<subscribeEventID>. When communicating with the device via HTTP directly, there is no need to call this API. You can just terminate the connection.

Note:

Three types of data will be transmitted on the arming link: <SubscribeEventResponse/>, <EventNotificationAlert/>, and picture data. <SubscribeEventResponse/> is the data of first form sent by the device after arming established, see the response parameters of URL (POST /ISAPI/Event/notification/subscribeEvent) for details; and <EventNotificationAlert/> is the event content or heartbeat, you can identify the event type via field eventType, e.g., for heartbeat, the value of eventType is heartBeat.

5.2.2.2.2 Example

```
POST /ISAPI/Event/notification/subscribeEvent HTTP/1.1
Host: device_ip
Accept-Language: zh-cn
Date: YourDate
Content-Type: application/xml;
Content-Length: text_length
Connection: Keep-Alive

<SubscribeEvent/>
HTTP/1.1 401 Unauthorized
Date: Sun, 01 Apr 2018 18:58:53 GMT
Server:
Content-Length: 178
Content-Type: text/html
Connection: keep-alive
Keep-Alive: timeout=10, max=99
WWW-Authenticate: Digest qop="auth", realm="IP Camera(C2183)", nonce="4e5468694e7a42694e7a4d364f4449354d7a6b354d54513d", stale="FALSE"

POST /ISAPI/Event/notification/subscribeEvent HTTP/1.1
Authorization: Digest username="admin", realm="IP
Camera(C2183)", nonce="4e5468694e7a42694e7a4d364f4449354d7a6b354d54513d", uri="/ISAPI/Event/notification/alertStream", cnonce="3d183a245b8729121ae4ca3d41b90f18", nc=00000001, qop="auth", response="f2e0728991bb031f83df557a8f185178"
Host: device_ip

<SubscribeEvent/>
HTTP/1.1 200 OK
MIME-Version: 1.0
Connection: close
Content-Type: multipart/mixed; boundary=<frontier>

--<frontier>
Content-Type: application/xml; charset="UTF-8" <!--some event messages are uploaded in JSON format, and the upper layer needs to distinguish the message format according to Content-Type when parsing event messages-->
Content-Length: text_length

<SubscribeEventResponse/>
--<frontier>
Content-Type: application/xml; charset="UTF-8" <!--some event messages are uploaded in JSON format, and the upper layer needs to distinguish the message format according to Content-Type when parsing event messages-->
Content-Length: text_length

<EventNotificationAlert/>
--<frontier>
Content-Disposition: form-data; name="Picture_Name"
Content-Type: image/jpeg
Content-Length: image_length

[Picture Data]
--<frontier>
```

5.2.2.3 Event Messages Parsing

After the arming connection with the device is established, the data sent by the device is in HTTP form format (multipart/form-data). In an HTTP request, Content-Type in Headers is usually multipart/form-data, boundary=AaB03x, and boundary is a variable used to divide HTTP Body into multiple units, each being a set of data and has its own Headers and Body. For detailed format description, see [RFC 1867 \(Form-based File Upload in HTML\)](#). An example is shown below. Note the dash -- before and after boundary. Under normal circumstances, the device will not actively close the arming connection, so the device will not send the form format end symbol --AaB03x-- on the arming connection.

```

HTTP/1.1 200 OK
Content-Type: multipart/form-data; boundary=AaB03x
Connection: keep-alive
--AaB03x
Content-Disposition: form-data; name="ANPR.xml"; filename="ANPR.xml";
Content-Type: application/xml
Content-Length: 9

<ANPR/>
--AaB03x
Content-Disposition: form-data; name="licensePlatePicture.jpg"; filename="licensePlatePicture.jpg";
Content-Type: image/jpeg
Content-Length: 14

Image Data
--AaB03x--

```

The description of some keywords are as follows:

Keyword	Example	Description
Content-Type	multipart/form-data; boundary=AaB03x	Content type. multipart/form-data means the message is in form format.
boundary	AaB03x	Delimiter of the form message. --boundary is the start of a form. --boundary-- is the end of the whole HTTP form message.
Content-Disposition	form-data; name="ANPR.xml"; filename="ANPR.xml";	Content description.
name	"ANPR.xml"	Form name.
filename	"ANPR.xml"	File name of the form.
Content-Length	9	Content length, starting from the next \r\n to the next --boundary.

5.2.3 Restriction Description

Note that ISAPI arming (with or without subscription) uses HTTP/HTTPS persistent connection. Due to the simplex channel communication mode of HTTP, after establishing the arming connection, the device will send out event messages continuously, while you cannot send any message to the device via the connection.

After the heartbeat time, if you do not receive any message from the device, you should disable the arming connection and try establishing a new one.

5.2.4 Sample Messages

5.2.4.1 Establish Arming Subscription

```

POST /ISAPI/Event/notification/subscribeEvent HTTP/1.1
Authorization: Digest username="admin", realm="IP
Camera(C2183)", nonce="4e5468694e7a4d364f4449354d7a6b354d54513d", uri="/ISAPI/Event/notification/alertStream", cnonce="3d183a245b8729121ae4ca3d41b90f18", nc=00000001, qop="auth", response="f2e0728991bb031f83df557a8f185178"
Host: device_ip

<SubscribeEvent/>

```

5.2.4.2 The Device Responses and Uploads an Event Message

```

HTTP/1.1 200 OK
MIME-Version: 1.0
Connection: close
Content-Type: multipart/mixed; boundary=<frontier>

--<frontier>
Content-Type: application/xml; charset="UTF-8" <!--Some alarm messages are in JSON format, so when parsing messages, the upper-layer should distinguish them according to the Content-Type field.-->
Content-Length: text_length

<SubscribeEventResponse/>
--<frontier>
Content-Type: application/xml; charset="UTF-8" <!--Some alarm messages are in JSON format, so when parsing messages, the upper-layer should distinguish them according to the Content-Type field.-->
Content-Length: text_length

<EventNotificationAlert version="2.0" xmlns="http://www.isapi.org/ver20/XMLSchema">
  <ipAddress>10.17.133.46</ipAddress>
  <portNo>80</portNo>
  <protocol>HTTP</protocol>
  <macAddress>44:19:b6:6d:24:85</macAddress>
  <channelID>1</channelID>
  <dateTime>2017-05-04T11:20:02+08:00</dateTime>
  <activePostCount>0</activePostCount>
  <eventType>heartBeat</eventType>
  <eventState>active</eventState>
  <eventDescription>heartBeat</eventDescription>
</EventNotificationAlert>
--<frontier>
Content-Disposition: form-data; name="Picture_Name"
Content-Type: image/jpeg
Content-Length: image_length
Content-ID: image_ID

[Picture Data]
--<frontier>

```

5.3 Calling Flow of Device Packet Capture


5.3.1 Function Introduction

When problems arise after a device is deployed on site, interaction message between the device and the external network is necessary to help developers for troubleshooting. Packet capture can be stored on the local device, and packet capture files can be exported after capture is complete. Also, packet capture files can be uploaded to cloud storage, and packet capture data can be obtained in real-time even if the device does not have the storage space.

1. Device packet capture: save packet capture files on the local device, and export the files after capture is complete. Also, uploading packet capture files to cloud storage after capture is complete is supported. Then the client can obtain the storage URL and download packet capture files from the cloud storage.
2. Device real-time packet capture: after it is enabled, the device returns an URI for downloading packet capture data. The client can submit this URI to the browser to download the packet data. The device transmits packet data via HTTP Chunked, and users can store the packet data through the browser.

5.3.2 API Calling Flow

5.3.2.1 Device Packet Capture

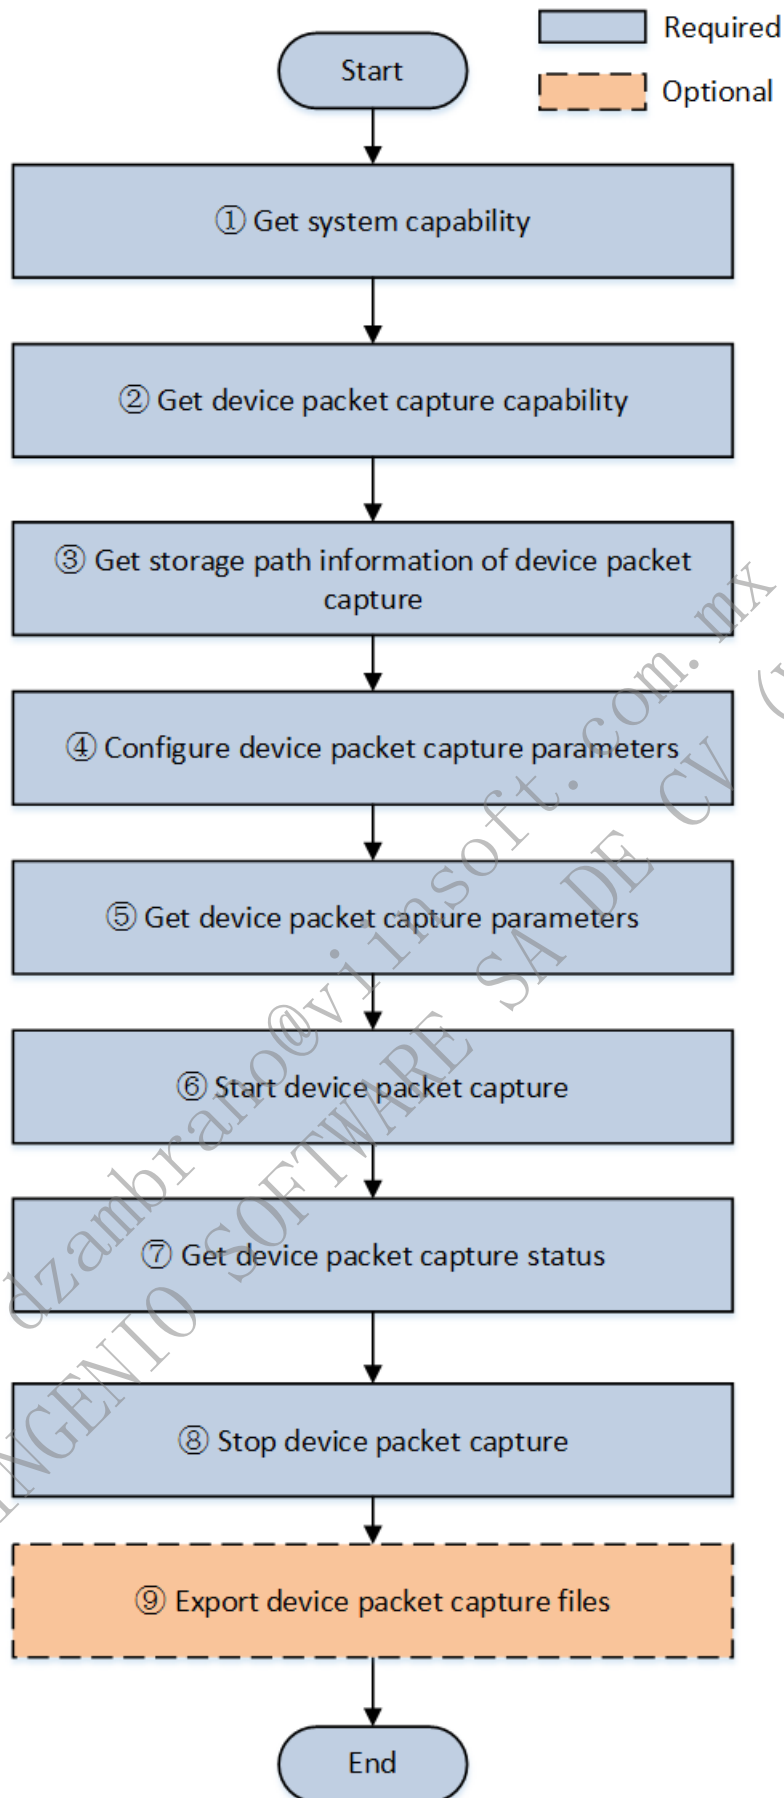

1. Get device system capabilities: GET /ISAPI/System/capabilities. Get to know if the device supports packet capture by the field: `<isSupportNetworkCapture>true</isSupportNetworkCapture>`.

2. Check if the device supports packet captures: GET /ISAPI/System/networkCapture/capabilities?format=json. If `isSupportManualControl` is true, the device supports packet capture. If `isSupportManualControlAsyn` is true, the device supports asynchronous packet capture.

3. Get storage path information of device packet capture: GET /ISAPI/System/networkCapture/StoragePathInfo?format=json.

4. Configure device packet capture parameters such as capture duration, storage path, port, and address: PUT /ISAPI/System/networkCapture/captureParams?format=json.

5. Get device packet capture parameters such as capture duration, storage path, port, and address: GET /ISAPI/System/networkCapture/captureParams?format=json.

6. Start device packet capture: depending on the parameters, packet capture files can be saved on the local device for export after capture is complete, or packet capture files can be uploaded to cloud storage and downloaded via the storage URL, or the packet capture data can be returned in real-time.

Start device packet capture: PUT /ISAPI/System/networkCapture/manualStart?format=json&asyn=<asyn>&realTime=<realTime>.

Note:

- If the API does not contain URL parameters, the packet capture file is saved on the local device.
- If the API contains `asyn=true`, the packet capture file is automatically uploaded to cloud storage after capture is complete.

7. After starting capture, you can repeatedly get capture status, including whether the capture is ongoing, the size of the packet capture data, and the progress and storage URL for uploading the data to cloud storage.

Get status of device packet capture: GET /ISAPI/System/networkCapture/manualStatus?format=json.

8. Packet capture can be stopped at any time by calling the interface of stopping packet capture.


Stop device packet capture: PUT /ISAPI/System/networkCapture/manualStop?format=json.

9. (Optional) If packet capture data is stored on the local device, packet capture files need to be exported. If packet capture files are saved to cloud storage or captured in real-time, there is no need to export packet capture files.


Export device packet capture files: GET /ISAPI/System/networkCapture/exportFile?format=json.

5.3.2.2 Device Real-Time Packet Capture

The process of real-time packet capture is shown as the following:

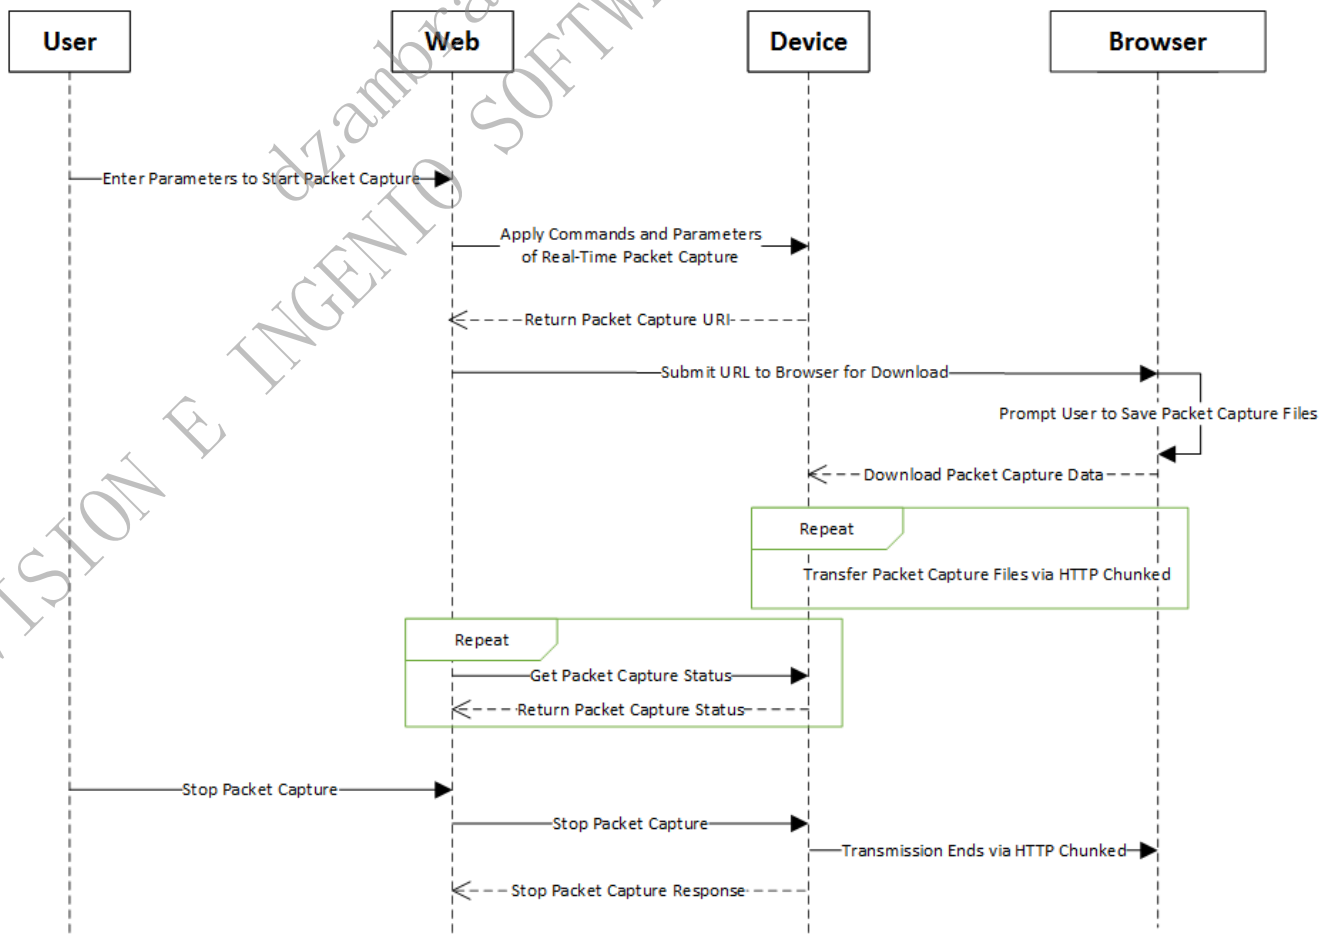

See the following figure for the calling flow:

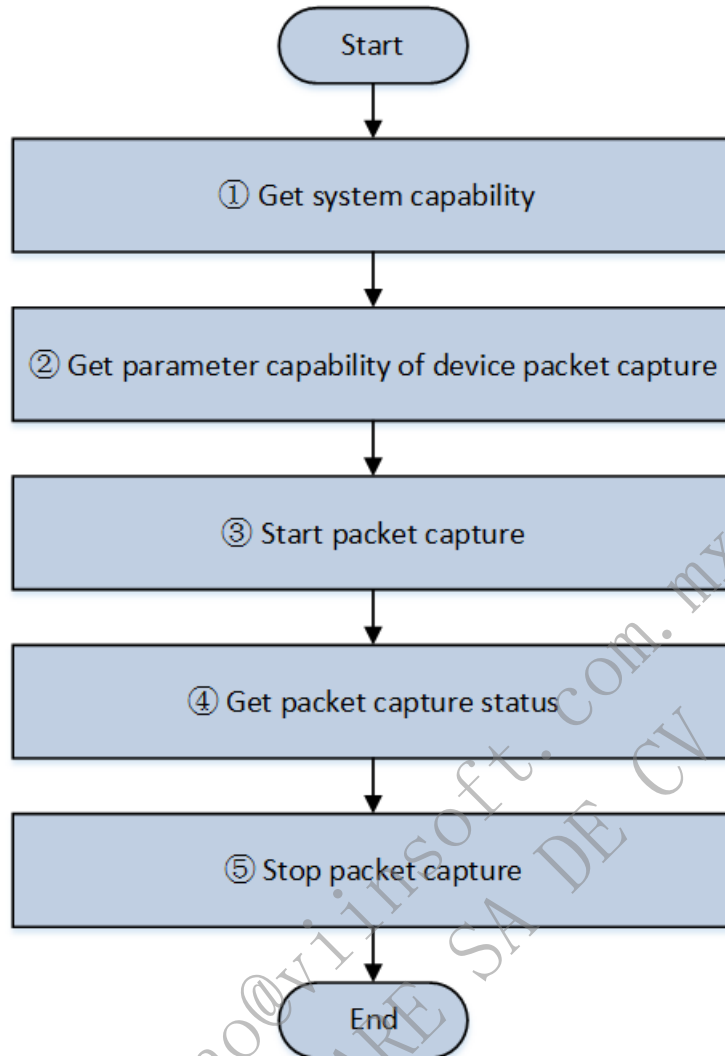

1. Get device system capabilities: GET /ISAPI/System/capabilities.

<isSupportStartNetworkCapture>true</isSupportStartNetworkCapture> indicates the device supports starting packet capture. <isSupportStopNetworkCapture>true</isSupportStopNetworkCapture> indicates the device supports stopping packet capture. <isSupportGetNetworkCaptureStatus>true</isSupportGetNetworkCaptureStatus> indicates the device supports getting packet capture status.

2. Get capabilities of packet capture parameters: GET /ISAPI/System/NetworkCaptureParams/capabilities?format=json. The realTimeEnabled field indicates whether the device supports real-time packet capture.

3. Set the field realTimeEnabled as true in the parameters applied to the device to start device packet capture. The device returns an URI, and the client can download the real-time packet capture data from the device through a browser.

Start packet capture: POST /ISAPI/System/StartNetworkCapture?format=json&security=<security>&iv=<iv>.

Note:

- If realTimeEnabled=true is contained when starting device packet capture, it indicates packet capture data is uploaded in real-time by HTTP Chunked. The URL for downloading the returned packet capture data is valid for 30 seconds by default. If the download is attempted after this time, the device should return an HTTP 404 status code.

4. After starting packet capture, you can repeatedly get packet capture status, including whether packet capture is ongoing and the size of the packet capture data.

Get packet capture status: GET /ISAPI/System/GetNetworkCaptureStatus?format=json.

5. Packet capture can be stopped at any time by calling the interface of stopping packet capture.

Stop device packet capture: POST /ISAPI/System/StopNetworkCapture?format=json.


5.4 Device Peripherals Upgrade

5.4.1 Introduction to the Function

The platform or client software or web client under the LAN upgrades device peripherals via ISAPI.

5.4.2 API Calling Flow

The sequence diagram of upgrading device peripherals by the platform is shown below.

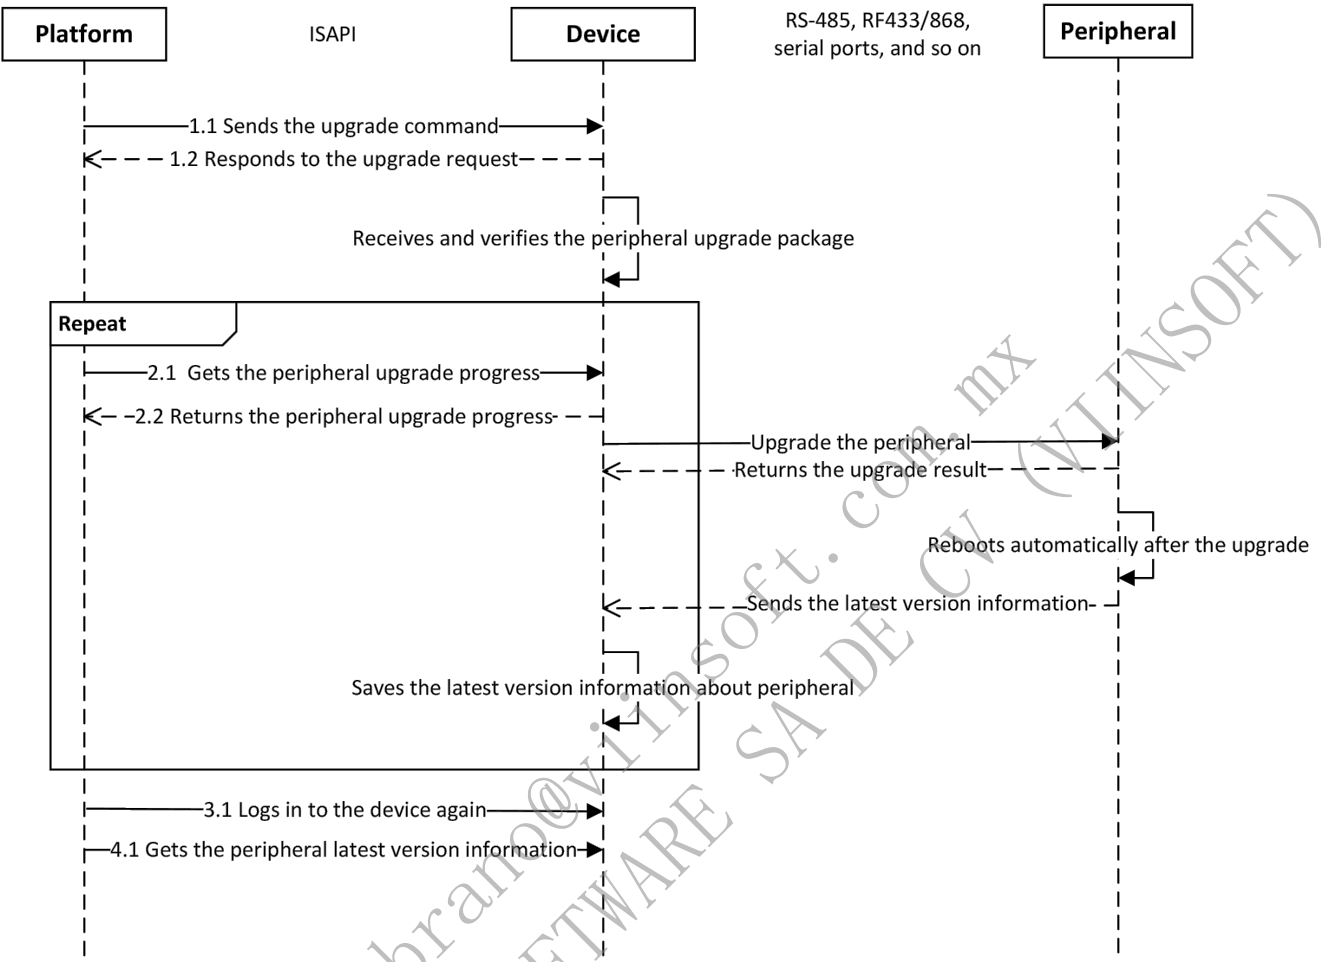

1. Get the device system capability `GET /ISAPI/System/capabilities` and check whether the device supports upgrading peripherals. If the field `isSupportAcsUpdate` is returned and its value is true, it indicates that the device supports this function, otherwise, the device does not support this function.
2. Get the capability of upgrading the peripherals module `GET /ISAPI/System/AcsUpdate/capabilities`, and get the types and IDs of peripherals that support upgrading.
3. The platform sends the upgrade command `POST /ISAPI/System/updateFirmware?type=<type>&moduleAddress=<moduleAddress>&id=<indexID>`. In the URL `type` refers to the peripheral type, `moduleAddress` refers to the peripheral module address, and `indexID` refers to the ID of peripheral to be upgraded. The platform will apply the upgrade peripheral package to the device.
4. Get the peripheral upgrade progress `GET /ISAPI/System/upgradeStatus?type=<Type>`.
5. Log in to the device again.
6. Get the peripheral latest version information.

5.5 Device Time Sync

5.5.1 Introduction to the Function


Time sync is a method to synchronize the time of all devices connecting to the NTP server, so that all devices can share the same clock time for providing related functions based on time. Supported time sync types: NTP time sync, manual sync, satellite time sync, platform time synchronization, etc. The following describes the method of NTP time sync.

5.5.1.1 NTP Time Sync

The local system of running NTP can receive sync from other clock sources (self as client), other clocks can sync from the local system (self as server), and sync with other devices.

The basic working principle of NTP is shown in the picture. Device A and Device B are connected via the network, and their systems follow their own independent system time. To auto sync their time, you can set device time auto sync via NTP. For example:

Before time sync between Device A and Device B, the time of Device A is 10:00:00 am, and that of Device B is 11:00:00 am. Device B is set as the server of NTP server, so that the time of Device A should be synchronized with that of Device B. The time of NTP message transmitted between Device A and Device B is 1 second.

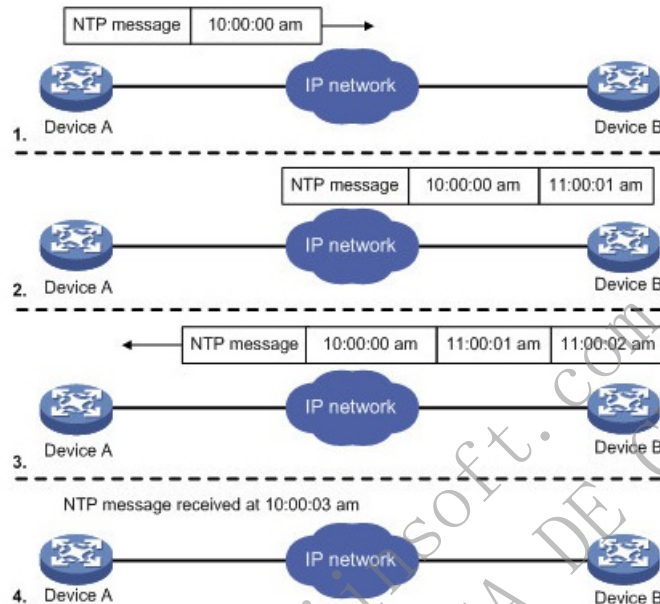

The working process of system clock synchronization is as follows:

Device A sends an NTP message to Device B with a timestamp of 10:00:00 am (T1) that is when it leaves Device A.

When the NTP message reaches Device B, Device B will add its own timestamp, which is 11:00:01 am (T2).

Then the NTP message leaves Device B with Device B's timestamp, which is 11:00:02 am (T3).

Device A receives the response message, and the local time of Device A is 10:00:03 am (T4).

Above all, Device A can calculate two important parameters:

Round-trip delay of NTP message: $\text{Delay} = (T4 - T1) - (T3 - T2) = 2 \text{ seconds}$.

Time difference between Device A and Device B: $\text{offset} = ((T2 - T1) + (T3 - T4)) / 2 = 1 \text{ h}$.

Device A can sync its own time with that of Device B according to calculation results.

5.5.2 API Calling Flow

5.5.2.1 Time Sync Configuration

1. Get the Capability of Device Time Synchronization Management

You can call this API to get the time sync types currently supported by the device, such as NTP time sync, manual time sync, satellite time sync, EZ platform time sync.

Get the capability: `GET /ISAPI/System/time/capabilities`.

2. Set device time synchronization management parameters

You can configure the time synchronization mode as follows:

Get device time synchronization management parameters: `GET /ISAPI/System/time`;

Set device time synchronization management parameters: `PUT /ISAPI/System/time`;

NTP time synchronization: See 4.2.2 NTP Time Sync (Client).

Manual time synchronization: Set the value of `timeMode` to `manual`, and set the device local time in nodes `localTime`, `timeZone`.

Satellite time synchronization: Set the value of `timeMode` to `satellite`, and set the device local time in nodes `satelliteInterval`.

Platform time synchronization: Set the value of `timeMode` to `platform`.

Note: For manual time synchronization (time offset including time zone offset): Set manual time synchronization: `localTime` refers to the local time on device (time offset excluded, in format like 2019-02-28T10:50:44); `timeZone` refers to the time offset of local time on device (time offset format with DST disabled: CST-8:00:00; time offset format with DST enabled: CST-8:00:00DST00:30:00,M4.1.0/02:00:00,M10.5.0/02:00:00); Get manual time synchronization: `localTime` refers to the local time on device (time offset included, in format like 2019-02-28T10:50:44+8:30); `timeZone` refers to the time offset of local time on device (time offset format with DST disabled: CST-8:00:00; time offset format with DST enabled: CST-8:00:00DST00:30:00,M4.1.0/02:00:00,M10.5.0/02:00:00).

5.5.2.2 Time Zone Configuration

1. Get device time zone configuration capability

Call `GET /ISAPI/System/capabilities` to get the system capability. When `isSupportTimeZone` is returned, the time zone configuration is supported by the device.


2. Configure time zone parameters

Get the device's time zone parameters: `GET /ISAPI/System/time/timeZone`. Set the device's time zone parameters: `PUT /ISAPI/System/time/timeZone`.

If DST (Daylight Saving Time) is disabled, the example of returned time zone parameters is: CST-8:00:00. It refers to UTC+8, and -8:00:00 is the UTC local time. If DST (Daylight Saving Time) is enabled, the example of returned time zone parameters is: CST-8:00:00DST00:30:00,M4.1.0/02:00:00,M10.5.2/02:00:00. It refers to UTC+8, the DST time is 30 minutes ahead of local time, the DST starts at 02:00:00 on the first Sunday of April and ends at 02:00:00 on the fifth Tuesday of October. MX.Y.Z: X is the month, Y is the week number in the month, Z is the day of a week (0-Sunday, 1-Monday, 2-Tuesday, 3-Wednesday, 4-Thursday, 5-Friday, 6-Saturday).

5.5.2.3 NTP Time Sync (Client)

The local system running the NTP server can receive sync information from other clock sources (self as client), sync other clocks (self as server) as clock sources, and sync with other devices. Calling flow (self as client):

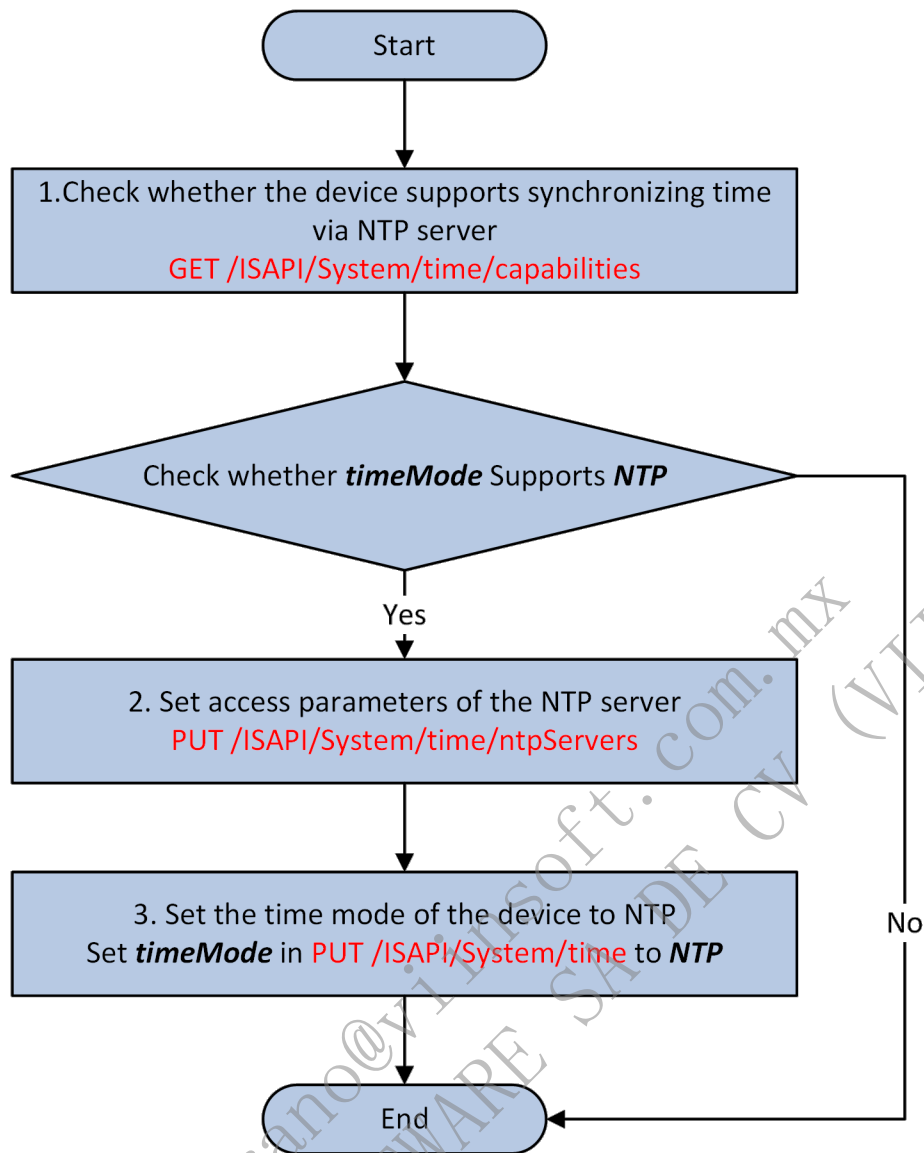

1. Check whether the device supports synchronizing time via NTP server Get the capability of the device: GET /ISAPI/System/time/capabilities; and check whether timeMode supports NTP.

2. Set access parameters of the NTP server

Supports accessing the NTP server by IP address to synchronize the device time.

Get the access parameter capability of the NTP server: GET /ISAPI/System/time/ntpServers/capabilities

Set access parameters of the NTP server: PUT /ISAPI/System/time/ntpServers

Get access parameters of the NTP server: GET /ISAPI/System/time/ntpServers


3. Set the time mode of the device to NTP

Supports setting the value of timeMode to NTP.

Get device time synchronization management parameters: GET /ISAPI/System/time Set device time synchronization management parameters: PUT /ISAPI/System/time

5.5.2.4 NTP Time Sync (Server Mode)

The local system running the NTP server can receive sync information from other clock sources (self as client), sync other clocks (self as server) as clock sources, and sync with other devices. Calling flow (self as server):

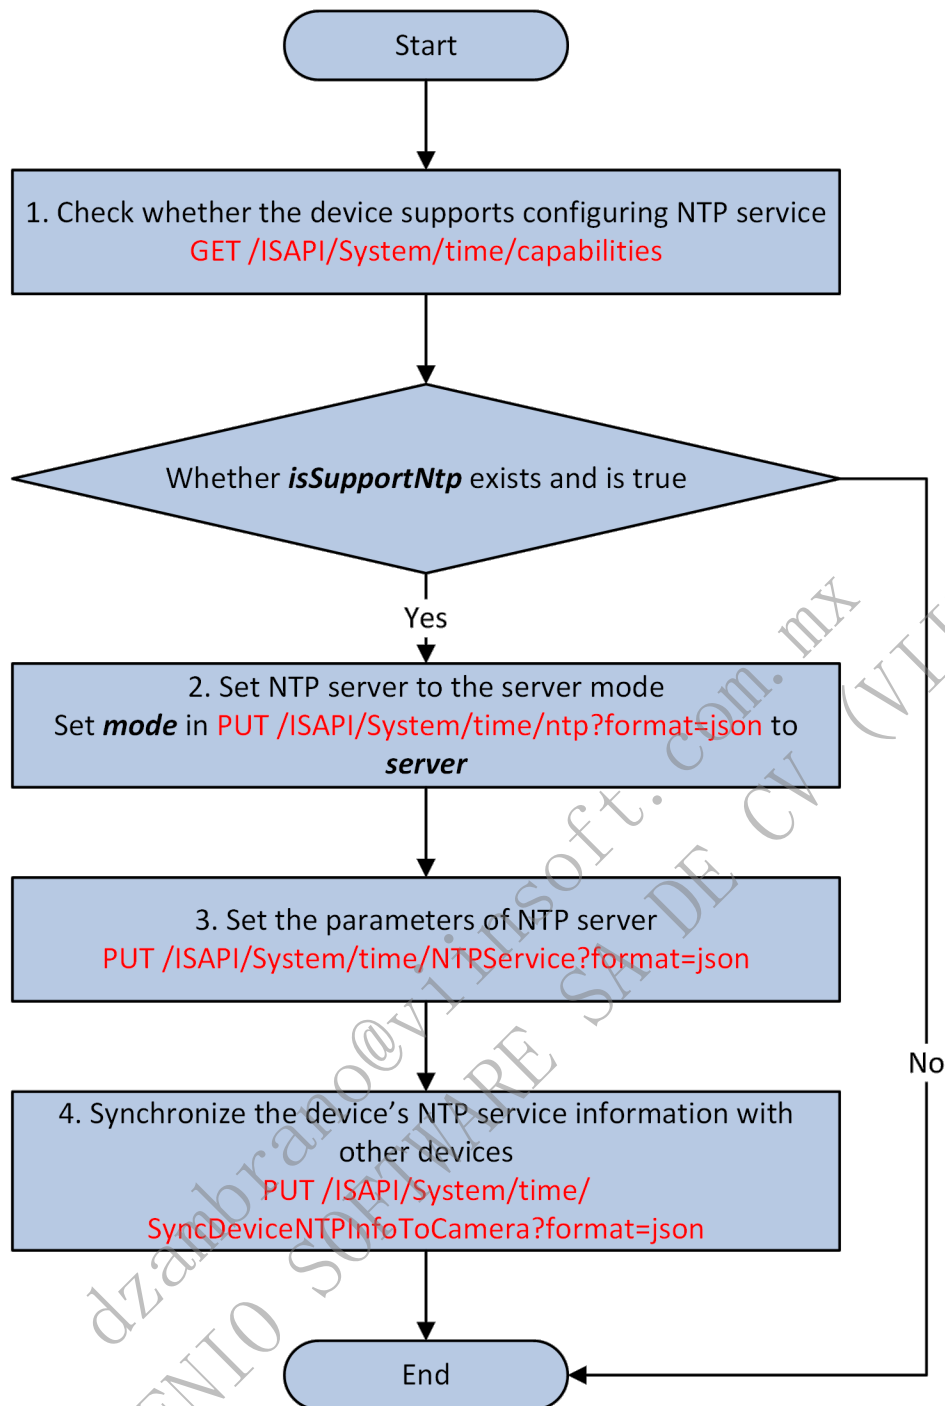

1. Check whether the device supports configuring NTP service Get the capability of device time synchronization management: GET /ISAPI/System/time/capabilities; If `isSupportNtp` is returned, it indicates that the device supports time synchronization management.

2. Set NTP server to the server mode

Supports setting the value of `mode` to `server`.

Get the capability of server mode: GET /ISAPI/System/time/ntp/capabilities?format=json

Set NTP to server mode: PUT /ISAPI/System/time/ntp?format=json

Get parameters of NTP server mode: GET /ISAPI/System/time/ntp?format=json

3. Set the parameters of NTP server

Supports setting the IP address of the NTP server.

Get the capability of NTP server: GET /ISAPI/System/time/NTPService/capabilities?format=json

Set the NTP server parameters: PUT /ISAPI/System/time/NTPService?format=json

Get the parameters of the NTP server: GET /ISAPI/System/time/NTPService?format=json

4. Synchronize the device's NTP service information with other devices

Supports synchronizing the time information to the camera.

Get the capability set of synchronizing device's NTP service information with the camera: GET
/ISAPI/System/time/SyncDeviceNTPInfoToCamera/capabilities?format=json

Synchronize device's NTP service information with the camera: PUT
/ISAPI/System/time/SyncDeviceNTPInfoToCamera?format=json

Get the progress of synchronizing device's NTP service information with the camera: GET
/ISAPI/System/time/SyncDeviceNTPInfoToCamera/Progress?format=json

Search for the results of synchronizing device's NTP service information with the camera: POST
/ISAPI/System/time/SyncDeviceNTPInfoToCamera/SearchResult?format=json


5.6 Device Upgrade

5.6.1 Introduction to the Function

The platform or client software or web client under the LAN upgrades devices via ISAPI.

5.6.2 API Calling Flow

The sequence diagram of upgrading devices by the platform is shown below.

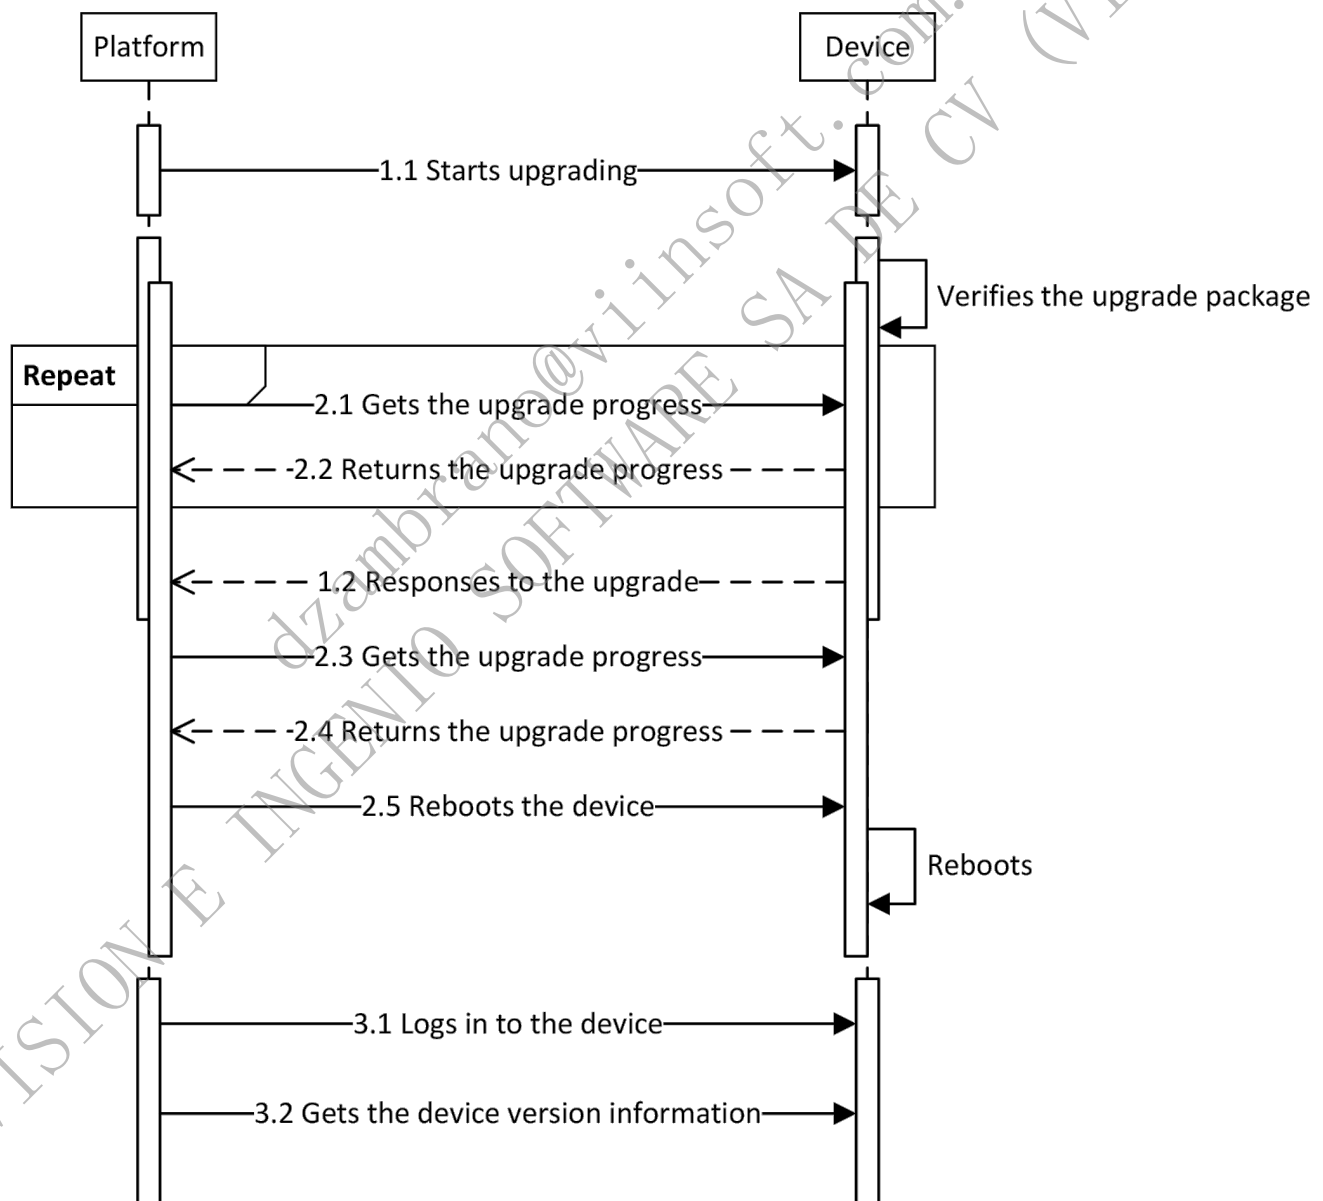

1. Upgrade devices.

Upgrade the device firmware: POST /ISAPI/System/updateFirmware.

2. Get the device upgrade progress.

Get the device upgrade progress: `GET /ISAPI/System/upgradeStatus`.

3. Reboot devices.


Reboot devices: `PUT /ISAPI/System/reboot`.

5.7 HEOP Basics

5.7.1 Introduction to the Function

The HEOP integrated by Intelligent Security API (ISAPI) provides runtime environments and management APIs for third-party application programs to connect to and run on network cameras.

5.7.2 API Calling Flow

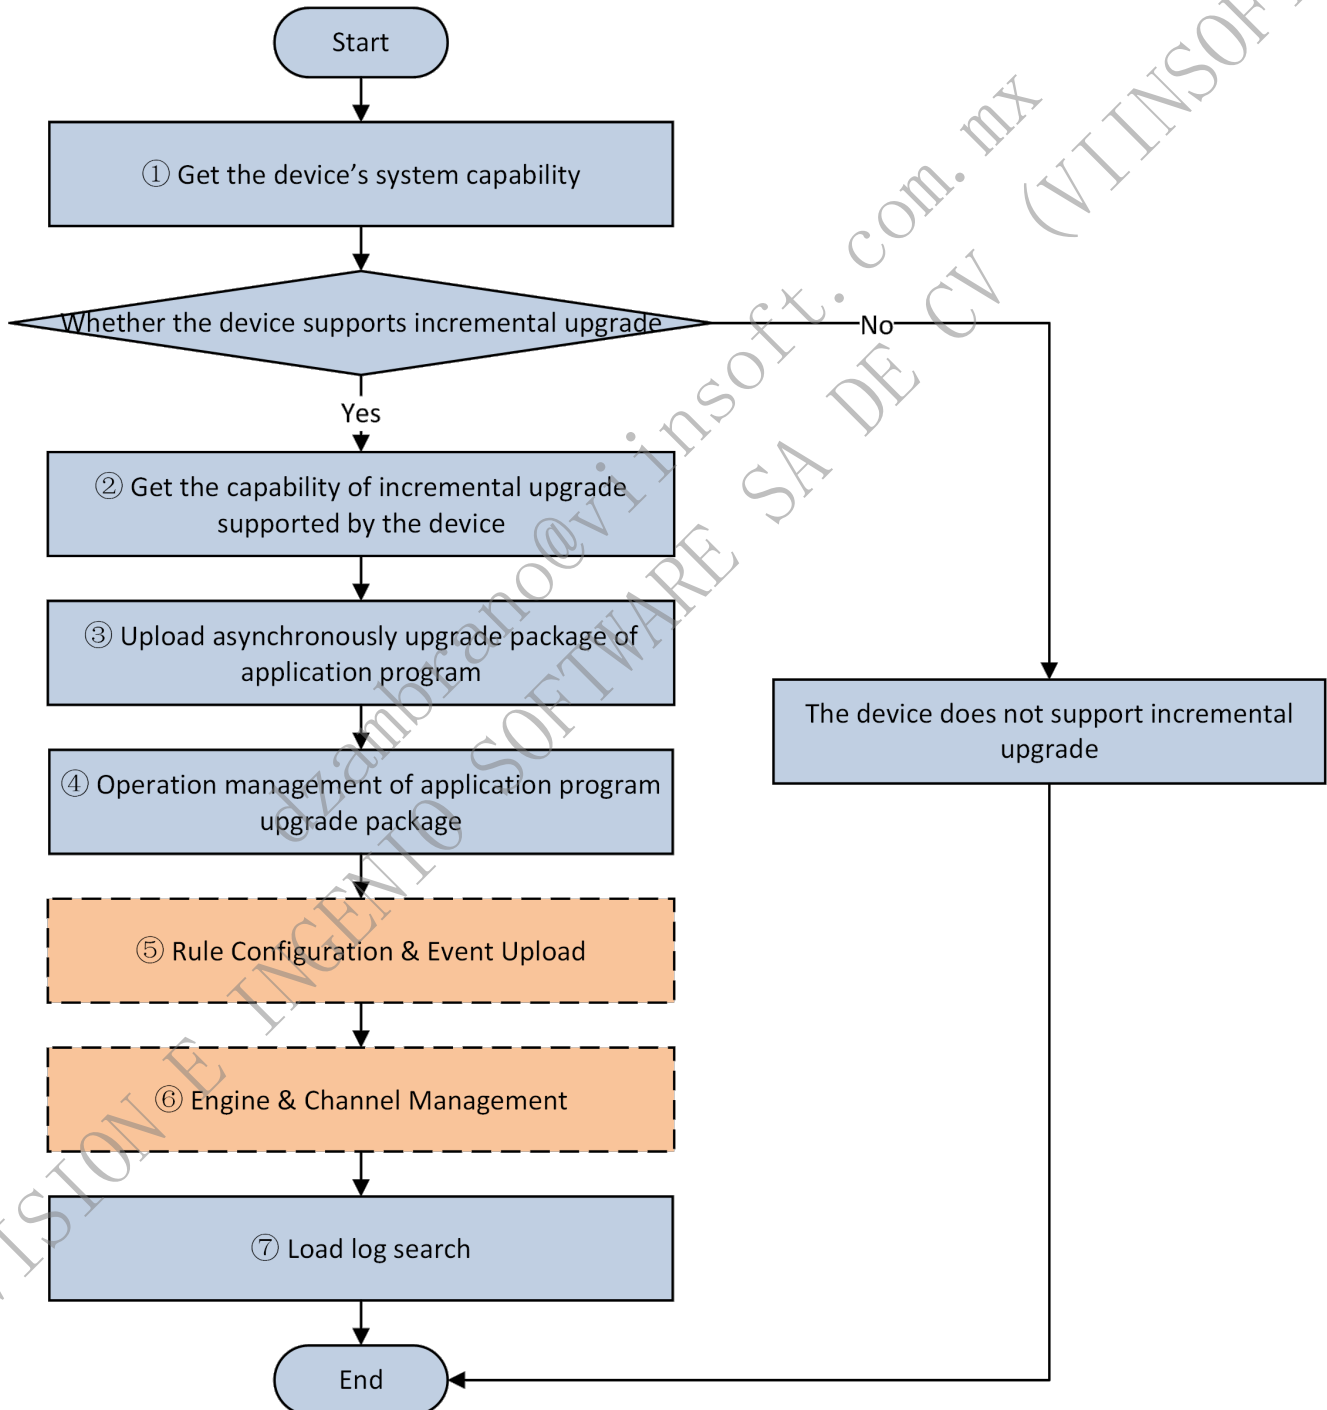

1. Get the device system capability: `GET /ISAPI/System/capabilities`. If the node `<OpenPlatformCap>` is returned in the capability message and its value is true, it indicates that the HEOP function is supported by the device.
2. Get the HEOP capability supported by the device: `GET /ISAPI/OpenPlatform/capabilities`.
3. Search the HEOP remaining resources: `GET /ISAPI/Custom/OpenPlatform/resource`.


4. Upgrade synchronously the application program package:
 - i. Configure synchronous upgrade of the application program full package: PUT /ISAPI/Custom/OpenPlatform/uploadApp.
 - ii. Get the synchronous upgrading progress of the application program full package: GET /ISAPI/Custom/OpenPlatform/uploadAppStatus.
5. Application program information management:
 - i. Get page information of application program: GET /ISAPI/Custom/OpenPlatform/pageItem.
 - ii. Get the application program information list: GET /ISAPI/Custom/OpenPlatform/App.
 - iii. Get the information of a single application program: GET /ISAPI/Custom/OpenPlatform/App/<AppID>.
 - iv. Get the logs of the application program: GET /ISAPI/Custom/OpenPlatform/App/<AppID>/syslog.
6. Application program operation management:
 - i. Run the application program: PUT /ISAPI/Custom/OpenPlatform/App/<AppID>/start?engineID=<engineID>.
 - ii. Stop running the application program: PUT /ISAPI/Custom/OpenPlatform/App/<AppID>/stop?engineID=<engineID>.
 - iii. Delete the application program: DELETE /ISAPI/Custom/OpenPlatform/App/<AppID>/delete.

5.8 Incremental Upgrade

5.8.1 Introduction to the Function

If intelligent detection models of the front-end and back-end devices mismatch, the model data collected by the front-end device cannot be used for the comparison on back-end devices. At present, the device package is becoming larger, and the size some device upgrade packages reach level GB, which makes it difficult to upgrade the device (such as the upgrade package delivery, long upgrade time). The unified algorithm switch of front-end and back-end devices is designed to support HEOP framework, which supports patch upgrade of algorithm package.

5.8.2 API Calling Flow

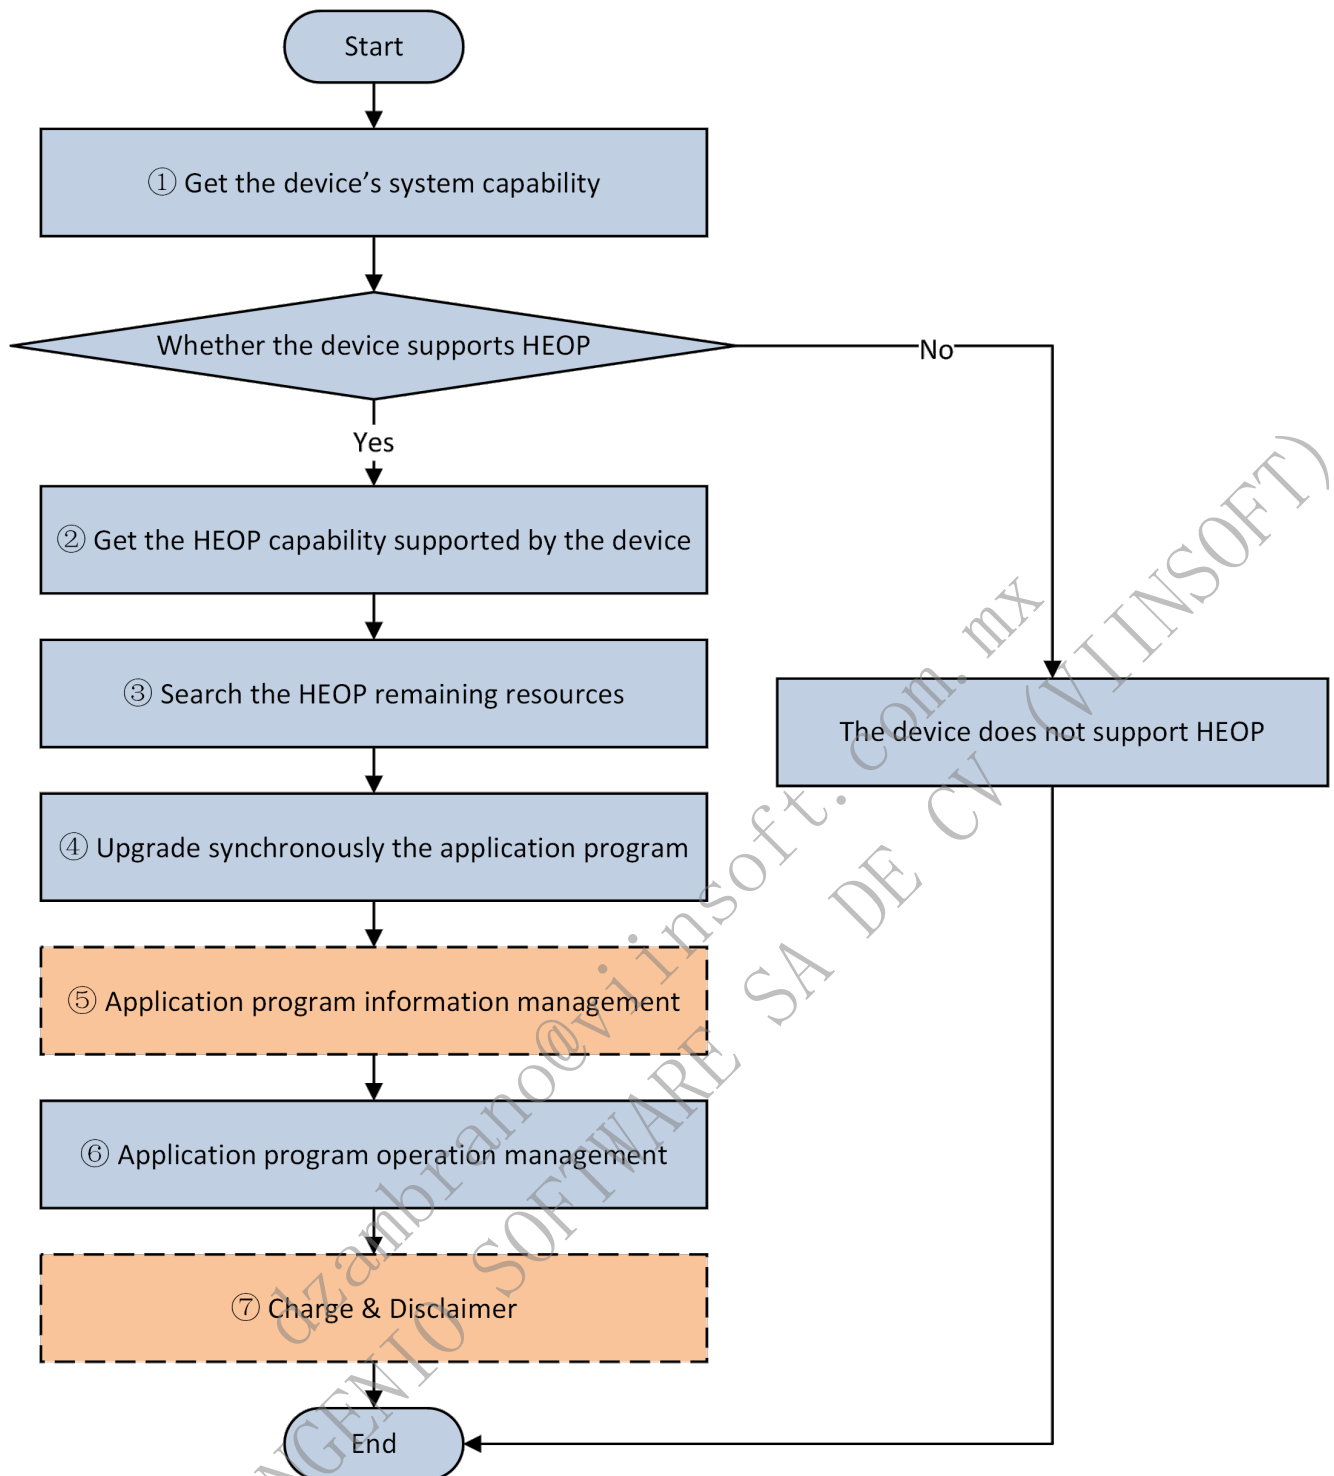

1. Get the device system capability: GET /ISAPI/System/capabilitie. If the node <isSupportPatchUpgrade> is returned in the capability message and its value is "true", it indicates that HEOP Synchronization is supported by the device.
2. Get the incremental upgrade capability supported by device: GET /ISAPI/Custom/OpenPlatform/patchUpgrade/capabilities?format=json.
3. Upload asynchronously the application program package:
 - i. Upload asynchronously the application program package: POST /ISAPI/Custom/OpenPlatform/uploadApp/async?format=json.
 - ii. Get the asynchronous uploading progress of the application program package: GET /ISAPI/Custom/OpenPlatform/uploadAppStatus/async/<AppID>?format=json.
4. Operation management of application program upgrade package:
 - i. Run the specified application program upgrade package: POST /ISAPI/Custom/OpenPlatform/appPackage/<AppUUID>/start.
 - ii. Stop running the application program upgrade package: PUT /ISAPI/Custom/OpenPlatform/appPackage/<AppUUID>/stop.

- iii. Delete the specified application program upgrade package: DELETE
/ISAPI/Custom/OpenPlatform/appPackage/<AppUUID>.
- 5. Rule Configuration & Event Upload: Reuse the existing protocol system (HCNetSDK and ISAPI), and the device selects whether to provide this function according to different intelligent types based on the existing intelligent rules.
- 6. Engine & Channel Management:
 - i. Get the information about engine status: GET /ISAPI/Custom/OpenPlatform/APP/engines?format=json.
 - ii. Get the information about the application program package that is bound to a specified engine: GET /ISAPI/Custom/OpenPlatform/APP/loading/<engineID>?format=json.
 - iii. Set the information about the application program package that is bound to a specified engine: PUT /ISAPI/Custom/OpenPlatform/APP/loading/<engineID>?format=json.
 - iv. Delete the binding between the application program package and the engine: DELETE /ISAPI/Custom/OpenPlatform/APP/unloading/<engineID>?format=json.
 - v. Unbind the specified application program(s) from the engine: PUT /ISAPI/Custom/OpenPlatform/APP/unloading?format=json.

5.9 Mutually Exclusive Functions

5.9.1 Introduction to the Function

Some functions are mutually exclusive due to the device performance (for example, function A and function B cannot run at the same time, i.e, only one of them is allowed at one time).

5.9.2 API Calling Flow

The following three APIs are available for the integration of mutually exclusive functions:


1. Get the information of mutually exclusive functions: GET /ISAPI/System/mutexFunction/capabilities?format=json. Call this URL to get the list of existing mutually exclusive functions supported by the device. Note: NVR devices only support setting exclusive function "perimeter" (perimeter protection), and do not support "linedetection" (line crossing detection), "fielddetection" (intrusion detection), "regionEntrance" (region entrance), or "regionExiting" (region exiting).
2. Search for the functions that are mutually exclusive with a specified function: POST /ISAPI/System/mutexFunction?format=json. Based on the list of mutually exclusive functions returned by GET /ISAPI/System/mutexFunction/capabilities?format=json, you can search for the mutual exclusion status of a specified function and see whether to change the settings and disable the mutually exclusive function.
3. Get the mutual exclusion information when device function exception occurs: GET /ISAPI/System/mutexFunctionErrorMsg. After getting the error code, you can call this API to get the current mutually exclusive functions.

5.10 Remote Online Upgrade Based on The EZ2.0

5.10.1 Introduction to the Function

Considering that the device is connected to EZ via EZ 2.0 Protocol, EZ OTA upgrade solution is not supported. This solution applies to specified version upgrade.

5.10.2 API Calling Flow

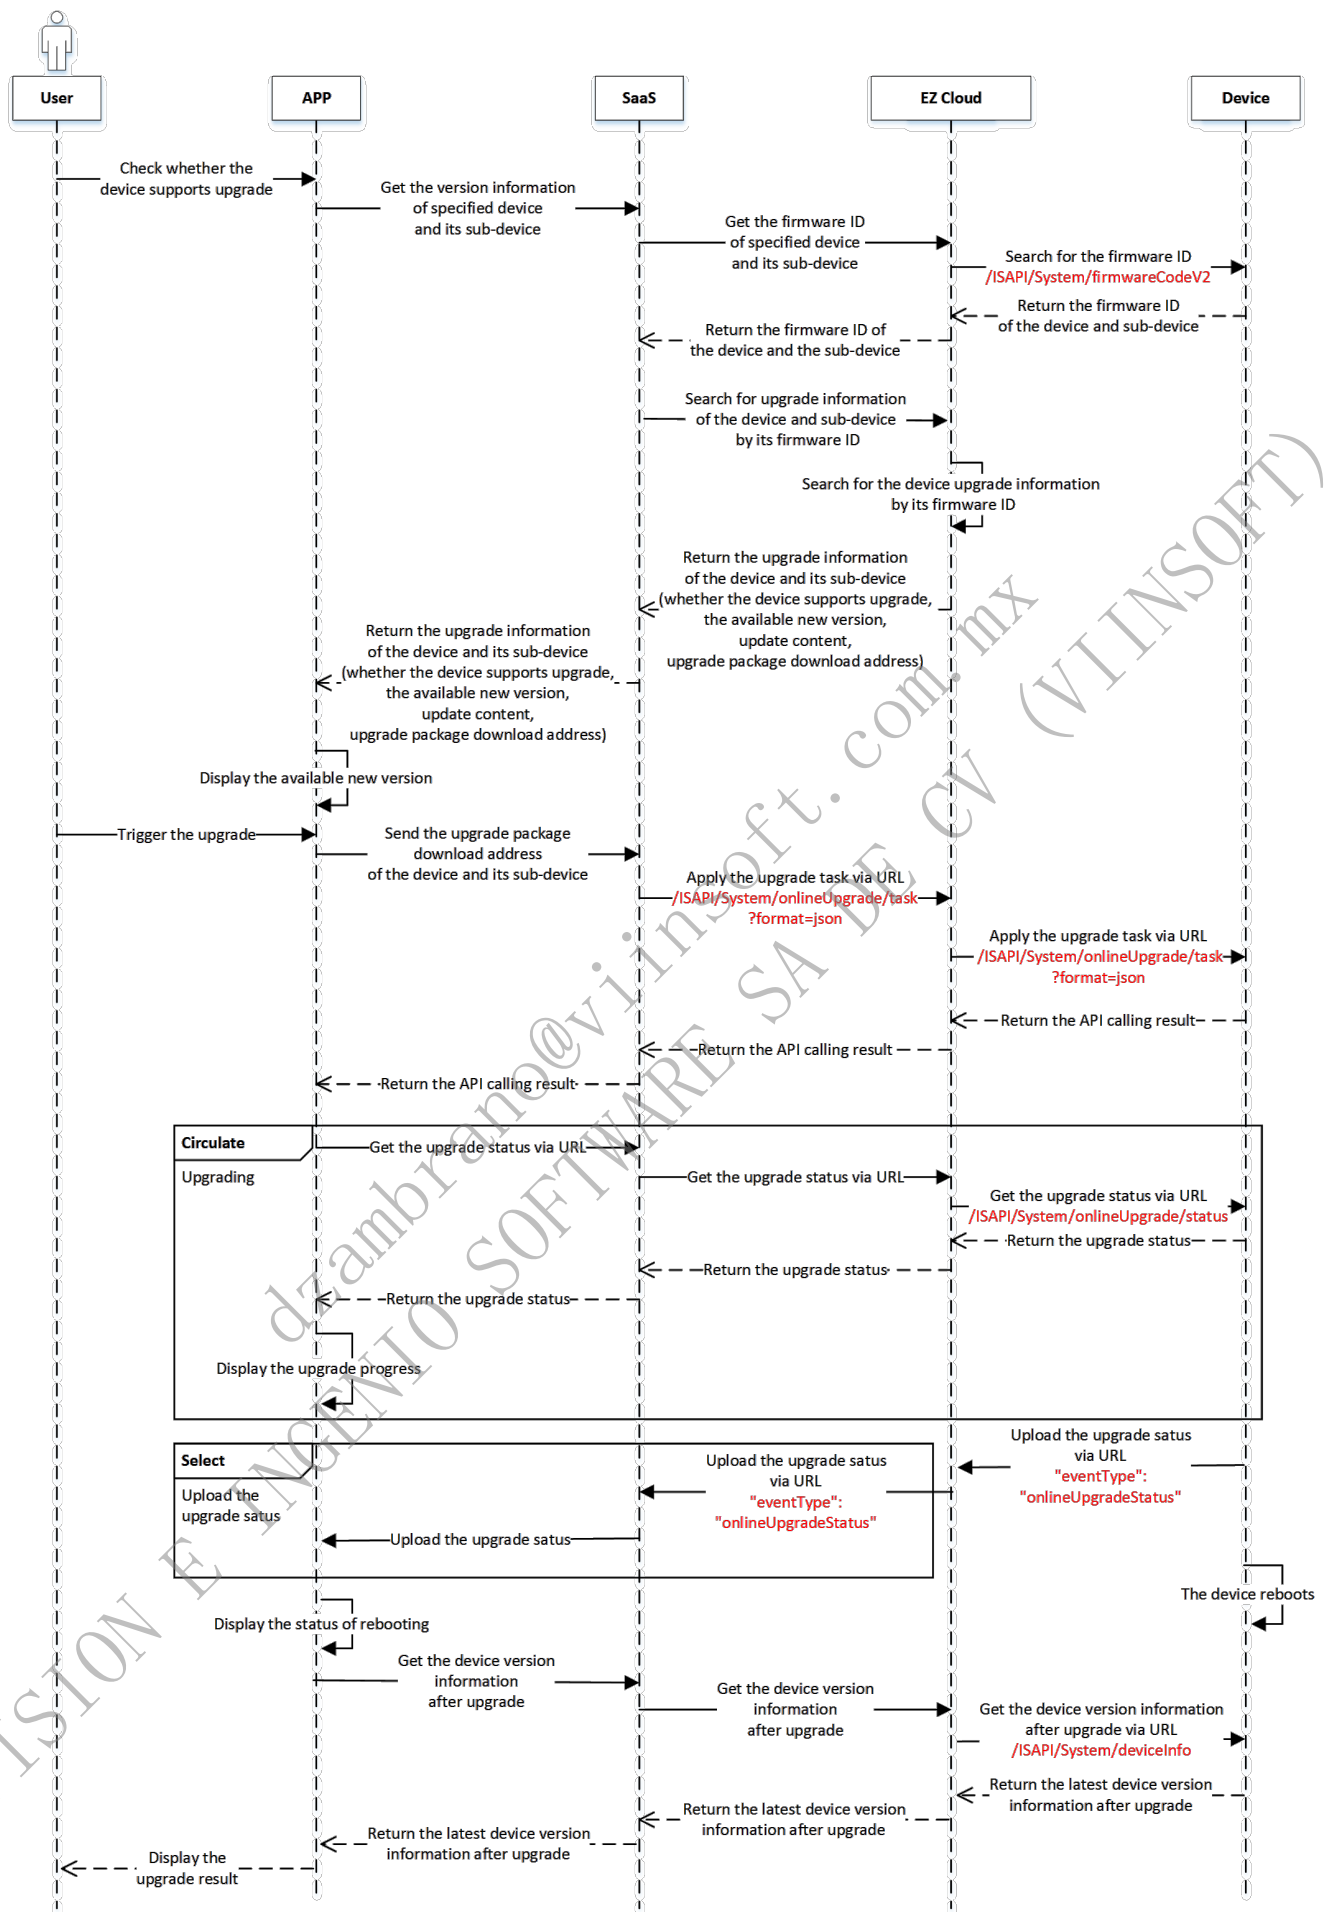

1. Search for the device firmware ID: GET /ISAPI/System/firmwareCodeV2.

2. Search for the device upgrade information by its firmware ID. If there is an available new version, apply the upgrade task to the device: POST /ISAPI/System/onlineUpgrade/task?format=json. You can specify to upgrade device (e.g. NVR) or sub-device (e.g. IPC) via the code.

device (e.g., NVR) or sub-device (e.g., IPC) via the node `<channel>`.

3. During the device upgrade, you can get the real-time upgrade progress on the platform: `GET /ISAPI/System/onlineUpgrade/status`.
4. After the device upgrade is finished, the device will upload the `"onlineUpgradeStatus"` and reboot automatically.
5. After both upgrade and reboot are finished, you can get the latest device version information on the platform.
 - Get the device (e.g., NVR) version information: `GET /ISAPI/System/deviceInfo`.
 - Get the sub-device (e.g., IPC) version information: `GET /ISAPI/ContentMgmt/InputProxy/channels?security=<security>&iv=<iv>`.

5.11 Remote Online Upgrade Based on the WEB Client


5.11.1 Introduction to the Function

This solution applies to remote online upgrade of the devices and sub-devices connected to WEB client.

5.11.2 API Calling Flow

VISION E INGENIO SOFTWARE SA DE CV (VIINSOFT)

dzambrano@vinsoft.com.mx

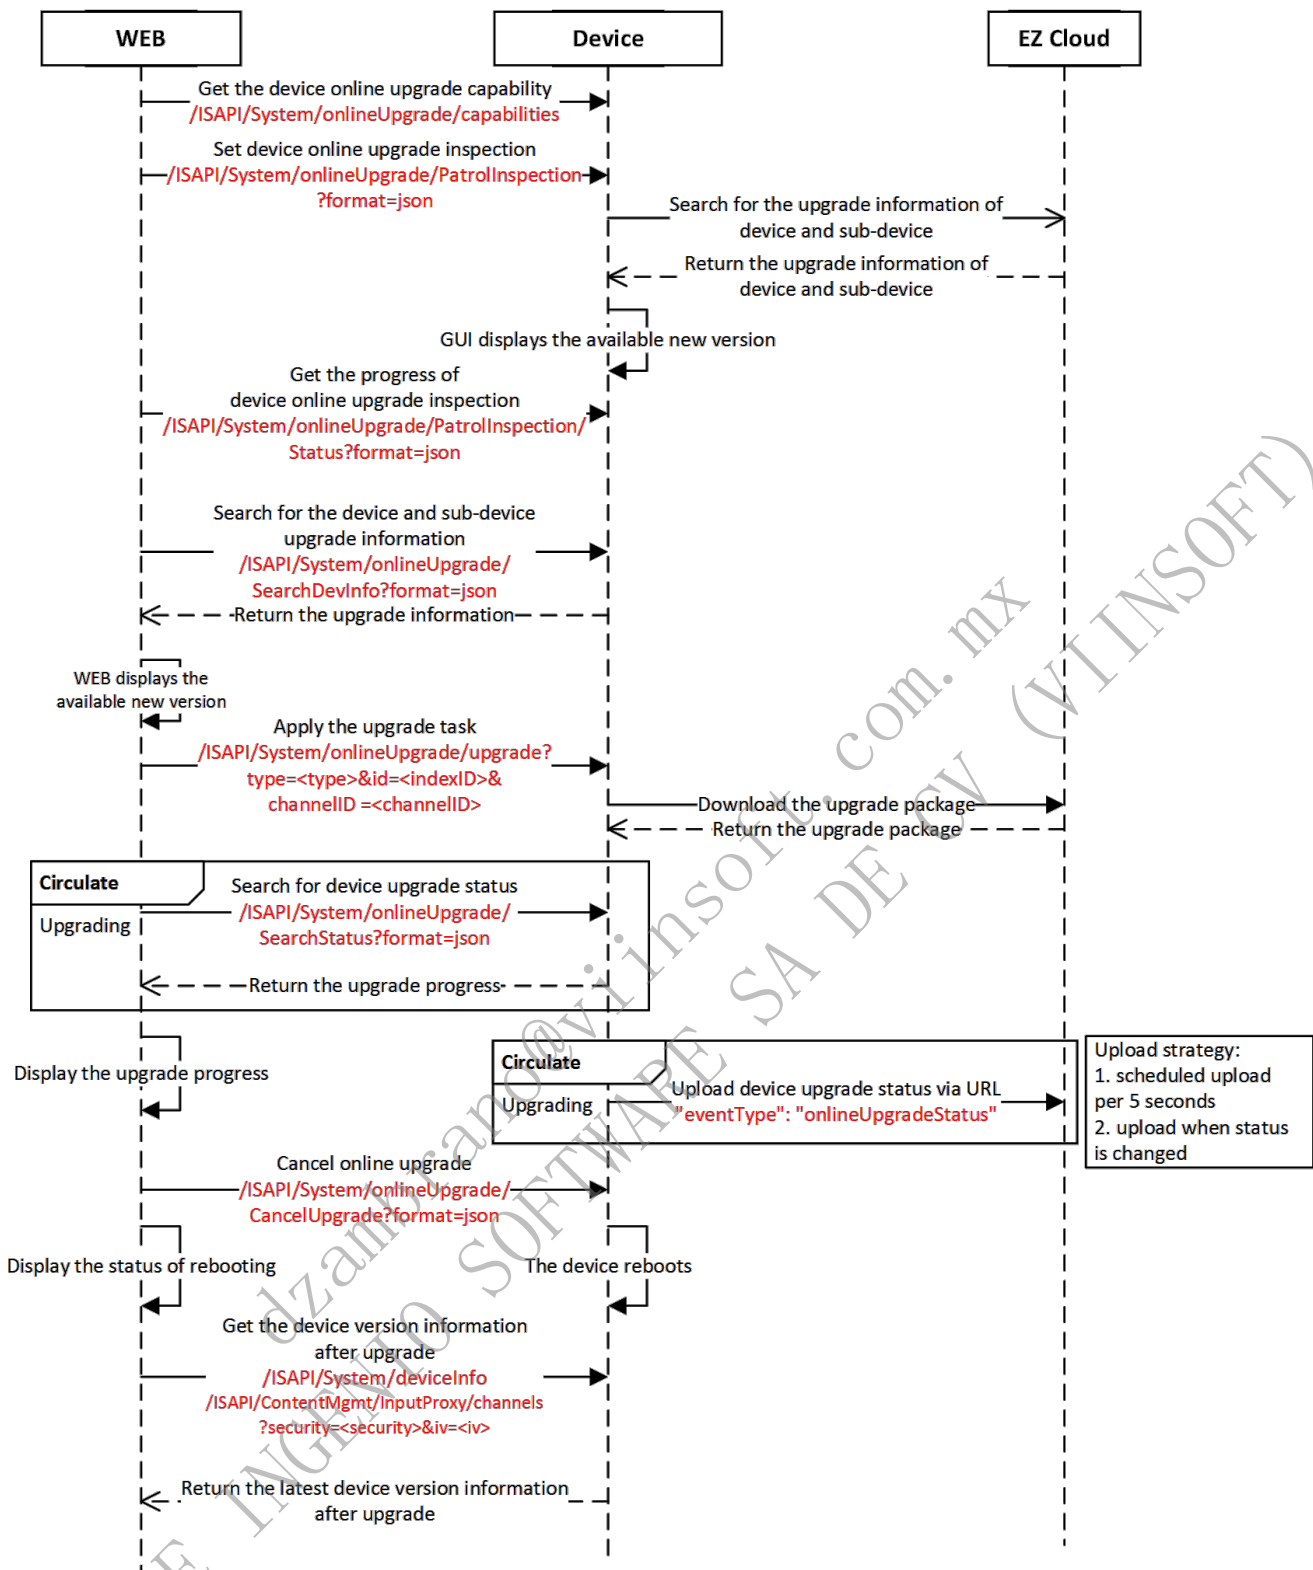

1. Get device online upgrade capability: GET /ISAPI/System/onlineUpgrade/capabilities.
2. Manually trigger the device online upgrade inspection: POST /ISAPI/System/onlineUpgrade/PatrolInspection?format=json. After it is enabled, the device will search for the available new version.
3. During the inspection, the WEB client can get the real-time inspection progress: GET /ISAPI/System/onlineUpgrade/PatrolInspection/Status?format=json.
4. After the device inspection is finished, search for the device and sub-device upgrade information: GET /ISAPI/System/onlineUpgrade/SearchDevInfo?format=json.
5. Apply the upgrade task: PUT /ISAPI/System/onlineUpgrade/upgrade?type=<type>&id=<indexID>&channelID = <channelID>. You can upgrade a specified device via the node <channelID> in the URL. Specify sub-device upgrade by configuring <type>.

6. You can search for online upgrade status during the upgrade: `GET /ISAPI/System/onlineUpgrade/SearchStatus?format=json`.
7. You can cancel the upgrade during the upgrade: `PUT /ISAPI/System/onlineUpgrade/CancelUpgrade?format=json`.
8. After the upgrade and reboot are finished, you can get the latest device version information.
 - Get the device (e.g., NVR) version information: `GET /ISAPI/System/deviceInfo`.
 - Get the sub-device (e.g., IPC) version information: `GET /ISAPI/ContentMgmt/InputProxy/channels?security=<security>&iv=<iv>`.

5.12 Serial Port Accessed External Device Management

5.12.1 Introduction to the Function

Information management of device accessed the serial are as follows: 1. Configure manufacturer, type, and model information of the specific serial port access device. 2. Search for the device type or model supported by the specific serial port.

5.12.2 API Calling Flow

1. Check whether the device supports information management of serial port. Get the capability of the device serial port: `GET /ISAPI/System/Serial/capabilities`; If `<isSupportDeviceInfo>` is returned, the device supports information configuration of devices access the serial port.
2. Set the information of serial port:
 - Get the capability of device information parameters of a single serial port: `GET /ISAPI/System/Serial/ports/<portID>/deviceInfo?format=json`.
 - Get device information parameters access single serial port: `GET /ISAPI/System/Serial/ports/<portID>/deviceInfo?format=json`.
 - Set device information parameter of single serial port: `PUT /ISAPI/System/Serial/ports/<portID>/deviceInfo?format=json`.
3. Check whether the device supports linking information of devices access the serial port: `GET /ISAPI/System/Serial/capabilities`; If `<isSupportSearchDeviceInfoRelations>` is returned, it indicates that the device supports searching for linked information of devices access the serial port.
4. Search for linked information of devices access the serial port.
 - Get the capability of searching for linked parameters of information of devices access a single serial port: `GET /ISAPI/System/Serial/ports/<portID>/searchDeviceInfoRelations/capabilities?format=json`.
 - Search for linked parameters of information of devices access a single serial port: `POST /ISAPI/System/Serial/ports/<portID>/searchDeviceInfoRelations?format=json`.

5.13 Serial Port Data Transparent Transmission


5.13.1 Introduction to the Function

RS485, RS422 and RS232 serial ports external to the device are used as transparent channels to transmit serial port data. Supports the client sending serial data to the device, which then forwards the data to the serial port; conversely, when the serial port sends data to the device, which transparently transmits the data to the client. Note that the device's transparent transmission of serial data is half-duplex communication, meaning that bidirectional communication can be implemented between the device and the client, but the communication data is not necessarily in a question-and-answer format, and the client must match the request and response relationship on its own.

Since most standard HTTP request libraries do not support the persistent connection for receiving and sending data in real time, it is recommended that the client uses two TCP clients to implement the sending and receiving of

transparently transmitted serial data.

5.13.2 API Calling Flow

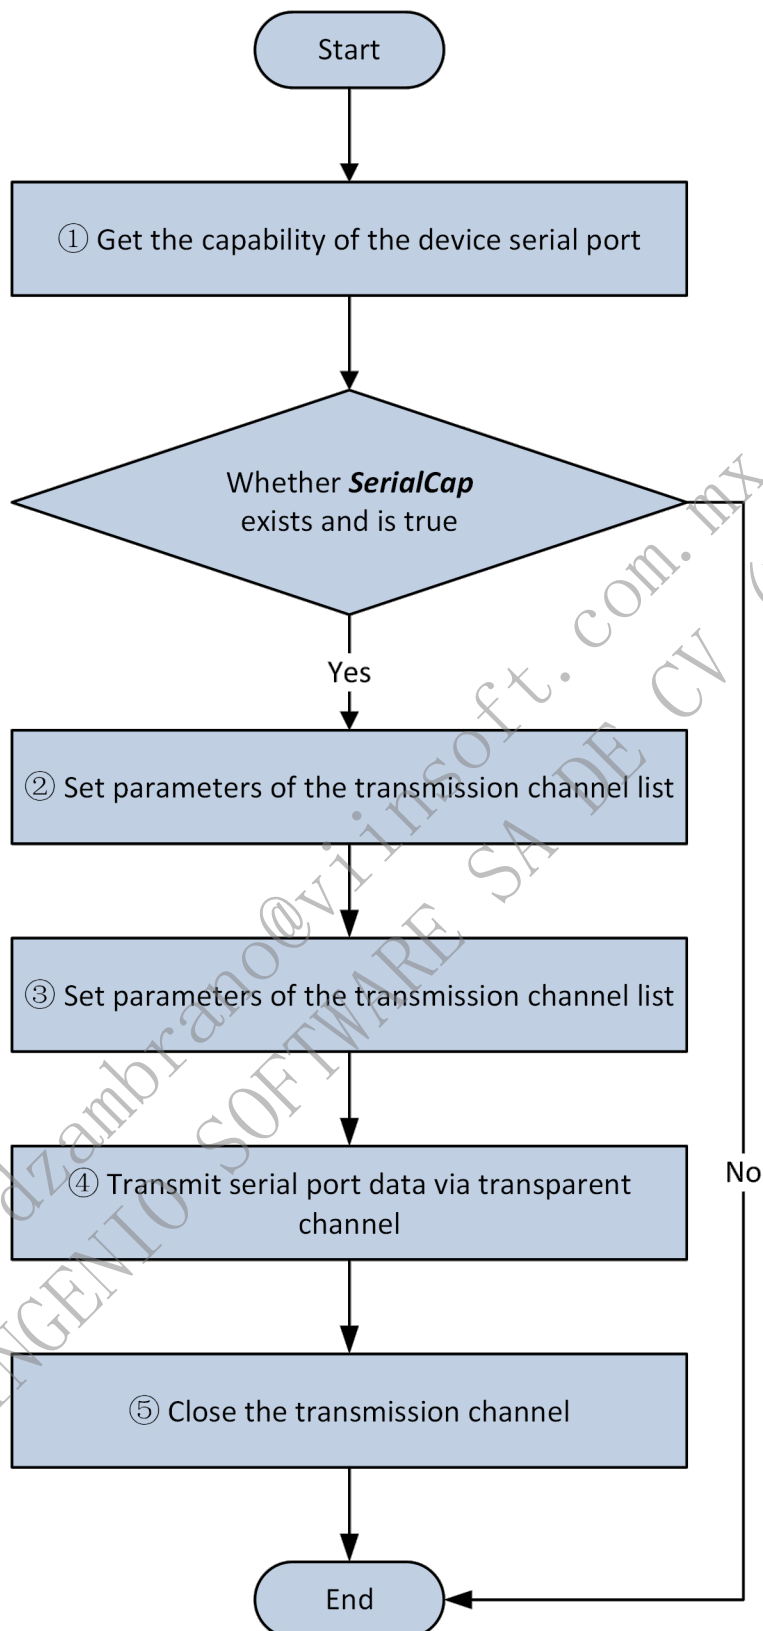

1. Check whether the device supports serial port data transmission.

Get the capability of the device serial port: `GET /ISAPI/System/capabilities`. If `SerialCap` is returned and the value is true, it indicates that the device supports the functions of the serial port.

2. Set parameters of the transmission channel list.

- Get parameters of the specific transmission channel: `GET /ISAPI/System/Serial/ports/<portID>/Transparent/channels/<channelID>`.
- Configure parameters of the specific transmission channel: `GET`

/ISAPI/System/Serial/ports/<portID>/Transparent/channels/<channelID>.

3. Open the transmission channel: PUT

/ISAPI/System/Serial/ports/<portID>/Transparent/channels/<channelID>/open;

4. Transmit serial port data via transparent channel.

- Receive data uploaded by device serial port through transmission channel: GET
/ISAPI/System/Serial/ports/<portID>/Transparent/channels/<channelID>/transData.
- Send data to device serial port through transmission channel: PUT
/ISAPI/System/Serial/ports/<portID>/Transparent/channels/<channelID>/transData.

5. Close the transmission channel: PUT

/ISAPI/System/Serial/ports/<portID>/Transparent/channels/<channelID>/close.

5.14 Serial Port Parameter Configuration

5.14.1 Introduction to the Function

Serial port parameter configuration.

5.14.2 API Calling Flow

1. Check whether the device supports configuring serial port parameters.

Get the capability of device serial port: `GET /ISAPI/System/capabilities`. If it is returned and its value is true, the device supports functions of serial port.

3. Get parameters of all serial ports.

- Get the capability of all serial ports: GET /ISAPI/System/Serial/capabilities.
- Get control parameters of all serial ports: GET /ISAPI/System/Serial/ports?permissionController=<indexID>.

4. Set control parameters of a single serial port.

- Get control parameters of single serial port: GET /ISAPI/System/Serial/ports/<portID>?permissionController=<indexID>.
- Configure control parameters of single serial port: PUT /ISAPI/System/Serial/ports/<portID>?permissionController=<indexID>.

5. Get the status of single serial port: GET /ISAPI/System/Serial/ports/<portID>/status.

5.15 Sub-device Batch Upgrade

5.15.1 Introduction to the Function

Sub-device Batch Upgrade (Single Task): applicable to situations of upgrading multiple sub-devices using one upgrade package. Application scenarios include: when the UWB positioning anchor connects to the web, upgrading multiple tags (sub-devices) through the positioning engine (gateway), with the same upgrade package.

Management of Sub-device Batch Upgrade Tasks: There are many types of sub-devices, such as LoRa nodes, which have a slow upgrade process and different models of LoRa nodes in the field also require different upgrade packages. Therefore, it is necessary to support the creation of multiple upgrade tasks at once, entrusting the upgrade to the devices, to enhance the practicality of batch upgrading sub-devices.

5.15.2 API Calling Flow

Sub-device Batch Upgrade (Single Task)

Get the device capability: /ISAPI/System/capabilities.

If the node `isSupportBulkUpgradeChildDevice` exists and is true, it indicates that the device support the function.

If the node `isSupportSearchBulkUpgradeChildDeviceProgress` exists and is true, it indicates that the device support getting the progress of batch upgrading sub-devices.

Sub-device batch upgrade: `POST /ISAPI/System/BulkUpgradeChildDeviceList?format=json`.

Batch sub-device upgrade progress search: `POST /ISAPI/System/BulkUpgradeChildDeviceList/Search?format=json`.

Sub-device Batch Upgrade Task Management

Get device system capabilities `/ISAPI/System/capabilities`, If the node `isSupportBulkUpgradeChildDevice` exists and is true, it indicates that batch upgrade of sub devices is supported,

If the node `isSupportSearchBulkUpgradeChildDeviceProgress` exists and is true, it indicates that progress of batch upgrading sub devices can be searched,

If the node `isSupportSearchBulkUpgradeChildDeviceTask` exists and is true, it indicates that batch upgrading devices can be searched,

If the node `isSupportModifyBulkUpgradeChildDeviceTask` exists and is true, it indicates that batch upgrading sub devices can be edited,

If the node `isSupportDeleteBulkUpgradeChildDeviceTask` exists and is true, it indicates that task of batch upgrading sub devices can be deleted.

Get the capability of batch upgrading sub-device: `GET /ISAPI/System/BulkUpgradeChildDevice/capabilities?format=json`.

Batch upgrade sub devices: `POST /ISAPI/System/BulkUpgradeChildDeviceList?format=json`.****

Search for tasks of batch sub-device upgrade: `POST /ISAPI/System/ModifyBulkUpgradeChildDeviceTask?format=json`.

Edit tasks of batch sub-device upgrade: `PUT /ISAPI/System/ModifyBulkUpgradeChildDeviceTask?format=json`.****

Delete tasks of batch sub-device upgrade: `PUT /ISAPI/System/DeleteBulkUpgradeChildDeviceTask?format=json`.

Note: 1. The two methods for batch upgrading child devices are the same API: `POST`


`/ISAPI/System/BulkUpgradeChildDeviceList?format=json`. If the `BulkUpgradeChildDeviceListCap.taskID` is returned in `GET /ISAPI/System/BulkUpgradeChildDevice/capabilities?format=json`, it indicates that the task method is supported in the sub device upgrade. 2. To determine which sub devices can be upgraded, you can use the API `POST /ISAPI/IoTGateway/Childmanage/SearchChild?format=json`. Sub devices with the tag `isUpgradable` and value `true` indicate that the sub devices support upgrades.

5.16 Upgrade Based on Interactive Tools Local Deployment

5.16.1 Introduction to the Function

This solution applies to the upgrade of devices and sub-devices connected via ISAPI. If the device is connected via ISAPI protocols, it is required to set up HTTP(s) service to store device upgrade package and generate URL for downloading upgrade package. If the device is connected via HCNetsDK, you can implement the device upgrade via transmitting ISAPI.

5.16.2 API Calling Flow

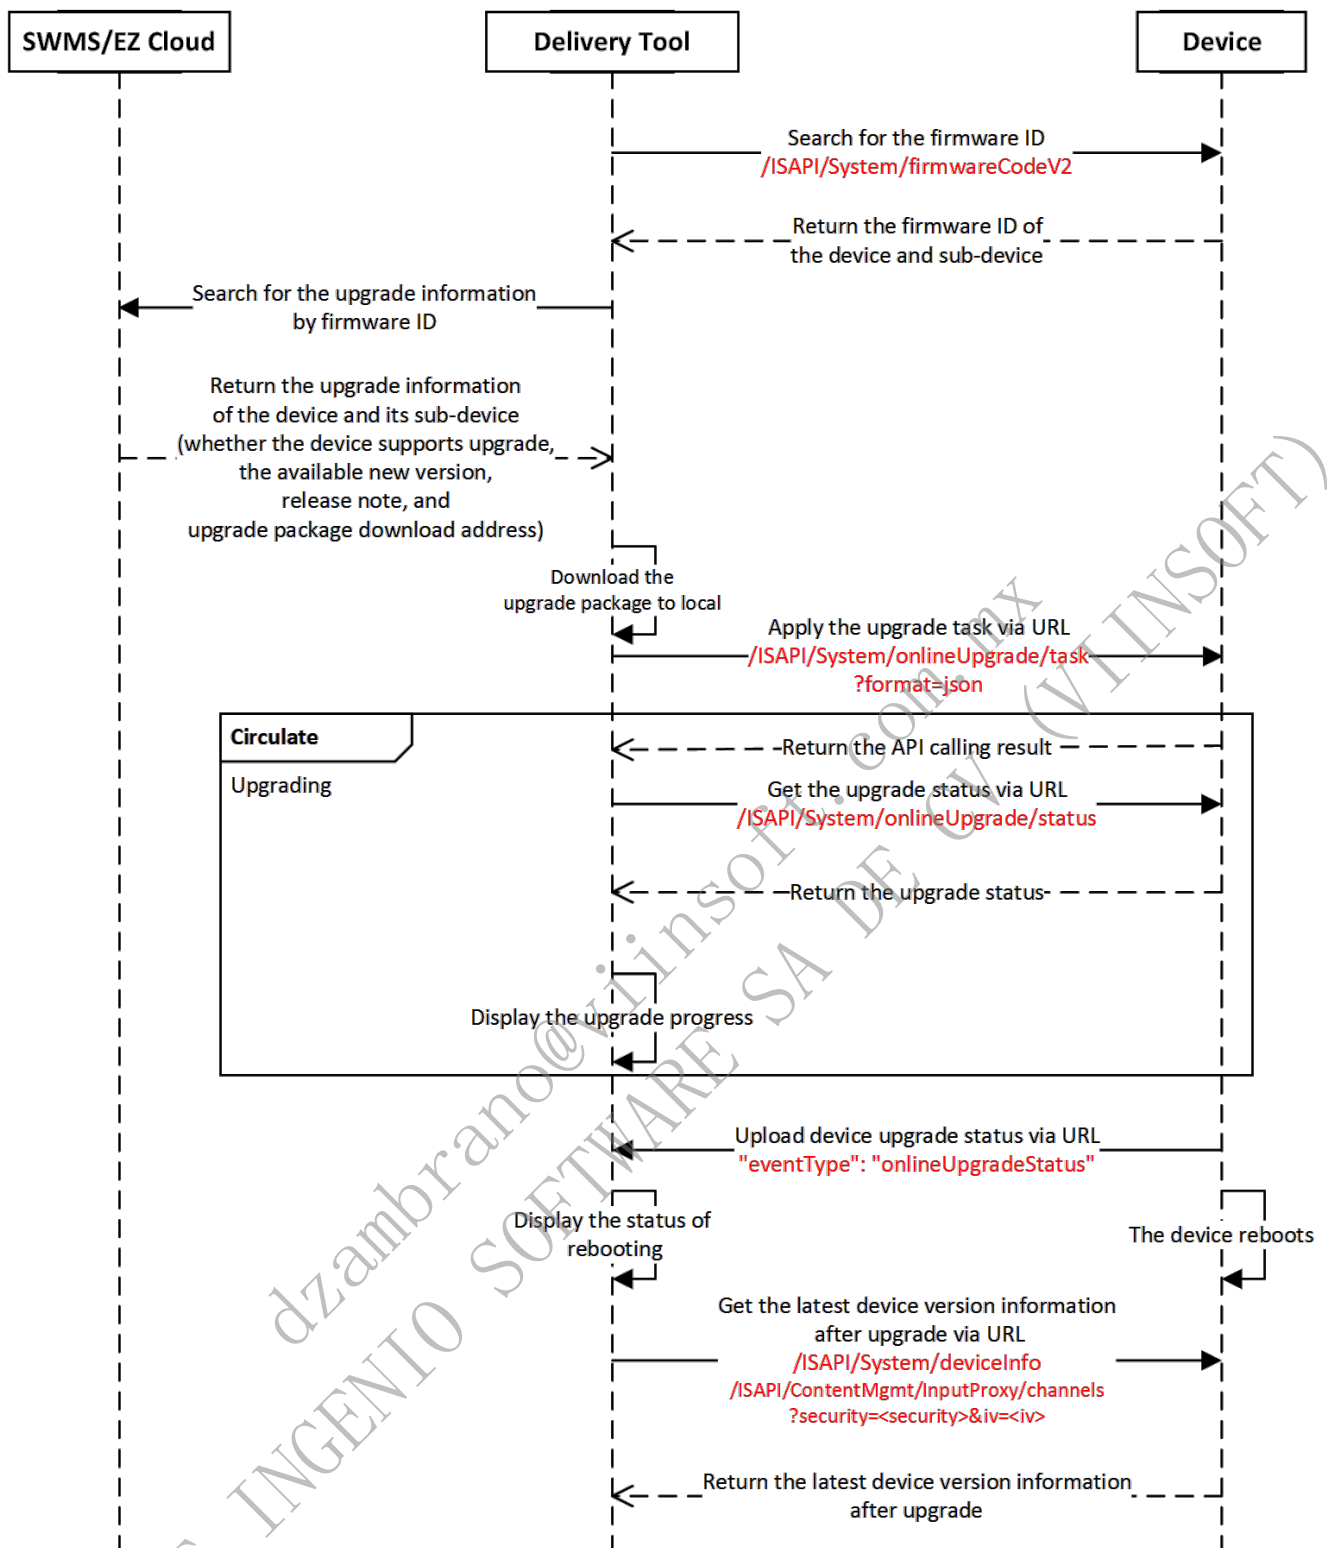


1. Search for the device firmware ID: `GET /ISAPI/System/firmwareCodeV2`.
2. Search for the device upgrade information by firmware ID on the SWMS/EZ Cloud, download upgrade package to local storage, and apply the upgrade task to the device: `POST /ISAPI/System/onlineUpgrade/task?format=json`. You can specify to upgrade device (e.g., NVR) or sub-device (e.g., camera) via the node `<channel>`.
3. During the upgrade, you can get the real-time upgrade progress: `GET /ISAPI/System/onlineUpgrade/status`.
4. After upgrade is completed, the device will upload the `"onlineUpgradeStatus"` (upgrade status), and reboot automatically.
5. After the device rebooting, you can get the latest device version information.
 - Get the device (e.g., NVR) version information: `GET /ISAPI/System/deviceInfo`.
 - Get the sub-device (e.g., IPC) version information: `GET /ISAPI/ContentMgmt/InputProxy/channels?security=`


5.17 Upgrade Based on Platform Local Deployment

5.17.1 Introduction to the Function

This solution applies to the upgrade of devices and sub-devices connected via ISAPI and ISUP. If via ISAPI, it is required to set up HTTP(s) service or transfer binary upgrade package files so as to store device upgrade package and generate URL for downloading upgrade package. If via ISUP, it is required to set up FTP service to store device upgrade package and generate URL for downloading upgrade package. If the device is connected via HCNetsDK protocols, you can realize device upgrade via transmitting ISAPI.

5.17.2 API Calling Flow

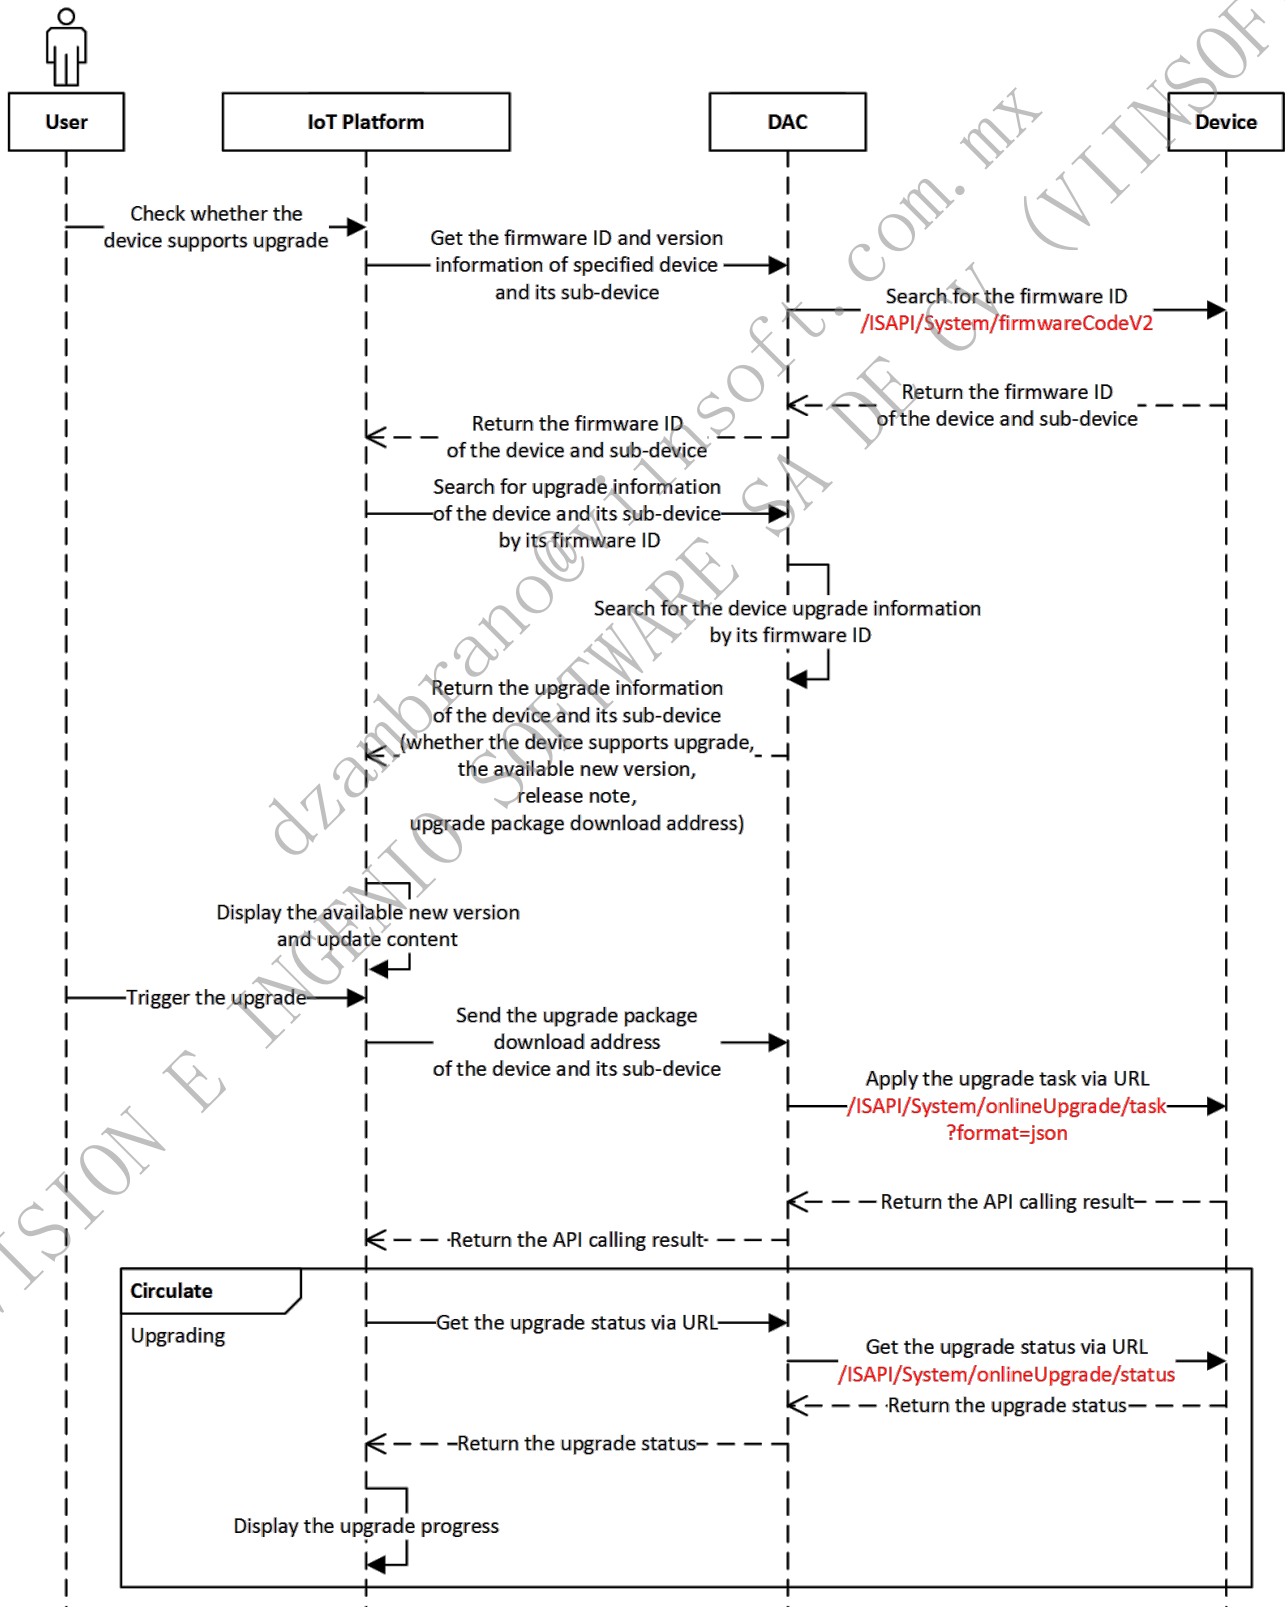

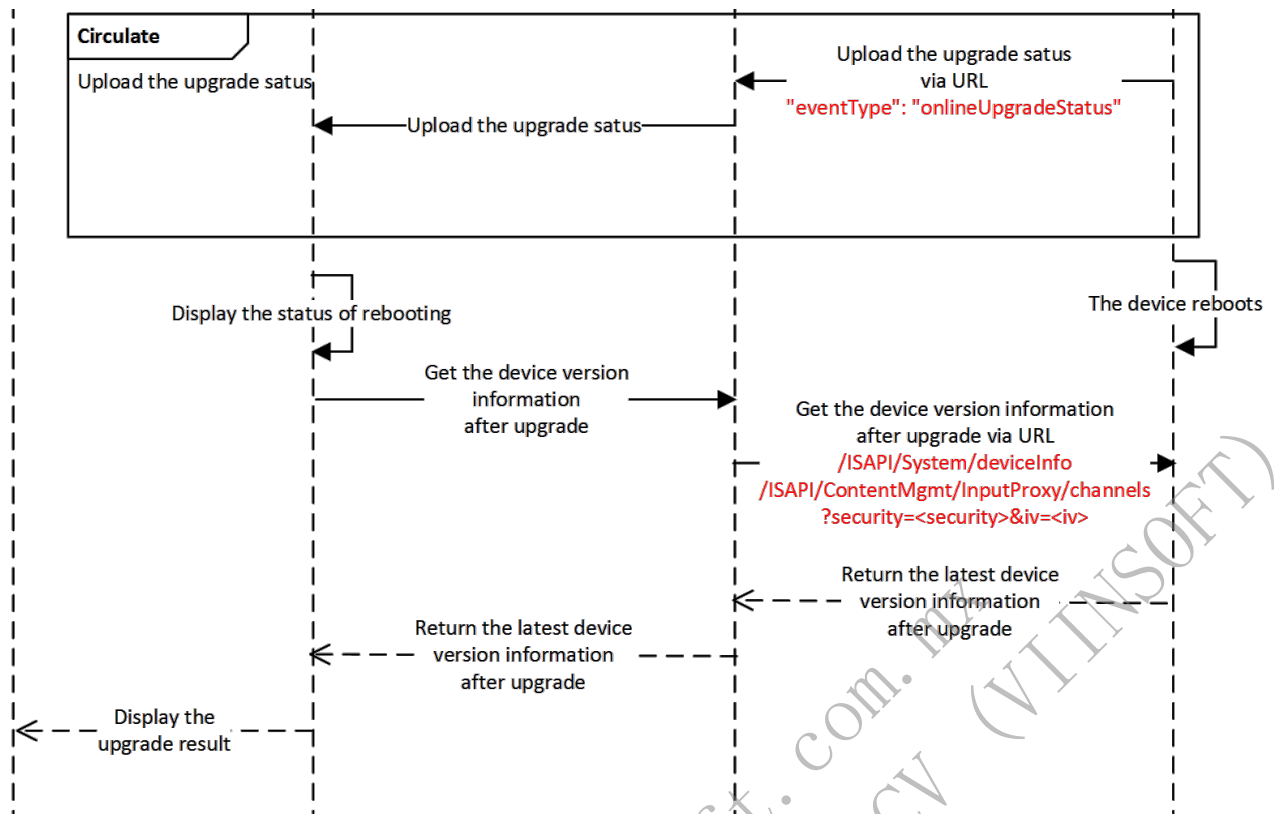

1. Search for device firmware ID on the platform: GET /ISAPI/System/firmwareCodeV2.
2. Search for the device upgrade information in DAC by device firmware ID on the platform. If there is an available new version, DAC will trigger an upgrade task and apply it to the device: POST /ISAPI/System/onlineUpgrade/task?format=json. You can specify to upgrade device (e.g., NVR) or sub-device (e.g., IPC) via the node <channel>.
3. During the upgrade, you can get the real-time upgrade progress on the platform: GET /ISAPI/System/onlineUpgrade/status.
4. After the device upgrade is finished, the device will upload the "onlineUpgradeStatus" (upgrade status), and will reboot automatically.
5. After the upgrade and reboot are finished, you can get the latest device version information on the platform.
 - Get the device (e.g., NVR) version information: GET /ISAPI/System/deviceInfo.
 - Get the sub-device (e.g., IPC) version information: GET /ISAPI/ContentMgmt/InputProxy/channels?security=<security>&iv=<iv>.

6 Video (General)

6.1 . OSD

6.1.1 Introduction to the Function

On-screen display is applied in the display interface of cameras, and is used to display some characters or graphics on the video to provide some information to the audience. After OSD configurations on the client software, the configured information text will be overlaid on the video stream of cameras and displayed on the screen.

The typical application scenarios of dynamic OSD: elevator floor number overlay for elevator monitoring, characters overlay for toll stations on highway/road, notification information overlay during live video programs. The typical application scenarios of static OSD: fixed information (such as camera position, date, time) overlay on the video signal.

6.1.2 API Calling Flow

6.1.2.1 OSD

1. The client software gets the OSD capability of a specified channel: GET
/ISAPI/System/Video/inputs/channels/<channelID>/overlays/capabilities.
2. The client software configures OSD parameters, including whether to enable OSD, custom text overlay, time overlay, and overlay format, for a specified channel.

Get: GET /ISAPI/System/Video/inputs/channels/<channelID>/overlays.

Set: PUT /ISAPI/System/Video/inputs/channels/<channelID>/overlays.

Remarks:

- o The configuration URL supports various parameters, including custom text overlay, channel name overlay, time overlay, overlay format, and so on. Some of these parameters can also be configured by other URLs, as shown below: `TextOverlayList` can also be configured via URL of custom text overlay.
`channelNameOverlay` can also be configured via URL of channel name overlay.
`DateTimeOverlay` can also be configured via URL of channel time overlay.
- o The overlaid information alignment mode (defined by `alignment`) refers to the alignment mode of custom text:
`customize`: custom mode. The client software sends the overlay position coordinates of custom text to the device, and the device will overlay the characters on the stream for display according to the position coordinates.
`alignRight`: right align. The device will display custom text on the right boundary of screen.
`alignLeft`: left align. The device will display custom text on the left boundary of screen.
`allRight`: all right align. The device will display all overlay contents, including custom text, the channel name, the time on the right boundary of screen.
`allLeft`: all left align. The device will display all overlay contents, including custom text, the channel name, the time on the left boundary of screen.

6.1.2.2 Custom Text Overlay

1. The client software gets the OSD capability of a specified channel: GET
/ISAPI/System/Video/inputs/channels/<channelID>/overlays/capabilities. If `TextOverlayList` is returned, it indicates that custom text overlay is supported and `size` defines the maximum number of custom texts.
2. The client software configures custom text OSD. `textID` refers to the custom text No., and the value range is: [1, `size`]:

Create a custom text for a specified channel: POST

/ISAPI/System/Video/inputs/channels/<channelID>/overlays/text.

Get overlay parameters of a custom text for a specified channel: GET

/ISAPI/System/Video/inputs/channels/<channelID>/overlays/text/<textID>.

Set overlay parameters of a custom text for a specified channel: PUT

/ISAPI/System/Video/inputs/channels/<channelID>/overlays/text/<textID>.

Delete a custom text: DELETE /ISAPI/System/Video/inputs/channels/<channelID>/overlays/text/<textID>.

Get overlay parameters of all custom texts for a specified channel: GET

/ISAPI/System/Video/inputs/channels/<channelID>/overlays/text.

Set overlay parameters of all custom texts for a specified channel: PUT
/ISAPI/System/Video/inputs/channels/<channelID>/overlays/text.

Delete all custom texts for a specified channel: DELETE
/ISAPI/System/Video/inputs/channels/<channelID>/overlays/text.

6.1.2.3 Channel Name Overlay

1. The client software gets the OSD capability of a specified channel: GET
/ISAPI/System/Video/inputs/channels/<channelID>/overlays/capabilities. If channelNameOverlay is returned, it indicates that channel name overlay is supported.
2. The client software configures the channel name overlay, including whether to enable channel name overlay, overlay position, and so on.

Get channel name overlay parameters: GET
/ISAPI/System/Video/inputs/channels/<channelID>/overlays/channelNameOverlay.

Set channel name overlay parameters: PUT
/ISAPI/System/Video/inputs/channels/<channelID>/overlays/channelNameOverlay.

6.1.2.4 Channel Time Overlay

1. The client software gets the OSD capability of a specified channel: GET
/ISAPI/System/Video/inputs/channels/<channelID>/overlays/capabilities. If DateTimeOverlay is returned, it indicates that channel time overlay is supported.
2. The client software configures the channel time overlay, including whether to enable channel time overlay, overlay position, date format, and so on.

Get channel time overlay parameters: GET
/ISAPI/System/Video/inputs/channels/<channelID>/overlays/dateTimeOverlay.

Set channel time overlay parameters: PUT
/ISAPI/System/Video/inputs/channels/<channelID>/overlays/dateTimeOverlay.

6.2 Async Capturing Manually

6.2.1 Introduction to the Function

The client sends a capture command to the device, and the device immediately responds by returning the URL of the storage server where the captured picture is stored. The client can request image data from the storage server based on the received URL. It is suitable for the limited network bandwidth between the client and the device or the client centrally manages a large number of devices. The client can choose to use the image URL address carried in the alarm content to request pictures from the storage server when the network conditions improve or there is no concurrency of a large number of requests, so as to reduce the probability of image download failure and the risk of network congestion.

6.2.2 API Calling Flow

1. The client gets the system capability: GET /ISAPI/System/capabilities, and if isSupportSnapshotAsync is returned and its value is true, async manual capturing shall be supported.
2. (Optional) The client gets the async manual capturing capability of a specified channel: GET /ISAPI/Streaming/channels/<channelID>/picture/async/capabilities?format=json.
3. The client controls the specified channel to manually and asynchronously capture pictures: GET /ISAPI/Streaming/channels/<channelID>/picture/async?format=json&imageType=<imageType>&URLType=<URLType>, and the device returns the URL of the storage server for capturing pictures.

Remarks:

- If the step 2 returns a failure during the integration, it is recommended that you check whether the channel supports async manual capturing according to steps 1 and 3.


6.3 Live View

6.3.1 Introduction to the Function

Supports getting and setting stream media parameters of devices such as resolution, coding format, and stream type.

Supports streaming from products via RTSP (Real Time Streaming Protocol, see details in [RFC 7826](#)).

6.3.2 API Calling Flow

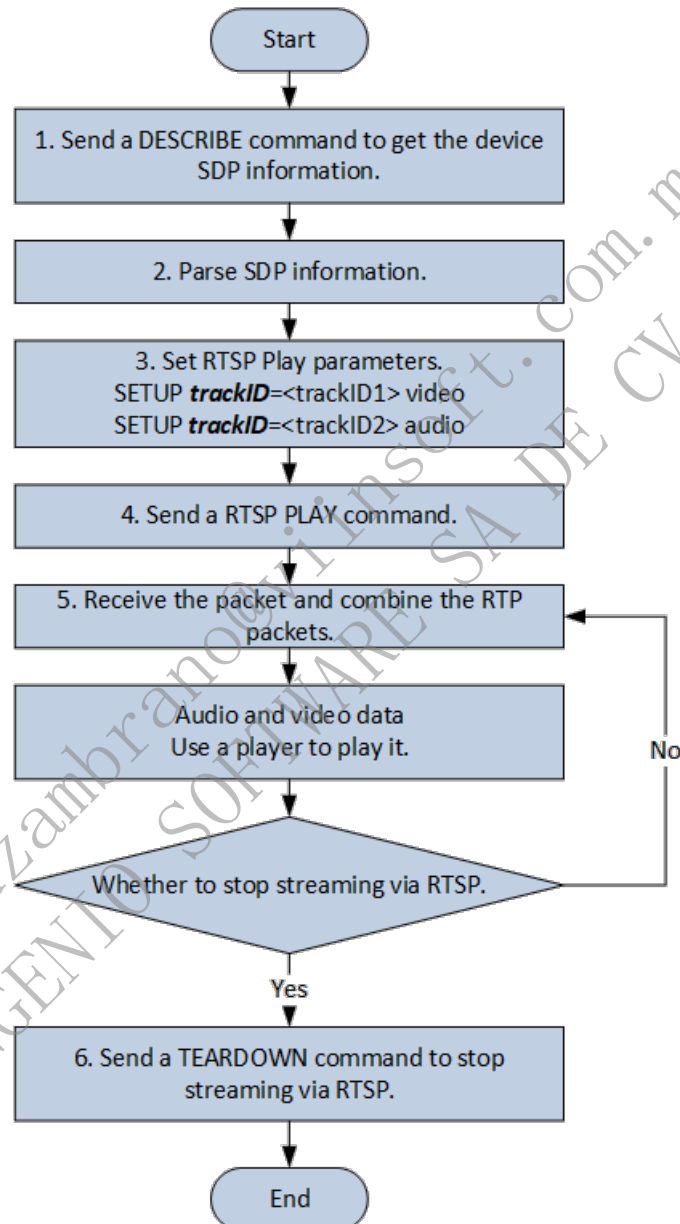

1. A client sends RTSP DESCRIBE commands such as `DESCRIBE /ISAPI/Streaming/channels/101 RTSP/1.0`; Digest authentication with devices is required.
2. The client parses the media SDP information returned by the device.
3. Set RTSP play parameters, set the track ID parsed from SDP information via SETUP commands. For example, trackID=1 indicates videos while trackID=2 indicates audios.
4. The client sends an RTSP PLAY command, and device will send audio stream, video stream, and metadata in the format of `PLAY /ISAPI/Streaming/channels/101 RTSP/1.0`.
5. The client receives the RTP package sent by device. Divided RTP packets should be assembled on the client before being parsed.
6. The client sends the command RTSP TEARDOWN to stop streaming.

Notes:

- Digest authentication is required in RTSP playback. The method is the same as that of ISAPI digest authentication.
- The address format for streaming from devices is `rtsp://<host>[:port]/ISAPI/Streaming/channels/<ID>`, of which `<host>` is the device IP address, `[:port]` is optional, and 554 by default, `<ID>` is the device channel ID * 100 + stream type (1-main stream, 2-sub-stream, 3-third stream); for example, the IP address of the target device is 172.7.203.11, and if the channel number is 172, the streaming address will be `rtsp://172.7.203.11:554/ISAPI/Streaming/channels/1701`.
- RTSP also supports containing user names and passwords in URL. The format is `rtsp://username:password@[address]:[port]/Streaming/Channels/[id](?parm1=value1&parm2=-value2...)`, such as `/Streaming/Channels/101?transportmode=unicast`.

6.3.3. Example

1. A client sends an RTSP DESCRIBE request.

```
DESCRIBE rtsp://10.21.84.147:554/ISAPI/Streaming/channels/101 RTSP/1.0
CSeq:0
Accept:application/sdp
User-Agent:NKPlayer-1.00.00.081112
```

2. Server responds that authentication is required.

```
RTSP/1.0 401 Unauthorized
CSeq: 0
WWW-Authenticate: Digest realm="3521781c29acb312330dd668", nonce="026019333", algorithm="MD5"
```

3. The client sends an RTSP DESCRIBE request with authentication information again.

```
DESCRIBE rtsp://10.21.84.147:554/ISAPI/Streaming/channels/101 RTSP/1.0
CSeq:1
Accept:application/sdp
Authorization: Digest username="admin", realm="3521781c29acb31230dd668", nonce="026019333", uri="rtsp://10.21.84.147:554/ISAPI/Streaming/channels/101",
response="76a2c9c5b8edbd49838013cf1cf27941"
User-Agent:NKPlayer-1.00.00.081112
```

4. The device responds to SDP information.

```
RTPSP/1.0 200 OK  
CSeq: 1  
Content-Type: application/sdp  
Content-Length: 571  
Date: Tue, 17 Nov 2020 02:09:45 GMT  
  
v=0  
o=- 1109162014219182 0 IN IP4 0.0.0.0  
s=Media Server V4.22.126  
i=Media Server Session Description : standard  
e=NONE  
c=IN IP4 0.0.0.0  
t=0 0  
a=control:*  
b=AS:6154  
a=range:npt=now-  
m=video 0 RTP/AVP 96  
i=Video Media  
a=rtpmap:96 H264/90000  
a=fmtp:96 profile-level-id=4D0014;packetization-mode=0  
a=control:trackID=1  
b=AS:6144  
m=audio 0 RTP/AVP 8  
i=Audio Media  
a=rtpmap:8 PCMA/8000  
a=control:trackID=2  
b=AS:10  
a=Media_header:MEDIAINFO=494D4B48020100000200000111710110401F00000FA000000000000000000000000000000;  
a=appversion:1.0
```

5. The client sends RTSP SETUP requests, and the server responds to them.

```
SETUP rtsp://10.21.84.147:554/ISAPI/Streaming/channels/101/trackID=1 RTSP/1.0
CSeq:2
Authorization: Digest username="admin", realm="3521781c29acb312330dd668", nonce="026019333", uri="rtsp://10.21.84.147:554/ISAPI/Streaming/channels/101",
response="ff343f5ff82deb028dd9b4932cc44201"
Transport:RTP/AVP/TCP;unicast;interleaved=0-1;ssrc=0
User-Agent:NKPlayer-1.00.00.081112
```

```
RTSP/1.0 200 OK
Session: 1127293610;timeout=60
Transport: RTP/AVP/TCP;unicast;interleaved=0-1;ssrc=433122aa
CSeq: 2
Accept-Ranges: NPT
Media-Properties: No-Seeking, Time-Progressing, Time-Duration=0
Date: Tue, 17 Nov 2020 02:09:45 GMT
```

```
SETUP rtsp://10.21.84.147:554/ISAPI/Streaming/channels/101/trackID=2 RTSP/1.0
CSeq:3
Authorization: Digest username="admin", realm="3521781c29acb312330dd668", nonce="026019333", uri="rtsp://10.21.84.147:554/ISAPI/Streaming/channels/101",
response="ff343f5ff82deb028dd9b4932cc44201"
Session:1127293610;timeout=60
Transport:RTP/AVP/TCP;unicast;interleaved=2-3;ssrc=0
User-Agent:NKPlayer-1.00.00.081112
```

```
RTSP/1.0 200 OK
Session: 1127293610;timeout=60
Transport: RTP/AVP/TCP;unicast;interleaved=2-3;ssrc=433122ab
CSeq: 3
Accept-Ranges: NPT
Media-Properties: No-Seeking, Time-Progressing, Time-Duration=0
Date: Tue, 17 Nov 2020 02:09:45 GMT
```

6. The client sends an RTSP PLAY request.

```
PLAY rtsp://10.21.84.147:554/ISAPI/Streaming/channels/101 RTSP/1.0
CSeq:4
Authorization: Digest username="admin", realm="3521781c29acb312330dd668", nonce="026019333", uri="rtsp://10.21.84.147:554/ISAPI/Streaming/channels/101",
response="24edf8a6ff3ef767f7c49d1c847200bd"
Session:1127293610;timeout=60
Range:npt=0.000000-0.000000
User-Agent:NKPlayer-1.00.00.081112
```

7. The server sends audio and video stream data.

```
RTSP/1.0 200 OK
Session: 1127293610
CSeq: 4
Date: Tue, 17 Nov 2020 02:09:45 GMT

$. ....d1.w....C....".T....g....).i.....a....7.S...~J.....X....X.
```

8. The client sends an RTSP TEARDOWN request, and the server responds to it.

```
TEARDOWN rtsp://10.21.84.147:554/ISAPI/Streaming/channels/101 RTSP/1.0
CSeq:5
Authorization: Digest username="admin", realm="3521781c29acb312330dd668", nonce="026019333", uri="rtsp://10.21.84.147:554/ISAPI/Streaming/channels/101",
response="24edf8a6ff3ef767f7c49d1c847200bd"
Session:1127293610;timeout=60
Range:npt=0.000000-0.000000
User-Agent:NKPlayer-1.00.00.081112
```

```
RTSP/1.0 200 OK
Session: 1127293610
CSeq: 5
Date: Tue, 17 Nov 2020 02:09:50 GMT
```

6.4 Manual Capturing Events

6.4.1 Introduction to the Function

According to the preset information and capture interval configured by the client, the device manually captures images at the specified preset and reports the image information in the form of events. It is used for the client to identify emergency situations and perform an emergency patrol on some presets for analysis. It has a higher priority than the daily scheduled patrol capture. Common usage scenarios: according to the scheduled capturing event (eventType: imageCapture) rules, the store camera regularly audits in a number of key areas. If in the event of an emergency, and a worker wants to immediately re-inspect each area, you can set a manual capture rule to complete an independent audit. After the audit is completed, the camera will continue to audit according to the scheduled capturing rules.

6.4.2 API Calling Flow

1. The client gets the system capability: GET /ISAPI/System/capabilities, and if isSupportManualImageCapture returns true, manual capturing shall be supported.
2. The client gets manual capturing capability for a specified channel: GET /ISAPI/System/Video/inputs/channels/<channelID>/manualImageCapture/capabilities?format=json.
3. The client sets the parameters of manual capture events for a specified channel: Get parameters: GET /ISAPI/System/Video/inputs/channels/<channelID>/manualImageCapture?format=json. Set parameters: PUT /ISAPI/System/Video/inputs/channels/<channelID>/manualImageCapture?format=json.
4. Receive the event uploaded by the device in arming or listening mode: eventType: manualImageCapture.

Remarks:

- Each time the client sets manual capture event parameters, the channel immediately takes a patrol capture of the relevant presets. When the last preset capture is finished, the manual capture event ends.

6.5 Motion Detection

6.5.1 Introduction to the Function


Commonly used in unattended camera recording and automatic alarm, motion detection can help to reduce the cost of manual monitoring for public institutions and companies. Besides, it can greatly improve monitoring efficiency and accuracy by avoiding the errors of manual monitoring due to fatigue after long-time work. For example, it can be applied in home and company theft proof, as well as monitoring and alarm in institutions like medical organizations and nursing homes.

Motion detection has two modes: normal mode and expert mode.

Normal mode: the default mode of motion detection. In this mode, all detected areas only support a same sensitivity.

Expert mode: in this mode, every detected area can have its own detection sensitivity and percentage of objects in area. It supports configuring different sensitivities according to area types. For example, for the motion detection in the company hall, you can set higher detection sensitivity for the gate area to focus on people's entering and exiting.

6.5.2 API Calling Flow

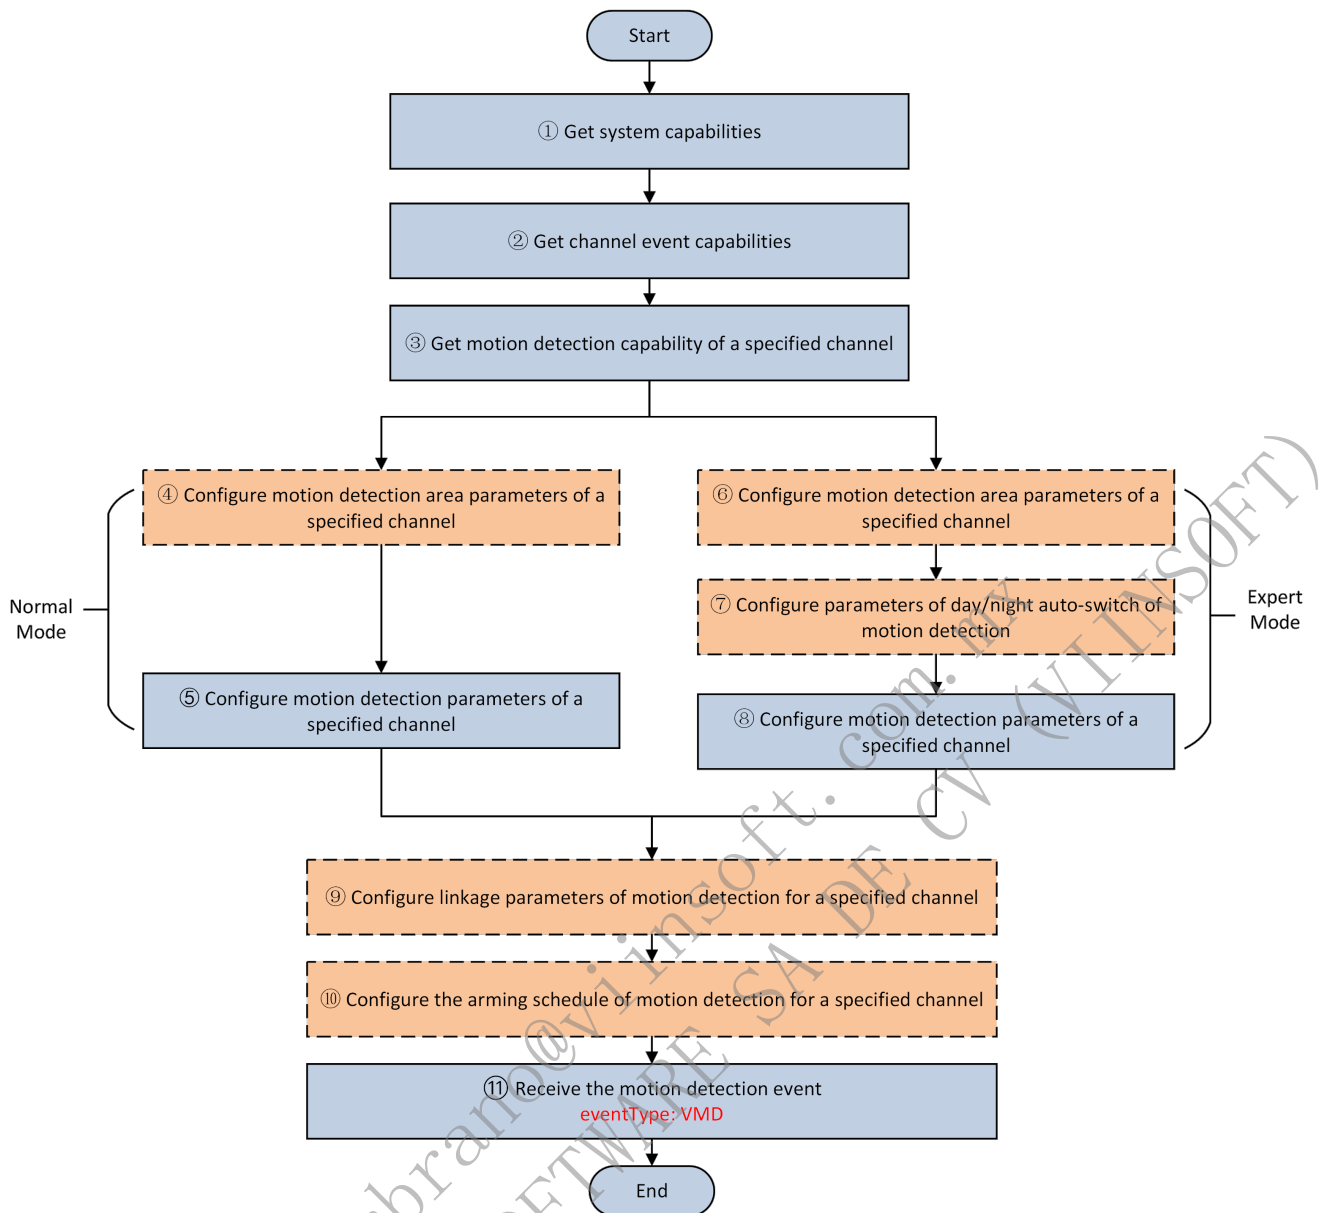

1. Get the system capability: GET /ISAPI/System/capabilities. If the node `isSupportMotionDetection` is returned and its value is `true`, it indicates that the device supports motion detection.
2. Get the device channel event capability. If the returned `eventType` contains `VMD`, it indicates that the corresponding channel supports motion detection.

Get the event capability of all channels: GET /ISAPI/Event/channels/capabilities.

Get the event capability of a specified channel: GET /ISAPI/Event/channels/<channelID>/capabilities.

3. Get the motion detection capability of a specified channel (normal mode): GET /ISAPI/System/Video/inputs/channels/<channelID>/motionDetection/capabilities.

Check the motion detection parameters (such as function enabling, detection sensitivity) supported by the device. You can check whether the device supports multiple areas via checking whether the node `regionType` contains `region`.

4. (Optional) Configure parameters of the motion detection area (normal mode).

Capability: GET /ISAPI/System/Video/inputs/channels/<channelID>/motionDetection/layout/capabilities.

Get: GET /ISAPI/System/Video/inputs/channels/<channelID>/motionDetection/layout?regionType=<regionType>. **Note:** If the device supports multiple areas of motion detection, for compatibility, both `<gridMap>` and `<RegionList>` will be returned regardless the `regionType` value in URL.

Configure: PUT /ISAPI/System/Video/inputs/channels/<channelID>/motionDetection/layout?regionType=<regionType>. **Note:** If the device supports multiple areas of motion detection, to set multiple areas, you need to input regionType=<region> in URL.

5. Configure the motion detection parameters (such as motion detection enabling, detection sensitivity) (normal mode).

Get: GET /ISAPI/System/Video/inputs/channels/<channelID>/motionDetection. **Note:** If the device supports multiple areas of motion detection, for compatibility, both <gridMap> and <RegionList> will be returned regardless the regionType value in URL.

Configure: PUT /ISAPI/System/Video/inputs/channels/<channelID>/motionDetection. **Note:** If the device supports multiple areas of motion detection, to set multiple areas, you need to input regionType=<region> in URL.

6. (Optional) Configure the parameters of motion detection area (expert mode). You can configure different detection conditions such as sensitivity for different areas.

Get: GET /ISAPI/System/Video/inputs/channels/<channelID>/motionDetectionExt/regions.

Configure: PUT /ISAPI/System/Video/inputs/channels/<channelID>/motionDetectionExt/regions.

7. (Optional) Configure day/night auto switch of motion detection (expert mode). You can configure the time switch schedule of day and night.

Get: GET /ISAPI/System/Video/inputs/channels/<channelID>/motionDetectionExt/switch.

Configure: PUT /ISAPI/System/Video/inputs/channels/<channelID>/motionDetectionExt/switch.

8. Configure motion detection conditions (expert mode).

Get: GET /ISAPI/System/Video/inputs/channels/<channelID>/motionDetectionExt.

Configure: PUT /ISAPI/System/Video/inputs/channels/<channelID>/motionDetectionExt.

9. (Optional) Configure linkage parameters of the motion detection.

Get: GET /ISAPI/Event/triggers/VMD-<channelID>.

Configure: PUT /ISAPI/Event/triggers/VMD-<channelID>.

Delete: DELETE /ISAPI/Event/triggers/VMD-<channelID>.

10. (Optional) Configure the arming schedule of motion detection.

Get: GET /ISAPI/Event/schedules/motionDetections/VMD_video<channelID>.

Configure: PUT /ISAPI/Event/schedules/motionDetections/VMD_video<channelID>.

11. Receive events reported by device in arming or listening mode: eventType:VMD.

Remarks:

1. For motion detection (normal mode), the uploaded VMD event includes device basic information only, such as channel No. and event time. For details, see 4.3.1 Motion Detection Event (Normal Mode).
2. For motion detection (expert mode), in addition to the device basic information, the uploaded VMD event includes the detection area ID, area coordinates and area detection sensitivity. For details, see 4.3.2 Motion Detection Event (Expert Mode).
3. In practical employment, you can select one mode as needed. There are no logical relations between the two modes.

6.5.3 Message Example

6.5.3.1 Motion Detection Event (Normal Mode)

```
<?xml version="1.0" encoding="UTF-8"?>
<EventNotificationAlert version="1.0" xmlns="urn:psalliance-org">
  <ipAddress>10.17.114.252</ipAddress>
  <protocolType>HTTP</protocolType>
  <macAddress>64:db:8b:6e:4f:08</macAddress>
  <channelID>1</channelID>
  <dateTime>2018-03-13T19:42:27+08:00</dateTime>
  <activePostCount>4</activePostCount>
  <eventType>VMD</eventType>
  <eventState>active</eventState>
  <eventDescription>Motion alarm</eventDescription>
  <channelName>Camera 01</channelName>
  <Extensions version="1.0" xmlns="urn:psalliance-org">
    <serialNumber xmlns="urn:selfextension:psiaext-ver10-xsd">DS-2DF8236IX-AELW20170718CCWR799562898X</serialNumber>
    <eventPush xmlns="urn:selfextension:psiaext-ver10-xsd">VMD&amp;&amp;DS-2DF8236IX-AELW20170718CCWR799562898X,2018-01-21T12:50:39+08:00,1,1.0</eventPush>
  </Extensions>
</EventNotificationAlert>
```

6.5.3.2 Motion Detection Event (Expert Mode)

```
<?xml version="1.0" encoding="UTF-8"?>
<EventNotificationAlert version="1.0" xmlns="urn:psalliance-org">
  <ipAddress>10.17.114.252</ipAddress>
  <protocolType>HTTP</protocolType>
  <macAddress>64:db:8b:6e:4f:08</macAddress>
  <channelID>1</channelID>
  <dateTime>2018-03-13T20:36:34+08:00</dateTime>
  <activePostCount>11</activePostCount>
  <eventType>VMD</eventType>
  <eventState>active</eventState>
  <eventDescription>Motion alarm</eventDescription>
  <DetectionRegionList>
    <DetectionRegionEntry>
      <regionID>1</regionID>
      <sensitivityLevel>50</sensitivityLevel>
      <RegionCoordinatesList>
        <RegionCoordinates>
          <positionX>216</positionX>
          <positionY>216</positionY>
        </RegionCoordinates>
        <RegionCoordinates>
          <positionX>756</positionX>
          <positionY>756</positionY>
        </RegionCoordinates>
        <RegionCoordinates>
          <positionX>756</positionX>
          <positionY>756</positionY>
        </RegionCoordinates>
        <RegionCoordinates>
          <positionX>216</positionX>
          <positionY>216</positionY>
        </RegionCoordinates>
      </RegionCoordinatesList>
    </DetectionRegionEntry>
  </DetectionRegionList>
  <channelName>Camera 01</channelName>
  <Extensions version="1.0" xmlns="urn:psalliance-org">
    <serialNumber xmlns="urn:selfextension:psiaext-ver10-xsd">DS-2DF8236IX-AELW20170718CCWR799562898X</serialNumber>
    <eventPush xmlns="urn:selfextension:psiaext-ver10-xsd">VMD&amp;&amp;DS-2DF8236IX-AELW20170718CCWR799562898X,2018-01-21T12:50:39+08:00,1,1.0</eventPush>
  </Extensions>
</EventNotificationAlert>
```


6.6 Scene Change Detection

6.6.1 Function Introduction

The scene change detection function identifies whether a scene has changed based on configured rules. Once a scene change is detected, an alarm is triggered.

This function is commonly used to monitor whether external forces have caused changes in camera's viewing angle. When the viewing angle is changed by external interference, or the monitoring scene is tampered, affecting normal monitoring, relevant personnel can be notified promptly to take actions.

6.6.2 API Calling Flow

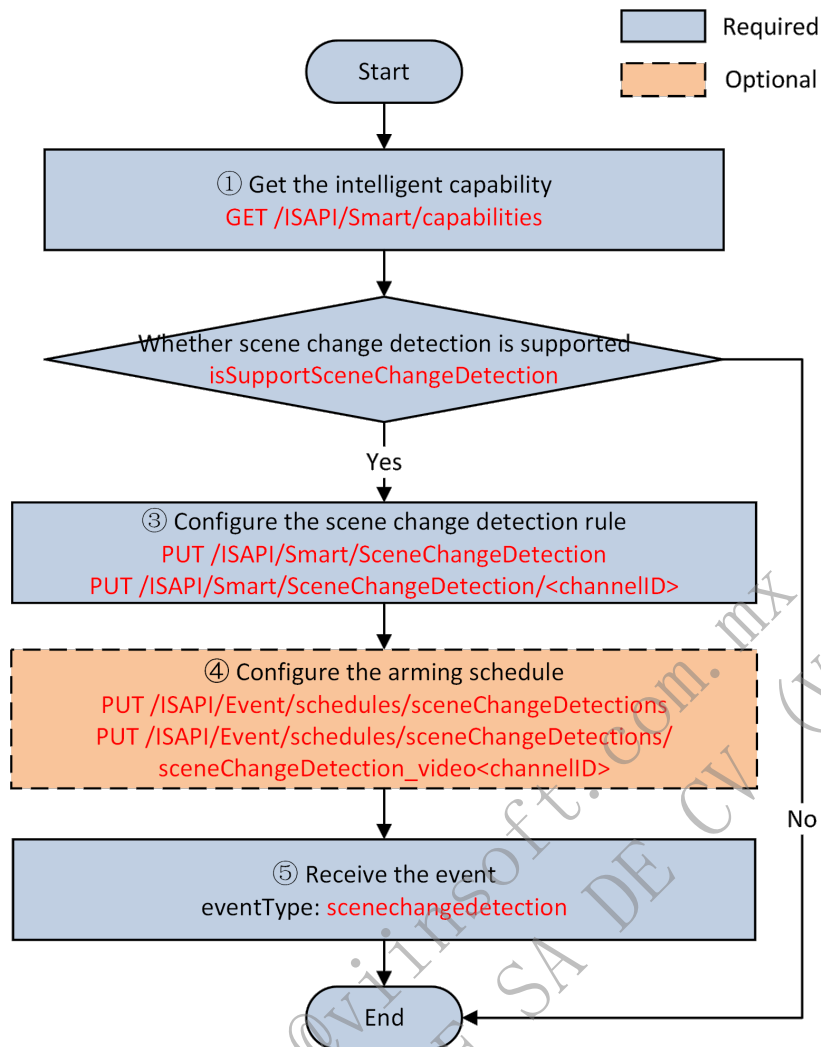

1. Get the device's intelligent capability.

GET /ISAPI/Smart/capabilities. If the response returns isSupportSceneChangeDetection as true, it indicates that the device supports the scene change detection.

2. Configure the detection rules.

- Get the scene change detection capability: GET /ISAPI/Smart/SceneChangeDetection/<channelID>/capabilities.
- Get scene change detection parameters: GET /ISAPI/Smart/SceneChangeDetection.
- Set scene change detection parameters: PUT /ISAPI/Smart/SceneChangeDetection.
- Get scene change detection parameters for a specific channel: GET /ISAPI/Smart/SceneChangeDetection/<channelID>.
- Set scene change detection parameters for a specific channel: PUT /ISAPI/Smart/SceneChangeDetection/<channelID>.

Note: A higher **sensitivityLevel** makes the camera more sensitive to scene changes. Adjust it based on actual environment.

3. (Optional) Configure the arming schedule.

- Get schedule parameters of scene change detection for all channels: GET /ISAPI/Event/schedules/sceneChangeDetections.
- Set schedule parameters of scene change detection for all channels: PUT /ISAPI/Event/schedules/sceneChangeDetections.

- Get schedule parameters of scene change detection for a specific channel: GET `/ISAPI/Event/schedules/sceneChangeDetections/sceneChangeDetection_video<channelID>`.
- Set schedule parameters of scene change detection for a specific channel: PUT `/ISAPI/Event/schedules/sceneChangeDetections/sceneChangeDetection_video<channelID>`.

Note:

- Up to 8 time periods can be configured per day.
- Time periods must not overlap.

4. Receive the event ("eventType": "scenechangedetection").

6.7 Sync Capturing Manually

6.7.1 Introduction to the Function

The client sends a capture command to the device, and the device immediately returns the captured picture data in respond. It is often used in scenarios with high network bandwidth between clients and devices to facilitate the rapid transmission of image data, such as a LAN built on a company campus.

6.7.2 API Calling Flow

1. (Optional) The client gets the system capability: GET `/ISAPI/System/capabilities`, and if `isSupportManualSnapPicture` returns `true`, sync manual capturing shall be supported.
2. (Optional) The client gets sync manual capturing capability for a specified channel: GET `/ISAPI/Streaming/channels/<trackStreamID>/picture/capabilities?format=json`.
3. The client controls the specified channel to perform sync manual capturing: GET `/ISAPI/Streaming/channels/<trackStreamID>/picture?snapShotImageType=<snapShotImageType>&videoResolutionWidth=<videoResolutionWidth>&videoResolutionHeight=<videoResolutionHeight>&imageQuality=<imageQuality>&x=<x>&y=<y>&hight=<hight>&width=<width>`, and the device returns the captured binary picture data.

Remarks:

- If you only need to capture a JPEG picture, you can jump to step 3.
- If you need to capture pictures other than JPEG or capture in the designated area of the video, you need to perform steps 1 and 2 to determine whether the device supports it. If it does, go to step 3.
- In step 3, the value ranges of `videoResolutionWidth` and `videoResolutionHeight` are the same as `<videoResolutionWidth>` and `<videoResolutionHeight>` returned by GET `/ISAPI/Streaming/channels/<trackStreamID>/capabilities`.


6.8 Video Privacy Mask

6.8.1 Introduction to the Function

Video privacy mask is to cover certain areas on the live image to protect personal privacy from being live viewed and recorded. You can use the masking method such as a mosaic or black frame as needed to make the area invisible. The device supporting privacy mask can specify the area(s) to be masked permanently on the live image, as a result of which the live view and recorded video during the live view will be influenced and the image cannot be restored. The following image shows the effect of masking an area with the mosaic.

6.8.2 API Calling Flow

6.8.2.1 Video Privacy Mask

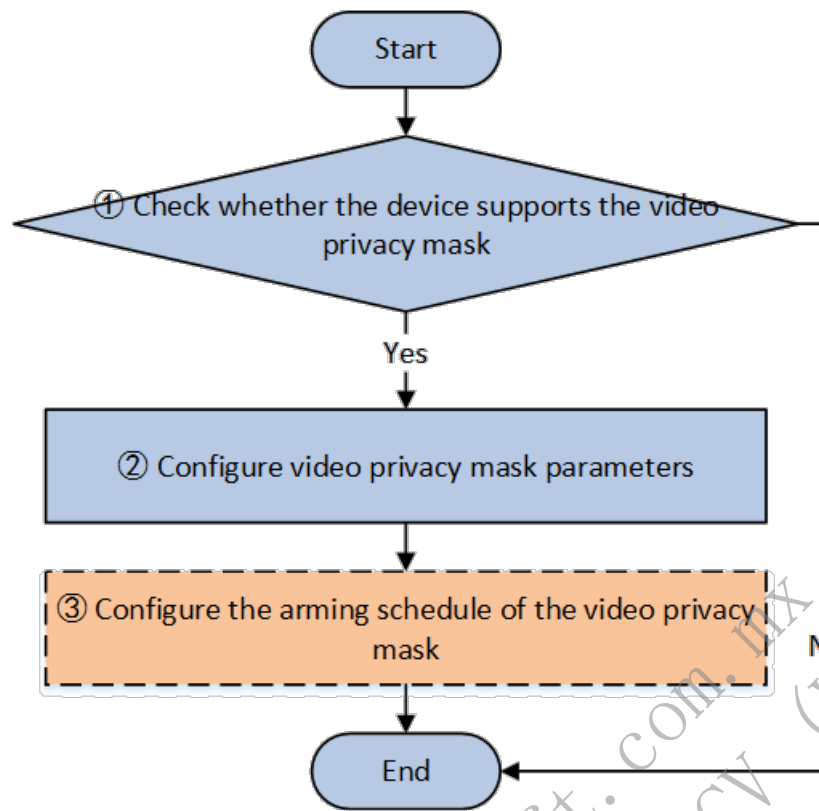

1. Check whether the device supports the video privacy mask. Get the device's system capability: `GET /ISAPI/System/capabilities`. If `isSupportPrivacyMask` is returned and its value is true, it indicates that the video privacy mask is supported by the device.

2. Configure the video privacy mask parameters. You can specify sensitive area(s) to be masked on the live image (related field: `PrivacyMaskRegionList`), and up to 8 areas are supported. You can also configure the masking type, such as mosaic, black frame, and red frame (related field: `maskType`). Get the video privacy mask capability: `GET /ISAPI/System/Video/inputs/channels/<channelID>/privacyMask/privacyMaskCap`. Configure the video privacy mask parameters: `PUT /ISAPI/System/Video/inputs/channels/<channelID>/privacyMask`. Get the video privacy mask parameters: `GET /ISAPI/System/Video/inputs/channels/<channelID>/privacyMask`.


3. (Optional) Configure the arming schedule of the video privacy mask. You can configure the privacy mask schedule as needed. If not configured, the privacy mask is performed 24 hours a day by default. Get the video privacy mask schedule: `GET /ISAPI/Event/schedules/privacyMask/privacyMask-<channelID>`. Set the video privacy mask schedule: `PUT /ISAPI/Event/schedules/privacyMask/privacyMask-<channelID>`.

7 Video Management

7.1 . Scheduled Recording

7.1.1 Introduction to the Function

The web interface for reference is shown below.

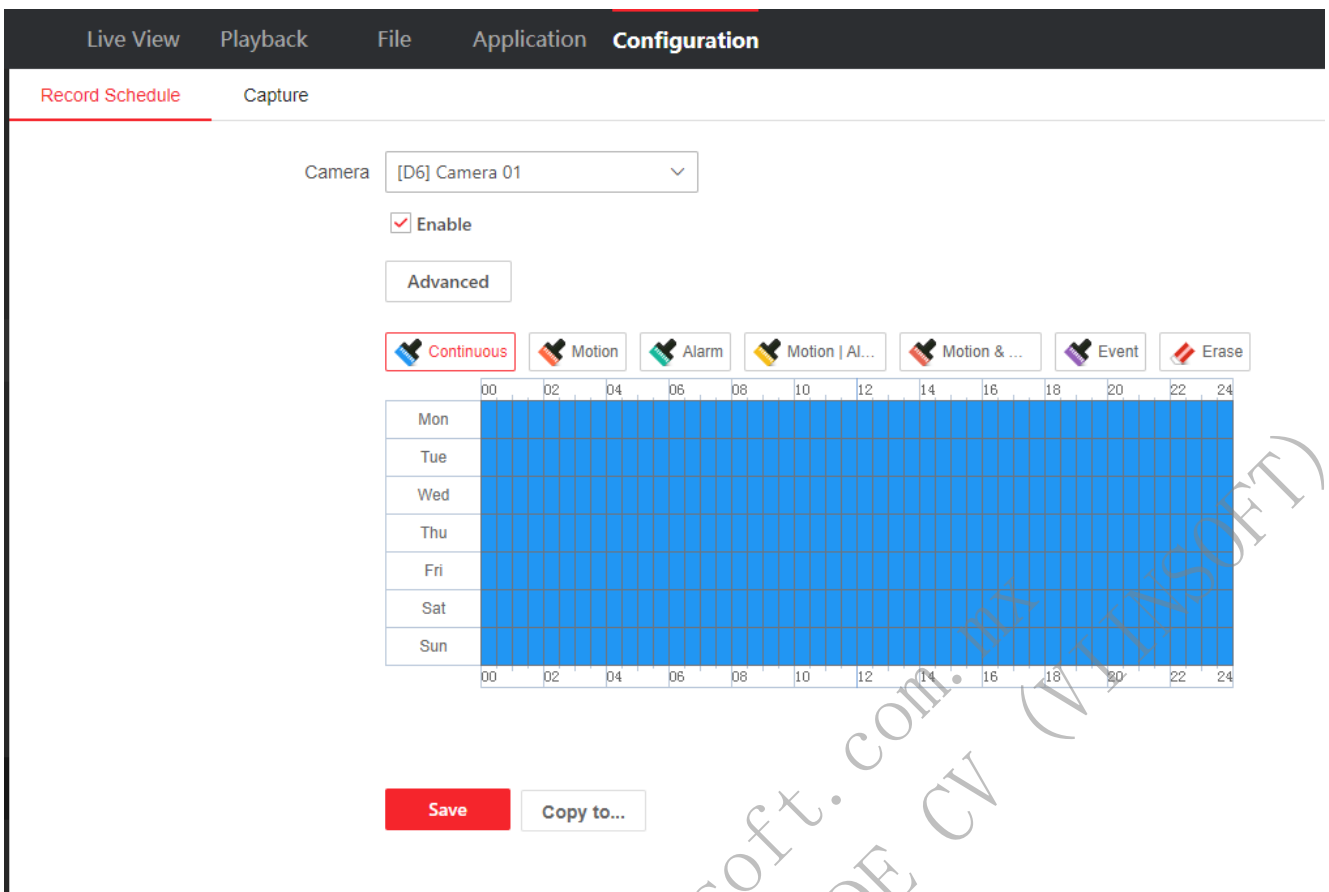

7.1.2 API Calling Flow

1. The client software gets the device system capability: `GET /ISAPI/System/capabilities`. When `isSupportScheduledRecordUpload` is returned and its value is true, it indicates that scheduled recording is supported.
2. The client software configure schedule parameters of scheduled recording. You can configure recording schedules for all channels or configure the recording schedule for a specified channel.

- Recording schedule management for all channels: Add a recording schedule: `POST /ISAPI/ContentMgmt/record/tracks`. Get all recording schedules parameters: `GET /ISAPI/ContentMgmt/record/tracks`. Set all recording schedules: `PUT /ISAPI/ContentMgmt/record/tracks`.
- Recording schedule management for a specified channel: Get the capability of configuring the recording schedule for a specified channel: `GET /ISAPI/ContentMgmt/record/tracks/<trackStreamID>/capabilities?security=<security>&iv=<iv>`. Get the recording schedule parameters for a specified channel: `GET /ISAPI/ContentMgmt/record/tracks/<trackStreamID>?security=<security>&iv=<iv>`. Set the recording schedule for a specified channel: `PUT /ISAPI/ContentMgmt/record/tracks/<trackStreamID>?security=<security>&iv=<iv>`. Delete the recording schedule for a specified channel: `DELETE /ISAPI/ContentMgmt/record/tracks/<trackStreamID>?security=<security>&iv=<iv>`.

7.2 Search for Event Video

7.2.1 Introduction to the Function

This function supports searching for the videos of linked cameras when an event occurs.

7.2.2 API Calling Flow

1. Check whether the device supports searching for event videos.

Get the device system capability: `GET /ISAPI/System/capabilities`. If the node `<SerialCap>` is returned and its value is true, the device supports searching for event videos.

2. Search for event videos: `POST /ISAPI/ContentMgmt/eventRecordSearch?format=json`.

7.3 Search for Videos and Pictures

7.3.1 Introduction to the Function

This function supports searching for the video/picture data stored in the device. Video data source includes scheduled recording, manual recording and event recording, and picture data source includes scheduled capture and event linkage capture.

7.3.2 API Calling Flow

1. Check the device's supported time format. Get device's system capabilities: `GET /ISAPI/System/capabilities`.
 - o If node `isSupportTimeTypeSTD` is returned with value `true`, it indicates that the device supports the ISO 8601 standard time, and URLs of functions related to ISO 8601 time parameters support additional query parameter `timeType=STD`.
 - o If node `isSupportTimeTypeSTD` is not returned. Call `GET /ISAPI/System/time/timeType?format=json` to get the time type. If the `type` field returns `local`, it indicates that the device video search and playback use local time. If the `type` field returns `UTC`, it indicates that the device video search and playback use ISO 8601 time format.
 - o If the device does not support API `GET /ISAPI/System/time/timeType?format=json`. Call `GET /ISAPI/System/deviceInfo` and check the time type of device via field `deviceType`. If `deviceType` (device type) is CVR, NVR, DVR, or ITCCAM, the device video search and playback use local time. Otherwise, follow the protocol specifications and use the TZ format, for example, `2024-05-13T16:00:00Z`.
2. Check whether the device supports video/picture search. Get the device's video search capability via `GET /ISAPI/ContentMgmt/capabilities`. If `<isSupportRecordSearch>` is returned, it indicates that the device supports video/picture search.
3. Search for videos and pictures:
 - i. Get the capability of searching for videos and pictures: `GET /ISAPI/ContentMgmt/capabilities`. Get the picture search types that the device supports searching via the node `<pictureSearchType>` returned in the message, including pictures of event capture, scheduled capture and manual capture. Get the video types that the device supports searching for via the node `<recordSearchType>` returned in the message.
 - ii. Get the parameters capability of searching for videos and pictures: `GET /ISAPI/ContentMgmt/search/capabilities`. Get the periods when the device supports searching for videos and pictures via the node `<timeSpanList>` returned in the message. Get the file tags that the device supports searching via the node `<labelSearch>` returned in the message.
 - iii. Search for videos and pictures: `POST /ISAPI/ContentMgmt/search?security=<security>&iv=<iv>`.
 - o The URL containing `timeType=STD` indicates that the time in the input and output messages are according to the ISO 8601 time format. The URL without `timeType=STD` indicates to use device's original time.
 - o Check whether it is picture or video to be searched via the node `<trackID>` in the request message `<CMSearchDescription>`. "101" (search for the main stream videos of channel 1), "103" (search for the pictures of channel 1), and it is channel 1 by default.

Note:

- o The value of `CMSearchDescription.trackIDList.trackID` is obtained from the `id` value returned in the response message of `GET /ISAPI/ContentMgmt/record/tracks`. The meaning of `id`: `101` is the main stream of channel 1, `102` is the sub-stream of channel 1, `103` is the capture schedule of channel 1, `201` is the main stream of channel 2, and so on. When the device saves only one copy of channel videos, it does not distinguish between the main and sub stream, and only supports setting `trackID` to `xx1`.
- o If `<trackIDList>` is returned in response message of `GET /ISAPI/ContentMgmt/search/capabilities`, it indicates that the device supports accurate search, and the returned value in `<trackIDList>` indicates the channels that support independent video search.

7.4 Search for Videos by Target Type

7.4.1 Introduction to the Function

This function realizes persons, vehicles or mixed targets distinguishing when searching for motion detection event videos. Searching for videos by target type is newly added. The search conditions include target type information, and the returned result of the search contains the start and end time as well as the file name of the video.

7.4.2 API Calling Flow

1. Check whether the device supports searching by target type:

Get the device capability: `GET /ISAPI/System/capabilities`. If the node is returned and its value is true, it indicates that the device supports searching by target type. Currently, the device supports searching by person and by vehicle.

2. Get the capability of searching by target type: `GET /ISAPI/ContentMgmt/SearchByTargetType/capabilities?format=json`.

3. Search for videos by target type: `POST /ISAPI/ContentMgmt/SearchByTargetType?format=json`.

8 PTZ

8.1 . PTZ Lock

8.1.1 Introduction to the Function

The client can control a network camera's PTZ lock. During the locked period, the PTZ linked with alarm events will not work, but manual rotation is available, until the client unlocks the PTZ. This function can be used for long-term monitoring of key locations to prevent the lens from being moved. When configuring or modifying intelligent applications that involve patrol, the PTZ should be locked and then unlocked after the configuration is completed to achieve internal control of the intelligent application's operation, while the actual PTZ operation remains functional.

8.1.2 API Calling Flow

1. (Client) Get the PTZ capabilities: `GET /ISAPI/PTZCtrl/channels/<channelID>/capabilities`. The returned `ManualPTZLockCap` indicates the support for manual PTZ control locking;

2. (Client) Control PTZ manually:

Manually lock the PTZ: `PUT /ISAPI/PTZCtrl/channels/<channelID>/manualPTZLock?format=json`;

Manually unlock the PTZ: `PUT /ISAPI/PTZCtrl/channels/<channelID>/manualPTZUnlock?format=json`.

3. (Optional) The client configures the PTZ lock parameters to specify the lock duration:

Capability: `GET /ISAPI/PTZCtrl/channels/<channelID>/capabilities`. The returned `lockTime` indicates the maximum lock duration.

Configure: `PUT /ISAPI/PTZCtrl/channels/<channelID>/lockPTZ`.

Get: `GET /ISAPI/PTZCtrl/channels/<channelID>/lockPTZ`.

4. The client gets the remaining time for PTZ unlock: `GET /ISAPI/PTZCtrl/channels/<channelID>/manualPTZLockCfg?format=json`.

8.2 Auxiliary Device Control

8.2.1 Introduction to the Function

The PTZ auxiliary devices help the device better display video content. The auxiliary devices includes lights, wipers, fans, and heaters. This function is used to control PTZ auxiliary devices.

8.2.2 API Calling Flow

1. (Client) Get the PTZ capabilities: `GET /ISAPI/PTZCtrl/channels/<channelID>/capabilities`. The returned `PTZAuxType` indicates the support for PTZ auxiliary device control;
2. The client configures the PTZ auxiliary device parameters to control the auxiliary devices. It is recommended to first get all auxiliary device parameters before modifying parameter configurations:

(Optional) Get all auxiliary device parameters: `GET /ISAPI/PTZCtrl/channels/<channelID>/auxcontrols`;

(Optional) Get a single auxiliary device parameter: `GET /ISAPI/PTZCtrl/channels/<channelID>/auxcontrols/<auxCtrlID>`;

(Optional) Configure auxiliary device parameters: `PUT /ISAPI/PTZCtrl/channels/<channelID>/auxcontrols`;

Configure a single auxiliary device parameter: `PUT /ISAPI/PTZCtrl/channels/<channelID>/auxcontrols/<auxCtrlID>`.

Notes:

The `id` in the parameter configuration message corresponds to the `auxCtrlID` in the `url`, which is the auxiliary device index and starts from 1 by default.


8.3 PTZ 3D Positioning Control

8.3.1 Introduction to the Function

Supports centering a point in the video image, and supports centering and zooming a rectangular area in the video image.

8.3.2 API Calling Flow

1. (Client) Get the PTZ capabilities: `GET /ISAPI/PTZCtrl/channels/<channelID>/capabilities`. The returned `isSupportPosition3D` indicates the support for 3D positioning control;
2. (Client) Send a control command to the device: `PUT /ISAPI/PTZCtrl/channels/<channelID>/position3D`:
 - The point in the video image is centered by the device, and the coordinates of `StartPoint` and `EndPoint` are the same;
 - The device zooms in and centers a rectangular area in the video image, and the X coordinate value of `StartPoint` is smaller than that of `EndPoint`;
 - The device zooms out and centers a rectangular area in the video image, and the X coordinate value of `StartPoint` is greater than that of `EndPoint`.

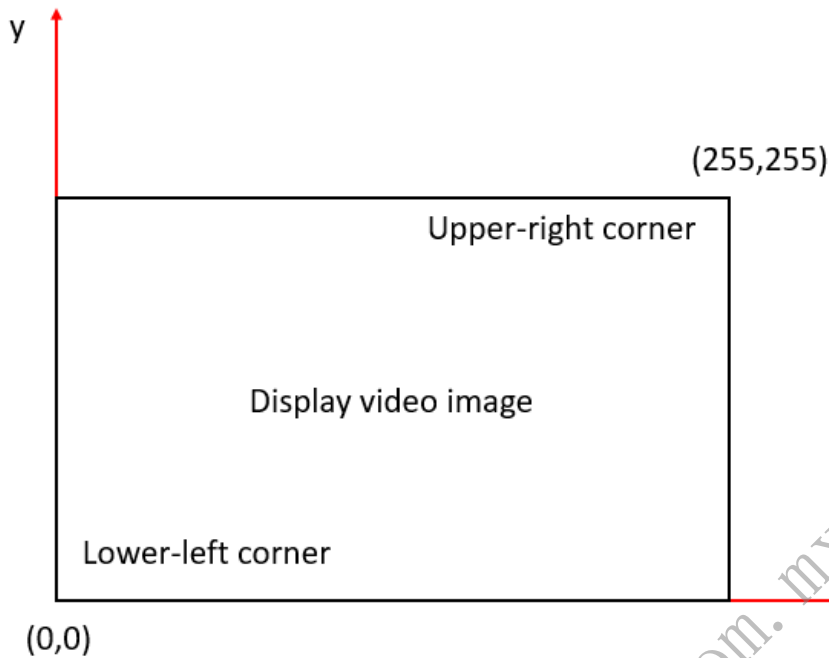

8.4 PTZ Absolute Position

8.4.1 Introduction to the Function

The PTZ absolute position is unique and remains the same. The client can record certain PTZ absolute positions in actual application scenarios to repeatedly inspect at specified positions. For example, in a supermarket, record the PTZ absolute position of the cash register and inspect the position periodically.

8.4.2 API Calling Flow

1. (Client) Get the PTZ capabilities: `GET /ISAPI/PTZCtrl/channels/<channelID>/capabilities`. the returned `isSupportAbsoluteEx` indicates the support for high-precision absolute PTZ movement control;
2. (Client) Get the high-precision absolute PTZ movement control capabilities: `GET /ISAPI/PTZCtrl/channels/<channelID>/RailwayRobot/capabilities?format=json`. The value range of control parameters will be returned;
3. The client specifies the PTZ to move to an absolute position: `PUT /ISAPI/PTZCtrl/channels/<channelID>/absoluteEx`. The `elevation` and `azimuth` represent the angles in the vertical and horizontal directions, `absoluteZoom` represents the zoom range, `focus` represents the focus range, and `absoluteRotate` represents the absolute rotation angle.
4. (Client) Get the PTZ absolute position: `GET /ISAPI/PTZCtrl/channels/<channelID>/absoluteEx`.

Notes:

- The zero coordinate position of `elevation` and `azimuth`, i.e., PT(0,0), can be specified by `PUT /ISAPI/PTZCtrl/channels/<channelID>/homeposition`.

8.5 PTZ Manual Control

8.5.1 Introduction to the Function

Adjust the horizontal and vertical positions of the PTZ, and control the zoom and focus of the lens at specified rotation/changing speeds. The client adjusts PTZ continuously through applying control commands, which is usually used for manual direction adjustment in remote live view.

8.5.2 API Calling Flow

1. (Client) Get the PTZ capabilities: `GET /ISAPI/PTZCtrl/channels/<channelID>/capabilities`. The returned

`ContinuousPanTiltSpace` in the message indicates the support for PTZ manual control;

2. The client sends a control command to the device: `PUT /ISAPI/PTZCtrl/channels/<channelID>/continuous`. The values of `pan`, `tilt`, `zoom`, and `rotate` represent the speed of rotation/change, and the characteristics (positive and negative) of the values represent the direction of rotation/change. If the control needs to be stopped, another command should be sent and values should be set as 0.

8.6 PTZ One-Touch Focus

8.6.1 Introduction to the Function

Help PTZ devices to focus. When defocus (blurry image) occurs, one-touch focus can make the image clear.

8.6.2 API Calling Flow

1. (Client) Get the PTZ capabilities: `GET /ISAPI/PTZCtrl/channels/<channelID>/capabilities`. The returned `isSupportOnepushfoucsStart` indicates the support for one-touch focus;
2. (Client) Configure PTZ one-touch focus parameters: `PUT /ISAPI/PTZCtrl/channels/<channelID>/onepushfoucs/start`;
3. (Client) Get the PTZ capabilities: `GET /ISAPI/PTZCtrl/channels/<channelID>/capabilities`. The returned `isSupportOnepushfoucsReset` indicates the support for resetting focus parameters;
4. (Client) Reset the PTZ one-touch focus parameters: `PUT /ISAPI/PTZCtrl/channels/<channelID>/onepushfoucs/reset`. The PTZ focus parameter setting will be restored.

8.7 Save PTZ Position

8.7.1 Introduction to the Function

The client controls the device to save the current PTZ position information. After the PTZ leaves the current position, the client can control the PTZ to return to the saved position, but only one position can be saved for each PTZ.

8.7.2 API Calling Flow

1. (Client) Get the PTZ capabilities: `GET /ISAPI/PTZCtrl/channels/<channelID>/capabilities`. The returned `isSupportPTZSave` and `isSupportPTZSaveGet` indicates the support for keeping and getting PTZ parameters configurations;
2. (Client) Configure the device to save PTZ information: `PUT /ISAPI/PTZCtrl/channels/<channelID>/save?format=json`;
3. The client controls the PTZ to move to the saved position: `PUT /ISAPI/PTZCtrl/channels/<channelID>/gotoPosition?format=json`. The PTZ will rotates to the saved position;
4. The client gets the saved PTZ position information: `GET /ISAPI/PTZCtrl/channels/<channelID>/save`. The PTZ position information will be returned and PTZ does not move.


9 Abnormal Event Detection

9.1 People Gathering

9.1.1 Introduction to the Function

The people gathering function is used for triggering the alarm in the fastest and best way when the people density in the set area exceeds the set threshold. The people gathering function is often used for performing the real-time monitoring of the abnormal behavior of people in the monitoring area, effectively preventing accidents caused by negligence, so as to avoid potential safety accidents and improve the supervision efficiency.

9.1.2 API Calling Flow

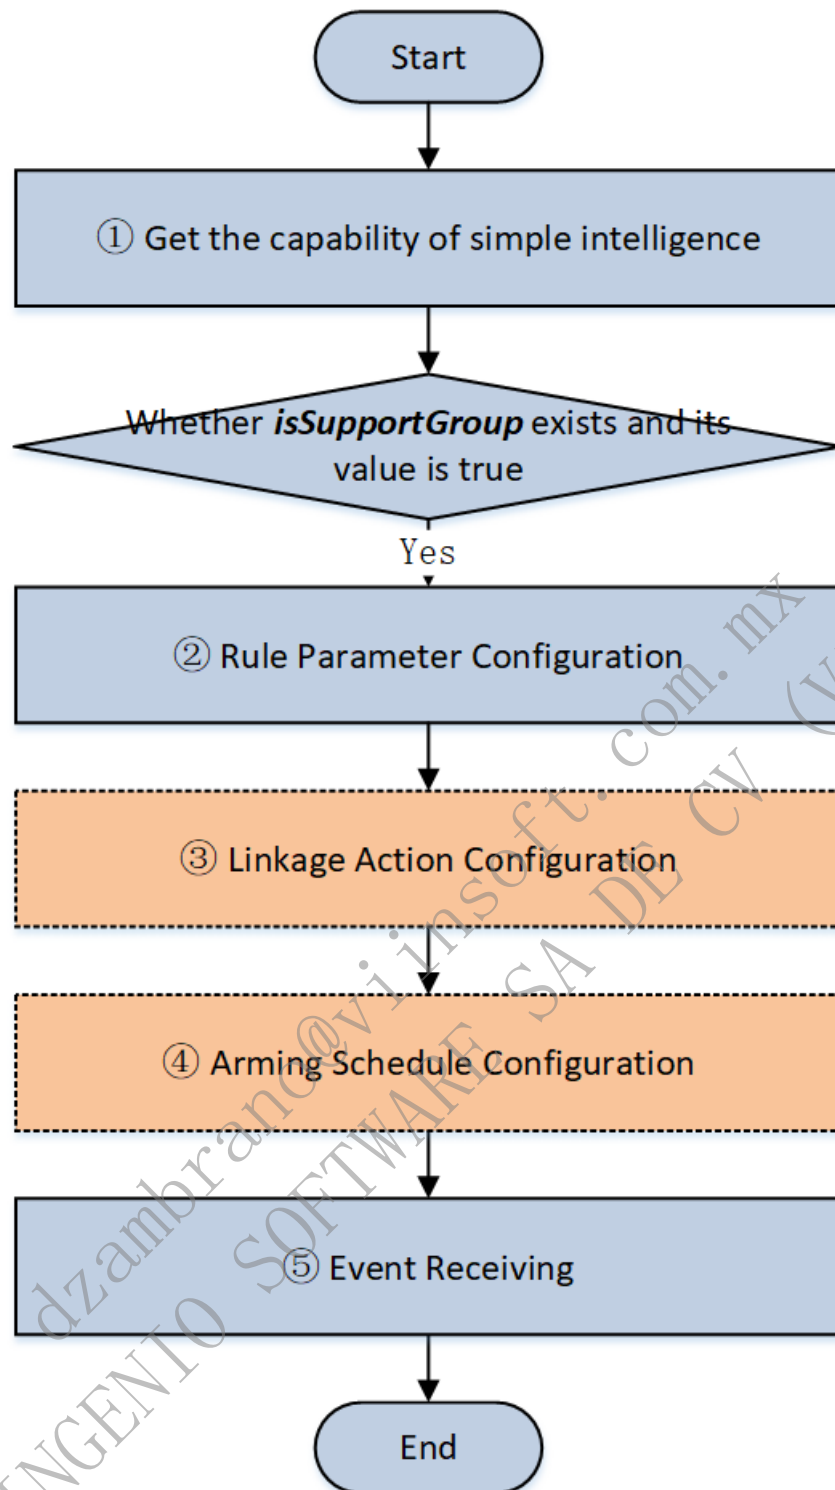

1. Get the capability of AI intelligent search.

Get the `isSupportGroup` in the capability of simple intelligence (related URI: `GET /ISAPI/Smart/capabilities`).

2. Configure rule parameters.

Configure All Channels

- Get people gathering parameters (related URI: `GET /ISAPI/Smart/group`).
- Configure people gathering parameters (related URI: `PUT /ISAPI/Smart/group`).

Configure Specified Channel

- Get the capability of people gathering parameters (related URI: `GET /ISAPI/Smart/group/<channelID>/capabilities`).

- Get the people gathering parameters of a specified channel (related URI: `GET /ISAPI/Smart/group/<channelID>`).
- Configure the people gathering parameters of a specified channel (related URI: `PUT /ISAPI/Smart/group/<channelID>`).

Configure All Areas of Specified Channel

- Get the capability of the parameters of all areas for people gathering (related URI: `GET /ISAPI/Smart/group/<channelID>/regions/capabilities`).
- Get the parameters of all areas for people gathering (related URI: `GET /ISAPI/Smart/group/<channelID>/regions`).
- Configure the parameters of all areas for people gathering (related URI: `PUT /ISAPI/Smart/group/<channelID>/regions`).

Configure Specified Channel in Specified Channel

- Get the capability of the parameters of specified areas for people gathering (related URI: `GET /ISAPI/Smart/group/<channelID>/regions/<regionID>/capabilities`).
 - Get the parameters of specified areas for people gathering (related URI: `GET /ISAPI/Smart/group/<channelID>/regions/<regionID>`).
 - Configure the parameters of specified areas for people gathering (related URI: `PUT /ISAPI/Smart/group/<channelID>/regions/<regionID>`). Note: The percentage refers to the percentage of people number accounts for the alarming area. An alarm will be triggered in the system when the percentage is higher than the set percentage. Otherwise, no alarm will be triggered.
- (Optional) Configure arming linkage parameters.
 - Get the capability of event linkage configuration (related URI: `GET /ISAPI/Event/triggersCap`), whether the message `EventTriggersCap` contains the node `GroupDetectionTriggerCap`.
 - Get the linkage parameters of people gathering (related URI: `GET /ISAPI/Event/triggers/group-<channelID>`).
 - Configure linkage parameters of people gathering (related URI: `PUT /ISAPI/Event/triggers/group-<channelID>`).
 - (Optional) Configure arming schedule.
 - Get the arming schedule of alarm outputs for all channels (related URI: `GET /ISAPI/Event/schedules/groups`).
 - Configure the arming schedule of people gathering for all channels (related URI: `PUT /ISAPI/Event/schedules/groups`).
 - Get the arming schedule of people gathering for a specified channel (related URI: `GET /ISAPI/Event/schedules/groups/group-<channelID>`).
 - Configure the arming schedule of people gathering for a specified channel (related URI: `PUT /ISAPI/Event/schedules/groups/group-<channelID>`). Note: 1. Supports setting up to 8 time periods in one day on the timeline. 2. Overlapped time between any two time periods is not allowed when setting the arming schedule.
 - Receive event: "eventType": "group", including the following. `detectionPictureTransType` refers to the transmission method of the pictures. The field value is `bkgUrl` for the picture URL or the picture encoding data via base64 when the value of `detectionPictureTransType` is "url" or "base64". The field value is the picture Content-ID when the value of `detectionPictureTransType` is "binary".


10 Face Capture

10.1 Face Capture

10.1.1 Introduction to the Function

Face capture is to detect whether face pictures show up in images. If set conditions are met and there are faces showing up, the face pictures will be captured and uploaded as alarms.

10.1.2 API Calling Flow

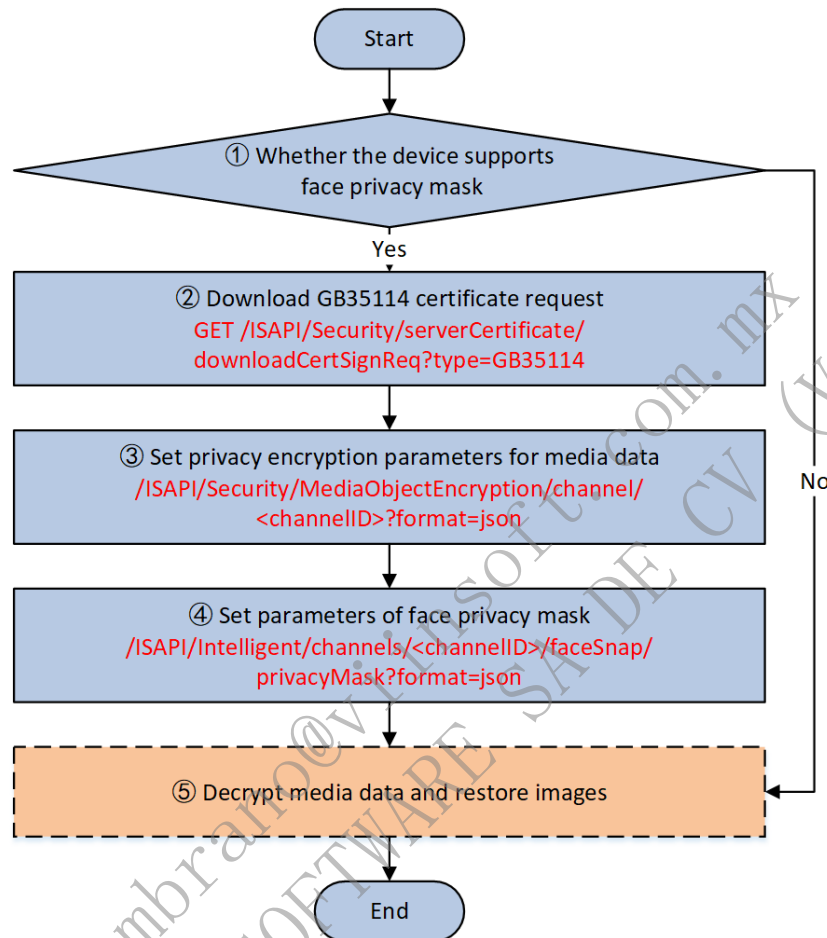

1. Whether the device supports face capture:

Get the system capabilities: GET /ISAPI/System/capabilities. If the node (its parent node is) is returned as true, it indicates that the device supports face capture.

2. Whether the device supports multi-scene face capture:

Get the intelligent capabilities of device: GET /ISAPI/Intelligent/channels/<channelID>/capabilities. If the node is returned and its value is true, it indicates that the device supports face capture.

3. Set face picture capturing rules of multiple scenes:

If multi-scene capture of a channel is required, you can set the face picture capturing rules for multiple scenes.

Set the face capture rules of a specified scene: PUT
/ISAPI/Intelligent/channels/<channelID>/faceRule/multiScene/<SID>;

Get the face capture rules of a specified scene: GET
/ISAPI/Intelligent/channels/<channelID>/faceRule/multiScene/<SID>;

Set the face picture capturing rules of multiple scenes for a specified channel: PUT
/ISAPI/Intelligent/channels/<channelID>/faceRule/multiScene;

Get the face picture capturing rules of multiple scenes for a specified channel: GET /ISAPI/Intelligent/channels/<channelID>/faceRule/multiScene.

4. Set face picture capturing rules of a specific scene.

If specific-scene capture of a channel is required, you can set the face picture capturing rules.

Get the capabilities of captured face picture rules GET /ISAPI/Intelligent/channels/<channelID>/faceRule/capabilities;

Set the face capture rule parameters: PUT /ISAPI/Intelligent/channels/<channelID>/faceRule;

Get the face capture rule parameters: GET /ISAPI/Intelligent/channels/<channelID>/faceRule;

Get the default parameters of face capture rule: GET /ISAPI/Intelligent/channels/<channelID>/faceRule?default=<default>.

5. Set linkage mode of face picture capture.

Set the linkage parameters of face capture: PUT /ISAPI/Event/triggers/faceSnap-<channelID>;

Get the linkage parameters of face capture: GET /ISAPI/Event/triggers/faceSnap-<channelID>;

Delete the linkage of face capture: DELETE /ISAPI/Event/triggers/faceSnap-<channelID>.

6. Configure the arming schedule of face capture.

Set the arming schedule of face capture for a specified channel: PUT /ISAPI/Event/schedules/faceSnap/faceSnap-<channelID>;

Get the arming schedule of face capture for a specified channel: GET /ISAPI/Event/schedules/faceSnap/faceSnap-<channelID>;

Set the arming schedule of face capture: PUT /ISAPI/Event/schedules/faceSnap;

Get the arming schedule of face capture: GET /ISAPI/Event/schedules/faceSnap.

7. Receive face capture and recognition events.


If the wanted face shows up in the set area, face recognition event will be reported. The event information includes face pictures and attribute information, etc. "eventType": "faceCapture".

10.2 Privacy Mask on Faces

10.2.1 Introduction to the Function

Privacy mask on faces is to encrypt privacy contents for face capture and media data (see "Video Privacy Mask" API calling flow); it is the process of privacy masking for all faces of cameras and the encrypted images can be restored. First of all, all faces need to be identified, the original media data of faces in the images and masking block data will be replaced, the original media data of faces will be added to the private data of the live view stream and encrypted, then reported to the user synchronously; and the user can decrypt the private data to get the original media data and restore the face image. **Note: The current image restoration only supports private streams, which needs to be restored by integrating the Playback Library.** The following figure shows the effect of face privacy mask by mosaic processing.

10.2.2 API Calling Flow

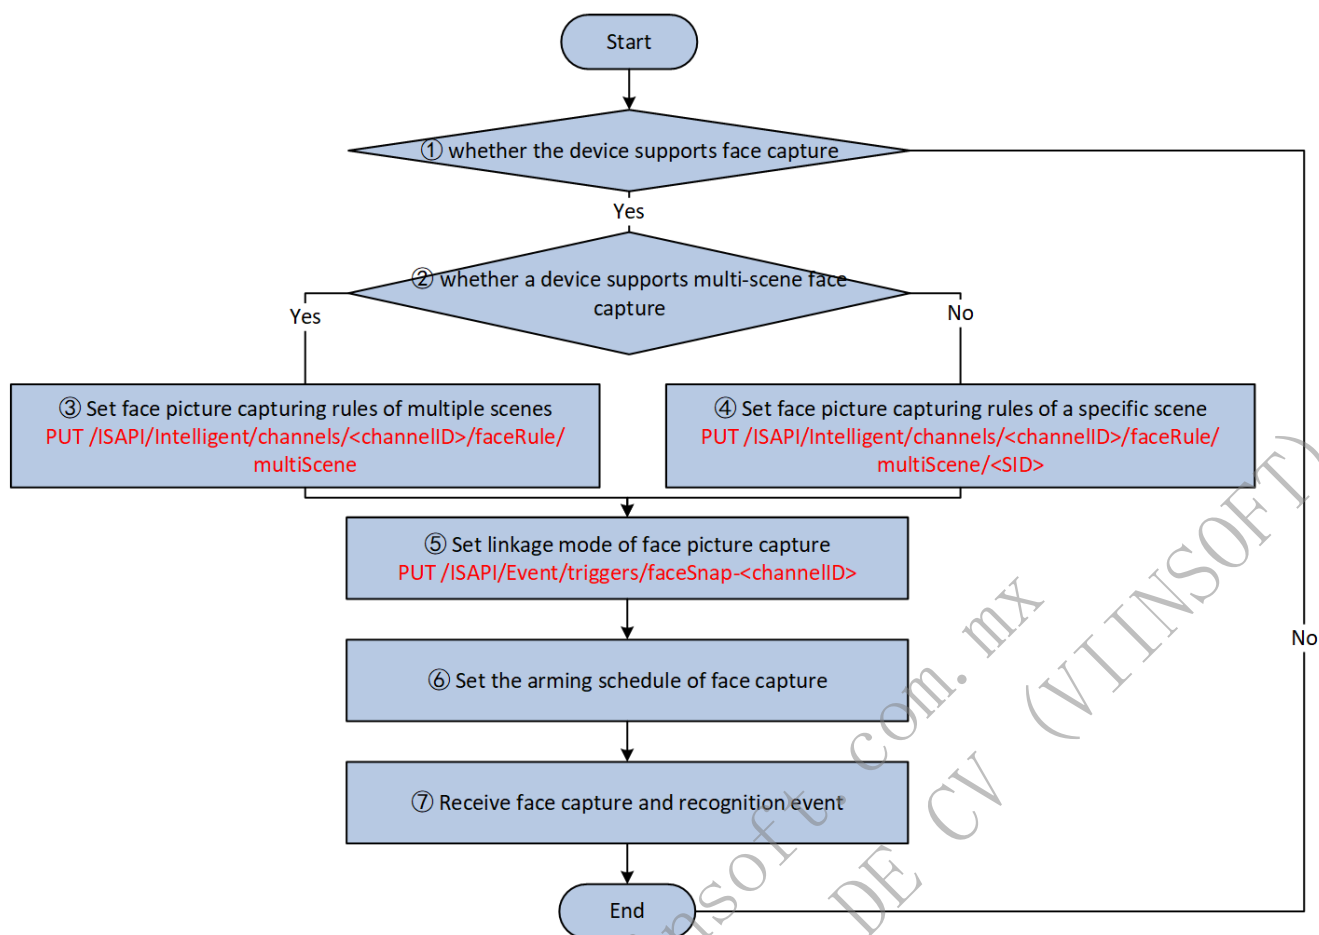

1. **Whether the video channel supports face privacy mask.** Get the channel intelligence capabilities: GET /ISAPI/Intelligent/channels/<channelID>/capabilities, if the node <isSupportFacePrivacyMask> is returned as true, it indicates that the device supports face privacy masking.
2. **Set privacy encryption parameters in media data.** Users apply the encryption parameters including secondary key `secretKey` and the update time of the primary key `secretKeyUpdateFrequency` to devices, etc. Get the encryption capabilities of media data privacy: GET /ISAPI/Security/MediaObjectEncryption/channel/<channelID>/capabilities?format=json. Set the encryption parameters of media data privacy PUT /ISAPI/Security/MediaObjectEncryption/channel/<channelID>?format=json. Get the encryption parameters of media data privacy: GET /ISAPI/Security/MediaObjectEncryption/channel/<channelID>?format=json.
3. **Set parameters of face privacy mask.** Users can enable face privacy mask for a channel `enabled`. Get the capability of face privacy masking: GET /ISAPI/Intelligent/channels/<channelID>/faceSnap/privacyMask/capabilities?format=json; Set the parameters of face privacy mask: PUT /ISAPI/Intelligent/channels/<channelID>/faceSnap/privacyMask?format=json; Get the parameters of face privacy mask: GET /ISAPI/Intelligent/channels/<channelID>/faceSnap/privacyMask?format=json;
4. **(Optional) Decrypt media data and restore images.** The device generates the primary key and updates the primary key periodically according to the primary key update time in the media data privacy encryption parameters, then replaces the original media data with the masking block in the specified sensitive area in the live view screen, after which the images in the sensitive area are encrypted by the primary key and added to the private data of the live view stream, and at the same time the primary key is encrypted by the secondary key and added to the private data of the preview stream. The key is also encrypted by the secondary key and added to the private data of the live view stream. The user can parse the private data in the live view stream and decrypt it with the secondary key to get the primary key, then decrypt the private data with the primary key to get the original media data and restore the image.

Note: At present, image restoration is only supported by private streams. You need to get the private data in the live view stream by integrating Playback Library, and get the primary key by decrypting the secondary key, then decrypt the private data by the primary key to get the original media data; and finally call the Playback Library API to restore the image. You can refer to Playback library interface integration manual for playback library related APIs.

11 VCA

11.1 Professional Smart Abnormal Event Detection

11.1.1 Introduction to the Function

Professional Smart Abnormal Event Detection includes the following features:

- Line Crossing Detection
- Intrusion Detection
- Region Entrance Detection
- Region Exiting Detection
- Loitering Detection
- People Gathering Detection
- Rapid Movement Detection
- Parking Detection
- Unattended Baggage Detection
- Object Removal Detection
- Running Detection
- Abnormal Number of People Detection
- Person Spacing Change Detection
- Violent Motion Detection
- On/Off Duty Detection
- Falling Down Detection
- Linger Detection
- Person Density Detection
- Climbing Detection
- Trend Analysis
- In-Toilet Overtime Detection
- Sudden Change of Sound Intensity Detection
- Student Standing Up Detection
- Getting Up from Bed Detection

Professional smart abnormal event detection is designed for specific scenarios: workplace activity detection and pedestrian activity detection.

Workplace activity detection includes but not limited to:

- Using a Mobile Phone
- Number of People Changes
- On/Off Duty
- Person Linger

Pedestrian activity detection includes but not limited to:

- Running Detection
- People Gathering Detection
- Violent Motion Detection

- Person Falling Detection

You can configure workplace activity detection and pedestrian activity detection rules and alarm linkage actions to suit your needs.


Abnormal event detection can be categorized into two types: Basic smart abnormal event detection and professional smart abnormal event detection. Their differences are as follows:

1. **Algorithms:** Traditional algorithms are used for basic smart abnormal event detection, while deep learning algorithms are used for professional smart abnormal event detection.
2. **Detection Effect:** Basic smart abnormal event detection can only analyze targets as people or vehicles. Professional smart abnormal event detection can not only distinguish between targets as people or vehicles but also identify specific behaviors, such as the number of people and human behaviors such as using a mobile phone, violent motion, and running.
3. **Supported Events:** Smart Basic Intelligent Abnormal Behavior Detection supports events such as:
 - Line Crossing Detection
 - Intrusion Detection
 - Region Entrance Detection
 - Region Exiting Detection
 - Loitering Detection
 - People Gathering Detection
 - Rapid Movement Detection
 - Parking Detection
 - Unattended Baggage Detection
 - Object Removal Detection

Professional Smart Abnormal Event Detection supports all the events mentioned above and additional events including:

- Running Detection
- Abnormal Number of People Detection
- Person Spacing Change Detection
- Violent Motion Detection
- On/Off Duty Detection
- Falling Down Detection
- Linger Detection
- Person Density Detection
- Climbing Detection
- Trend Analysis
- In-Toilet Overtime Detection
- Sudden Change of Sound Intensity Detection
- Student Standing Up Detection
- Getting Up from Bed Detection

11.1.2 API Calling Flow

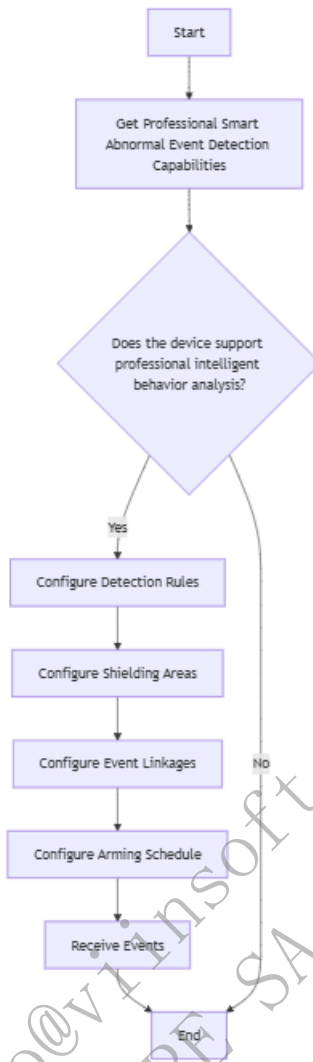

Before taking the following steps, ensure that this smart detection has been enabled for devices.

1. Get Professional Smart Abnormal Event Detection Capabilities

- Call GET /ISAPI/Intelligent/capabilities to get professional smart abnormal event detection capabilities and the field `isBehaviorSupport` is returned as `true` in the response message.
- Call GET /ISAPI/Intelligent/channels/<channelID>/capabilities to get professional smart abnormal event detection capabilities for a specified channel and the field `isBehaviorSupport` is returned as `true` in the response message.

Note: `isBehaviorSupport` as `true` indicates support for professional smart abnormal event detection. The fields of supported events are as follows:

- `isLineDetectionSupport` indicates support for **Line Crossing Detection**.
- `isFieldDetectionSupport` indicates support for **Intrusion Detection**.
- `isRegionEntranceSupport` indicates support for **Region Entrance Detection**.
- `isRegionExitingSupport` indicates support for **Region Exiting Detection**.
- `isLoiteringSupport` indicates support for **Loitering Detection**.
- `isGroupSupport` indicates support for **People Gathering Detection**.
- `isRapidMoveSupport` indicates support for **Rapid Movement Detection**.
- `isParkingSupport` indicates support for **Parking Detection**.
- `isUnattendedBaggageSupport` indicates support for **Unattended Baggage Detection**.
- `isAttendedBaggageSupport` indicates support for **Object Removal Detection**.
- `isRunningSupport` indicates support for **Running Detection**.
- `isPeopleNumChange` indicates support for **Abnormal Number of People Detection**.
- `isSpacingChangeSupport` indicates support for **Person Spacing Change Detection**.

- `isViolentMotionSupport` indicates support for **Violent Movement Detection**.
- `isLeavePositionSupport` indicates support for **On/Off Duty Detection**.
- `isFailDownSupport` indicates support for **Falling Down Detection**.
- `isRetentionParamSupport` indicates support for **Lingering Detection**.
- `isSupportPersonDensityDetection` indicates support for **Person Density Detection**.
- `isVcaEventAdvReachHeightSupport` indicates support for **Climbing Detection**.
- `isSupportSituationAnalysis` indicates support for **Trend Analysis**.
- `isSupportToiletTarry` indicates support for **In-Toilet Overtime Detection**.
- `isSupportAudioAbnormal` indicates support for **Sudden Change of Sound Intensity Detection**.
- `isSupportStandUp` indicates support for **Student Standing Up Detection**.
- `isSupportGetUp` indicates support for **Getting Up from Bed Detection**.

2. Configure Detection Rules

- Call `GET /ISAPI/Intelligent/channels/<channelID>/behaviorRule/<SID>/rule/capabilities` to get professional smart abnormal event detection capabilities.
- Call `GET /ISAPI/Intelligent/channels/<channelID>/behaviorRule/<SID>/rule/<ruleID>` to get detection rules.
- Call `PUT /ISAPI/Intelligent/channels/<channelID>/behaviorRule/<SID>/rule/<ruleID>` to configure detection rules.
- Call `DELETE /ISAPI/Intelligent/channels/<channelID>/behaviorRule/<SID>/rule/<ruleID>` to delete detection rules.
- Call `GET /ISAPI/Intelligent/channels/<channelID>/behaviorRule/<SID>` to get all detection rules.
- Call `PUT /ISAPI/Intelligent/channels/<channelID>/behaviorRule/<SID>` to configure all detection rules.

Note:

- The `eventType` field in the rules indicates the corresponding event type.
- The `ruleType` field indicates the event support drawing a detection line or a polygon detection area. Some events (sudden change of sound intensity) do not support drawing a box or line, some events (line crossing, climbing) support drawing a line, and some events (except sudden change of sound intensity, line crossing, and climbing) support for polygon detection areas.

3. (Optional) Configure Shielding Areas

- Call `GET /ISAPI/Intelligent/channels/<channelID>/Shield/capabilities` to get professional smart area shielding capabilities.
- Call `GET /ISAPI/Intelligent/channels/<channelID>/Shield` to get shielding areas for all events.
- Call `PUT /ISAPI/Intelligent/channels/<channelID>/Shield` to configure shielding areas for all events.

4. (Optional) Configure Event Linkages

- Call `GET /ISAPI/Intelligent/channels/<channelID>/behaviorRule/<SID>/notifications` to get event linkages.
- Call `PUT /ISAPI/Intelligent/channels/<channelID>/behaviorRule/<SID>/notifications` to configure event linkages.

5. (Optional) Configure Arming Schedule

- Call `GET /ISAPI/Intelligent/channels/<channelID>/behaviorRule/<SID>/schedules` to get the schedule to disable the professional smart abnormal event detection rules.
- Call `PUT /ISAPI/Intelligent/channels/<channelID>/behaviorRule/<SID>/schedules` to configure the schedule to disable the professional smart abnormal event detection rules.

Note:

- Up to eight time periods can be configured per day.

- Each two time periods cannot overlap.

6. Receive Events

- Line Crossing Detection: "eventType": "linedetection"
- Intrusion Detection: "eventType": "fielddetection"
- Region Entrance Detection: "eventType": "regionEntrance"
- Region Exiting Detection: "eventType": "regionExiting"
- Loitering Detection: "eventType": "loitering"
- People Gathering Detection: "eventType": "group"
- Rapid Movement Detection: "eventType": "rapidMove"
- Parking Detection: "eventType": "parking"
- Unattended Baggage Detection: "eventType": "unattendedBaggage"
- Object Removal Detection: "eventType": "attendedBaggage"
- Running Detection: "eventType": "running"
- Abnormal Number of People Detection: "eventType": "peopleNumChange"
- Person Spacing Change Detection: "eventType": "spacingChange"
- Violent Movement Detection: "eventType": "violentMotion"
- On/Off Duty Detection: "eventType": "leavePosition"
- Falling Down Detection: "eventType": "failDown"
- Lingering Detection: "eventType": "retention"
- Person Density Event: "eventType": "personDensityDetection"
- Climbing Detection: "eventType": "advReachHeight"
- Trend Analysis: "eventType": "situationAnalysis"
- In-Toilet Overtime Detection: "eventType": "toiletTarry"
- Sudden Change of Sound Intensity Detection: "eventType": "audioAbnormal"
- Student Standing Up Detection: "eventType": "standUp"
- Getting Up from Bed Detection: "eventType": "getUp"
- Sitting Still Detection: "eventType": "sitQuietly"
- Key Target Standing Up Detection: "eventType": "keyPersonGetUp"
- Using Mobile Phone Detection: "eventType": "playCellphone"
- Yard Lingering: "eventType": "yardTarry"
- Key Target Standing Up Detection: "eventType": "keyPersonGetUp"
- Sitting Still Detection: "eventType": "sitQuietly"
- Yard Lingering: "eventType": "yardTarry"
- Using Mobile Phone Detection: "eventType": "playCellphone"

Note:

- The content of `targetAttrs` is in JSON format. When the event format is XML, use [CDATA \(Character Data\)](#) to include this data in the event and transmit it to the platform.
- [CDATA \(Character Data\)](#) is used to include large amounts of text data in XML documents. This text may contain special characters (such as `<`, `>`, `&`), which have special meanings in XML and typically need to be escaped. CDATA blocks allow these special characters to be included directly in the document without escaping, such as including JavaScript scripts or CSS styles in XML documents.

11.2 Upgrading the Deep Learning Model for Perimeter Intrusion Detection

11.2.1 Introduction to the Function

You can upgrade the deep learning model for perimeter intrusion detection. You can also upgrade both the local training model for NVRs and the training model for network camera channels.

11.2.2 API Calling Flow

1. Determine if the device supports upgrading the deep learning model for perimeter intrusion detection: Call `GET /ISAPI/Intelligent/capabilities`. If the field `isSupportUpgradeDepthPerimeterModel` is returned as `true` in the response message, this function is supported.
2. Get the deep learning model upgrade capabilities: `GET /ISAPI/Intelligent/depthPerimeter/upgradeTrainModel/capabilities?format=json`
3. Set the model version: `PUT /ISAPI/Intelligent/depthPerimeter/upgradeTrainModel/VersionOperation?format=json`
 - You cannot specify a version to upgrade. Only rolling back to the previous version and restoring to the factory model version are currently supported.
4. Get the model upgrade progress: `GET /ISAPI/Intelligent/depthPerimeter/upgradeTrainModel/process?format=json`
5. Set the model version for a channel: `PUT /ISAPI/Intelligent/depthPerimeter/channels/<channelID>/upgradeTrainModel/VersionOperation?format=json`
6. Get the model upgrade progress for a channel: `GET /ISAPI/Intelligent/depthPerimeter/channels/<channelID>/upgradeTrainModel/process?format=json`

12 Two-Way Audio


12.1 Two-Way Audio

12.1.1 Introduction to the Function

This function is for the two-way audio between the client and device. When you call the API to implement the two-way audio, it requires the client to collect and encode the local audios and to decode the device audio data.

Note: Before starting two-way audio, check whether the way of collecting device audio data, audio encoding format, volume, etc., is correct or not. The audio encoding format of the client should be consistent with the device audio encoding format.

12.1.2 API Calling Flow

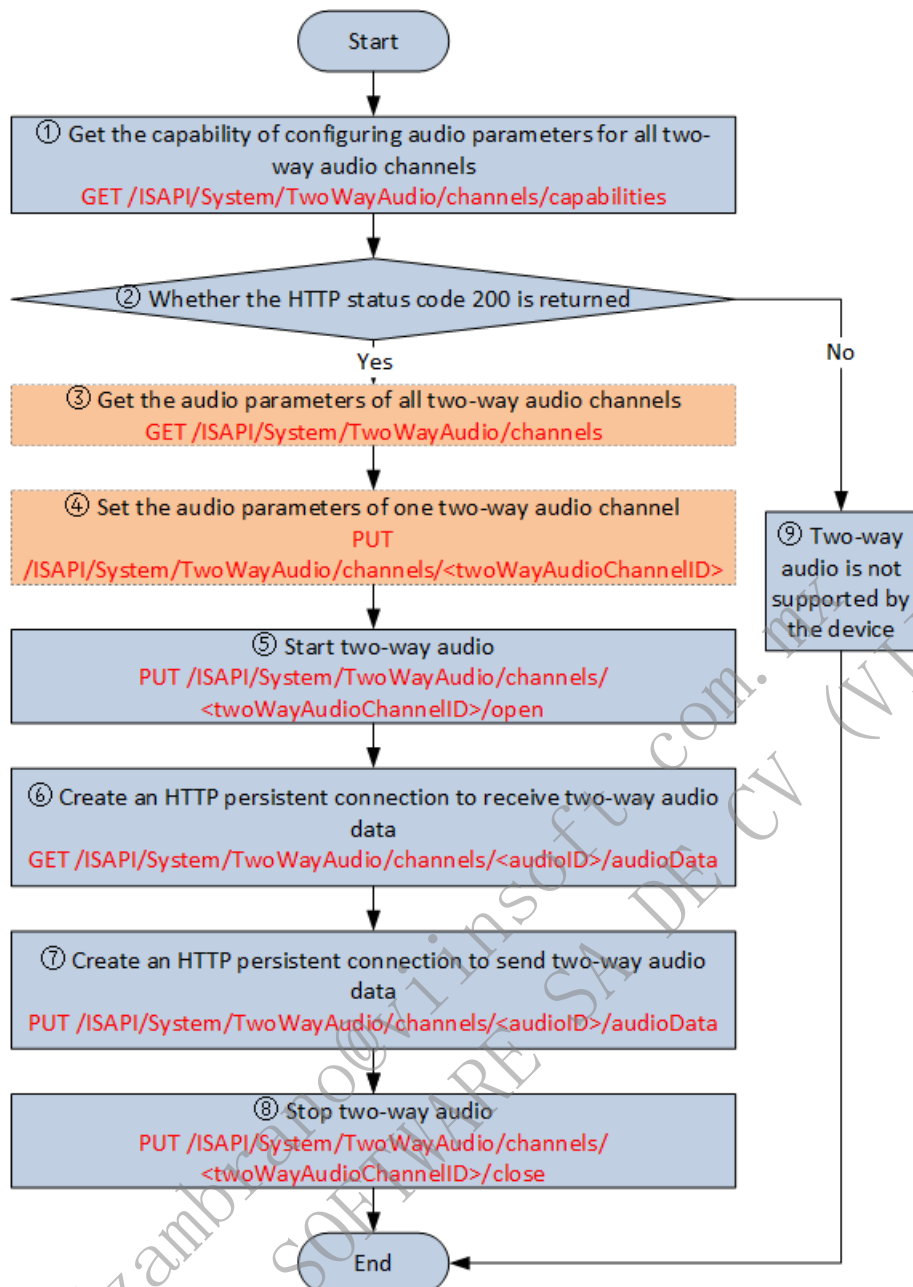

1. Get the capability of configuring audio parameters for all two-way audio channels: GET /ISAPI/System/TwoWayAudio/channels/capabilities. Check whether the device supports two-way audio. If the HTTP status code 200 OK is returned, then the device supports two-way audio.
2. Get the audio parameters of all two-way audio channels: GET /ISAPI/System/TwoWayAudio/channels. Get the No. of two-way audio channel for response and parsing <id>, audio type <audioCompressionType>, frame rate <audioBitRate>, sampling rate <audioSamplingRate> and so on, to ensure the consistent of audio format during the two-way audio process.
3. Set the audio parameters of one two-way audio channel: PUT /ISAPI/System/TwoWayAudio/channels/<audioID>. This step is optional, and the <audioID> is the channel No. <id> responded and parsed in step 2.
4. Start two-way audio: PUT /ISAPI/System/TwoWayAudio/channels/<audioID>/open.
5. Create an HTTP persistent connection to receive the two-way audio data: GET /ISAPI/System/TwoWayAudio/channels/<audioID>/audioData.
6. Create an HTTP persistent connection to send the two-way audio data: PUT /ISAPI/System/TwoWayAudio/channels/<audioID>/audioData.
7. When the two-way audio ends, the client disables the persistent connections in steps 6 and 7 and sends the message of stopping the two-way audio: PUT /ISAPI/System/TwoWayAudio/channels/<audioID>/close.

Note:

- Two-way audio over ISAPI supports digest authentication.

- It supports the two-way audio mode or sending only mode (the platform only call PUT /ISAPI/System/TwoWayAudio/channels/<audioID>/audioData to send the audio data to devices).
- The <audioID> in step 3, 4, 5, 6, and 7 is the two-way audio channel No. which starts from 1. It can be parsed from the <id> in the device response message of the step 2.
- The audio type <audioCompressionType>, frame rate <audioBitRate>, and sampling rate <audioSamplingRate> can be parsed from the device response message of the step 2 for audio playing and collection in the step 5 and 6.
- The step 6 and 7 use persistent connections. In the HTTP request headers, you don't need to set Content-Length, but need to set the Connection: keep-alive and Content-Type: application/octet-stream.
- When the encoding format of audio data in the step 5 and 6 is AAC/MP2L2/MP3, the audio data length is variable, so the frame header should be lengthened by 4 bytes. When the encoding format is G.722.1/G.711alaw/G.711ulaw/G.726/G.729/G.729a/G.729b/PCM/ADPCM/Opus, the audio data length is fixed, there is no need to lengthen the frame header. For example, if the content length of a frame of MP3 audio data is 576 bytes and the header length is 4 bytes, the big end data is 0x00000240, the total length is 580 bytes.
- The damaged audio file in the AC3 format is usually incompatible when using. Currently, the audio algorithm library does not support this format.

Statistics of audio types with fixed lengths:

Audio Type	Fixed Length	Frame Interval
G.722.1	80	40ms
G.711alaw	160/320	20ms/40ms
G.711ulaw	160/320	20ms/40ms
G.726	80	40ms
G.729	10	10ms
G.729a	10	10ms
G.729b	10	10ms
PCM	1920	None
ADPCM	80	20ms
Opus	32/64	20ms/40ms

12.1.3 Exception Handling

12.1.3.1 Error Codes

statusCode	statusString	subStatusCode	errorCode	errorMsg	Description	Re
4	Invalid Operation	twoWayAudioInProgressPleaseWait	0x40002068	Two-way audio in progress...Please wait.	Two-way audio in progress...Please wait.	Th of is all Tv au in pr Pl ac af tw au st

12.1.4 Message Format and Example

12.1.4.1 Receive Two-Way Audio Data

```
GET /ISAPI/System/TwoWayAudio/channels/1/audioData HTTP/1.1
Host: 10.17.115.128
Connection: keep-alive
Content-Type: application/octet-stream
```

```
HTTP/1.1 200 OK
Connection: keep-alive
Content-Type: application/octet-stream
```

//The following are the two-way audio data sent by the device.

12.1.4.2 Send Two-Way Audio Data

```
PUT /ISAPI/System/TwoWayAudio/channels/1/audioData HTTP/1.1
Host: 10.17.115.128
Connection: keep-alive
Content-Type: application/octet-stream
```

//The following are the two-way audio data sent by the client.


13 Audio Recognition

13.1 Audio Detection

13.1.1 Introduction to the Function

Detects the sound change, including the sudden increase or decrease of sound intensity and audio loss, of devices or the surrounding environment. Audio loss detection is used to timely detect audio loss situations, that are due to the audio configuration error or pickup damage.

13.1.2 API Calling Flow

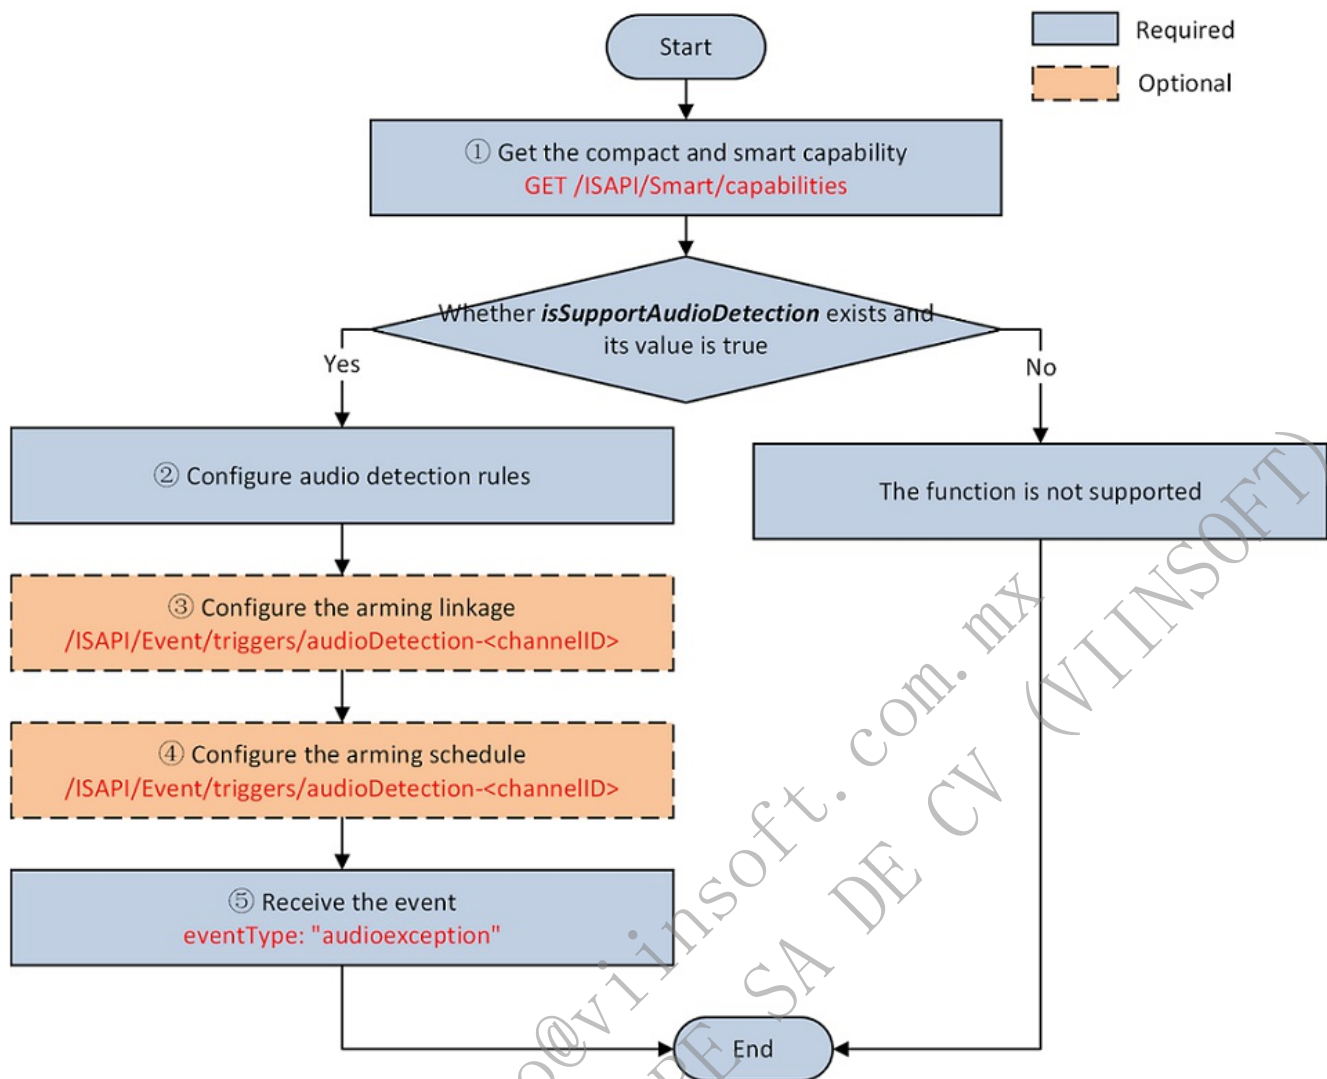

1. Get the compact and smart capability.

Get the compact and smart capability: GET /ISAPI/Smart/capabilities. Check whether the isSupportAudioDetection is returned with true value.

2. Configure rules.

Configure rules for all channels:

Get audio detection parameters of all channels: GET /ISAPI/Smart/AudioDetection/channels.

Set audio detection parameters of all channels: PUT /ISAPI/Smart/AudioDetection/channels.

Configure rules for a specified channel:

Get the capability of audio detection parameters of a specified channel: GET /ISAPI/Smart/AudioDetection/channels/<channelID>/capabilities.

Get audio detection parameters of a specified channel: GET /ISAPI/Smart/AudioDetection/channels/<channelID>.

Set audio detection parameters of a specified channel: PUT /ISAPI/Smart/AudioDetection/channels/<channelID>.

3. (Optional) Configure arming linkages.

Get the event linkage configuration capability: GET /ISAPI/Event/triggersCap. Check if AudioExceptionCap is contained in EventTriggersCap.

Get the audio detection linkage parameters: GET /ISAPI/Event/triggers/audioDetection-<channelID>.

Set the audio detection linkage parameters: PUT /ISAPI/Event/triggers/audioDetection-<channelID>.

4. (Optional) Configure the arming schedule.

Get the audio detection arming schedule for all channels: GET /ISAPI/Event/schedules/audioDetections.

Set the audio detection arming schedule for all channels: PUT /ISAPI/Event/schedules/audioDetections.

Get the audio detection arming schedule for a specified channel: GET /ISAPI/Event/schedules/audioDetections/audioDetection-<channelID>.

Set the audio detection arming schedule for a specified channel: PUT /ISAPI/Event/schedules/audioDetections/audioDetection-<channelID>.

Notes:

- i. Up to eight time periods can be configured on the timeline for one day.
- ii. Time of each two time periods cannot be overlapped.

5. Receive the event.

The event type (eventType) is audioexception, and it contains alarmType (the alarm type, including audio loss, sudden decrease of sound intensity, and sudden increase of sound intensity).

14 API Reference

14.1 Device (General)

14.1.1 Device Exception Detection

14.1.1.1 Get the linkage parameters of HDD error

Request URL

GET /ISAPI/Event/triggers/diskerror

Query Parameter

None

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<EventTrigger xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string-->diskerror
  </id>
  <eventType>
    <!--ro, req, enum, subType:string-->diskerror
  </eventType>
  <eventDescription>
    <!--ro, opt, string-->test
  </eventDescription>
  <inputIOPortID>
    <!--ro, opt, string-->test
  </inputIOPortID>
  <dynInputIOPortID>
    <!--ro, opt, string-->test
  </dynInputIOPortID>
  <videoInputChannelID>
    <!--ro, opt, string-->1
  </videoInputChannelID>
  <dynVideoInputChannelID>
    <!--ro, opt, string-->1
  </dynVideoInputChannelID>
  <intervalBetweenEvents>
    <!--ro, opt, int, unit:s-->1
  </intervalBetweenEvents>
  <WLSensorID>
    <!--ro, opt, string-->1
  </WLSensorID>
  <EventTriggerNotificationList>
    <!--ro, opt, array, subType:object-->
    <EventTriggerNotification>
      <!--ro, opt, object-->
      <id>
        <!--ro, req, string-->test
      </id>
      <notificationMethod>
        <!--ro, req, enum, subType:string-->FTP
      </notificationMethod>
      <notificationRecurrence>
        <!--ro, opt, enum, subType:string-->beginning
      </notificationRecurrence>
      <notificationInterval>
        <!--ro, opt, int, unit:ms-->1
      </notificationInterval>
      <outputIOPortID>
        <!--ro, opt, string-->test
      </outputIOPortID>
      <dynOutputIOPortID>
        <!--ro, opt, string-->test
      </dynOutputIOPortID>
      <videoInputID>
        <!--ro, opt, string-->1
      </videoInputID>
      <dynVideoInputID>
        <!--ro, opt, string-->1
      </dynVideoInputID>
      <ptzAction>
        <!--ro, opt, object-->
        <ptzChannelID>
          <!--ro, req, string-->test
        </ptzChannelID>
        <actionName>
          <!--ro, req, enum, subType:string-->preset
        </actionName>
        <actionNum>
          <!--ro, opt, int-->1
        </actionNum>
        <presetDurationTime>
          <!--ro, opt, int, unit:s, dep:and,{$.EventTrigger.EventTriggerNotificationList[*].EventTriggerNotification.ptzAction.actionName,eq,preset}-->1
        </presetDurationTime>
        <ptzAction>
      </ptzAction>
      <cellphoneNumber>
        <!--ro, opt, string, range:[0,11]-->test
      </cellphoneNumber>
    </EventTriggerNotification>
  </EventTriggerNotificationList>
</EventTrigger>

```

14.1.1.2 Set the linkage parameters of HDD error

Request URL

PUT /ISAPI/Event/triggers/diskerror

Query Parameter

None

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<EventTrigger xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string-->diskerror
  </id>
  <eventType>
    <!--req, enum, subType:string-->diskerror
  </eventType>
  <eventDescription>
    <!--opt, string-->test
  </eventDescription>
  <inputIOPortID>
    <!--opt, string-->test
  </inputIOPortID>
  <dynInputIOPortID>
    <!--opt, string-->test
  </dynInputIOPortID>
  <videoInputChannelID>
    <!--opt, string-->1
  </videoInputChannelID>
  <dynVideoInputChannelID>
    <!--opt, string-->1
  </dynVideoInputChannelID>
  <intervalBetweenEvents>
    <!--opt, int, unit:s-->1
  </intervalBetweenEvents>
  <WLSensorID>
    <!--opt, string-->1
  </WLSensorID>
  <EventTriggerNotificationList>
    <!--opt, array, subType:object-->
    <EventTriggerNotification>
      <!--opt, object-->
      <id>
        <!--req, string-->test
      </id>
      <notificationMethod>
        <!--req, enum, subType:string-->FTP
      </notificationMethod>
      <notificationRecurrence>
        <!--opt, enum, subType:string-->beginning
      </notificationRecurrence>
      <notificationInterval>
        <!--opt, int, unit:ms-->1
      </notificationInterval>
      <outputIOPortID>
        <!--opt, string-->test
      </outputIOPortID>
      <dynOutputIOPortID>
        <!--opt, string-->test
      </dynOutputIOPortID>
      <videoInputID>
        <!--opt, string-->1
      </videoInputID>
      <dynVideoInputID>
        <!--opt, string-->1
      </dynVideoInputID>
      <ptzAction>
        <!--opt, object-->
        <ptzChannelID>
          <!--req, string-->test
        </ptzChannelID>
        <actionName>
          <!--req, enum, subType:string-->preset
        </actionName>
        <actionNum>
          <!--opt, int-->1
        </actionNum>
        <presetDurationTime>
          <!--opt, int, unit:s, dep:and,{$.EventTrigger.EventTriggerNotificationList[*].EventTriggerNotification.ptzAction.actionName,eq,preset}-->1
        </presetDurationTime>
      </ptzAction>
      <cellphoneNumber>
        <!--opt, string, range:[0,11]-->test
      </cellphoneNumber>
    </EventTriggerNotification>
  </EventTriggerNotificationList>
</EventTrigger>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.1.1.3 Delete the linkage of HDD error

Request URL

DELETE /ISAPI/Event/triggers/diskerror

Query Parameter

None

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.1.1.4 Get the linkage parameters of full HDD

Request URL

GET /ISAPI/Event/triggers/diskfull

Query Parameter

None

Request Message

None

Response Message


```

<?xml version="1.0" encoding="UTF-8"?>

<EventTrigger xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string-->diskfull
  </id>
  <eventType>
    <!--ro, req, enum, subType:string-->diskfull
  </eventType>
  <eventDescription>
    <!--ro, opt, string-->test
  </eventDescription>
  <inputIOPortID>
    <!--ro, opt, string-->test
  </inputIOPortID>
  <dynInputIOPortID>
    <!--ro, opt, string-->test
  </dynInputIOPortID>
  <intervalBetweenEvents>
    <!--ro, opt, int, unit:s-->1
  </intervalBetweenEvents>
  <WLSensorID>
    <!--ro, opt, string-->1
  </WLSensorID>
  <EventTriggerNotificationList>
    <!--ro, opt, array, subType:object-->
    <EventTriggerNotification>
      <!--ro, opt, object-->
      <id>
        <!--ro, req, string-->test
      </id>
      <notificationMethod>
        <!--ro, req, enum, subType:string-->FTP
      </notificationMethod>
      <notificationRecurrence>
        <!--ro, opt, enum, subType:string-->beginning
      </notificationRecurrence>
      <notificationInterval>
        <!--ro, opt, int, unit:ms-->1
      </notificationInterval>
      <videoInputID>
        <!--ro, opt, string-->1
      </videoInputID>
      <dynVideoInputID>
        <!--ro, opt, string-->1
      </dynVideoInputID>
      <ptzAction>
        <!--ro, opt, object-->
        <ptzChannelID>
          <!--ro, req, string-->test
        </ptzChannelID>
        <actionName>
          <!--ro, req, enum, subType:string-->preset
        </actionName>
        <actionNum>
          <!--ro, opt, int-->1
        </actionNum>
        <presetDurationTime>
          <!--ro, opt, int, unit:s, dep:and,{$.EventTrigger.EventTriggerNotificationList[*].EventTriggerNotification.ptzAction.actionName,eq,preset}-->1
        </presetDurationTime>
        <ptzAction>
          <cellphoneNumber>
            <!--ro, opt, string, range:[0,11]-->test
          </cellphoneNumber>
        </ptzAction>
      </EventTriggerNotification>
    </EventTriggerNotificationList>
  </EventTrigger>

```

14.1.1.5 Set the linkage parameters of full HDD

Request URL

PUT /ISAPI/Event/triggers/diskfull

Query Parameter

None

Request Message

```

<?xml version="1.0" encoding="UTF-8"?>

<EventTrigger xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string-->diskfull
  </id>
  <eventType>
    <!--req, enum, subType:string-->diskfull
  </eventType>
  <eventDescription>
    <!--opt, string-->test
  </eventDescription>
  <inputIOPortID>
    <!--opt, string-->test
  </inputIOPortID>
  <dynInputIOPortID>
    <!--opt, string-->test
  </dynInputIOPortID>
  <intervalBetweenEvents>
    <!--opt, int, unit:s-->1
  </intervalBetweenEvents>
  <WLSensorID>
    <!--opt, string-->1
  </WLSensorID>
  <EventTriggerNotificationList>
    <!--opt, array, subType:object-->
    <EventTriggerNotification>
      <!--opt, object-->
      <id>
        <!--req, string-->test
      </id>
      <notificationMethod>
        <!--req, enum, subType:string-->FTP
      </notificationMethod>
      <notificationRecurrence>
        <!--opt, enum, subType:string-->beginning
      </notificationRecurrence>
      <notificationInterval>
        <!--opt, int, unit:ms-->1
      </notificationInterval>
      <videoInputID>
        <!--opt, string-->1
      </videoInputID>
      <dynVideoInputID>
        <!--opt, string-->1
      </dynVideoInputID>
      <ptzAction>
        <!--opt, object-->
        <ptzChannelID>
          <!--req, string-->test
        </ptzChannelID>
        <actionName>
          <!--req, enum, subType:string-->preset
        </actionName>
        <actionNum>
          <!--opt, int-->1
        </actionNum>
        <presetDurationTime>
          <!--opt, int, unit:s, dep:and,{$.EventTrigger.EventTriggerNotificationList[*].EventTriggerNotification.ptzAction.actionName,eq,preset}-->1
        </presetDurationTime>
        <ptzAction>
        <cellphoneNumber>
          <!--opt, string, range:[0,11]-->test
        </cellphoneNumber>
      </EventTriggerNotification>
    </EventTriggerNotificationList>
  </EventTrigger>

```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.1.1.6 Delete the linkage of full HDD

Request URL

DELETE /ISAPI/Event/triggers/diskfull

Query Parameter

None

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.1.1.7 Delete the linkage of illegal login

Request URL

DELETE /ISAPI/Event/triggers/illaccess

Query Parameter

None

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.1.1.8 Set the linkage parameters of illegal login

Request URL

PUT /ISAPI/Event/triggers/illaccess

Query Parameter

None

Request Message

```

<?xml version="1.0" encoding="UTF-8"?>

<EventTrigger xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string-->illaccess
  </id>
  <eventType>
    <!--req, enum, subType:string-->illaccess
  </eventType>
  <eventDescription>
    <!--opt, string-->test
  </eventDescription>
  <inputIOPortID>
    <!--opt, string-->test
  </inputIOPortID>
  <dynInputIOPortID>
    <!--opt, string-->test
  </dynInputIOPortID>
  <videoInputChannelID>
    <!--opt, string-->1
  </videoInputChannelID>
  <dynVideoInputChannelID>
    <!--opt, string-->1
  </dynVideoInputChannelID>
  <intervalBetweenEvents>
    <!--opt, int, unit:s-->1
  </intervalBetweenEvents>
  <wLSensorID>
    <!--opt, string-->1
  </wLSensorID>
  <EventTriggerNotificationList>
    <!--opt, array, subType:object-->
    <EventTriggerNotification>
      <!--opt, object-->
      <id>
        <!--req, string-->test
      </id>
      <notificationMethod>
        <!--req, enum, subType:string-->FTP
      </notificationMethod>
      <notificationRecurrence>
        <!--opt, enum, subType:string-->beginning
      </notificationRecurrence>
      <notificationInterval>
        <!--opt, int, unit:ms-->1
      </notificationInterval>
      <outputIOPortID>
        <!--opt, string-->test
      </outputIOPortID>
      <dynOutputIOPortID>
        <!--opt, string-->test
      </dynOutputIOPortID>
      <outputIOPortID>
        <!--opt, string-->test
      </outputIOPortID>
      <dynOutputIOPortID>
        <!--opt, string-->test
      </dynOutputIOPortID>
      <videoInputID>
        <!--opt, string-->1
      </videoInputID>
      <dynVideoInputID>
        <!--opt, string-->1
      </dynVideoInputID>
      <ptzAction>
        <!--opt, object-->
        <ptzChannelID>
          <!--req, string-->test
        </ptzChannelID>
        <actionName>
          <!--req, enum, subType:string-->preset
        </actionName>
        <actionNum>
          <!--opt, int-->1
        </actionNum>
        <presetDurationTime>
          <!--opt, int, unit:s, dep:and,{$.EventTrigger.EventTriggerNotificationList[*].EventTriggerNotification.ptzAction.actionName,eq,preset}-->1
        </presetDurationTime>
        <ptzAction>
        <cellphoneNumber>
          <!--opt, string, range:[0,11]-->test
        </cellphoneNumber>
      </EventTriggerNotification>
    </EventTriggerNotificationList>
  </EventTrigger>

```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.1.1.9 Get the linkage parameters of illegal login

Request URL

GET /ISAPI/Event/triggers/illaccess

Query Parameter

None

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<EventTrigger xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string-->illaccess
  </id>
  <eventType>
    <!--ro, req, enum, subType:string-->illaccess
  </eventType>
  <eventDescription>
    <!--ro, opt, string-->test
  </eventDescription>
  <inputIOPortID>
    <!--ro, opt, string-->test
  </inputIOPortID>
  <dynInputIOPortID>
    <!--ro, opt, string-->test
  </dynInputIOPortID>
  <videoInputChannelID>
    <!--ro, opt, string-->1
  </videoInputChannelID>
  <dynVideoInputChannelID>
    <!--ro, opt, string-->1
  </dynVideoInputChannelID>
  <intervalBetweenEvents>
    <!--ro, opt, int, unit:s-->1
  </intervalBetweenEvents>
  <wLSensorID>
    <!--ro, opt, string-->1
  </wLSensorID>
  <EventTriggerNotificationList>
    <!--ro, opt, array, subType:object-->
    <EventTriggerNotification>
      <!--ro, opt, object-->
      <id>
        <!--ro, req, string-->test
      </id>
      <notificationMethod>
        <!--ro, req, enum, subType:string-->FTP
      </notificationMethod>
      <notificationRecurrence>
        <!--ro, opt, enum, subType:string-->beginning
      </notificationRecurrence>
      <notificationInterval>
        <!--ro, opt, int, unit:ms-->1
      </notificationInterval>
      <outputIOPortID>
        <!--ro, opt, string-->test
      </outputIOPortID>
      <dynOutputIOPortID>
        <!--ro, opt, string-->test
      </dynOutputIOPortID>
      <videoInputID>
        <!--ro, opt, string-->1
      </videoInputID>
      <dynVideoInputID>
        <!--ro, opt, string-->1
      </dynVideoInputID>
      <ptzAction>
        <!--ro, opt, object-->
        <ptzChannelID>
          <!--ro, req, string-->test
        </ptzChannelID>
        <actionName>
          <!--ro, req, enum, subType:string-->preset
        </actionName>
        <actionNum>
          <!--ro, opt, int-->1
        </actionNum>
        <presetDurationTime>
          <!--ro, opt, int, unit:s, dep:and,{$.EventTrigger.EventTriggerNotificationList[*].EventTriggerNotification.ptzAction.actionName,eq,preset}-->1
        </presetDurationTime>
        <ptzAction>
      </ptzAction>
      <cellphoneNumber>
        <!--ro, opt, string, range:[0,11]-->test
      </cellphoneNumber>
    </EventTriggerNotification>
  </EventTriggerNotificationList>
</EventTrigger>

```

14.1.1.10 Get the linkage parameters of IP address conflict event

Request URL

GET /ISAPI/Event/triggers/ipconflict

Query Parameter

None

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<EventTrigger xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string-->ipconflict
  </id>
  <eventType>
    <!--ro, req, enum, subType:string-->ipconflict
  </eventType>
  <eventDescription>
    <!--ro, opt, string-->test
  </eventDescription>
  <inputIOPortID>
    <!--ro, opt, string-->test
  </inputIOPortID>
  <dynInputIOPortID>
    <!--ro, opt, string-->test
  </dynInputIOPortID>
  <videoInputChannelID>
    <!--ro, opt, string-->1
  </videoInputChannelID>
  <dynVideoInputChannelID>
    <!--ro, opt, string-->1
  </dynVideoInputChannelID>
  <intervalBetweenEvents>
    <!--ro, opt, int, unit:s-->1
  </intervalBetweenEvents>
  <wLSensorID>
    <!--ro, opt, string-->1
  </wLSensorID>
  <EventTriggerNotificationList>
    <!--ro, opt, array, subType:object-->
    <EventTriggerNotification>
      <!--ro, opt, object-->
      <id>
        <!--ro, req, string-->test
      </id>
      <notificationMethod>
        <!--ro, req, enum, subType:string-->FTP
      </notificationMethod>
      <notificationRecurrence>
        <!--ro, opt, enum, subType:string-->beginning
      </notificationRecurrence>
      <notificationInterval>
        <!--ro, opt, int, unit:ms-->1
      </notificationInterval>
      <outputIOPortID>
        <!--ro, opt, string-->test
      </outputIOPortID>
      <dynOutputIOPortID>
        <!--ro, opt, string-->test
      </dynOutputIOPortID>
      <videoInputID>
        <!--ro, opt, string-->1
      </videoInputID>
      <dynVideoInputID>
        <!--ro, opt, string-->1
      </dynVideoInputID>
      <ptzAction>
        <!--ro, opt, object-->
        <ptzChannelID>
          <!--ro, req, string-->test
        </ptzChannelID>
        <actionName>
          <!--ro, req, enum, subType:string-->preset
        </actionName>
        <actionNum>
          <!--ro, opt, int-->1
        </actionNum>
        <presetDurationTime>
          <!--ro, opt, int, unit:s, dep:and,{$.EventTrigger.EventTriggerNotificationList[*].EventTriggerNotification.ptzAction.actionName,eq,preset}-->1
        </presetDurationTime>
      </ptzAction>
      <cellphoneNumber>
        <!--ro, opt, string, range:[0,11]-->test
      </cellphoneNumber>
    </EventTriggerNotification>
  </EventTriggerNotificationList>
</EventTrigger>
```


14.1.1.11 Delete the linkage of IP address conflict event

Request URL

DELETE /ISAPI/Event/triggers/ipconflict

Query Parameter

None

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.1.1.12 Set the linkage parameters of IP address conflict event

Request URL

PUT /ISAPI/Event/triggers/ipconflict

Query Parameter

None

Request Message

```

<?xml version="1.0" encoding="UTF-8"?>

<EventTrigger xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string-->ipconflict
  </id>
  <eventType>
    <!--req, enum, subType:string-->ipconflict
  </eventType>
  <eventDescription>
    <!--opt, string-->test
  </eventDescription>
  <inputIOPortID>
    <!--opt, string-->test
  </inputIOPortID>
  <dynInputIOPortID>
    <!--opt, string-->test
  </dynInputIOPortID>
  <videoInputChannelID>
    <!--opt, string-->1
  </videoInputChannelID>
  <dynVideoInputChannelID>
    <!--opt, string-->1
  </dynVideoInputChannelID>
  <intervalBetweenEvents>
    <!--opt, int, unit:s-->1
  </intervalBetweenEvents>
  <WLSensorID>
    <!--opt, string-->1
  </WLSensorID>
  <EventTriggerNotificationList>
    <!--opt, array, subType:object-->
    <EventTriggerNotification>
      <!--opt, object-->
      <id>
        <!--req, string-->test
      </id>
      <notificationMethod>
        <!--req, enum, subType:string-->FTP
      </notificationMethod>
      <notificationRecurrence>
        <!--opt, enum, subType:string-->beginning
      </notificationRecurrence>
      <notificationInterval>
        <!--opt, int, unit:ms-->1
      </notificationInterval>
      <outputIOPortID>
        <!--opt, string-->test
      </outputIOPortID>
      <dynOutputIOPortID>
        <!--opt, string-->test
      </dynOutputIOPortID>
      <videoInputID>
        <!--opt, string-->1
      </videoInputID>
      <dynVideoInputID>
        <!--opt, string-->1
      </dynVideoInputID>
      <ptzAction>
        <!--opt, object-->
        <ptzChannelID>
          <!--req, string-->test
        </ptzChannelID>
        <actionName>
          <!--req, enum, subType:string-->preset
        </actionName>
        <actionNum>
          <!--opt, int-->1
        </actionNum>
        <presetDurationTime>
          <!--opt, int, unit:s, dep:and,{$.EventTrigger.EventTriggerNotificationList[*].EventTriggerNotification.ptzAction.actionName,eq,preset}-->1
        </presetDurationTime>
      </ptzAction>
    </EventTriggerNotification>
  </EventTriggerNotificationList>
</EventTrigger>

```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.1.1.13 Get the linkage parameters of network disconnection

Request URL

GET /ISAPI/Event/triggers/nicbroken

Query Parameter

None

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<EventTrigger xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string-->nicbroken
  </id>
  <eventType>
    <!--ro, req, enum, subType:string-->nicbroken
  </eventType>
  <eventDescription>
    <!--ro, opt, string-->test
  </eventDescription>
  <inputIOPortID>
    <!--ro, opt, string-->test
  </inputIOPortID>
  <dynInputIOPortID>
    <!--ro, opt, string-->test
  </dynInputIOPortID>
  <videoInputChannelID>
    <!--ro, opt, string-->1
  </videoInputChannelID>
  <dynVideoInputChannelID>
    <!--ro, opt, string-->1
  </dynVideoInputChannelID>
  <intervalBetweenEvents>
    <!--ro, opt, int, unit:s-->1
  </intervalBetweenEvents>
  <wLSensorID>
    <!--ro, opt, string-->1
  </wLSensorID>
  <EventTriggerNotificationList>
    <!--ro, opt, array, subType:object-->
    <EventTriggerNotification>
      <!--ro, opt, object-->
      <id>
        <!--ro, req, string-->test
      </id>
      <notificationMethod>
        <!--ro, req, enum, subType:string-->FTP
      </notificationMethod>
      <notificationRecurrence>
        <!--ro, opt, enum, subType:string-->beginning
      </notificationRecurrence>
      <notificationInterval>
        <!--ro, opt, int, unit:ms-->1
      </notificationInterval>
      <outputIOPortID>
        <!--ro, opt, string-->test
      </outputIOPortID>
      <dynOutputIOPortID>
        <!--ro, opt, string-->test
      </dynOutputIOPortID>
      <videoInputID>
        <!--ro, opt, string-->1
      </videoInputID>
      <dynVideoInputID>
        <!--ro, opt, string-->1
      </dynVideoInputID>
      <ptzAction>
        <!--ro, opt, object-->
        <ptzChannelID>
          <!--ro, req, string-->test
        </ptzChannelID>
        <actionName>
          <!--ro, req, enum, subType:string-->preset
        </actionName>
        <actionNum>
          <!--ro, opt, int-->1
        </actionNum>
        <presetDurationTime>
          <!--ro, opt, int, unit:s, dep:and,{$.EventTrigger.EventTriggerNotificationList[*].EventTriggerNotification.ptzAction.actionName,eq,preset}-->1
        </presetDurationTime>
        <ptzAction>
      </ptzAction>
      <cellphoneNumber>
        <!--ro, opt, string, range:[0,11]-->test
      </cellphoneNumber>
    </EventTriggerNotification>
  </EventTriggerNotificationList>
</EventTrigger>

```

14.1.1.14 Set the linkage parameters of network disconnection

Request URL

PUT /ISAPI/Event/triggers/nicbroken

Query Parameter

None

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<EventTrigger xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string-->nicbroken
  </id>
  <eventType>
    <!--req, enum, subType:string-->nicbroken
  </eventType>
  <eventDescription>
    <!--opt, string-->test
  </eventDescription>
  <inputIOPortID>
    <!--opt, string-->test
  </inputIOPortID>
  <dynInputIOPortID>
    <!--opt, string-->test
  </dynInputIOPortID>
  <videoInputChannelID>
    <!--opt, string-->1
  </videoInputChannelID>
  <dynVideoInputChannelID>
    <!--opt, string-->1
  </dynVideoInputChannelID>
  <intervalBetweenEvents>
    <!--opt, int, unit:s-->1
  </intervalBetweenEvents>
  <WLSensorID>
    <!--opt, string-->1
  </WLSensorID>
  <EventTriggerNotificationList>
    <!--opt, array, subType:object-->
    <EventTriggerNotification>
      <!--opt, object-->
      <id>
        <!--req, string-->test
      </id>
      <notificationMethod>
        <!--req, enum, subType:string-->FTP
      </notificationMethod>
      <notificationRecurrence>
        <!--opt, enum, subType:string-->beginning
      </notificationRecurrence>
      <notificationInterval>
        <!--opt, int, unit:ms-->1
      </notificationInterval>
      <outputIOPortID>
        <!--opt, string-->test
      </outputIOPortID>
      <dynOutputIOPortID>
        <!--opt, string-->test
      </dynOutputIOPortID>
      <videoInputID>
        <!--opt, string-->1
      </videoInputID>
      <dynVideoInputID>
        <!--opt, string-->1
      </dynVideoInputID>
      <ptzAction>
        <!--opt, object-->
        <ptzChannelID>
          <!--req, string-->test
        </ptzChannelID>
        <actionName>
          <!--req, enum, subType:string-->preset
        </actionName>
        <actionNum>
          <!--opt, int-->1
        </actionNum>
        <presetDurationTime>
          <!--opt, int, unit:s, dep:and,{$.EventTrigger.EventTriggerNotificationList[*].EventTriggerNotification.ptzAction.actionName,eq,preset}-->1
        </presetDurationTime>
      </ptzAction>
      <cellphoneNumber>
        <!--opt, string, range:[0,11]-->test
      </cellphoneNumber>
    </EventTriggerNotification>
  </EventTriggerNotificationList>
</EventTrigger>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.1.1.15 Delete the linkage of network disconnection

Request URL

DELETE /ISAPI/Event/triggers/nicbroken

Query Parameter

None

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.1.1.16 HDD error

EventType:diskerror

```

<?xml version="1.0" encoding="UTF-8"?>

<EventNotificationAlert xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, attr:version{opt, string, protocolVersion}-->
  <ipAddress>
    <!--ro, req, string, IPv4 address of the device that triggers the alarm-->172.6.64.7
  </ipAddress>
  <ipv6Address>
    <!--ro, opt, string, IPv6 address of the device that triggers the alarm-->1080:0:0:0:8:800:200C:417A
  </ipv6Address>
  <portNo>
    <!--ro, opt, int, communication port No. of the device that triggers the alarm-->80
  </portNo>
  <protocol>
    <!--ro, opt, enum, transmission communication protocol type, subType:string, desc:when ISAPI protocol is transmitted via HCNetsDK, the channel No. is the video channel No. of private protocol. When ISAPI protocol is transmitted via EZ protocol, the channel No. is the video channel No. of EZ protocol. When ISAPI protocol is transmitted via ISUP, the channel No. is the video channel No. of ISUP-->HTTP
  </protocol>
  <macAddress>
    <!--ro, opt, string, MAC address-->01:17:24:45:D9:F4
  </macAddress>
  <dynChannelID>
    <!--ro, opt, string, digital channel No.-->test
  </dynChannelID>
  <channelID>
    <!--ro, opt, int, channel No. of the device that triggers the alarm, desc:video channel No. that triggers the alarm-->1
  </channelID>
  <dateTime>
    <!--ro, req, datetime, alarm trigger time-->2004-05-03T17:30:08+08:00
  </dateTime>
  <activePostCount>
    <!--ro, opt, int, times that the same alarm has been uploaded, desc:event triggering frequency-->1
  </activePostCount>
  <eventType>
    <!--ro, req, enum, event type, subType:string, desc:"diskerror" (HDD Error)-->diskerror
  </eventType>
  <eventState>
    <!--ro, req, enum, event status, subType:string, desc:for durative event: "active" (valid), "inactive" (invalid)-->active
  </eventState>
  <eventDescription>
    <!--ro, req, string, event description, desc:HDD Error-->diskerror
  </eventDescription>
  <channelName>
    <!--ro, opt, string, channel name, range:[1,64]-->test
  </channelName>
  <deviceID>
    <!--ro, opt, string, device ID, desc:it should be returned for ISUP alarms, e.g., test0123 (Ehome2.0, Ehome4.0, and ISUP5.0)-->12345
  </deviceID>
  <diskNo>
    <!--ro, opt, int, HDD number-->1
  </diskNo>
  <HDDList>
    <!--ro, opt, array, HDD List, subType:object-->
    <HDD>
      <!--ro, opt, object, HDD-->
      <id>
        <!--ro, req, int, index, desc:it starts from 1-->1
      </id>
      <diskNumber>
        <!--ro, req, int, HDD No.-->1
      </diskNumber>
    </HDD>
  </HDDList>
</EventNotificationAlert>

```

14.1.1.17 Invalid access

EventTypeError:illaccess

```

<?xml version="1.0" encoding="UTF-8"?>

<EventNotificationAlert xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, event parameters, attr:version{opt, string, protocolVersion}-->
  <ipAddress>
    <!--ro, req, string, IPv4 address of the alarm device-->172.6.64.7
  </ipAddress>
  <ipv6Address>
    <!--ro, opt, string, IPv6 address of the alarm device-->1080:0:0:0:8:800:200C:417A
  </ipv6Address>
  <portNo>
    <!--ro, opt, int, port No. of the alarm device-->80
  </portNo>
  <protocol>
    <!--ro, opt, string, transfer protocol type, range:[0,64], desc:transfer protocol type: "HTTP", "HTTPS", "EHome". The value should be "HTTP" when ISAPI
    protocol is transmitted via EZVIZ protocol. The value should be "EHome" when ISAPI protocol is transmitted via ISUP-->HTTP
  </protocol>
  <macAddress>
    <!--ro, opt, string, MAC address-->01:17:24:45:D9:F4
  </macAddress>
  <dynChannelID>
    <!--ro, opt, string, digital channel No.-->test
  </dynChannelID>
  <channelID>
    <!--ro, opt, int, No. of the channel that triggers an alarm, desc:No. of the video channel that triggers an alarm-->1
  </channelID>
  <dateTime>
    <!--ro, req, datetime, alarm time-->2004-05-03T17:30:08+08:00
  </dateTime>
  <activePostCount>
    <!--ro, opt, int, the uploading times of the same alarm, desc:event frequency-->1
  </activePostCount>
  <eventType>
    <!--ro, req, enum, event type, subType:string, desc:"illaccess" (invalid access)-->illaccess
  </eventType>
  <eventState>
    <!--ro, req, enum, event status, subType:string, desc:for persistent events: "active" (valid), "inactive" (invalid)-->active
  </eventState>
  <eventDescription>
    <!--ro, req, string, event description, desc:illaccess-invalid access-->illaccess
  </eventDescription>
  <channelName>
    <!--ro, opt, string, channel name, range:[1,64]-->test
  </channelName>
  <deviceID>
    <!--ro, opt, string, device ID, desc:it should be returned for ISUP alarms, e.g., test0123 (Ehome2.0, Ehome4.0, and ISUP5.0)-->12345
  </deviceID>
  <username>
    <!--ro, opt, string, Locked user name, range:[0,32], desc:the number of attempts by current user name has reached limit. The user name and IPv4 address
    may be Locked at the same time-->test
  </username>
  <ipV4Address>
    <!--ro, opt, string, Locked IPv4 address, desc:the number of attempts by current IPv4 address has reached limit. The user name and Ipv4 address may be
    Locked at the same time-->test
  </ipV4Address>
  <lockStatus>
    <!--ro, opt, enum, Locking status, subType:string, desc:; "unLocked", "Locked"-->unlocked
  </lockStatus>
  <retryLoginTime>
    <!--ro, opt, int, remaining attempts, range:[0,65535], desc:it is valid when the value of LockStatus is "unLocked"-->0
  </retryLoginTime>
  <lockedTime>
    <!--ro, opt, int, Locking duration (minutes), range:[0,65535], unit:秒, desc:it is valid when the value of LockStatus is "Locked"-->0
  </lockedTime>
  <accessInfoList>
    <!--ro, opt, array, invalid access information List, subType:object-->
    <accessInfo>
      <!--ro, opt, object, invalid access information-->
      <ipV4Address>
        <!--ro, opt, string, Invalid access IP address-->test
      </ipV4Address>
      <dateTime>
        <!--ro, opt, datetime, invalid access time-->2004-05-03T17:30:08+08:00
      </dateTime>
    </accessInfo>
  </accessInfoList>
</EventNotificationAlert>

```

14.1.1.18 Network disconnected

EventType:nicbroken


```
<?xml version="1.0" encoding="UTF-8"?>

<EventNotificationAlert xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, event information, attr:version{opt, string, protocolVersion}-->
  <ipAddress>
    <!--ro, req, string, IPv4 address of the device that triggers an alarm-->172.6.64.7
  </ipAddress>
  <ipv6Address>
    <!--ro, opt, string, IPv6 address of the device that triggers an alarm-->1080:0:0:8:800:200C:417A
  </ipv6Address>
  <portNo>
    <!--ro, opt, int, port No. of the device that triggers an alarm-->80
  </portNo>
  <protocol>
    <!--ro, opt, string, communication protocol types, range:[0,64], desc:transmission communication protocol type: "HTTP", "HTTPS", "EHome" (the value should be "HTTP" when ISAPI protocol is transmitted via EZ protocol, and the value should be "EHome" when ISAPI protocol is transmitted via ISUP)-->HTTP
  </protocol>
  <macAddress>
    <!--ro, opt, string, MAC address-->01:17:24:45:D9:F4
  </macAddress>
  <dynChannelID>
    <!--ro, opt, string, digital channel No.-->test
  </dynChannelID>
  <channelID>
    <!--ro, opt, int, channel No. of the device that triggers an alarm, desc:video channel No. that triggers the alarm-->1
  </channelID>
  <dateTime>
    <!--ro, req, datetime, alarm trigger time-->2004-05-03T17:30:08+08:00
  </dateTime>
  <activePostCount>
    <!--ro, opt, int, the uploading times of the same alarm, desc:event triggering frequency-->1
  </activePostCount>
  <eventType>
    <!--ro, req, string, event type, desc:"nicbroken" (network disconnected)-->nicbroken
  </eventType>
  <eventState>
    <!--ro, req, enum, event status, subType:string, desc:for durative event: "active" (valid), "inactive" (invalid)-->active
  </eventState>
  <eventDescription>
    <!--ro, req, string, event description, desc:"nicbroken" (network disconnected)-->nicbroken
  </eventDescription>
  <channelName>
    <!--ro, opt, string, channel name, range:[1,64]-->test
  </channelName>
  <deviceID>
    <!--ro, opt, string, device ID, desc:it should be returned for ISUP alarms, e.g., test0123 (Ehome2.0, Ehome4.0, and ISUP5.0)-->12345
  </deviceID>
  <DevicePositionInfo>
    <!--ro, opt, object, device location, desc:the current location of the device when triggering the event, which is mainly for on-board device-->
    <divisionEW>
      <!--ro, opt, enum, eastern/western hemisphere, subType:string, desc:"E" (eastern hemisphere), "W" (western hemisphere)-->E
    </divisionEW>
    <longitude>
      <!--ro, opt, int, Longitude, desc:degree*3600*100 + minute*60*100 + second*100-->100
    </longitude>
    <divisionNS>
      <!--ro, opt, enum, southern/northern hemisphere, subType:string, desc:"S" (southern hemisphere), "N" (northern hemisphere)-->N
    </divisionNS>
    <latitude>
      <!--ro, opt, int, Latitude, desc:degree*3600*100 + minute*60*100 + second*100-->100
    </latitude>
    <direction>
      <!--ro, opt, int, vehicle direction, desc:actual direction (degree) (due north as 0 degree, calculated clockwise)-->100
    </direction>
    <speed>
      <!--ro, opt, int, speed, desc:cm/h-->100
    </speed>
    <height>
      <!--ro, opt, int, height, unit:cm, desc:cm-->1
    </height>
  </DevicePositionInfo>
</EventNotificationAlert>
```

14.1.2 Event Subscription

14.1.2.1 Establish arming connection

Request URL

GET /ISAPI/Event/notification/alertStream?deployID=<deployID>

Query Parameter

Parameter Name	Parameter Type	Description
deployID	string	0 (client-side arming), 1 (real-time arming). Defaults to the client-side arming when deployID does not exist.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<EventNotificationAlert xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, event message, attr:version{req, string, protocolVersion}-->
  <ipAddress>
    <!--ro, opt, string, IPV4 address of the device that triggers an alarm-->test
  </ipAddress>
  <ipv6Address>
    <!--ro, opt, string, IPV6 address of the device that triggers an alarm-->test
  </ipv6Address>
  <portNo>
    <!--ro, opt, int, port No. of the device that triggers an alarm, range:[0,65535]-->0
  </portNo>
  <protocol>
    <!--ro, opt, enum, protocol type, subType:string, desc:"HTTP", "HTTPS", "EHome" (ISUP)-->HTTP
  </protocol>
  <macAddress>
    <!--ro, opt, string, MAC address, range:[0,17]-->00-16-EA-AE-3C-40
  </macAddress>
  <channelID>
    <!--ro, opt, int, channel No. of the device that triggers an alarm, range:[0,65535]-->1
  </channelID>
  <dateTime>
    <!--ro, req, datetime, alarm triggering time-->1970-01-01T00:00:00+08:00
  </dateTime>
  <activePostCount>
    <!--ro, req, int, the uploading times of the same alarm, range:[0,65535]-->0
  </activePostCount>
  <eventType>
    <!--ro, req, string, heartbeat type-->test
  </eventType>
  <eventState>
    <!--ro, req, enum, event status, subType:string, desc:"active" (triggered), "inactive" (not triggered, the heartbeat data)-->active
  </eventState>
  <eventDescription>
    <!--ro, req, string, event description, range:[0,128]-->test
  </eventDescription>
</EventNotificationAlert>
```

14.1.2.2 Subscribe to events/alarms in arming mode

Request URL

POST /ISAPI/Event/notification/subscribeEvent?deployID= <deployID>

Query Parameter

Parameter Name	Parameter Type	Description
deployID	enum	0 (device local arming), 1 (real-time arming by platform). If the deployID is absent, it defaults to device local arming.

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<SubscribeEvent xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, picture uploading modes of all events which contain pictures, attr:version{req, string, protocolVersion}-->
  <heartbeat>
    <!--opt, int, heartbeat interval time, range:[1,180], unit:s-->1
  </heartbeat>
  <channelMode>
    <!--opt, enum, channel subscription mode, subType:string, desc:"all" (subscribe to all channels), "list" (subscribe to channels according to channel list)-->list
  </channelMode>
  <eventMode>
    <!--req, enum, event subscription mode, subType:string, desc:"all" (subscribe to all alarms/events), "list" (subscribe to specified alarms/events)-->
```

```

>list
</eventMode>
<EventList>
  <!--opt, array, event type List for subscription, subType:object, desc:this node is valid when eventMode is "List"-->
  <Event>
    <!--opt, object, subscription of a specified alarm/event-->
    <type>
      <!--req, enum, event type, subType:string, desc:refer to event type List (eventType): "ADAS"(advanced driving assistance system), "ADASAlarm"
      (advanced driving assistance alarm), "AID"(traffic incident detection), "ANPR"(automatic number plate recognition), "AccessControllerEvent" (access
      controller event), "CDsStatus" (CD burning status), "DBD"(driving behavior detection) "GPSUpload" (GPS information upload), "HFDP"(frequently appeared
      person detection), "IO"(I/O alarm), "IOTD" (IoT device detection), "LES" (Logistics scanning event), "LFPD"(rarely appeared person detection), "PALMismatch"
      (video standard mismatch), "PIR", "PeopleCounting" (people counting), "PeopleNumChange" (people number change detection), "Standup"(standing up detection),
      "TMA"(thermometry alarm), "TMPA"(temperature measurement pre-alarm), "VMD"(motion detection), "abnormalAcceleration", "abnormalDriving", "advReachHeight",
      "alarmResult", "attendance", "attendedBaggage", "audioAbnormal", "audioException", "behaviorResult"(abnormal event detection), "blindSpotDetection"(blind
      spot detection alarm), "cardMatch", "changedStatus", "collision", "containerDetection", "crowdSituationAnalysis", "databaseException", "defocus"(defocus
      detection), "diskUnformat"(disk unformatted), "diskError", "diskFull", "driverConditionMonitor"(driver status monitoring alarm); "emergencyAlarm",
      "faceCapture", "faceSnapModeling", "facedetection", "failDown"(People Falling Down), "faultAlarm", "fieldetection"(intrusion detection), "fireDetection",
      "fireEscapeDetection", "flowOverrun", "framesPeopleCounting", "getUp"(getting up detection), "group" (people gathering), "hdbadBlock"(HDD bad sector
      detection event), "hdImpact"(HDD impact detection event), "heatmap"(heat map alarm), "highHDDTemperature"(HDD high temperature detection event),
      "highTempAlarm"(HDD high temperature alarm), "hotSpare"(hot spare exception), "ilLaccess"(invalid access), "ipcTransferAbnormal", "ipconflict"(IP address
      conflicts), "keyPersonGetUp"(key person getting up detection), "LeavePosition"(absence detection), "Linedetection"(Line crossing detection),
      "ListSyncException"(List synchronization exception), "Loitering"(Loitering detection), "LowHDDTemperature"(HDD Low temperature detection event),
      "mixedTargetDetection"(multi-target-type detection), "modelError", "nicbroken"(network disconnected), "nodeOffline"(node disconnected),
      "nonPoliceIntrusion", "overSpeed"(overspeed alarm), "overtimeTarry"(staying overtime detection), "parking"(parking detection), "peopleNumChange",
      "peopleNumCounting", "personAbnormalAlarm"(person ID exception alarm), "personDensityDetection", "personQueueCounting", "personQueueDetection",
      "personQueueRealTime"(real-time data of people queuing-up detection), "personQueueTime"(waiting time detection), "playCellphone"(playing mobile phone
      detection), "pocException"(video exception), "poe"(POE power exception), "policeAbsent", "radarAlarm", "radarFieldDetection", "radarLineDetection",
      "radarPerimeterRule"(radar rule data), "radarTargetDetection", "radarVideoDetection"(radar-assisted target detection), "radarException", "rapidMove",
      "reachHeight"(climbing detection), "recordCycleAbnormal"(insufficient recording period), "recordException", "regionEntrance", "regionExiting", "retention"
      (people overstay detection), "rollOver", "running"(people running), "safetyHelmetDetection"(hard hat detection), "scenechangedetection", "sensorAlarm"
      (angular acceleration alarm), "severeHDDFailure"(HDD major fault detection), "shelterAlarm"(video tampering alarm), "shipsDetection", "sitQuietly"(sitting
      detection), "smokeAndFireDetection", "smokeDetection", "softIO", "spacingChange"(distance exception), "sysStorageFull"(storing full alarm of cluster system),
      "takingElevatorDetection"(elevator electric moped detection), "targetCapture", "temperature"(temperature difference alarm), "thermometry"(temperature
      alarm), "thirdPartyException", "toiletTarry"(in-toilet overtime detection), "tollCodeInfo"(QR code information report), "tossing"(thrown object detection),
      "unattendedBaggage", "vehicleMatchResult"(uploading List alarms), "vehicleRcogResult", "versionAbnormal"(cluster version exception), "videoException",
      "videoloss", "violationAlarm", "violentMotion"(violent motion detection), "yardTarry"(playground overstay detection), "CertificateCaptureEvent"(person ID
      capture comparison event), "UncertificateCompareEvent", "ConsumptionAndTransactionRecordEvent", "ConsumptionEvent", "TFS" (traffic enforcement event),
      "TransactionRecordEvent", "SetMealQuery"(searching consumption set meals), "ConsumptionStatusQuery"(searching the consumption status),
      "certificateRevocation" (certificate expiry), "humanBodyComparison" (human body comparison), "regionTargetNumberCounting" (regional target statistics)--
      >mixedTargetDetection
    </type>
    <minorAlarm>
      <!--opt, string, minor alarm type, desc:this node is required when type is "AccessControllerEvent"-->0x400,0x401,0x402,0x403
    </minorAlarm>
    <minorException>
      <!--opt, string, minor exception type, desc:this node is required when type is "AccessControllerEvent"-->0x400,0x401,0x402,0x403
    </minorException>
    <minorOperation>
      <!--opt, string, minor operation type, desc:this node is required when type is "AccessControllerEvent"-->0x400,0x401,0x402,0x403
    </minorOperation>
    <minorEvent>
      <!--opt, string, minor event type, desc:this node is required when type is "AccessControllerEvent"-->0x01,0x02,0x03,0x04
    </minorEvent>
    <pictureURLType>
      <!--opt, enum, alarm picture format, subType:string, desc:"binary" (binary), "LocalURL" (device Local URL), "cloudStorageURL" (cloud storage URL)--
    >cloudStorageURL
    </pictureURLType>
    <channels>
      <!--opt, string, channel information linked to event, desc:it supports multiple channels, which are separated by commas-->1,2,3,4
    </channels>
    <ConferenceIDList>
      <!--opt, array, video conference ID List, subType:object, desc:when this node does not exist, it indicates to subscribe to all conferences-->
    </ConferenceIDList>
    <ConferenceID>
      <!--opt, string, ID of subscribed video conference, range:[1,32]-->test
    </ConferenceID>
    <ConferenceIDList>
    </ConferenceIDList>
    <uploadAllTarget>
      <!--opt, bool, whether to upload all detected targets, desc:the default value is false. In perimeter protection, this node is used for MVR to get
      all targets detected by the network camera-->>false
    </uploadAllTarget>
    <uploadMEFData>
      <!--opt, bool, whether to upload the electronic fence data related to the event, desc:true by default-->true
    </uploadMEFData>
    <minorType>
      <!--opt, enum, event sub-type, subType:string,
      desc:1. It is valid when the value of <type> is "CertificateCaptureEvent" or "ncertificateCompareEvent".
      2. There is the requirement to only subscribe to the failure or success of an event, for example, security inspection at the railway station and the hotel
      check-in.
      3. When this node is not applied, it indicates to subscribe to both success and failure of the event. "success", "failed"-->success
    </minorType>
    <childDevIDList>
      <!--opt, array, (sub-device Local identifier) device serial No. List, subType:object, desc:arm sub device (sensor)-->
    </childDevIDList>
    <childDevID>
      <!--opt, string, (sub-device Local identifier) device serial No. List, range:[1,128], desc:arm sub device (sensor)-->test
    </childDevID>
    <childDevIDList>
    </childDevIDList>
    <radarChannels>
      <!--opt, string, arm by radar channel, desc:it supports multiple channels, which are separated by commas-->1,2,3,4
    </radarChannels>
    <audioChannels>
      <!--opt, string, arm by audio channel, desc:it supports multiple channels, which are separated by commas-->1,2,3,4
    </audioChannels>
    <childDeviceFormat>
      <!--ant. bool. unload hv sub device. desc:unload hv sub device-->true
    </childDeviceFormat>

```

```

    </childDeviceFormat>
    <unitChannels>
        <!--opt, string, arm by optical fiber channel, desc:it supports multiple channels, which are separated by commas-->1,2,3,4
    </unitChannels>
</Event>
</EventList>
<channels>
    <!--opt, string, unified arming of all channels, desc:if this node is applied, <channels> in <Event> will be invalid. If the value of <channelMode> is
all, this node should not be applied-->1,2,3,4
    </channels>
    <pictureURLType>
        <!--opt, enum, format unified configuration of alarm pictures, subType:string, desc:"binary", "localURL" (device local URL), "cloudStorageURL" (cloud
storage URL). The node indicates the upload mode of all event pictures. If the node is applied, <pictureURLType> of <Event> will be invalid. If the node is
not applied, the pictures are uploaded in the default mode. The default data type of uploaded pictures for front-end devices is binary, and for back-end
devices is local URL of the device-->cloudStorageURL
    </pictureURLType>
    <ChangedUploadSub>
        <!--opt, object, subscribe to the uploaded information of device status changed event-->
        <interval>
            <!--opt, int, the lifecycle of arming GUID, range:[1,300], unit:s, desc:the default value is 5 (unit: minute). Within the interval, if the client
software does not reconnect to the device, a new GUID will be generated by the device-->300
        </interval>
        <StatusSub>
            <!--opt, object, status information-->
            <all>
                <!--opt, bool, whether to subscribe to the changing status of all channels, HDDs, and capability sets-->>false
            </all>
            <channel>
                <!--opt, bool, status of subscribed channels, desc:it is not required if the value of <all> is true-->>true
            </channel>
            <hd>
                <!--opt, bool, subscribe to HDD status, desc:it is not required if the value of <all> is true-->>true
            </hd>
            <capability>
                <!--opt, bool, subscribe to changing status of capability set, desc:it is not required if the value of <all> is true-->>true
            </capability>
            <ChanStatus>
                <!--ro, opt, object, channel status subscription of uploaded device status changed event, desc:it is valid when the value of <channel> is true. When
this node does not exist, it indicates to upload all channel status changes. For example, the recording status is uploaded frequently, and the platform
focuses more on the device online status and arming status, thus the recording status needs to be unsubscribed-->
                <online>
                    <!--ro, opt, bool, whether the channel online status is subscribed, desc:if this node does not exist, it indicates there will be no related alarm--
-->true
                </online>
                <record>
                    <!--ro, opt, bool, whether the recording status (the device is recording) is subscribed, desc:if this node does not exist, it indicates there will
be no related alarm-->true
                </record>
                <recordStatus>
                    <!--ro, opt, bool, whether the recording status is subscribed, desc:if this node does not exist, it indicates there will be no related alarm--
>true
                </recordStatus>
                <signal>
                    <!--ro, opt, bool, whether the signal status is subscribed, desc:if this node does not exist, it indicates there will be no related alarm-->true
                </signal>
                <arming>
                    <!--ro, opt, bool, whether the camera arming status (armed by NVR) is subscribed, desc:if this node does not exist, it indicates there will be no
related alarm-->true
                </arming>
                </ChanStatus>
            </StatusSub>
        </ChangedUploadSub>
        <identityKey>
            <!--opt, string, subscription connection interaction key, range:[1,64], desc:N/A-->test
        </identityKey>
        <ConferenceIDList>
            <!--opt, array, video conference ID list, subType:object-->
            <ConferenceID>
                <!--opt, string, ID of subscribed video conference, range:[1,32]-->test
            </ConferenceID>
        </ConferenceIDList>
        <subscribeEventID>
            <!--opt, string, custom subscription ID. The platform should guarantee the uniqueness of ID when applying it. The automatic network replenishment of
events will be enabled by default after the node is applied, range:[1,128], desc:when an event/alarm is subscribed (related URL: POST
/ISAPI/Event/notification/subscribeEvent), if this node is applied, it can be used to replace <id> (subscription ID) returned in message
SubscribeEventResponse-->test
        </subscribeEventID>
        <level>
            <!--opt, enum, arming level, subType:string, desc:"high" (default value), "middle", "low"-->high
        </level>
        <middleLevelPictureEnabeld>
            <!--opt, bool, whether to enable picture uploading for middle-level arming, desc:the default value is true-->true
        </middleLevelPictureEnabeld>
        <childDevIDList>
            <!--opt, array, (sub-device local identifier) device serial No. list, subType:object, desc:arm sub device (sensor)-->
            <childDevID>
                <!--opt, string, (sub-device local identifier) device serial No. list, range:[1,128], desc:arm sub device (sensor)-->test
            </childDevID>
        </childDevIDList>
        <SubscribeISAPIMessage>
            <!--opt, object-->
        </SubscribeISAPIMessage>
        <EventTypeList>
            <!--opt, array, event list, subType:object, desc:event list-->

```

```

<eventType>
  <!--req, enum, event type, subType:string, desc:event type-->AIOP_Video
</eventType>
<uploadPicEnabled>
  <!--opt, bool, whether to upload the event picture, desc:whether to upload the event picture-->>false
</uploadPicEnabled>
</EventTypeList>
<EventList>
  <!--req, array, event List, subType:object, range:[0,200]-->
  <Event>
    <!--opt, object, a single event-->
    <eventType>
      <!--req, enum, event type, subType:string, desc:event type-->AIOP_Video
    </eventType>
    <uploadPicEnabled>
      <!--opt, bool, whether to upload the event picture, desc:whether to upload the event picture-->>false
    </uploadPicEnabled>
  </Event>
</EventList>
</SubscribeISAPIMessage>
<radarChannels>
  <!--opt, string, batch arming by radar channel, desc:if this field is applied, radarChannels in Event will not take effect. To arm all radar channels, this field should not be applied. To arm a part of channels, you can List the channel numbers. Multiple channels are separated by commas-->1,2,3,4
</radarChannels>
<qosLevel>
  <!--ro, opt, object, subscription events qos Level, desc:subscription events qos Level-->
  <defaultLevel>
    <!--ro, req, enum, default qos Level, subType:int, desc:default qos Level-->0
  </defaultLevel>
  <eventList>
    <!--ro, opt, array, custom event qos Level List, subType:object-->
    <event>
      <!--ro, opt, object, custom event qos Level-->
      <eventType>
        <!--ro, req, string, event type, range:[0,64], desc:its values refer to event types of different domains-->test
      </eventType>
      <level>
        <!--ro, req, enum, qos Level of this event type, subType:int, desc:qos Level of this event type-->1
      </level>
      <channels>
        <!--ro, opt, string, video resource channel No., range:[0,256], desc:no such node means it applies to all channels; otherwise it applies to the channels listed in the array, and channels not listed use default qos Level-->0,1,2
      </channels>
    </event>
  </eventList>
</qosLevel>
<audioChannels>
  <!--opt, string, arm by audio channel, desc:it supports multiple channels, which are separated by commas-->1,2,3,4
</audioChannels>
<unitChannels>
  <!--opt, string, batch arming by optical fiber channel, desc:if this field is applied, unitChannels in Event will not take effect. To arm all fiber channels, this node should not be applied. To arm a part of channels, you can List the channel numbers. Multiple channels are separated by commas-->1,2,3,4
</unitChannels>
<retransmissionID>
  <!--opt, string, ANR arming ID, range:[1,64], desc:UUID (an unique ID generated by the client). If this field is applied during establishing the event arming/subscription connection, the ANR of subscribed event will be enabled by default; when the network reconnected, the platform can apply the same UUID to tell the device to re-upload saved event information during network disconnection period-->123456
</retransmissionID>
<retransmissionTimeoutDuration>
  <!--opt, int, data transmission timeout for ANR, range:[1,168], unit:h, desc:data transmission timeout for ANR-->1
</retransmissionTimeoutDuration>
<subscribeWithoutPic>
  <!--opt, bool-->>false
</subscribeWithoutPic>
</SubscribeEvent>

```

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<SubscribeEventResponse xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, subscription result, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, int, subscription ID, which is returned by the device. The device should guarantee the uniqueness of ID, range:[1,64]-->1
  </id>
  <FailedEventList>
    <!--ro, opt, array, list of events, of which subscription failed, subType:object, desc:when subscription of one or multiple events failed, this node should be returned. The client software can check if all events are subscribed to by checking whether the node <FailedEventList> is returned-->
    <Event>
      <!--ro, opt, object, event, of which the subscription failed. The event/alarm type name can be obtained via the capability set-->
      <type>
        <!--ro, req, enum, event type, subType:string, desc:event type-->ADAS
      </type>
      <minorAlarm>
        <!--ro, opt, string, minor alarm type, desc:refer to the macro definition of uploaded events. "IDCardInfoEvent" is required when the type of event is "AccessControllerEvent"-->0x400,0x401,0x402,0x403
      </minorAlarm>
      <minorException>
        <!--ro, opt, string, minor exception type, desc:refer to the macro definition of uploaded events. "IDCardInfoEvent" is required when the type of event is "AccessControllerEvent"-->0x400,0x401,0x402,0x403
      </minorException>
      <minorOperation>
        <!--ro, opt, string, minor operation type, desc:refer to the macro definition of uploaded events. "IDCardInfoEvent" is required when the type of event is "AccessControllerEvent"-->0x400,0x401,0x402,0x403
      </minorOperation>
      <minorEvent>
        <!--ro, opt, string, minor event type, desc:refer to the macro definition of uploaded events. "IDCardInfoEvent" is required when the type of event is "AccessControllerEvent"-->0x01,0x02,0x03,0x04
      </minorEvent>
      <pictureURLType>
        <!--ro, opt, enum, alarm picture format, subType:string, desc:"binary", "LocalURL" (Local URL), "cloudStorageURL" (cloud storage URL).-->binary
      </pictureURLType>
      <channels>
        <!--ro, opt, string, channel No., desc:it supports multiple channels, which are separated by commas-->1,2,3,4
      </channels>
      <subStatusCode>
        <!--ro, req, enum, error code, subType:string, desc:refer to the error code dictionary-->activeNumMax
      </subStatusCode>
      <minorType>
        <!--ro, opt, enum, event sub-type, subType:string,
        desc:1. It is valid when the value of <type> is "CertificateCaptureEvent" or "ncertificateCompareEvent".
        2. There is the requirement to only subscribe to the failure or success of an event, for example, security inspection at the railway station and the hotel check-in.
        3. When this node is not returned, it indicates to subscribe to both success and failure of the event. "success", "failed"-->success
      </minorType>
    </Event>
  </FailedEventList>
</SubscribeEventResponse>

```

14.1.2.3 Get the alarm/event subscription capability

Request URL

GET /ISAPI/Event/notification/subscribeEventCap

Query Parameter

None

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>
<SubscribeEventCap xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, picture uploading modes of all events which contain pictures, attr:version{req, string, protocolVersion}-->
  <format opt="xml,json">
    <!--ro, opt, string, supported message data format, attr:opt{req, string}-->xml
  </format>
  <heartbeat min="1" max="180">
    <!--ro, opt, int, heartbeat interval time, range:[1,180], unit:s, attr:min{req, int},max{req, int}-->1
  </heartbeat>
  <channelMode opt="all,list">
    <!--ro, opt, enum, channel subscription mode, subType:string, attr:opt{req, string}, desc:"all" (subscribe to all channels), "list" (subscribe to channels according to channel list)-->list
  </channelMode>
  <eventMode opt="all,list,allAndChild">
    <!--ro, req, enum, event subscription mode, subType:string, attr:opt{req, string}, desc:"all" (subscribe to all alarms/events), "list" (subscribe to specified alarms/events)-->list
  </eventMode>
  <EventList>
    <!--ro, opt, array, event type list for subscription, subType:object, desc:this node is valid when eventMode is "list"-->
    <Event>
      <!--ro, opt, object, subscription of a specified alarm/event-->
      <type>
        <!--ro, req, enum, event type, subType:string, desc:refer to event type list (eventType): "ADAS"(advanced driving assistance system), "ADASAlarm" (advanced driving assistance alarm), "AID"(traffic incident detection), "ANPR"(automatic number plate recognition), "AccessControllerEvent" (access controller event), "CDsStatus" (CD burning status), "DBD"(driving behavior detection) "GPSUpload" (GPS information upload), "HFDP"(frequently appeared person detection), "IO"(I/O alarm), "IOTD" (IoT device detection), "LES" (Logistics scanning event), "LFDP"(rarely appeared person detection), "PALMismatch" (video standard mismatch), "PIR", "PeopleCounting" (people counting), "PeopleNumChange" (people number change detection), "Standup"(standing up detection), "TMA"(thermometry alarm), "TMPA"(temperature measurement pre-alarm), "VMD"(motion detection), "abnormalAcceleration", "abnormalDriving", "advReachHeight", "alarmResult", "attendance", "attendedBaggage", "audioAbnormal", "audioException", "behaviorResult"(abnormal event detection), "blindSpotDetection"(blind spot detection alarm), "cardMatch", "changedStatus", "collision", "containerDetection", "crowdSituationAnalysis", "databaseException", "defocus"(defocus detection), "diskUnformat"(disk unformatted), "diskerror", "diskfull", "driverConditionMonitor"(driver status monitoring alarm); "emergencyAlarm", "faceCapture", "faceSnapModeling", "facedetection", "failDown"(People Falling Down), "faultAlarm", "fieldDetection"(intrusion detection), "fireDetection", "fireEscapeDetection", "flowOverrun", "framesPeopleCounting", "getUp"(getting up detection), "group" (people gathering), "hddBadBlock"(HDD bad sector detection event), "hddImpact"(HDD impact detection event), "heatmap"(heat map alarm), "highHDDTemperature"(HDD high temperature detection event), "highTempAlarm"(HDD high temperature alarm), "hotSpare"(hot spare exception), "iLLaccess"(invalid access), "ipcTransferAbnormal", "ipConflict"(IP address conflicts), "keyPersonGetUp"(key person getting up detection), "LeavePosition"(absence detection), "linedetection"(line crossing detection), "listSyncException"(list synchronization exception), "Loitering"(loitering detection), "LowHDDTemperature"(HDD low temperature detection event), "mixedTargetDetection"(multi-target-type detection), "modelError", "nicBroken"(network disconnected), "nodeOffline"(node disconnected), "nonPoliceIntrusion", "overSpeed"(overspeed alarm), "overtimeTarry"(staying overtime detection), "parking"(parking detection), "peopleNumChange", "peopleNumCounting", "personAbnormalAlarm"(person ID exception alarm), "personDensityDetection", "personQueueCounting", "personQueueDetection", "personQueueRealTime"(real-time data of people queuing up detection), "personQueueTime"(waiting time detection), "playCellphone"(playing mobile phone detection), "poeException"(video exception), "poe"(POE power exception), "policeAbsent", "radarAlarm", "radarFieldDetection", "radarLineDetection", "radarPerimeterRule"(radar rule data), "radarTargetDetection", "radarVideoDetection"(radar-assisted target detection), "raidException", "rapidMove", "reachHeight"(climbing detection), "recordCycleAbnormal"(insufficient recording period), "recordException", "regionEntrance", "regionExiting", "retention" (people overstay detection), "rollover", "running"(people running), "safetyHelmetDetection"(hard hat detection), "scenechangedetection", "sensorAlarm" (angular acceleration alarm), "severeHDDFailure"(HDD major fault detection), "shelterAlarm"(video tampering alarm), "shipsDetection", "sitQuietly"(sitting detection), "smokeAndFireDetection", "smokeDetection", "softIO", "spacingChange"(distance exception), "sysStorFull"(storing full alarm of cluster system), "takingElevatorDetection"(elevator electric moped detection), "targetCapture", "temperature"(temperature difference alarm), "thermometry"(temperature alarm), "thirdPartyException", "toiletTarry"(in-toilet overtime detection), "tollCodeInfo"(QR code information report), "tossing"(thrown object detection), "unattendedBaggage", "vehicleMatchResult"(uploading list alarms), "vehicleRecogResult", "versionAbnormal"(cluster version exception), "videoException", "videoLoss", "violationAlarm", "violentMotion"(violent motion detection), "yardTarry"(playground overstay detection), "AccessControllerEvent", "IDCardInfoEvent", "FaceTemperatureMeasurementEvent", "QRCodeEvent"(QR code event of access control), "CertificateCaptureEvent"(person ID capture comparison event), "UncertificateCompareEvent", "ConsumptionAndTransactionRecordEvent", "ConsumptionEvent", "TFS" (traffic enforcement event), "TransactionRecordEvent", "HealthInfoSyncQuery" (health information search event), "SetMealQuery"(searching consumption set meals), "ConsumptionStatusQuery" (searching the consumption status), "certificateRevocation" (certificate expiry), "humanBodyComparison" (human body comparison), "regionTargetNumberCounting" (regional target statistics)-->mixedTargetDetection
      </type>
      <channels>
        <!--ro, opt, string, channel information linked to event, desc:it supports multiple channels, which are separated by commas-->1,2,3,4
      </channels>
    </Event>
  </EventList>
  <isSupportUnSubscribeEvent>
    <!--ro, opt, bool, whether the device supports canceling arming subscription-->true
  </isSupportUnSubscribeEvent>
</SubscribeEventCap>

```

14.1.2.4 Cancel subscribing alarm/event

Request URL

PUT /ISAPI/Event/notification/unSubscribeEvent?ID=<subscribeEventID>

Query Parameter

Parameter Name	Parameter Type	Description
subscribeEventID	string	Subscription event ID, which should match the id field in the SubscribeEventResponse of the response message from the POST /ISAPI/Event/notification/subscribeEvent?deployID=.This field is optional. When the protocol is /ISAPI/Event/notification/unSubscribeEvent, it indicates that all subscription links are to be unsubscribed. When the protocol is /ISAPI/Event/notification/unSubscribeEvent?ID=XXX, it indicates that a specific subscription link is to be unsubscribed.

Request Message

None

Response Message

<pre> <?xml version="1.0" encoding="UTF-8"?> <ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0"> <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}--> <requestURL> <!--ro, opt, string, request URL, range:[0,1024]-->null </requestURL> <statusCode> <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0 </statusCode> <statusString> <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK </statusString> <subStatusCode> <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK </subStatusCode> <description> <!--ro, opt, string, custom error message description, range:[0,1024], desc:the custom error message description returned by the application is used to quickly identify and evaluate issues-->badXMLFormat </description> <MErrCode> <!--ro, opt, string, error codes categorized by functional modules, desc:ALL general error codes are in the range of this field-->0x00000000 </MErrCode> <MErrDevSelfEx> <!--ro, opt, string, error codes categorized by functional modules, desc:N/A-->0x00000000 </MErrDevSelfEx> </ResponseStatus> </pre>	
---	--

14.1.2.5 Event subscription heartbeat

EventType:heartBeat


```
<?xml version="1.0" encoding="UTF-8"?>

<EventNotificationAlert xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, alarm message, attr:version{opt, string, protocolVersion}-->
  <ipAddress>
    <!--ro, req, string, IPv4 address of the device that triggers the alarm-->172.6.64.7
  </ipAddress>
  <ipv6Address>
    <!--ro, opt, string, IPv6 address of the device that triggers the alarm-->1080:0:0:0:8:800:200C:417A
  </ipv6Address>
  <portNo>
    <!--ro, opt, int, communication port No. of the device that triggers the alarm-->80
  </portNo>
  <protocol>
    <!--ro, opt, string, transmission communication protocol type, range:[0,64], desc:when ISAPI protocol is transmitted via HCNetsDK, the channel No. is the video channel No. of private protocol. When ISAPI protocol is transmitted via EZ protocol, the channel No. is the video channel No. of EZ protocol. When ISAPI protocol is transmitted via ISUP, the channel No. is the video channel No. of ISUP-->HTTP
  </protocol>
  <macAddress>
    <!--ro, opt, string, MAC address-->01:17:24:45:D9:F4
  </macAddress>
  <channelID>
    <!--ro, opt, int, channel No. of the device that triggers the alarm, desc:video channel No. that triggers the alarm-->1
  </channelID>
  <dateTime>
    <!--ro, req, datetime, alarm trigger time-->2004-05-03T17:30:08+08:00
  </dateTime>
  <activePostCount>
    <!--ro, opt, int, times that the same alarm has been uploaded, desc:event triggering frequency-->1
  </activePostCount>
  <eventType>
    <!--ro, req, string, event type-->heartBeat
  </eventType>
  <eventState>
    <!--ro, req, enum, event status, subType:string, desc:for durative event: "active" (valid), "inactive" (invalid)-->active
  </eventState>
  <eventDescription>
    <!--ro, req, string, event description-->heartBeat
  </eventDescription>
  <channelName>
    <!--ro, opt, string, channel name, range:[1,64]-->test
  </channelName>
  <deviceID>
    <!--ro, opt, string, device ID, desc:it should be returned for ISUP alarms, e.g., test0123 (Ehome2.0, Ehome4.0, and ISUP5.0)-->12345
  </deviceID>
</EventNotificationAlert>
```

14.1.3 HEOP

14.1.3.1 Get Version Information of HEOP Software Library

Request URL

GET /ISAPI/Custom/OpenPlatform/algInfo?format=json

Query Parameter

None

Request Message

None

Response Message

```
{
  "HEOPVersion": "1.0.1",
  /*ro, opt, string, HEOP SDK version information, range:[1,64], desc:format: 1.0.1*/
  "BASEVersion": "1.0.1",
  /*ro, opt, string, BASE SDK version information, range:[1,64], desc:format: 1.0.1*/
  "MEDIAVersion": "1.0.1"
  /*ro, opt, string, MEDIA SDK version information, range:[1,64], desc:format: 1.0.1*/
}
```

14.1.3.2 Get the application program information list

Request URL

GET /ISAPI/Custom/OpenPlatform/App

Query Parameter

None

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>
<AppList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, array, application program information list, subType:object, attr:version{req, string, protocolVersion}-->
  <App>
    <!--ro, opt, object, application program information-->
    <id>
      <!--ro, req, int, index (it is not AppID), range:[0,128]-->1
    </id>
    <AppID>
      <!--ro, opt, string, application program ID-->test
    </AppID>
    <packageName>
      <!--ro, req, string, software package name to be displayed, range:[0,128]-->test
    </packageName>
    <vendor>
      <!--ro, req, string, manufacturer name of the third-party application program, range:[0,128]-->test
    </vendor>
    <softVersion>
      <!--ro, req, string, software version number, range:[0,128]-->test
    </softVersion>
    <runStatus>
      <!--ro, req, enum, program running status, subType:string, desc:"true" (running), "false" (stopped)-->true
    </runStatus>
    <licenseInstalled>
      <!--ro, opt, enum, License status, subType:string, desc:"none" (free), "no" (inactivity), "yes" (activated), "expired"-->none
    </licenseInstalled>
    <memory>
      <!--ro, opt, int, memory size occupied by the application program, range:[0,1024], step:1, unit:MB-->1
    </memory>
    <flash>
      <!--ro, opt, int, flash size occupied by the application program, range:[0,1024], step:1, unit:MB-->1
    </flash>
    <bStartedOnce>
      <!--ro, opt, bool, whether the application program has been started, desc:"true" (yes), "false" (no)-->true
    </bStartedOnce>
    <appPackageUUID>
      <!--ro, opt, string, the UUID of the application program package, range:[0,128]-->test
    </appPackageUUID>
    <status>
      <!--ro, opt, enum, status, subType:string, desc:"notDownloaded" (it is not downloaded), "installed" (it is installed), "uninstalled" (it is not installed)-->notDownloaded
    </status>
    <caculation>
      <!--ro, opt, float, computing power used by the application program. It should be accurate to one decimal place, desc:unit: TOPS-->0.000
    </caculation>
    <intelligentMemory>
      <!--ro, opt, int, intelligent memory size occupied by the application program, unit:Byte-->0
    </intelligentMemory>
  </App>
</AppList>
```

14.1.3.3 Get Information of an Application Program

Request URL

GET /ISAPI/Custom/OpenPlatform/App/<AppID>

Query Parameter

Parameter Name	Parameter Type	Description
AppID	string	App ID, which is unique and composed of strings containing numbers and letters. For details, see the App ID description in Terminology and Definitions in the HEOP API calling flow

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>
<App xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, application program information list, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, int, application program ID-->1
  </id>
  <packageName>
    <!--ro, req, string, packet name for display-->test
  </packageName>
  <vendor>
    <!--ro, req, string, vendor name of third-party application program-->test
  </vendor>
  <softVersion>
    <!--ro, req, string, software version number-->test
  </softVersion>
  <runStatus>
    <!--ro, req, enum, program running status, subType:string, desc:"true" (running), "false" (stopped)-->true
  </runStatus>
  <licenseInstalled>
    <!--ro, opt, enum, whether the License is installed, subType:string, desc:"none" (free), "no" (inactivity), "yes" (activated), "expired"-->none
  </licenseInstalled>
  <memory>
    <!--ro, opt, int, memory size occupied by the application program, unit:MB-->1
  </memory>
  <flash>
    <!--ro, opt, int, flash size occupied by the application program, unit:MB-->1
  </flash>
  <bStartedOnce>
    <!--ro, opt, bool, whether the application program has been started:, desc:"true" (yes), "false" (no)-->true
  </bStartedOnce>
  <appPackageUUID>
    <!--ro, opt, string, the UUID of the application program package, range:[0,128]-->test
  </appPackageUUID>
  <status>
    <!--ro, opt, enum, status, subType:string, desc:"notDownloaded", "installed", "uninstalled"-->notDownloaded
  </status>
  <caculation>
    <!--ro, opt, float, computing power size occupied by the application program, desc:The number is accurate to one decimal place (e.g., 0.1)-->0.1
  </caculation>
  <intelligentMemory>
    <!--ro, opt, int, intelligent memory size occupied by the application program-->0
  </intelligentMemory>
  <isMaxIntelligentMemory>
    <!--ro, opt, bool-->true
  </isMaxIntelligentMemory>
  <engineID>
    <!--ro, opt, string-->1
  </engineID>
</App>

```

14.1.3.4 Set permission of the third-party application program

Request URL

PUT /ISAPI/Custom/OpenPlatform/App/<AppID>/permission?format=json&engineID=<engineID>

Query Parameter

Parameter Name	Parameter Type	Description
AppID	string	App ID, and the length is 1 to 28 bytes. It is unique and composed of strings containing numbers and letters. For details, see the App ID description in Terminology and Definitions in the HEOP API calling flow.
engineID	string	Engine ID.

Request Message

```

{
  "PermissionList": {
    /*req, object, list of permissions*/
    "Stream": {
      /*opt, object*/
      "enabled": true
      /*req, bool*/
    },
    "configAuth": {
      /*opt, object, configure the permission for free authentication*/
      "enabled": true
      /*req, bool, enable the permission to get streams*/
    },
    "Storage": {
      /*opt, object*/
      "enabled": true
      /*req, bool*/
    },
    "Network": {
      /*opt, object*/
      "enabled": true
      /*req, bool*/
    },
    "OSD": {
      /*opt, object*/
      "enabled": true
      /*req, bool*/
    }
  }
}

```

Response Message

```

{
  "statusCode": 1,
  /*ro, opt, int, status code, desc:1 (succeeded). It is required when an error occurred*/
  "statusString": "OK",
  /*ro, opt, string, status description, range:[1,64], desc:"ok" (succeeded). It is required when an error occurred*/
  "subStatusCode": "ok",
  /*ro, opt, string, sub status code, range:[1,64], desc:"ok" (succeeded). It is required when an error occurred*/
  "errorCode": 1,
  /*ro, opt, int, error code, desc:when the value of statusCode is not 1, it corresponds to subStatusCode*/
  "errorMsg": "ok",
  /*ro, opt, string, error information, desc:this field is required when the value of statusCode is not 1*/
  "MErrCode": "0x00000000",
  /*ro, opt, string*/
  "MErrDevSelfEx": "0x00000000"
  /*ro, opt, string*/
}

```

14.1.3.5 Get permissions of the third-party application program

Request URL

GET /ISAPI/Custom/OpenPlatform/App/<AppID>/permission?format=json&engineID=<engineID>

Query Parameter

Parameter Name	Parameter Type	Description
AppID	string	App ID, and the length is 1 to 28 bytes. It is unique and composed of strings containing numbers and letters. For details, see the App ID description in Terminology and Definitions in the HEOP API calling flow.
engineID	string	Engine ID

Request Message

None

Response Message

```

{
  "PermissionList": {
    /*ro, req, object, permission information*/
    "Stream": {
      /*ro, opt, object, streaming permission*/
      "enabled": true
      /*ro, req, bool, enable the permission to get streams*/
    },
    "configAuth": {
      /*ro, opt, object, configure the permission for free authentication*/
      "enabled": true
      /*ro, req, bool, enable the permission for free authentication*/
    },
    "Storage": {
      /*ro, opt, object, storage accessing permission*/
      "enabled": true
      /*ro, req, bool, enable the permission to access storages, desc:enable the permission to get streams*/
    },
    "Network": {
      /*ro, opt, object, network accessing permission*/
      "enabled": true
      /*ro, req, bool, enable the permission to access the network, desc:enable the permission to get streams*/
    },
    "OSD": {
      /*ro, opt, object*/
      "enabled": true
      /*ro, req, bool*/
    }
  }
}

```

14.1.3.6 Stop Running Specified Application Program

Request URL

PUT /ISAPI/Custom/OpenPlatform/App/<AppID>/stop?engineID=<engineID>&channelID=<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
AppID	string	App ID, length is 1 to 28 bytes, which is unique and composed of strings containing numbers and letters. For details, see the App ID description in Terminology and Definitions in the HEOP API calling flow.
engineID	string	Engine ID
channelID	string	Video channel No.

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, opt, string, request URL, range:[0,1024]-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6
    (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format",
    "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
  <description>
    <!--ro, opt, string, range:[0,1024]-->badXmlFormat
  </description>
  <MErrCode>
    <!--ro, opt, string-->0x00000000
  </MErrCode>
  <MErrDevSelfEx>
    <!--ro, opt, string-->0x00000000
  </MErrDevSelfEx>
  <AttachInfo>
    <!--ro, opt, array, subType:object-->
    <StatusList>
      <!--ro, req, object-->
      <Status>
        <!--ro, req, object-->
        <index>
          <!--ro, req, int-->0
        </index>
        <statusCode>
          <!--ro, req, enum, subType:int-->0
        </statusCode>
        <statusString>
          <!--ro, req, enum, subType:string-->OK
        </statusString>
        <subStatusCode>
          <!--ro, req, string, range:[1,64]-->ok
        </subStatusCode>
        <description>
          <!--ro, opt, string, range:[0,1024]-->test
        </description>
      </Status>
    </StatusList>
  </AttachInfo>
</ResponseStatus>

```

14.1.3.7 Get Specified Application Program Logs

Request URL

GET /ISAPI/Custom/OpenPlatform/App/<AppID>/syslog?engineID=<engineID>

Query Parameter

Parameter Name	Parameter Type	Description
AppID	string	App ID, and the length is 1 to 28 bytes. It is unique and composed of strings containing numbers and letters. For details, see the App ID description in Terminology and Definitions in the HEOP API calling flow.
engineID	string	Engine ID

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<logInfo xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, Log information, attr:version{req, string, protocolVersion}-->
  <logPath>
    <!--ro, opt, string, saving path of the Log files, range:[0,256], desc:Log files are generated from the compressed text file with the suffix tar.gz-->
  >test
  </logPath>
</logInfo>
```

14.1.3.8 Get Device Engine Status

Request URL

GET /ISAPI/Custom/OpenPlatform/APP/engines?format=json

Query Parameter

None

Request Message

None

Response Message

```
{
  "LoadingInfoList": [
    /*ro, req, array, the list of the loading information of the engine, subType:object*/
    {
      "engineID": 1,
      /*ro, req, int, engine ID, desc:used to distinguish different engine No.*/
      "engineStatus": 1,
      /*ro, req, enum, engine status, subType:int, desc:0 (not loaded), 1 (loaded & runs well), 2 (running exception), 10 (initializing), 11 (engine exception), 12 (initialization exception), 13 (algorithm exception)*/
      "platform": 1,
      /*ro, req, enum, the platform where the algorithm runs, subType:int, desc:1 (TX1), 2 (P4), 3 (3559), 4 (3519), 5 (3516)*/
      "platformName": "K81",
      /*ro, req, string, the platform where the algorithm runs, desc:which is product-defined and used for display*/
      "PackageInfo": [
        /*ro, opt, array, upgrade information of the application program package, subType:object*/
        {
          "packageName": "test",
          /*ro, opt, string, the name of the application program package, range:[0,128], desc:which is used to distinguish the application program information (fill in the name after loading)*/
          "appPackageUUID": "abcdefg1234567890",
          /*ro, opt, string, the UUID of the application program package, range:[0,128]*/
          "runStatus": "true",
          /*ro, opt, enum, the running status of the application program package:, subType:string, desc:"true" (running), "false" (stopped)*/
        }
      ],
      "AbilityInfos": {
        /*ro, opt, object, the capability supported by device*/
        "cardType": "DSP",
        /*ro, req, enum, computer power unit type, subType:string, desc:"DSP", "NNIE"*/
        "totalGFLOPS": 0.1,
        /*ro, req, float, total computer power value, range:[0.1,100.0]*/
        "surplusGFLOPS": 0.1,
        /*ro, req, float, remaining computer power value, range:[0.1,100.0]*/
      },
      "BaseInfo": {
        /*ro, opt, object*/
        "totalMemory": 1000,
        /*ro, opt, int, step:1, unit:MB*/
        "surplusMemory": 500,
        /*ro, opt, int, step:1, unit:MB*/
        "totalFlash": 50,
        /*ro, opt, int, step:1, unit:MB*/
        "surplusFlash": 25,
        /*ro, opt, int, step:1, unit:MB*/
        "CPUUtility": 80,
        /*ro, opt, int, range:[0,100], step:1*/
      }
    }
  ]
}
```

14.1.3.9 Get the HEOP capability supported by device

Request URL

GET /ISAPI/Custom/OpenPlatform/capabilities

Query Parameter

None

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<OpenPlatformCap xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, HEOP capability set supported by device, attr:version{req, string, protocolVersion}-->
  <isSupportOpenPlatform>
    <!--ro, req, bool, whether the device supports HEOP (Hikvision Embedded Open Platform)-->true
  </isSupportOpenPlatform>
  <maxAPPNum>
    <!--ro, req, int, the maximum number of third-party application programs allowed to be installed-->0
  </maxAPPNum>
  <AppInstallConfig>
    <!--ro, opt, string, the configuration capability set of installing application programs, desc:If this node is returned, it indicates that the device supports configuring installation rules, otherwise it does not support-->test
    <downloadUrl min="0" max="128">
      <!--ro, opt, string, the URI for downloading the application program, range:[0,128], attr:min{req, int},max{req, int}, desc:the complete URI-->test
    </downloadUrl>
    <installationTime>
      <!--ro, opt, datetime, installation time, dep:and,{$.OpenPlatformCap.AppInstallConfig.method,eq,timing}-->1970-01-01T00:00:00+08:00
    </installationTime>
    <method opt="immediate,timing">
      <!--ro, opt, enum, installation method, subType:string, attr:opt{req, string},
      desc:"immediate"(instant downloading and installation),"timing" (scheduled
      downloading and installation)-->immediate
    </method>
  </AppInstallConfig>
  <AppManage>
    <!--ro, opt, object, the capability set of managing application programs, desc:If this node is returned, it indicates that the device supports managing application programs, otherwise it does not support-->
    <manualCmd opt="download,clear">
      <!--ro, opt, enum, manual command, subType:string, attr:opt{req, string}, desc:"download" (download),"clear" (clear)-->download
    </manualCmd>
  </AppManage>
  <isNotSupportAppUpload>
    <!--ro, opt, bool, whether it does not support uploading the application program to the device-->true
  </isNotSupportAppUpload>
  <isNotSupportAppUploadStatus>
    <!--ro, opt, bool, whether it does not support getting the application program uploading progress-->true
  </isNotSupportAppUploadStatus>
  <isNotSupportAppDelete>
    <!--ro, opt, bool, whether it does not support deleting the application program-->true
  </isNotSupportAppDelete>
  <isSupportAppUserDataDelete>
    <!--ro, opt, bool, whether it supports deleting the user data of the application program, desc:If supports, userData can be loaded in
    /ISAPI/Custom/OpenPlatform/App/<AppID>/delete, such as /ISAPI/Custom/OpenPlatform/App/<AppID>/delete?userData=true, which indicates that deleting the user
    data of the application program while deleting the application program-->true
  </isSupportAppUserDataDelete>
  <isNotSupportAppStart>
    <!--ro, opt, bool, whether it does not support starting the application program-->true
  </isNotSupportAppStart>
  <isNotSupportAppList>
    <!--ro, opt, bool, whether it does not support getting the list of application programs-->true
  </isNotSupportAppList>
  <isNotSupportUploadLicenseKey>
    <!--ro, opt, bool-->true
  </isNotSupportUploadLicenseKey>
  <isNotSupportPermission>
    <!--ro, opt, bool-->true
  </isNotSupportPermission>
  <isNotSupportDisclaimer>
    <!--ro, opt, bool-->true
  </isNotSupportDisclaimer>
  <isNotSupportPageItem>
    <!--ro, opt, bool-->true
  </isNotSupportPageItem>
  <isNotSupportSyslog>
    <!--ro, opt, bool-->true
  </isNotSupportSyslog>
  <isSupportServerAddress>
    <!--ro, opt, bool-->true
  </isSupportServerAddress>
  <isSupportAlgInfo>
    <!--ro, opt, bool, whether it supports getting the information about the version of the HEOP software library-->true
  </isSupportAlgInfo>
  <isSupportAppBindMultiEngines>
    <!--ro, opt, bool, whether it supports binding one application program with multiple engines, desc:returning "true" indicates that it supports this
    function, returning "false" or not returning this node indicates that it does not support this function-->true
  </isSupportAppBindMultiEngines>
  <AppChannels>
    <!--ro, opt, object, the capability of binding the application program with channel(s), desc:If this node appears in the message, it indicates that the
    device supports the function: : /ISAPI/Custom/OpenPlatform/searchAppChannels?format=json. /ISAPI/Custom/OpenPlatform/modifyAppChannels?format=json-->
    <channel min="0" max="128">
      <!--ro, opt, int, the capability of binding the application with video channel(s), attr:min{req, int, range:[0,256]},max{req, int, range:[0,256]}-->1
    </channel>
  </AppChannels>
</OpenPlatformCap>
```



```

<!--ro, opt, int, the maximum number of channels allowed to be bound with the application program, range:[0,256]-->1
</maxChannelNum>
</AppChannels>
<isSupportEngineBindMultiApp>
  <!--ro, opt, bool, whether it supports binding one engine with multiple application programs, desc:returning "true" indicates that it supports this
function, returning "false" or not returning this node indicates that it does not support this function-->true
</isSupportEngineBindMultiApp>
<isSupportReboot>
  <!--ro, opt, bool, whether it supports restarting the specified application program-->true
</isSupportReboot>
<isSupportUploadLicenseKey>
  <!--ro, opt, bool, whether it supports uploading License file, desc:corresponding URL: /ISAPI/Custom/OpenPlatform/uploadLicenseKey-->true
</isSupportUploadLicenseKey>
<isSupportHEOPCustomEvent>
  <!--ro, opt, bool-->true
</isSupportHEOPCustomEvent>
<isSupportHEOPFormattedEvent>
  <!--ro, opt, bool-->true
</isSupportHEOPFormattedEvent>
<isSupportSearchHEOPCustomEvent>
  <!--ro, opt, bool-->true
</isSupportSearchHEOPCustomEvent>
<isSupportSearchHEOPFormattedEvent>
  <!--ro, opt, bool-->true
</isSupportSearchHEOPFormattedEvent>
<isSupportEngineSyslog>
  <!--ro, opt, bool-->true
</isSupportEngineSyslog>
<isSupportAPPPortMap>
  <!--ro, opt, bool-->true
</isSupportAPPPortMap>
<isSupportAPPAutoReboot>
  <!--ro, opt, bool-->true
</isSupportAPPAutoReboot>
</OpenPlatformCap>

```

14.1.3.10 Get selection status of open platform disclaimer

Request URL

GET /ISAPI/Custom/OpenPlatform/disclaimer?format=json

Query Parameter

None

Request Message

None

Response Message

```

{
  "Disclaimer": {
    /*ro, req, object*/
    "enabled": true
    /*ro, req, bool, whether the disclaimer is selected*/
  }
}

```

14.1.3.11 Select the disclaimer

Request URL

PUT /ISAPI/Custom/OpenPlatform/disclaimer?format=json

Query Parameter

None

Request Message

```

{
  "Disclaimer": {
    /*req, object*/
    "enabled": true
    /*req, bool, whether the disclaimer is selected*/
  }
}

```

Response Message

```

{
  "statusCode": 1,
  /*ro, opt, int, status code, desc:1 (succeeded). It is required when an error occurred*/
  "statusString": "ok",
  /*ro, opt, string, status description, range:[1,64], desc:"ok" (succeeded). It is required when an error occurred*/
  "subStatusCode": "ok",
  /*ro, opt, string, sub status code, range:[1,64], desc:"ok" (succeeded). It is required when an error occurred*/
  "errorCode": 1,
  /*ro, opt, int, error code, desc:it is required when the value of statusCode is not 1, it corresponds to subStatusCode*/
  "errorMsg": "ok"
  /*ro, opt, string, error information, desc:this node is required when the value of statusCode is not 1*/
}

```

14.1.3.12 Get Application Program Page Information

Request URL

GET /ISAPI/Custom/OpenPlatform/pageItem

Query Parameter

None

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<pageItemList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, array, page information list of application program, subType:object, attr:version(req, string, protocolVersion)-->
  <pageItem>
    <!--ro, opt, object, page information of application program-->
    <id>
      <!--ro, req, int, page No. of application program, range:[0,128], step:1-->1
    </id>
    <appName>
      <!--ro, req, string, the third-party application program name, range:[0,128]-->test
    </appName>
    <htmlPath>
      <!--ro, opt, string, html page path of the third-party application program, range:[0,128]-->test
    </htmlPath>
    <introducePath>
      <!--ro, req, string, the introduction path of the third-party application program name, range:[0,128]-->test
    </introducePath>
    <logoPath>
      <!--ro, opt, string, picture path of the third-party application program Logo, range:[0,128]-->test
    </logoPath>
    <copyRight>
      <!--ro, opt, string, copyright statement of the third-party application program, range:[0,128]-->test
    </copyRight>
    <hostname>
      <!--ro, req, string, home page domain of the third-party application program, range:[0,128]-->test
    </hostname>
  </pageItem>
</pageItemList>

```

14.1.3.13 Get the details of incremental upgrade capability

Request URL

GET /ISAPI/Custom/OpenPlatform/patchUpgrade/capabilities?format=json

Query Parameter

None

Request Message

None

Response Message

```

{
  "PatchUpgradeCap": {
    /*ro, req, object, incremental upgrade capability*/
    "isSupportAsyncUpload": true,
    /*ro, opt, bool, whether it supports managing the asynchronous upgrade of application program, desc:corresponding URI:
    /ISAPI/Custom/OpenPlatform/uploadApp/async?format=json: /ISAPI/Custom/OpenPlatform/uploadAppStatus/async?format=json*/
    "isSupportManagement": true,
    /*ro, opt, bool, whether it supports managing the running of application program, desc:corresponding URI:
    /ISAPI/Custom/OpenPlatform/appPackage/<UUID>/start; /ISAPI/Custom/OpenPlatform/appPackage/<UUID>/stop; /ISAPI/Custom/OpenPlatform/appPackage/<UUID>*/
    "isSupportEngine": true
    /*ro, opt, bool, whether it supports the engine that manages the running of application program, desc:corresponding URI:
    /ISAPI/Custom/OpenPlatform/APP/engines?format=json; /ISAPI/Custom/OpenPlatform/APP/loading/<engineID>?format=json;
    /ISAPI/Custom/OpenPlatform/APP/unloading/<engineID>?format=json*/
  }
}

```

14.1.3.14 Get HEOP Remaining Resources

Request URL

GET /ISAPI/Custom/OpenPlatform/resource

Query Parameter

None

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<resource xmlns="http://www.isapi.org/ver20/XMLSchema" version="1.0">
  <!--ro, req, object, remaining resource information, attr:version{req, string, protocolVersion}-->
  <totalMemory>
    <!--ro, opt, int, the size of all available memory for open platform, unit:MB-->0
  </totalMemory>
  <restMemory>
    <!--ro, opt, int, the size of remaining available memory for open platform, unit:MB-->0
  </restMemory>
  <totalFlash>
    <!--ro, opt, int, the size of all available memory for open platform, unit:MB-->0
  </totalFlash>
  <restFlash>
    <!--ro, opt, int, the size of remaining available flash for open platform, unit:MB-->0
  </restFlash>
  <totalCalculation>
    <!--ro, opt, float, the size of all available computing power for open platform, desc:The number is accurate to one decimal place (e.g.,0.1).-->0.000
  </totalCalculation>
  <restCalculation>
    <!--ro, opt, float, the size of remaining available computing power for open platform, desc:The number is accurate to one decimal place (e.g.,0.1).-->0.000
  </restCalculation>
  <totalIntelligentMemory>
    <!--ro, opt, int, the size of all available intelligent memory for open platform, unit:MB, desc:The physical address of intelligent memory is continuous, which is used to speed up processing.-->0
  </totalIntelligentMemory>
  <restIntelligentMemory>
    <!--ro, opt, int, the size of remaining available intelligent memory for open platform, unit:MB-->0
  </restIntelligentMemory>
</resource>

```

14.1.3.15 Search for the list of channels that are bound with the application program

Request URL

POST /ISAPI/Custom/OpenPlatform/searchAppChannels?format=json

Query Parameter

None

Request Message

```
{
  "appID": "1",
  /*req, string, the unique ID of an application program, range:[1,64]*/
  "engineID": "1"
  /*opt, string, range:[1,64]*/
}
```

Response Message

```
{
  "channelList": [1, 2, 3, 4]
  /*ro, req, array, list of channels, subType:int, range:[0,128], desc:list of channels*/
}
```

14.1.3.16 Get Asynchronous Uploading Progress of Application Program Package

Request URL

GET /ISAPI/Custom/OpenPlatform/uploadAppStatus/async/<AppID>?format=json

Query Parameter

Parameter Name	Parameter Type	Description
AppID	string	UUID of the App package, with a maximum length of 128. This ID can be used to determine the uniqueness of the upgrade package, and it is consistent with the appPackageUUID during asynchronous loading.

Request Message

None

Response Message

```
{
  "UploadAppStatus": {
    /*ro, req, object, the upload status of the application program*/
    "percent": 100,
    /*ro, req, int, the upload progress of the application program, range:[0,100], desc:in the format of percentage*/
    "status": 1,
    /*ro, req, enum, upload status, subType:int, desc:0 (exception occurred), 1 (uploading), 2 (uploaded)*/
    "statusExceptionDetails": "appFileCorruption"
  }
  /*ro, opt, string, dep:and,{$.UploadAppStatus.status,ue,0}*/
}
```

14.1.3.17 Get Synchronous Upgrading Progress of Application Program Full Package

Request URL

GET /ISAPI/Custom/OpenPlatform/uploadAppStatus?taskID=<taskID>

Query Parameter

Parameter Name	Parameter Type	Description
taskID	string	Task ID: When the taskID is specified in POST /ISAPI/Custom/OpenPlatform/uploadAppBinaryPackets?format=json, it indicates asynchronous uploading of the App. The specified taskID is used to search for the import progress of the App.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<uploadAppStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="1.0">
  <!--ro, req, object, uploading status, attr:version{req, string, protocolVersion}-->
  <uploading>
    <!--ro, req, bool, whether the application program is uploading-->true
  </uploading>
  <percent>
    <!--ro, req, int, uploading progress of the application program, range:[0,100], step:1-->1
  </percent>
  <uploadStatus>
    <!--ro, opt, enum, subType:string-->nonexecution
  </uploadStatus>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, opt, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, opt, string-->OK
  </subStatusCode>
</uploadAppStatus>
```

14.1.4 Online Upgrading Management

14.1.4.1 Get the device online upgrade capability

Request URL

GET /ISAPI/System/onlineUpgrade/capabilities

Query Parameter

None

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<OnlineUpgradeCap xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, online upgrade, attr:version{req, string, protocolVersion}-->
  <firmwareNum max="10">
    <!--ro, req, int, number of supported online upgrade packages, attr:max{req, int}-->1
  </firmwareNum>
  <firmwareCode max="256">
    <!--ro, req, int, maximum length of firmware ID, attr:max{req, int}-->1
  </firmwareCode>
  <firmwareVersion max="64">
    <!--ro, req, int, maximum length of version, attr:max{req, int}-->1
  </firmwareVersion>
  <firmwareCodeNumOnce max="10">
    <!--ro, req, int, maximum number of obtained firmware IDs, attr:max{req, int}-->1
  </firmwareCodeNumOnce>
  <upgradePercent min="0" max="100">
    <!--ro, req, int, upgrade progress capability in percentage, attr:min{req, int},max{req, int}-->1
  </upgradePercent>
  <Version>
    <!--ro, opt, object, upgrade package version information-->
    <newVersion max="64">
      <!--ro, req, string, version information of the new upgrade package, attr:max{req, int}-->test
    </newVersion>
    <changeLog max="64">
      <!--ro, req, string, Log of the new upgrade package, attr:max{req, int}-->test
    </changeLog>
  </Version>
  <rebootAfterUpgrade>
    <!--ro, opt, enum, upgrade options after device reboot, subType:string, desc:"auto" (auto upgrade), "manual" (manual upgrade)-->auto
  </rebootAfterUpgrade>
  <DeviceParameter>
    <!--ro, opt, object, online upgrade parameters-->
    <isSupportAutoDownloadPackage>
      <!--ro, opt, bool, whether it supports automatic download of upgrade package-->true
    </isSupportAutoDownloadPackage>
    <notSupportAutoUpgrade>
      <!--ro, opt, bool, whether it no longer supports automatic download of upgrade package and automatic upgrade, desc:corresponding URL: PUT /ISAPI/System/onLineUpgrade/upgrade-->true
    </notSupportAutoUpgrade>
    <isSupportTimingUpgrade>
      <!--ro, opt, bool, whether it supports scheduled upgrade-->true
    </isSupportTimingUpgrade>
  </DeviceParameter>
```

```

<ManualDownloadPackage>
  <!--ro, opt, object, manual download of upgrade package-->
  <supportOperation opt="start, cancel, pause, resume">
    <!--ro, opt, enum, supported operations, subtype:string, attr:opt{req, string}, desc:"start", "cancel", "pause", "resume"-->start
  </supportOperation>
</ManualDownloadPackage>
<isSupportIgnoreCurrentVersion>
  <!--ro, opt, bool, whether it supports ignoring the current version-->true
</isSupportIgnoreCurrentVersion>
<UpgradePackageTask>
  <!--ro, opt, object, whether the device supports applying upgrade tasks, desc:if this node is returned, it indicates that the following URLs are also
supported: /ISAPI/System/onlineUpgrade/task?format=json, /ISAPI/System/onlineUpgrade/status/<ID>-->
  <isSupportUpgradeModules>
    <!--ro, opt, bool, whether the device supports upgrading sub modules-->true
  </isSupportUpgradeModules>
  <isSupportUpgradeChannels>
    <!--ro, opt, bool, whether the device supports upgrading sub channels-->true
  </isSupportUpgradeChannels>
  <isSupportDownloadStrategy>
    <!--ro, opt, bool, whether the device supports strategy parameters of downloading upgrade package, desc:corresponding filed is "downloadStrategy" of
URL (/ISAPI/System/onlineUpgrade/task?format=json)-->true
  </isSupportDownloadStrategy>
  <isSupportDelayedUpgradeByDateTime>
    <!--ro, opt, bool, whether the device supports delaying the upgrade by time, desc:corresponding filed is "delayedUpgradeDateTime" of URL
(/ISAPI/System/onlineUpgrade/task?format=json)-->true
  </isSupportDelayedUpgradeByDateTime>
  <upgradePackageAddressType opt="URL, ftpIPAddress, ftpDomainAddress">
    <!--ro, opt, string, attr:opt{req, string}-->URL
  </upgradePackageAddressType>
</UpgradePackageTask>
<isSupportPatrolInspection>
  <!--ro, opt, bool, whether the device supports patrol inspection-->true
</isSupportPatrolInspection>
<isSupportBatchUpgrade>
  <!--ro, opt, bool, whether the device supports batch online upgrades-->true
</isSupportBatchUpgrade>
<isSupportCancelUpgrade>
  <!--ro, opt, bool, whether the device supports canceling online upgrade-->true
</isSupportCancelUpgrade>
<isSupportPackagePause>
  <!--ro, opt, bool, whether the device supports pausing upgrade package download, desc:/ISAPI/System/onlineUpgrade/PackagePause?format=json-->true
</isSupportPackagePause>
<isSupportPackageResume>
  <!--ro, opt, bool, whether the device supports resuming upgrade package download, desc:/ISAPI/System/onlineUpgrade/PackageResume?format=json-->true
</isSupportPackageResume>
<isSupportCancelUpgradeByTaskID>
  <!--ro, opt, bool, whether the device supports canceling online upgrade by task ID, desc:corresponding to the field assignByTaskID of operationType in
URL PUT /ISAPI/System/onlineUpgrade/CancelUpgrade?format=json-->true
  </isSupportCancelUpgradeByTaskID>
</OnlineUpgradeCap>

```

14.1.4.2 Get the online upgrade progress of device

Request URL

GET /ISAPI/System/onlineUpgrade/status

Query Parameter

None

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<OnlineUpgradeStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, online upgrade status, attr:version{req, string, protocolVersion}-->
  <status>
    <!--ro, req, enum, online upgrade status, subType:string, desc:"notUpgrade" (not upgraded), "upgrading", "successful" (upgraded), "LanguageMismatch" (language mismatch), "writeFlashError" (failed to write to flash), "packageTypeMismatch" (upgrade package type mismatch), "packageVersionMismatch" (upgrade version mismatch), "netUnreachable" (network disconnected), "unknownError" (unknown error), "engineVersionMismatch" (mismatch of upgrade package engine version)-->notUpgrade
  </status>
  <percent>
    <!--ro, req, int, current upgrade progress in percentage, range:[0,100]-->1
  </percent>
  <onlineUpdateDevInfoList>
    <!--ro, opt, object, online upgrade device information, desc:containing the online upgrade status of sub devices, sub modules, or sub channels-->
    <onlineUpdateDevInfo>
      <!--ro, opt, object, online upgrade device information-->
      <moduleType>
        <!--ro, req, enum, module type, subType:string, desc:"keypad", "detector", "cardReader" (card reader), "siren" (sounder), "relay", "transmitter" (transmitter), "remoteCtrl" (remote control), "repeater" (repeater), "SSD", "extensionModule" (extension module)-->keypad
      </moduleType>
      <moduleID>
        <!--ro, req, int, module ID, range:[1,128], step:1-->1
      </moduleID>
      <model>
        <!--ro, opt, string, model, range:[1,32]-->test
      </model>
      <status>
        <!--ro, opt, enum, upgrade status, subType:string, desc:"allowance" (upgradeable, the upgrade command is not triggered), "ready" (waiting for upgrade, the upgrade command has been triggered), "upgrading" (upgrading), "success" (upgraded), "failed" (upgrade failed)-->allowance
      </status>
      <percent>
        <!--ro, opt, int, current upgrade percentage, range:[0,100]-->1
      </percent>
      <updateTime>
        <!--ro, opt, datetime, upgrade completion time-->2004-05-03T17:30:08+08:00
      </updateTime>
    </onlineUpdateDevInfo>
  </onlineUpdateDevInfoList>
</OnlineUpgradeStatus>
```

14.1.4.3 Get all of the online upgrade task progress

Request URL

GET /ISAPI/System/onlineUpgrade/status/task?format=json

Query Parameter

None

Request Message

None

Response Message

```

{
  "onlineUpgradeStatusList": [
    /*ro, req, array, online upgrade status list, subType:object*/
    {
      "status": "notUpgrade",
      /*ro, req, enum, upgrade status, subType:string, desc:"notUpgrade", "upgrading", "successful" (upgrading succeeded), "languageMismatch",
      "writeFlashError", "packageTypeMismatch", "packageVersionMismatch", "netUnreachable" (network disconnected), "unknownError", "waitManualTrigger"*/
      "percent": 0,
      /*ro, req, int, upgrade progress percentage, range:[0,100]*/
      "taskId": "test",
      /*ro, opt, string, task ID, range:[1,64], desc:generated when creating upgrade tasks, related URI: /ISAPI/System/onlineUpgrade/task?
      format=json*/
      "moduleType": "stationHostAndScreen",
      /*ro, opt, enum, component type, subType:string, desc:"stationHostAndScreen" (dock station upgrade package, including host and screen),
      "stationHost" (dock station host), "splicingControllerMainAndSubBoard" (main board and sub board of splicing controller), "splicingControllerMainBoard"
      (main board of splicing controller), "splicingControllerSubBoard" (sub board of splicing controller), "bodyCamera" (body camera)*/
      "packageName": "ZCS-H1_target_V1.0.1_build201123.zip",
      /*ro, opt, string, upgrade package name, range:[1,128]*/
      "taskTime": "1970-01-01T00:00:00+08:00",
      /*ro, opt, datetime, applying upgrade task time*/
      "taskParam": {
        /*ro, opt, object, task parameters, desc:corresponding URL: POST /ISAPI/System/onlineUpgrade/task?format=json*/
        "URL": "test",
        /*ro, req, string, upgrade package address, range:[1,1024]*/
        "delayedUpgrade": true,
        /*ro, opt, bool, whether to delay the upgrade, desc:if this node is not applied, it indicates that the upgrade will be started immediately;
        if this node is applied and the value is false, it indicates that the upgrade will be delayed*/
        "delayedUpgradeDateTime": "1970-01-01T00:00:00+08:00"
        /*ro, opt, datetime, time of starting the delayed upgrade, dep:or,{$.PackageDescription.delayedUpgrade,eq,false}*/
      }
    }
  ]
}

```

14.1.4.4 Apply the task of online upgrade

Request URL

POST /ISAPI/System/onlineUpgrade/task?format=json

Query Parameter

None

Request Message


```

{
  "PackageDescription": {
    /*req, object, description of the upgrade package*/
    "name": "DSJ_N3_GWL_DEBUG_STD_1.2.0_190524.zip",
    /*opt, string, upgrade package name, range:[1,256]*/
    "URL": "test",
    /*req, string, URL of the upgrade package, range:[1,1024], desc:the task ID is contained in the URL. The uploading and downloading of the upgrade package is based on the object storage protocol (version 2.0). If this node is null, the FTP address will take effect. If both the URL and FTP address are configured, the URL has priority over FTP address*/
    "MDS": "test",
    /*opt, string, range:[0,256]*/
    "moduleType": "cardReader",
    /*opt, enum, module type, subType:string, desc:"cardReader" (card reader), "FPModule" (fingerprint module), "securityModule" (security module), "extendModule" (I/O extended module), "channelController" (lane controller), "IRModule" (infrared module), "lampModule" (indicator module), "elevatorController" (sub elevator controller), "FPAlgorithmProgram" (fingerprint algorithm programma of card reader), "dockStationHost" (dock station host), "dockStationScreen" (dock station screen), "stationHostAndScreen" (dock station host and screen)*/
    "moduleID": 1,
    /*opt, int, module ID*/
    "spellingControllerSubBoardList": [
    /*opt, array, splicing controller sub board list, subType:object, range:[1,1024], dep:or,
    {$.PackageDescription.moduleType,eq,spellingControllerMainAndSubBoard},{$.PackageDescription.moduleType,eq,spellingControllerSubBoard}, desc:it is valid when the value of the node moduleType is "spellingControllerMainAndSubBoard" or "spellingControllerSubBoard". If it is not configured, it indicates that all the sub boards will be updated*/
    {
      "subBoardID": 1,
      /*opt, int, sub board ID, range:[1,1024]*/
      "ipV4Address": "test",
      /*ro, opt, string, IPv4, range:[1,16], desc:when an exception occurs on the main board, the sub board can be updated through the IP address. The default sub board interface will be used*/
    }
    ],
    "channel": 1,
    /*opt, int, channel No., desc:this node is used for upgrading the IP channel of the NVR*/
    "childDevID": "3434645611",
    /*opt, string, range:[9,32]*/
    "customTaskID": "test",
    /*opt, string, user-defined task ID, range:[1,128], desc:if this node exists, it will be returned in the result*/
    "delayedUpgrade": true,
    /*opt, bool, whether to delay upgrading the package, desc:if this node is not applied, it indicates that the package will be upgraded immediately; if this node is applied and the value is false, it indicates that the upgrade will be delayed. User can decide the time to upgrade the package of the dock station or body camera if the upgrade is delayed*/
    "delayedUpgradeDateTime": "1970-01-01T00:00:00+08:00",
    /*opt, datetime, time of starting the delayed upgrade, dep:or,{$.PackageDescription.delayedUpgrade,eq,false}, desc:the related capability is "isSupportDelayedUpgradeByDateTime" in GET /ISAPI/System/onlineUpgrade/capabilities*/
    "ftpAddress": "test",
    /*opt, string, FTP address of the upgrade package, desc:this node will take effect when URL is null and the format is: ftp://[username]:[password]@[IP address]:[port No.]*/
    "downloadStrategy": {
    /*opt, object, device's upgrade package downloading strategy parameters*/
      "sequelEnabled": true,
      /*opt, bool, whether to enable ANR (Automatic Network Replenishment), desc:if enabled, when downloading is interrupted, the device will try downloading the package again; if disabled, the default strategy of the device will be adopted*/
      "sequelTimeout": 3000,
      /*opt, int, timeout of a single ANR attempt, step:1, unit:ms, desc:when a single ANR attempt exceeds the timeout period but the download does not continue, the ANR attempt will be recognized as failed*/
      "maxRetryTimes": 5,
      /*opt, int, ANR maximum attempt times, desc:when the device ANR exceeds the maximum attempt times but the download does not continue, the download and the upgrade will be recognized as failed*/
    },
    "upgradePackageURLType": "full"
    /*opt, enum, subType:string*/
  }
}

```

Response Message

```

{
  "statusCode": 1,
  /*ro, opt, int, status code, desc:1-succeeded, other value-error occurred. This field is required when an error occurred*/
  "statusString": "OK",
  /*ro, opt, string, status description, range:[1,64], desc:"OK" (succeeded), other value (error occurred). It is required when an error occurred*/
  "subStatusCode": "ok",
  /*ro, opt, string, sub status code, range:[1,64], desc:"ok" (succeeded), other value (error occurred). This field is required when an error occurred*/
  "errorCode": 1,
  /*ro, opt, int, error code, desc:when the value of statusCode is not 1, it corresponds to subStatusCode*/
  "errorMsg": "ok",
  /*ro, opt, string, error message, desc:this node is required when the value of statusCode is not 1*/
  "taskId": "test",
  /*ro, opt, string, ID of the upgrade task, desc:it can be used to get the status and progress of the task*/
}

```

14.1.4.5 Upload online upgrade status event

EventType:onlineUpgradeStatus

```

{
  "ipAddress": "172.6.64.7",
  /*ro, req, string, IPv4 address of the device that triggers the alarm*/
  "ipv6Address": "1080:0:0:0:8:800:200C:417A",
  /*ro, opt, string, IPv6 address of the device that triggers the alarm*/
  "portNo": 80,
  /*ro, opt, int, communication port No. of the device that triggers the alarm*/
  "protocol": "HTTP",
  /*ro, opt, enum, transmission communication protocol type, subType:string, desc:"HTTP", "HTTPS", "EHome". The value should be "HTTP" when ISAPI protocol
  is transmitted via EZ protocol. The value should be "EHome" when ISAPI protocol is transmitted via ISUP*/
  "macAddress": "01:17:24:45:D9:F4",
  /*ro, opt, string, MAC address*/
  "channelID": 1,
  /*ro, opt, int, channel No. of the device that triggers the alarm, desc:when ISAPI protocol is transmitted via HCNetsDK, the channel No. is the video
  channel No. of private protocol. When ISAPI protocol is transmitted via EZ protocol, the channel No. is the video channel No. of EZ protocol. When ISAPI
  protocol is transmitted via ISUP, the channel No. is the video channel No. of ISUP*/
  "dateTime": "2004-05-03T17:30:08+08:00",
  /*ro, req, datetime, alarm trigger time*/
  "activePostCount": 1,
  /*ro, opt, int, times that the same alarm has been uploaded, desc:the event triggering frequency. The pulse event is an event which is triggered
  continuously according to the detection frequency of the device, e.g., the motion detection. The instant event is the event triggered when object
  recognition occurs, and the recognition of each object will trigger the event once, e.g., the face capture. When the pulse events are triggered, this node
  is used to tell whether the events are triggered by the same source. For example, if it is motion detection, the alarms will be uploaded continuously
  according to the device detection frequency; if it changes to another source, then the counting will start again. It can be regarded as the event triggering
  frequency*/
  "eventType": "onlineUpgradeStatus",
  /*ro, req, string, event type*/
  "eventState": "active",
  /*ro, req, enum, event status, subType:string, desc:for durative event: "active" (valid event or event starts), "inactive" (invalid event or the event
  ends). For the heartbeat, the field value indicates the heartbeat data, and it is uploaded every 10 seconds*/
  "eventDescription": "Online Upgrade Status",
  /*ro, req, string, event description, desc:online upgrade status event*/
  "deviceId": "test0123",
  /*ro, opt, string, device ID, desc:PUID. This field must be returned when ISAPI event information is transmitted via ISUP. It is the same as deviceId of
  URI (/ISAPI/System/Network/EHome)*/
  "serialNumber": "test",
  /*ro, opt, string, device short serial No., range:[1,9]*/
  "status": "failure",
  /*ro, req, enum, upgrade status, subType:string, desc:"failure" (upgrade failed), "success" (upgrade succeeded), "upgrading"*/
  "failedReason": "languageMismatch",
  /*ro, opt, enum, cause of failure, subType:string, desc:"languageMismatch" (language mismatch), "writeFlashError" (failed to write to flash),
  "packageTypeMismatch" (upgrade package type mismatch), "packageVersionMismatch" (upgrade version mismatch), "netUnreachable" (network disconnected),
  "unknownError" (unknown error)*/
  "moduleType": "cardReader",
  /*ro, opt, enum, device component type, subType:string, desc:"cardReader" (card reader), "FPModule" (fingerprint module), "securityModule" (security
  module), "extendModule" (I/O extended module), "channelController" (lane controller), "IRModule" (infrared module), "lampModule" (indicator module),
  "elevatorController" (sub elevator controller), "FPAlgorithmProgram" (fingerprint algorithm programma of card reader), "dockStationHost" (dock station
  host), "dockStationScreen" (dock station screen)*/
  "moduleID": 1,
  /*ro, opt, int, device component No., desc:it depends on the node moduleType*/
  "channel": 1,
  /*ro, opt, int, channel No., desc:it is used for IP channel (to upgrade digital channel managed by NVR)*/
  "taskId": "test",
  /*ro, opt, string, task ID, range:[1,64], desc:generated when creating upgrade tasks, related URI: /ISAPI/System/onlineUpgrade/task?format=json*/
  "process": 1,
  /*ro, opt, int, upgrade progress, range:[1,100], step:1, unit:%, dep:or,{$.status,eq,upgrading}, desc:progress percentage*/
}

```

14.1.5 Port Settings

14.1.5.1 Get the serial port capability of the device

Request URL

GET /ISAPI/System/Serial/capabilities

Query Parameter

None

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<SerialCap xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, range of RS-485 serial port numbers supported by the device, attr:version{req, string, protocolVersion}-->
  <rs485PortNums>
    <!--ro, opt, int, the maximum number of RS-485 serial ports supported by the device-->0
  </rs485PortNums>
  <supportRS232Config>
    <!--ro, opt, bool, whether the device supports configuring parameters of RS-232 serial ports-->true
  </supportRS232Config>
  <rs422PortNums>
    <!--ro, opt, int, the maximum number of RS-422 serial ports supported by the device-->0
  </rs422PortNums>
  <rs232PortNums>
    <!--ro, opt, int, the maximum number of RS-232 serial ports supported by the device-->0
  </rs232PortNums>
  <rs485WorkMode opt="Led, CaptureTrigger,transparent">
    <!--ro, opt, string, range of RS-485 serial port No. supported by the device, attr:opt{req, string}-->test
  </rs485WorkMode>
  <rs232SerialNumber opt="1,2,3">
    <!--ro, opt, int, range of RS-232 serial port numbers supported by the device, attr:opt{req, string}-->1
  </rs232SerialNumber>
  <rs485SerialNumber opt="4,5,6">
    <!--ro, opt, int, range of RS-485 serial port numbers supported by the device, attr:opt{req, string}-->1
  </rs485SerialNumber>
  <isSupportAuthenticationService>
    <!--ro, opt, bool, whether the device supports the serial port authentication service-->true
  </isSupportAuthenticationService>
  <isSupportDeviceInfo>
    <!--ro, opt, bool, whether the device supports configuring the information about the serial port device-->true
  </isSupportDeviceInfo>
  <isSupportSearchDeviceInfoRelations>
    <!--ro, opt, bool, whether the device supports searching the linkage information of the serial port device-->true
  </isSupportSearchDeviceInfoRelations>
</SerialCap>
```

14.1.5.2 Get the capability of a specific serial port

Request URL

GET /ISAPI/System/Serial/ports/<portID>/capabilities

Query Parameter

Parameter Name	Parameter Type	Description
portID	string	--

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>
<SerialPort xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, port No., attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, int, ID-->0
  </id>
  <enabled opt="true,false">
    <!--ro, opt, bool, whether to enable, attr:opt{req, string}-->true
  </enabled>
  <serialPortType opt="RS485,RS422,RS232">
    <!--ro, opt, string, serial port type, attr:opt{req, string}-->RS485
  </serialPortType>
  <duplexMode opt="half,full">
    <!--ro, opt, string, duplex mode of the serial port, attr:opt{req, string}-->half
  </duplexMode>
  <baudRate opt="1200,2400,4800,9600,19200,38400,57600,115200">
    <!--ro, opt, int, attr:opt{req, string}-->1200
  </baudRate>
  <dataBits opt="6,7,8">
    <!--ro, opt, int, attr:opt{req, string}-->6
  </dataBits>
  <parityType opt="none,even,odd,mark,space">
    <!--ro, opt, string, attr:opt{req, string}-->none
  </parityType>
  <stopBits opt="1,1.5,2">
    <!--ro, opt, string, stop bit, attr:opt{req, string}-->1
  </stopBits>
  <flowCtrl opt="none,software,hardware">
    <!--ro, opt, string, flowCtrl, attr:opt{req, string}-->none
  </flowCtrl>
</SerialPort>

```

14.1.5.3 Close the transmission channel

Request URL

PUT /ISAPI/System/Serial/ports/<portID>/Transparent/channels/<channelID>/close?type=<type>

Query Parameter

Parameter Name	Parameter Type	Description
portID	string	--
channelID	string	--
type	string	Data (purpose) type "general" (general data transparent transmission, the device sends the transparent transmission data via serial port, regardless of whether there is an external component connected to the serial port), "sensorCtrl" (sensor data transparent transmission control, when the device sends the transparent transmission data via serial port, it will also stop collecting sensor data, and compared with general type, the device will perform specific control and management on the sensors externally connected to the serial port)

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>
<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, opt, string, range:[0,1024]-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
  <description>
    <!--ro, opt, string, range:[0,1024]-->badXmlFormat
  </description>
  <MErrCode>
    <!--ro, opt, string-->0x00000000
  </MErrCode>
  <MErrDevSelfEx>
    <!--ro, opt, string-->0x00000000
  </MErrDevSelfEx>
</ResponseStatus>

```

14.1.5.4 Open the transmission channel

Request URL

PUT /ISAPI/System/Serial/ports/<portID>/Transparent/channels/<channelID>/open?type=<type>

Query Parameter

Parameter Name	Parameter Type	Description
portID	string	--
channelID	string	Camera ID
type	string	Data (purpose) type. "general" (general data transparent transmission, the device sends the transparent transmission data via serial port, regardless of whether there is an external component connected to the serial port), "sensorCtrl" (sensor data transparent transmission control, when the device sends the transparent transmission data via serial port, it will also stop collecting sensor data, and compared with general type, the device will perform specific control and management on the sensors externally connected to the serial port)

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>
<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, opt, string, range:[0,1024]-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
  <description>
    <!--ro, opt, string, range:[0,1024]-->badXmlFormat
  </description>
  <MErrCode>
    <!--ro, opt, string-->0x00000000
  </MErrCode>
  <MErrDevSelfEx>
    <!--ro, opt, string-->0x00000000
  </MErrDevSelfEx>
</ResponseStatus>

```

14.1.5.5 Set the parameters of a specific serial port supported by the device

Request URL

PUT /ISAPI/System/Serial/ports/<portID>?permissionController=<indexID>&childDevID=
 <childDevID>&deviceIndex=<deviceIndex>

Query Parameter

Parameter Name	Parameter Type	Description
portID	string	--
indexID	string	--
childDevID	string	--
deviceIndex	string	--

Request Message

```

<?xml version="1.0" encoding="UTF-8"?>
<SerialPort xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, port, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, int, serial port ID-->0
  </id>
  <enabled>
    <!--opt, bool, whether to enable the function-->true
  </enabled>
  <encryptKey>
    <!--opt, string-->test
  </encryptKey>
  <serialNumber>
    <!--opt, int, serial No.-->0
  </serialNumber>
  <serialPortType>
    <!--opt, enum, serial port type: "RS485","RS422","RS232", subType:string, desc:serial port type: "RS485","RS422","RS232"-->RS485
  </serialPortType>
  <serialAddress>
    <!--opt, int-->1
  </serialAddress>
  <duplexMode>
    <!--opt, enum, duplex mode of the serial port, subType:string, desc:"half", "full"-->half
  </duplexMode>
  <direction>
    <!--opt, enum, "monodirectional,bidirectional", subType:string, desc:"monodirectional, bidirectional"-->monodirectional
  </direction>
  <baudRate>
    <!--opt, enum, subType:int-->2400
  </baudRate>
  <dataBits>
    <!--opt, int-->6
  </dataBits>
  <parityType>
    <!--opt, enum, parity type, subType:string, desc:"none, even, odd, mark, space"-->none
  </parityType>

```

```

<stopBits>
  <!--opt, string, stop bit: "1,1.5,2"-->1
</stopBits>
<workMode>
  <!--opt, enum, work mode, subType:string, desc:working mode: "console","transparent","audiomixer","stairsControl"-elevator control,"cardReader"-card reader,"disabled","custom". This node is required only when <serialPortType> is set to "RS232"-->console
</workMode>
<flowCtrl>
  <!--opt, enum, "none,software,hardware", subType:string, desc:"none, software, hardware"-->none
</flowCtrl>
<rs485WorkMode>
  <!--opt, enum, working mode of RS-485 serial port, which is used for LED display or triggering transmission of captured pictures: "Led, CaptureTrigger". This node is valid only when <serialPortType> is "RS485", subType:string, dep:or,{$.SerialPort.serialPortType,eq,RS485}, desc:working mode of RS-485 serial port,which is used for LED display or triggering transmission of captured pictures: "Led,CaptureTrigger". This node is valid only when <serialPortType> is "RS485"-->sensor
</rs485WorkMode>
<copyToAll>
  <!--opt, bool-->true
</copyToAll>
<deviceName>
  <!--ro, opt, string-->test
</deviceName>
<deviceProtocol>
  <!--ro, opt, int-->1
</deviceProtocol>
<mode>
  <!--opt, enum, work mode, subType:string, desc:deg,working mode: "readerMode,clientMode,externMode,accessControlHost,disabled",this node is valid only when <serialPortType> is "RS485"-->readerMode
</mode>
<outputDataType>
  <!--opt, enum, output data type, subType:string, dep:and,{$.SerialPort.mode,eq,accessControlHost}, desc:"cardNo,employeeNo", this node is valid when <mode>is "accessControlHost"-->cardNo
</outputDataType>
<isVariable>
  <!--opt, bool-->true
</isVariable>
<PTZInfo>
  <!--opt, object, PTZ information-->
  <bindChannelNo>
    <!--req, int-->0
  </bindChannelNo>
  <PTZProtocolList>
    <!--req, object-->
    <PTZProtocol>
      <!--opt, object-->
      <id>
        <!--req, int, serial port ID-->0
      </id>
      <protoDesc>
        <!--req, string-->test
      </protoDesc>
    </PTZProtocol>
  </PTZProtocolList>
</PTZInfo>
<ScreenCtrlInfo>
  <!--opt, object-->
  <ScreenCtrlProtoList>
    <!--req, object-->
    <ScreenCtrlProto>
      <!--opt, object-->
      <id>
        <!--req, int, serial port ID-->0
      </id>
      <protoDesc>
        <!--req, string-->test
      </protoDesc>
    </ScreenCtrlProto>
  </ScreenCtrlProtoList>
</ScreenCtrlInfo>
<MatrixCtrlInfo>
  <!--opt, object-->
  <MatrixCtrlProtoList>
    <!--req, object-->
    <MatrixCtrlProto>
      <!--opt, object-->
      <id>
        <!--req, int, serial port ID-->0
      </id>
      <protoDesc>
        <!--req, string-->test
      </protoDesc>
    </MatrixCtrlProto>
  </MatrixCtrlProtoList>
</MatrixCtrlInfo>
<KeyboardCtrlInfo>
  <!--opt, object-->
  <KeyboardCtrlProtoList>
    <!--req, object-->
    <KeyboardCtrlProto>
      <!--opt, object-->
      <id>
        <!--req, int, serial port ID-->0
      </id>
      <protoDesc>

```

```

    <protoDesc>
      <!--req, string-->test
    </protoDesc>
  </KeyboardCtrlProto>
</KeyboardCtrlProtoList>
</KeyboardCtrlInfo>
<ControlAddress>
  <!--opt, object-->
  <enabled>
    <!--req, bool, whether to enable the function-->true
  </enabled>
  <address>
    <!--req, int, address, range:[0,255]-->1
  </address>
</ControlAddress>
<SensorCtrlList>
  <!--opt, object-->
  <Sensor>
    <!--opt, object-->
    <id>
      <!--req, int, ID, range:[1,3]-->1
    </id>
    <name>
      <!--req, string, sensor name, range:[1,32]-->visibilitySensor
    </name>
    <enabled>
      <!--req, bool, whether to enable the function, desc:whether to enable the serial port: "true,false"-->>false
    </enabled>
  </Sensor>
</SensorCtrlList>
<stairsControl>
  <!--opt, object, elevator control parameters, this node is valid when the value of the node <mode> is stairsControl, dep:and,
  {$.SerialPort.mode,eq,stairsControl}-->
  <outputDataType>
    <!--opt, enum, output data type, subType:string, desc:"cardNo,employeeNo", this node is valid when <mode>is "accessControlHost"-->floorNumber
  </outputDataType>
</stairsControl>
<comMode>
  <!--opt, enum, subType:string-->active
</comMode>
<ModbusRTU>
  <!--opt, object, dep:and,{$.SerialPort.rs485WorkMode,eq,ModbusRTU}-->
  <ModbusRTUBaudRate>
    <!--opt, enum, subType:string-->9600
  </ModbusRTUBaudRate>
  <ModbusRTUDataBits>
    <!--opt, enum, subType:int-->6
  </ModbusRTUDataBits>
  <ModbusRTUParityType>
    <!--opt, enum, subType:string-->none
  </ModbusRTUParityType>
  <ModbusRTUStopBits>
    <!--opt, enum, subType:string-->1
  </ModbusRTUStopBits>
  <ModbusRTUFlowCtrl>
    <!--opt, enum, subType:string-->none
  </ModbusRTUFlowCtrl>
  <decoderAddress>
    <!--opt, int, range:[0,255]-->0
  </decoderAddress>
</ModbusRTU>
<accessName>
  <!--opt, string, range:[1,32]-->test
</accessName>
<serialPortUse>
  <!--opt, enum, subType:string-->acquisition
</serialPortUse>
<acquisitionProtocol>
  <!--opt, enum, subType:string, dep:and,{$.SerialPort.serialPortUse,eq,acquisition}-->modbus
</acquisitionProtocol>
<serialProtocol>
  <!--opt, enum, subType:string-->GB26875
</serialProtocol>
<SupplementLightList>
  <!--opt, array, subType:object, dep:and,{$.SerialPort.rs485WorkMode,eq,supplementLight}-->
  <SupplementLight>
    <!--opt, object-->
    <SupplementLightID>
      <!--req, int, range:[1,5]-->1
    </SupplementLightID>
  </SupplementLight>
</SupplementLightList>
<cardReaderType>
  <!--opt, enum, subType:string-->K1108AM
</cardReaderType>
</SerialPort>

```

Response Message


```

<?xml version="1.0" encoding="UTF-8"?>
<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status description, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, error reason description in detail, desc:error reason description in detail-->OK
  </subStatusCode>
</ResponseStatus>

```

14.1.5.6 Get the parameters of a specific port supported by the device

Request URL

GET /ISAPI/System/Serial/ports/<portID>?permissionController=<indexID>&childDevID=<childDevID>&deviceIndex=<deviceIndex>

Query Parameter

Parameter Name	Parameter Type	Description
portID	string	--
indexID	string	0 (main permission controller), 1 (sub permission controller) When this parameter does not exist, it indicates getting the serial port information of the main permission controller (i.e., the device serial port information).
childDevID	string	--
deviceIndex	string	For C60S devices connected to multiple LED sending cards, the URL needs to include deviceIndex= to distinguish which LED sending card to operate on. The value of deviceIndex is the value of "id" when "portType" is LED and can be obtained via GET /ISAPI/DisplayDev/Video/outputs/channels.

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>
<SerialPort xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, port, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, int, serial port ID-->0
  </id>
  <enabled>
    <!--ro, opt, bool, whether to enable the serial port-->true
  </enabled>
  <serialPortType>
    <!--ro, opt, enum, serial port type, subType:string, desc:"RS485", "RS422", "RS232"-->RS485
  </serialPortType>
  <duplexMode>
    <!--ro, opt, enum, duplex mode of the serial port, subType:string, desc:"half", "full"-->half
  </duplexMode>
  <baudRate>
    <!--ro, opt, enum, subType:int-->2400
  </baudRate>
  <dataBits>
    <!--ro, opt, int-->6
  </dataBits>
  <parityType>
    <!--ro, opt, enum, parity type, subType:string, desc:parity type: "none,even,odd,mark,space"-->none
  </parityType>
  <stopBits>
    <!--ro, opt, enum, stop bit, subType:string, desc:stop bit-->1
  </stopBits>
  <flowCtrl>
    <!--ro, opt, enum, "none,software,hardware", subType:string, desc:"none", "software", "hardware"-->none
  </flowCtrl>
</SerialPort>

```

14.1.5.7 Get the list of serial ports supported by the device

Request URL

GET /ISAPI/System/Serial/ports?permissionController= <indexID> &deviceIndex= <deviceIndex>

Query Parameter

Parameter Name	Parameter Type	Description
indexID	string	0 (main permission controller), 1 (sub permission controller) If this parameter does not exist, it indicates getting the serial port information of main permission controller, that is, the serial port information of the device.
deviceIndex	string	For C60S device connecting multiple LED sending cards, the URL needs to include the parameter deviceIndex= to specify which LED sending card to operate on. The value of deviceIndex is the value of "id" when "portType" is LED and can be obtained via GET /ISAPI/DisplayDev/Video/outputs/channels.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>
<SerialPortList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, array, subType:object, attr:version{req, string, protocolVersion}-->
  <SerialPort>
    <!--ro, opt, object-->
    <id>
      <!--ro, req, int-->0
    </id>
    <enabled>
      <!--ro, opt, bool-->>true
    </enabled>
    <serialPortType>
      <!--ro, opt, enum, subType:string-->RS485
    </serialPortType>
    <duplexMode>
      <!--ro, opt, enum, subType:string-->half
    </duplexMode>
    <baudRate>
      <!--ro, opt, enum, subType:int-->2400
    </baudRate>
    <dataBits>
      <!--ro, opt, int-->6
    </dataBits>
    <parityType>
      <!--ro, opt, enum, subType:string-->none
    </parityType>
    <stopBits>
      <!--ro, opt, enum, subType:string-->1
    </stopBits>
    <workMode>
      <!--ro, opt, enum, subType:string-->console
    </workMode>
    <flowCtrl>
      <!--ro, opt, enum, subType:string-->none
    </flowCtrl>
  </SerialPort>
</SerialPortList>
```

14.1.6 System Maintenance

14.1.6.1 Get the storage capability of the device

Request URL

GET /ISAPI/ContentMgmt/capabilities

Query Parameter

None

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>
<RacmCap xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, device storage capability, attr:version{req, string, protocolVersion}-->
  <nasNums>
    <!--ro, opt, int, supported number of NAS devices, desc:related URI: /ISAPI/ContentMgmt/Storage/nas-->0
  </nasNums>
  <pictureSearchType>
    opt="AllEvent,CMR,MOTION,ALARM,EDR,ALARMANDMOTION,Command,pir,wlsensor,callhelp,facedetection,FieldDetection,scenechangedetection,LineDetection,
    regionEntrance,regionExiting,loitering,group,rapidMove,parking,unattendedBaggage,attendedBaggage,vehicleDetection>manual>manualSnapshot,playSnapshot,safetyH
    elmet,
    personQueueCounting,personQueueTime,violentMotion,leavePosition,advReachHeight,peopleNumChange,mixedTargetDetection,illegalParking,pedestrian,construction,r
    oadblock,
    abandonedObject,trafficAccident,fogDetection,smokeDetection,personDensity,failDown,accessController,videoInterCom,GJD,Luminite,OPTEX,securityControlPanel,ge
    tUp,toiletTarry,
    playCellphone,vehicleMonitor,vibrationDetection,running,retention,spacingChange,yardTarry,keyPersonGetUp,sitQuietly,standUp,plateRecognition,smoking,onThePh
    one,fatigueDriving,
    notLookingStraightAhead,leaveThePost,seatBelt,sunglasses,identityAbnormal,ForwardCollisionWarning,LaneDepartureWarning,BlindSpotDetection,HeadwayMonitoringW
    arning,
    PedestrianCollisionWarning,SuddenSpeedUp,SuddenSpeedDown,SuddenLeftTurn,SuddenRightTurn,Turnover,NotYieldToPedestrian,unregisteredStreetVendor,stallOutsideS
    hop,stallOccupyingRoad,
    illegalHeap,illegalParkingofNon-
    MotorVehicle,illegalOutdoorAdvertisement,packGarbage,stallUnderUmbrella,dustbinOverflow,exposeGarbage,hangClothingAlongStreet,allPic,ATMPanel,
    ATMSurround,ATMFace,ATMSafetyCabin,loitering,smokeDetectAlarm,temperatureIntervalMeasurement,AIOP,tail,abnormalFace,normalFace,multiFace,callFace,sunglasses
    Face,humanEnter,operateOverTime,stickUp,installScanner,objectPlacedOrTaken,fakeCard,securityChecking,pothole,crack,roadMaint,imageCapture,methaneConcentrati
    onException,methaneLightIntensityException,bannerDetection,variableDataEvent,shipChannelAbnormal,radarVideoDetection,smokeAndFireDetection,smokeDetection,se
    nsorAlarm,alarmResult,AIOP_Video,AIOP_Polling_Snap,swipePatrol,BatteryCarInfoEvent,indoorPasswayBlock,detectorTemperatureAlarm,fireNoRegulation,detectorMoti
    onAlarm,detectorShelterAlarm,detectorRunningStatus,faceCapture,UVPhotonDetection,DevPowerStatusReport,HFPD,audioAnalysis,IndoorPasswayRecovery,BatteryCarRec
    overy,DetectorTemperatureRecovery,RadarFallenObjectsOnTracks,VegetationSpectrumDetection,personDensityDetection,ChannelClearEvent,channelOccupy,ChannelPassi
    ngEvent,FallenObjectsOnTracksEvent,audioexception,CarWindow,shipsDetection,InsulatorAbnormalAlarm,PackingSpaceRecognition,smokeAlarm,SmokeAlarmRecovery,fire
    SmartFireDetect,FirePointAlarmRecovery,offDuty,backDuty,sleepDuty,batteryCarDisobey,SmokingDetectionRecoverEvent,noFireExtinguisherRecog,FireExtinguisherRec
    overyEvent,TelephoningBehaviorAlarmEvent,TelephoningBehaviorRecoveryEvent,GasTankMonitoringEvent,TemperatureMeasurementPreviewRecovery,TMPA,TMA,TemperatureM
```

```

easurementPreviewAlarmRecovery, TemperatureMeasurementAlarmRecovery, DetectorShelterAlarmRecovery, TemperatureUp, TemperatureDown, TemperatureEvent, TemperatureUp
Recover, TemperatureDownRecover, TemperatureEventRecover, ElectricFenceAlarmEvent, cityManagement, flowVelocity, volumeFlowRate, rainfall, partialDischarge, gasLeaka
ge, manualSnapshot, AlarmTriggeredByPanicButton, detectorSmokeAlarm, smokeAndFireSample, synthesis, FireStatusSwitch, FlameCombustionCounting, linkedTracking, smartS
hipDetection, targetModeling, SafetyWorkwearDetectionEvent, SafetyWorkwearRecoveryEvent, DeskMatOffset">
<!--ro, opt, enum, picture search type, subType:string, attr:opt{req, string}, desc:"AllEvent", "CMR", "MOTION", "ALARM", "EDR", "ALARMANDMOTION",
"pir:PIR", "wlsensor", "callhelp", "facedetection", "FieldDetection", "scenechangedetection", "LineDetection", "regionEntrance", "regionExiting",
"loitering", "group", "rapidMove", "parking", "unattendedBaggage", "attendedBaggage", "vehicleDetection", "manual", "manualSnapshot", "playSnapshot",
"safetyHelmet", "personQueueCounting", "personQueueTime", "violentMotion", "leavePosition", "advReachHeight", "peopleNumChange", "mixedTargetDetection",
"illegalParking", "pedestrian", "construction", "roadblock", "evidence", "crossLane", "vehicleExist", "lanechange", "wrongdirection", "congestion",
"turnaround", "parallelParking", "abandonedObject", "trafficAccident", "fogDetection", "smokeDetection", "personDensity", "failDown", "accessController",
"videoInterCam", "GJD", "Luminite", "OPTEX", "securityControlPanel", "getUp", "toiletTarry", "playCellphone", "vehicleMonitor", "running", "retention",
"spacingChange", "yardTarry", "keyPersonGetUp", "sitQuietly", "standup", "plateRecognition", "smoking", "onThePhone", "fatigueDriving",
"notLookingStraightAhead", "leaveThePost", "seatbelt", "sunglasses", "identityAbnormal", "ForwardCollisionWarning", "LaneDepartureWarning",
"BlindSpotDetection", "HeadwayMonitoringWarning", "PedestrianCollisionWarning", "SuddenSpeedUp", "SuddenSpeedDown", "SuddenLeftTurn", "SuddenRightTurn",
"Turnover", "NotYieldToPedestrian;allPic", "ATMPanel", "ATMSurround", "ATMFace", "ATMSafetyCabin", "smokeDetectAlarm", "temperatureIntervalMeasurement",
"AIOp", "tail", "abnormalFace", "normalFace;callFace", "sunglassesFace", "humanEnter", "operateOverTime", "stickup", "installScanner",
"objectPlacedOrTaken", "FakeCard", "securityChecking", "pothole", "crack", "roadMaint", "imageCapture", "ReID", "thermalVehicleDetection",
"methaneConcentrationException", "methaneLightIntensityException", "bannerDetection", "waterQualityDetection", "waterLevelDetection", "parallelParking",
"methaneConcentrationException", "variableDataEvent", "VOCsGasDetection", "shipChannelAbnormal", "radarVideoDetection", "AIDfogDetection:AID",
"smokeAndFireDetection", "smokeDetection", "sensorAlarm", "GasTankDetection", "alarmResult", "AIOp_Video", "AIOp_Polling_Snap", "swipePatrol",
"BatteryCarInfoEvent", "indoorPasswayBlock", "detectorTemperatureAlarm", "fireNoRegulation", "detectorMotionAlarm", "detectorShelterAlarm",
"detectorRunningStatus", "faceCapture", "UVPhotonDetection", "DevPowerStatusReport", "HFPD"-->AllEvent
</pictureSearchType>
<recordSearchType
opt="AllEvent,CMR,MOTION,ALARM,EDR,ALARMANDMOTION,Command,pir,wlsensor,callhelp,facedetection,FieldDetection,scenechangedetection,LineDetection,
regionEntrance,regionExiting,loitering,group,rapidMove,parking,unattendedBaggage,attendedBaggage,vehicleDetection>manual>manualSnapshot,playSnapshot,safetyH
elmet,
failDown,personDensityDetection,smokeDetection,vibrationDetection,unregisteredStreetVendor,stallOutsideShop,stallOccupyingRoad,illegalHeap,illegalParkingofN
on-MotorVehicle,
illegalOutdoorAdvertisement,packGarbage,stallUnderUmbrella,dustbinOverflow,exposeGarbage,hangClothingAlongStreet,ATMPanel,ATMSurround,ATMFace,ATMSafetyCabin
,temperatureIntervalMeasurement,AIOp,securityChecking,scheduledRecordUpload,variableDataEvent,smokeAndFireDetection,smokeDetection,AIOp_Video,AIOp_Polling_S
nap,BatteryCarInfoEvent,indoorPasswayBlock,detectorTemperatureAlarm,fireNoRegulation,detectorMotionAlarm,detectorShelterAlarm,detectorRunningStatus,faceCapt
ure,UVPhotonDetection,DevPowerStatusReport,ChannelClearEvent,channelOccupy,channelPassingEvent,personQueueCounting,personQueueTime,leavePosition,localButton
Record,callRecord,partialDischarge,gasLeakage,smokeAndFireSample,passback,linkedTracking,CallRecordAnswered,CallRecordNotAnswered,lensMotorLocking">
<!--ro, opt, enum, video search type, subType:string, attr:opt{req, string}, desc:"AllEvent" (all events), "CMR" (capture by schedule), "MOTION" (motion
detection), "ALARM", "EDR", "ALARMANDMOTION", "pir", "wlsensor", "callhelp", "facedetection", "FieldDetection", "scenechangedetection", "LineDetection",
"regionEntrance", "regionExiting", "loitering", "group", "rapidMove", "parking", "unattendedBaggage", "attendedBaggage", "vehicleDetection", "manual",
"manualSnapshot", "playSnapshot", "safetyHelmet", "personDensityDetection", "smokeDetection", "ATMPanel", "ATMSurround", "ATMFace", "ATMSafetyCabin",
"temperatureIntervalMeasurement", "AIOp", "securityChecking", "scheduledRecordUpload", "thermalVehicleDetection", "waterQualityDetection",
"waterLevelDetection", "methaneConcentrationException", "variableDataEvent"-->AllEvent
</recordSearchType>
<isSupportRcamChannelsCap opt="true,false">
<!--ro, opt, bool, whether the device supports the Rcam capability by channel, attr:opt{opt, string}, desc:related URI:
/ISAPI/ContentMgmt/channels/<ID>/capabilities-->true
</isSupportRcamChannelsCap>
<SecurityLog>
<!--ro, opt, object, security log, desc:security log-->
<isSupportSecurityLog>
<!--ro, opt, bool, whether the device supports the security log-->true
</isSupportSecurityLog>
<isSupportLogServer>
<!--ro, opt, bool, whether it supports security log server configuration-->true
</isSupportLogServer>
<isSupportLogServerTest>
<!--ro, opt, bool, whether it supports security log server test-->true
</isSupportLogServerTest>
<SecurityLogTypeList>
<!--ro, req, array, list of security log types, subType:object-->
<SecurityLogType>
<!--ro, opt, object, list of log types-->
<primaryType>
<!--ro, req, enum, main log type, subType:string, desc:"Event", "Operation", "Other" (other types), "All" (all types)-->Event
</primaryType>
<secondaryType opt="test">
<!--ro, req, enum, sub type, subType:string, attr:opt{req, string}, desc:see other types on the appendix. "all" (all types)-->all
</secondaryType>
</SecurityLogType>
</SecurityLogTypeList>
</SecurityLog>
<isSupportRedirectStorageUrl>
<!--ro, opt, bool-->true
</isSupportRedirectStorageUrl>
</RcamCap>

```

14.1.6.2 Get device storage capability by channel

Request URL

GET /ISAPI/ContentMgmt/channels/<channelID>/capabilities

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<RacmChannelsCap xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, storage capability of a device, attr:version{req, string, protocolVersion}-->
  <pictureSearchType
    opt="AllEvent,CMR,MOTION,ALARM,EDR,ALARMANDMOTION,Command,pir,wlsensor,callhelp,facedetection,FieldDetection,scenechangedetection,LineDetection,regionEntrance,regionExiting,loitering,group,rapidMove,parking,unattendedBaggage,attendedBaggage,vehicleDetection>manual>manualSnapshot,playSnapshot,allPic, methaneConcentrationException, methaneLightIntensityException, bannerDetection, AIOpenPlatform, alarmResult, UVPhotonDetection, DevPowerStatusReport, FallenObjectsOnTracksEvent, ChannelClearEvent, channelOccupy, ChannelPassingEvent, audioexception, fieldddetection, linedetection, regionEntrance, regionExiting, smokeDetectAlarm, audioAnalysis, smokeAlarm, SmokeAlarmRecovery, fireSmartFireDetect, FirePointAlarmRecovery, indoorPasswayBlock, IndoorPasswayRecovery, offDuty, backDuty, sleepDuty, sleepDutyRecoveryEvent, batteryCarDisobey, BatteryCarRecovery, SmokingDetectionRecoverEvent, noFireExtinguisherRecog, FireExtinguisherRecoveryEvent, TelephoningBehaviorAlarmEvent, TelephoningBehaviorRecoveryEvent, GasTankMonitoringEvent, GasTankMonitoringRecoveryEvent, TemperatureMeasurementPreviewRecovery, TemperatureMeasurementRecovery, playCellphone, PlayCellphoneRecoveryEvent, TMA, TMA, TemperatureMeasurementPreviewAlarmRecovery, TemperatureMeasurementAlarmRecovery, detectorShelterAlarm, DetectorShelterAlarmRecovery,, TemperatureUp, TemperatureDown, TemperatureUpRecover, TemperatureDownRecover, TemperatureEventRecover, localButtonRecord, flowVelocity, volumeFlowRate, rainfall, detectorTemperatureAlarm, AlarmTriggeredByPanicButton, detectorSmokeAlarm, shipsDetection">
    <!--ro, opt, enum, picture search type, subType:string, attr:opt{req, string}, desc:"AllEvent", "CMR", "MOTION", "ALARM", "EDR", "ALARMANDMOTION", "Command", "pir", "wlsensor", "callhelp", "facedetection", "FieldDetection", "scenechangedetection", "LineDetection", "regionEntrance", "regionExiting", "Loitering", "group", "rapidMove", "parking", "unattendedBaggage", "attendedBaggage", "vehicleDetection", "manual", "manualSnapshot", "playSnapshot", "allPic", "methaneConcentrationException", "methaneLightIntensityException", "bannerDetection", "waterQualityDetection", "waterLevelDetection", "parallelParking", "waterLevelAndRainfall", "AIOpenPlatform", "VOCsGasDetection", "angleDeviationDetection"-->AllEvent
  </pictureSearchType>
</RacmChannelsCap>
```

14.1.6.3 Get the system security capability

Request URL

GET /ISAPI/Security/capabilities?username= <userName> &deviceIndex= <deviceIndex>

Query Parameter

Parameter Name	Parameter Type	Description
userName	string	user name
deviceIndex	string	For centralized splicing controllers connecting to LED sending cards, the URL needs to include the parameter deviceIndex= to specify LED sending card The value of deviceIndex is the value of "id" when "portType" is LED and can be obtained via GET /ISAPI/DisplayDev/Video/outputs/channels.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>
<SecurityCap xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, system security capability, attr:version{req, string, protocolVersion}-->
  <supportUserNums>
    <!--ro, opt, int, supported maximum number of users-->0
  </supportUserNums>
  <userBondIpNums>
    <!--ro, opt, int, supported maximum number of IP addresses that can be bound-->0
  </userBondIpNums>
  <userBondMacNums>
    <!--ro, opt, int, supported maximum number of MAC addresses that can be bound-->0
  </userBondMacNums>
  <isSupCertificate>
    <!--ro, opt, bool, whether the device supports authentication-->true
  </isSupCertificate>
  <issupIllegalLoginLock>
    <!--ro, opt, bool, whether the device supports Locking Login-->true
  </issupIllegalLoginLock>
  <isSupportOnlineUser>
    <!--ro, opt, bool, whether the device supports the online user configuration-->true
  </isSupportOnlineUser>
  <isSupportAnonymous>
    <!--ro, opt, bool, whether the device supports anonymous Login-->true
  </isSupportAnonymous>
  <isSupportStreamEncryption>
    <!--ro, opt, bool, whether the device supports stream encryption-->true
  </isSupportStreamEncryption>
  <securityVersion opt="1,2,3,4">
    <!--ro, opt, string, encryption capability set, attr:opt{req, string}, desc:the encryption capability of each version consists of two parts: encryption algorithm and the range of encrypted nodes currently 1 refers to AES128 encryption and 2 refers to AES256 encryption the range of encrypted nodes is
```

original XML and the range of encrypted nodes currently 1 refers to AES256 encryption and 2 refers to AES256 encryption, the range of encrypted nodes is described in each protocol-->1

```
</securityVersion>
<keyIterateNum>
  <!--ro, opt, int, secret key iteration times, dep:or,{$.SecurityCap.securityVersion,eq,1},{$.SecurityCap.securityVersion,eq,2}, desc:this node depends
on the node securityVersion, the range is between 100 and 1000-->100
</keyIterateNum>
<isSupportUserCheck>
  <!--ro, opt, bool, whether the device supports verifying the login password when editing (editing/adding/deleting) user parameters, dep:or,
{$.SecurityCap.securityVersion,eq,0},{$.SecurityCap.securityVersion,eq,1}, desc:it is an added capability, which indicates that whether supporting the login
password verification for editing/adding/deleting user parameters, this node depends on the node securityVersion, which means that it is only valid for the
versions that support encrypting the sensitive information-->true
</isSupportUserCheck>
<isSupportSecurityQuestionConfig>
  <!--ro, opt, bool, whether the device supports answering security questions, desc:related URI: /ISAPI/Security/questionConfiguration-->true
</isSupportSecurityQuestionConfig>
<supportSecurityNode opt="wirelessServer,wirelessDial">
  <!--ro, opt, string, additional node for supporting sensitive information encryption, attr:opt(req, string),
desc:in the earlier version of the solution for encrypting the sensitive information via ISAPI (i.e., the solution for transmitting plaintext via ISAPI),
some URIs containing sensitive information are left out now these URIs need to be encrypted for transmission, this capability node is added to be compatible
with old devices _x000D_
    if wirelessServer in this node is returned, it indicates that the following sensitive information should be encrypted _x000D_
    /ISAPI/System/Network/interfaces/<ID>/wirelessServer/capabilities, /ISAPI/System/Network/interfaces/<ID>/wirelessDial in this
node is returned, it indicates that the following sensitive information should be encrypted _x000D_
    /ISAPI/System/Network/WirelessDial/Interfaces/_x000D_
    /ISAPI/System/Network/WirelessDial/Interfaces/<ID>-->wirelessServer
</supportSecurityNode>
<SecurityLimits>
  <!--ro, opt, object, capability of configuring security limit parameters-->
  <LoginPasswordLenLimit min="1" max="16">
    <!--ro, opt, string, length limit of the user's login password, attr:min(req, int),max(req, int)-->1
  </LoginPasswordLenLimit>
  <SecurityAnswerLenLimit min="1" max="128">
    <!--ro, opt, string, length limit of the security question's answer, attr:min(req, int),max(req, int)-->1
  </SecurityAnswerLenLimit>
</SecurityLimits>
<RSAKeyLength opt="512,1024,2048" def="2048">
  <!--ro, opt, enum, HTTPS certificate length, subType:int, attr:opt(req, string),def(req, string), desc:512, 1024, 2048-->2048
</RSAKeyLength>
<isSupportONVIFUserManagement>
  <!--ro, opt, bool, whether the device supports user management of Open Network Video Interface Protocol-->true
</isSupportONVIFUserManagement>
<WebCertificateCap>
  <!--ro, opt, object, HTTP authentication capability, desc:if this node is not returned, it indicates that device supports basic and digest
authentication-->
  <CertificateType opt="basic,digest,digest/basic">
    <!--ro, req, enum, certificate type, subType:string, attr:opt(req, string), desc:"basic" (basic authentication), "digest" (digest authentication),
"digest/basic" (digest/basic authentication)-->basic
  </CertificateType>
  <SecurityAlgorithm>
    <!--ro, opt, object, security algorithm, dep:or,{$.SecurityCap.WebCertificateCap.CertificateType,eq,digest},
{$.SecurityCap.WebCertificateCap.CertificateType,eq,digest/basic}-->
    <algorithmType opt="MD5,SHA256,MD5/SHA256">
      <!--ro, opt, enum, algorithm type, subType:string, attr:opt(req, string), desc:"MD5", "SHA256", "MD5/SHA256"-->MD5
    </algorithmType>
  </SecurityAlgorithm>
</WebCertificateCap>
<isSupportConfigFileImport>
  <!--ro, opt, bool, whether the device supports importing the configuration file, desc:true (support), this node is not returned (not support)-->true
</isSupportConfigFileImport>
<isSupportConfigFileExport>
  <!--ro, opt, bool, whether the device supports exporting the configuration file, desc:true (support), this node is not returned (not support)-->true
</isSupportConfigFileExport>
<cfgFileSecretKeyLenLimit min="0" max="16">
  <!--ro, opt, string, length limit of the configuration file's verification key, attr:min(req, int),max(req, int)-->1
</cfgFileSecretKeyLenLimit>
<isIrreversible>
  <!--ro, opt, bool, whether the device supports irreversible password storage, desc:If this function is not supported, the plaintext password of the user
information will be stored in the device; otherwise, the password will be hashed for storage in the device.-->true
</isIrreversible>
<salt>
  <!--ro, opt, string, the specific salt used by the user to log in-->test
</salt>
<isSupportOnvifInfo>
  <!--ro, opt, bool, whether the device supports getting the Open Network Video Interface Protocol, desc:true (support), this node is not returned (not
support)-->true
</isSupportOnvifInfo>
<isSupportGB35114Certificate>
  <!--ro, opt, bool, whether supports GB35114 protocol and CA/SIP authentication certificate-->true
</isSupportGB35114Certificate>
<isSupportDeviceCertificatesManagement>
  <!--ro, opt, bool, whether the device supports device certificate management, desc:if this node is not returned, it indicates that device does not
support this function-->true
</isSupportDeviceCertificatesManagement>
<isSupportSIPCertificatesManagement>
  <!--ro, opt, bool, whether the device supports SIP certificate management, desc:this node is returned if the device supports this function and not
returned if device does not support this function, related URI: /ISAPI/Security/SIPCertificate, additional node: <SIPCertificatesManagementCap>-->true
</isSupportSIPCertificatesManagement>
<isSupportDeviceSelfSignCertExport>
  <!--ro, opt, bool, whether the device supports exporting self-signed certificate-->true
</isSupportDeviceSelfSignCertExport>
<isSupportSecurityEmail>
  <!--ro, opt, bool, whether the device supports configuring the security email, desc:if this node is not returned, it indicates that device does not
support this function-->true
</isSupportSecurityEmail>
```

```

</isSupportSecurityEmail>
<maxIllegalLoginTimes min="3" max="20" def="5">
  <!--ro, opt, int, maximum failed illegal login attempts, range:[3,20], attr:min{req, int},max{req, int},def{req, int}, desc:this node is valid when the
value of the node isSupportIllegalLoginLock is true and will be returned when the maximum failed attempts of illegally logging in to the device reach the
limit-->3
</maxIllegalLoginTimes>
<SecurityAdvanced>
  <!--ro, opt, object, security advanced parameters-->
  <noOperationEnabled>
    <!--ro, req, bool, whether to enable the control timeout when there is no operation-->true
  </noOperationEnabled>
  <noOperationTime min="1" max="60" def="15">
    <!--ro, req, int, control timeout when there is no operation, range:[1,60], unit:min, attr:min{req, int},max{req, int},def{req, int}-->15
  </noOperationTime>
</SecurityAdvanced>
<LoginLinkNum>
  <!--ro, opt, object, number of controls logging in at the same time-->
  <maxLinkNum min="1" max="128" def="50">
    <!--ro, req, int, maximum number of controls logging in at the same time, range:[1,128], attr:min{req, int},max{req, int},def{req, int}-->50
  </maxLinkNum>
</LoginLinkNum>
<DoubleVerificationCap>
  <!--ro, opt, object, secondary authentication capability-->
  <isSupportUsersConfig>
    <!--ro, opt, bool, whether the device supports configuring users for secondary authentication-->true
  </isSupportUsersConfig>
  <isSupportUsersPermissionConfig>
    <!--ro, opt, bool, whether the device supports configuring user permission for secondary authentication-->true
  </isSupportUsersPermissionConfig>
</DoubleVerificationCap>
<isSupportEncryptCertificate>
  <!--ro, opt, bool, whether the device supports certificate encryption, desc:/ISAPI/Security/deviceCertificate-->true
</isSupportEncryptCertificate>
<maxIllegalLoginLockTime min="1" max="120" def="30.00">
  <!--ro, opt, int, lock time range, range:[1,120], unit:min, attr:min{req, int},max{req, int},def{req, int}-->1
</maxIllegalLoginLockTime>
<isSupportCertificateCustomID>
  <!--ro, opt, bool, whether the device supports using the user's custom ID to configure the certificate-->true
</isSupportCertificateCustomID>
<isSupportSoftwareLicense>
  <!--ro, opt, bool, whether support configuring the product open source statement, desc:if this function is supported, this node will be returned and its
value is true; otherwise, this node will not be returned. Related URI: /ISAPI/Security/softwareLicense?format=json-->true
</isSupportSoftwareLicense>
<isSupportGetProtocolFirewallRulesFileImportStatus>
  <!--ro, opt, bool, N/A, desc:GET /ISAPI/Security/GetProtocolFirewallRulesFileImportStatus?format=json-->true
</isSupportGetProtocolFirewallRulesFileImportStatus>
<isSupportImportProtocolFirewallRulesFile>
  <!--ro, opt, bool, N/A, desc:PUT /ISAPI/Security/ImportProtocolFirewallRulesFile?format=json-->true
</isSupportImportProtocolFirewallRulesFile>
<isSupportGetProtocolFirewallEngineUpgradeStatus>
  <!--ro, opt, bool, N/A, desc:GET /ISAPI/Security/GetProtocolFirewallEngineUpgradeStatus?format=json-->true
</isSupportGetProtocolFirewallEngineUpgradeStatus>
<isSupportUpgradeProtocolFirewallEngine>
  <!--ro, opt, bool, N/A, desc:PUT /ISAPI/Security/UpgradeProtocolFirewallEngine?format=json-->true
</isSupportUpgradeProtocolFirewallEngine>
<isSupportProtocolFirewallVersionInfo>
  <!--ro, opt, bool, N/A, desc:GET /ISAPI/Security/ProtocolFirewallVersionInfo?format=json-->true
</isSupportProtocolFirewallVersionInfo>
<isSupportProtocolFirewallParams>
  <!--ro, opt, bool, N/A, desc:GET/PUT /ISAPI/Security/ProtocolFirewallParams?format=json-->true
</isSupportProtocolFirewallParams>
<isSupportGetIntrusionPreventionEngineUpgradeStatus>
  <!--ro, opt, bool, whether the device supports getting the upgrade status of intrusion prevention engine library, desc:GET
/ISAPI/Security/GetIntrusionPreventionEngineUpgradeStatus?format=json-->true
</isSupportGetIntrusionPreventionEngineUpgradeStatus>
<isSupportIntrusionPreventionEngineVersionInfo>
  <!--ro, opt, bool, whether the device supports version information of intrusion prevention engine, desc:GET
/ISAPI/Security/IntrusionPreventionEngineVersionInfo?format=json-->true
</isSupportIntrusionPreventionEngineVersionInfo>
<isSupportIntrusionPreventionParams>
  <!--ro, opt, bool, whether the device supports intrusion prevention parameters, desc:GET/PUT /ISAPI/Security/IntrusionPreventionParams?format=json--
>true
</isSupportIntrusionPreventionParams>
<isSupportUpgradeIntrusionPreventionEngine>
  <!--ro, opt, bool, whether the device supports upgrading intrusion prevention engine library, desc:PUT /ISAPI/Security/UpgradeIntrusionPreventionEngine?
format=json-->true
</isSupportUpgradeIntrusionPreventionEngine>
<isSupportPasswordProtection>
  <!--ro, opt, bool, whether it supports configuring SDK protocol authentication mode parameters, desc:PUT/GET
/ISAPI/Security/adminAccesses/SDKPasswordProtection?format=json&security=<security>&iv=<iv>-->true
</isSupportPasswordProtection>
</SecurityCap>

```

14.1.6.4 Get device system capability

Request URL

GET /ISAPI/System/capabilities?type= <all>

Query Parameter

Parameter Name	Parameter Type	Description
all	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>
<DeviceCap xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, device system capability, attr:version{opt, string, protocolVersion}-->
  <SysCap>
    <!--ro, opt, object, system capability-->
    <isSupportDst>
      <!--ro, opt, bool, whether the device supports DST (DayLight Saving Time)-->true
    </isSupportDst>
    <NetworkCap>
      <!--ro, opt, object, network capability, desc:related URI: /ISAPI/System/Network/capabilities-->
      <isSupportWireless>
        <!--ro, req, bool, whether the device supports wireless network-->true
      </isSupportWireless>
      <isSupportPPPoE>
        <!--ro, req, bool, whether the device supports PPPoE (Point to Point Protocol over Ethernet)-->true
      </isSupportPPPoE>
      <isSupportBond>
        <!--ro, req, bool, whether the device supports NIC (Network Interface Card) bonding-->true
      </isSupportBond>
      <isSupport802_1x>
        <!--ro, req, bool, whether the device supports 802.1x protocol-->true
      </isSupport802_1x>
      <isSupportNtp>
        <!--ro, opt, bool, whether the device supports NTP (Network Time Protocol)-->true
      </isSupportNtp>
      <isSupportFtp>
        <!--ro, opt, bool, whether the device supports FTP (File Transfer Protocol)-->true
      </isSupportFtp>
      <isSupportUpnp>
        <!--ro, opt, bool, whether the device supports UPnP (Universal Plug and Play ) protocol-->true
      </isSupportUpnp>
      <isSupportDdns>
        <!--ro, opt, bool, whether the device supports DDNS (Dynamic Domain Name System) service-->true
      </isSupportDdns>
      <isSupportHttps>
        <!--ro, opt, bool, whether the device supports HTTPS (Hypertext Transfer Protocol Secure)-->true
      </isSupportHttps>
      <SnmpCap>
        <!--ro, opt, object, SNMP (Simple Network Management Protocol) capability-->
        <isSupport>
          <!--ro, req, bool, whether the device supports SNMP-->true
        </isSupport>
      </SnmpCap>
      <isSupportExtNetCfg>
        <!--ro, opt, bool, whether the device supports configuring extended network parameters-->true
      </isSupportExtNetCfg>
      <isSupportIPFilter>
        <!--ro, opt, bool, whether the device supports IP filtering-->true
      </isSupportIPFilter>
      <isSupportSSH>
        <!--ro, opt, bool, whether the device supports SSH-->true
      </isSupportSSH>
      <isSupportEZVIZ>
        <!--ro, opt, bool, whether the device supports EZ protocol-->true
      </isSupportEZVIZ>
      <isSupportEhome>
        <!--ro, opt, bool, whether the device supports ISUP server configuration-->true
      </isSupportEhome>
      <isSupportWirelessDial>
        <!--ro, opt, bool, whether the device supports wireless dial-up protocol-->true
      </isSupportWirelessDial>
      <isSupportWirelessServer>
        <!--ro, opt, bool, whether the device supports wireless server-->true
      </isSupportWirelessServer>
      <isSupportWPS>
        <!--ro, opt, bool, whether the device supports Wi-Fi Protected Setup-->true
      </isSupportWPS>
      <isWirelessMutexWithWirelessServer>
        <!--ro, opt, bool, whether the device supports mutual exclusion of wireless access and wireless service-->true
      </isWirelessMutexWithWirelessServer>
      <isSupportMACFilter>
        <!--ro, opt, bool, whether the device supports physical address filtering-->true
      </isSupportMACFilter>
      <isSupportRFIDData>
        <!--ro, opt, bool, whether the device supports RFID collection configuration-->true
      </isSupportRFIDData>
      <isSupportwifiProbeSSID>
        <!--ro, opt, bool, whether the device supports configuration of Wi-Fi signal detection-->true
      </isSupportwifiProbeSSID>
      <isSupportwifiProbeBSSID>
```



```

<!--ro, opt, bool, whether the device supports Wi-Fi signal detection-->true
</isSupportWifiProbe>
<verificationCode min="1" max="1">
  <!--ro, opt, string, verification code, attr:min{opt, string},max{opt, string}-->test
</verificationCode>
<VerificationCodeModification>
  <!--ro, opt, object, device verification code configuration-->
  <verificationCodeType opt="normal,empty">
    <!--ro, opt, string, verification code type, attr:opt{opt, string}-->empty
  </verificationCodeType>
</VerificationCodeModification>
<isSupportDeclarationURL>
  <!--ro, opt, bool, whether the device supports the hyperlink to the Terms of Service-->true
</isSupportDeclarationURL>
<isSupportPrivacyPolicyURL>
  <!--ro, opt, bool, whether the device supports the hyperlink to the Privacy Policy-->true
</isSupportPrivacyPolicyURL>
<verificationCodeModify opt="true,false">
  <!--ro, opt, bool, whether the device verification code has been modified, attr:opt{opt, string}-->true
</verificationCodeModify>
<Hyperlinks>
  <!--ro, opt, object, hyperlink configuration-->
  <declarationURL>
    <!--ro, opt, string, hyperlink to the Terms of Service-->test
  </declarationURL>
  <privacyPolicyURL>
    <!--ro, opt, string, hyperlink to the Privacy Policy-->test
  </privacyPolicyURL>
</Hyperlinks>
</VerificationCodeModification>
<isSupportIntegrate>
  <!--ro, opt, bool, whether the device supports access protocol configuration-->true
</isSupportIntegrate>
<isSupportPlatformAccess>
  <!--ro, opt, bool, whether the device supports platform access, desc:GET /ISAPI/System/Network/platformAccessFilter/capabilities (platform access IP
address filtering configuration (Ehome and GB28181 allowList configuration))-->true
</isSupportPlatformAccess>
<isSupportGetLinkSocketIP>
  <!--ro, opt, bool, whether the device supports getting the SocketIP of the current link-->true
</isSupportGetLinkSocketIP>
<isSupportWebSocket>
  <!--ro, opt, bool, whether the device supports WebSocket-->true
</isSupportWebSocket>
<isSupportWebSockets>
  <!--ro, opt, bool, whether the device supports WebSockets-->true
</isSupportWebSockets>
<isSupportVideoImgDB>
  <!--ro, opt, bool, whether the device supports image and video Library configuration-->true
</isSupportVideoImgDB>
<isSupportEventDataOverWebSocket opt="true,false">
  <!--ro, opt, bool, whether the device supports uploading the event data via WebSocket, attr:opt{opt, string}-->true
</isSupportEventDataOverWebSocket>
<isSupportDynamicHostName>
  <!--ro, opt, bool, whether the device supports DDNS (Dynamic Domain Name System) configuration-->true
</isSupportDynamicHostName>
<isSupportTrafficMonitor>
  <!--ro, opt, bool, whether the device supports traffic monitoring, desc:related URI:
/ISAPI/System/Network/WirelessDial/Interfaces/<ID>/trafficMonitor?format=json-->true
</isSupportTrafficMonitor>
<isSupportEmailEncrypt>
  <!--ro, opt, bool, whether the device supports email encryption configuration-->true
</isSupportEmailEncrypt>
<isSupportIntranetSegment>
  <!--ro, opt, bool, whether the device supports LAN segment configuration, desc:if this function is supported, this node will be returned and its
value is true; otherwise, this node will be returned and its value is true or not be returned. Related URI:
/ISAPI/System/Network/intranetSegment/capabilities?format=json-->true
</isSupportIntranetSegment>
<isSupportBasebandCapture>
  <!--ro, opt, bool, whether the device supports capturing packets of the baseband, desc:you can capture packets transmitted between the 4G module and
the base station using the ping command. Related URI: /ISAPI/System/Network/cellularNetwork/basebandCapture/capabilities?format=json-->true
</isSupportBasebandCapture>
<isSupportCellularNetworkCellInfo>
  <!--ro, opt, bool, whether the device supports getting a cell's information of the cellular network, desc:you can get the information of the
cellular network where the device is. Related URI: /ISAPI/System/Network/cellularNetwork/cellInfo?format=json&security=<security>&iv=<iv>-->true
</isSupportCellularNetworkCellInfo>
<isSupportCellularNetworkLockBand>
  <!--ro, opt, bool, whether the device accessing the Locked frequency band of the cellular network, desc:related URI:
/ISAPI/System/Network/cellularNetwork/LockBand/capabilities?format=json-->true
</isSupportCellularNetworkLockBand>
<isSupportNetworkModuleUpgrade>
  <!--ro, opt, bool, whether it supports upgrading network module, desc:including importing upgrade package
(/ISAPI/System/Network/WirelessDial/ImportUpgradePackage?format=json), getting importing progress
(/ISAPI/System/Network/WirelessDial/GetUpgradePackageImportStatus?format=json), starting upgrade
(/ISAPI/System/Network/WirelessDial/StartUpgradeNetworkModule?format=json)-->true
</isSupportNetworkModuleUpgrade>
<isSupportNetworkModuleVersionInfo>
  <!--ro, opt, bool, whether it supports getting the version information of network module, desc:GET
/ISAPI/System/Network/WirelessDial/NetworkModuleVersionInfo?format=json-->true
</isSupportNetworkModuleVersionInfo>
<isSupportDSTPServerCfg>
  <!--ro, opt, bool, whether the device supports DTSP server address configuration, desc:GET or PUT /ISAPI/System/Network/DSTPAccess/DSTPServerCfg?
format=json-->true
</isSupportDSTPServerCfg>
<isSupportDSTPProtocolsCap>

```

```

    <!--ro, opt, bool, whether the device supports DTSP capability, desc:GET /ISAPI/System/Network/DSTPAccess/DSTPProtocolCap?format=json-->true
</isSupportDSTPProtocolCap>
<isSupportVoiceTalkOverWebSocket>
    <!--ro, opt, bool-->true
</isSupportVoiceTalkOverWebSocket>
<isSupportPlaybackOverWebSocket>
    <!--ro, opt, bool-->true
</isSupportPlaybackOverWebSocket>
<WebSocketPlaybackCap>
    <!--ro, opt, object-->
    <cmdType opt="speed,pause,resume,single,stop,seek,startExtracting,stopExtracting,transcoding">
        <!--ro, req, string, attr:opt{opt, string}-->speed
    </cmdType>
</WebSocketPlaybackCap>
</NetworkCap>
<IOCap>
    <!--ro, opt, object, I/O capability, desc:related URI: /ISAPI/System/IO/capabilities-->
    <IOInputPortNums>
        <!--ro, opt, int, number of local input ports of the device-->true
    </IOInputPortNums>
    <IOOutputPortNums>
        <!--ro, opt, int, number of local output ports of the device-->true
    </IOOutputPortNums>
    <isSupportStrobeLamp>
        <!--ro, opt, bool, whether the device supports configuring the output of the gate's light, desc:related URI:
/ISAPI/System/IO/outputs/strobeLampConf-->true
    </isSupportStrobeLamp>
    </IOCap>
<SerialCap>
    <!--ro, opt, object, range of RS-485 serial port numbers supported by the device-->
    <rs485PortNums>
        <!--ro, opt, int, the maximum number of RS-485 serial ports supported by the device-->true
    </rs485PortNums>
    <supportRS232Config>
        <!--ro, opt, bool, whether the device supports configuring parameters of RS-232 serial ports-->true
    </supportRS232Config>
    <rs422PortNums>
        <!--ro, opt, int, the maximum number of RS-422 serial ports supported by the device-->true
    </rs422PortNums>
    <rs232PortNums>
        <!--ro, opt, int, the maximum number of RS-232 serial ports supported by the device-->true
    </rs232PortNums>
</SerialCap>
<VideoCap>
    <!--ro, opt, object, video encoding capability, desc:related URI: /ISAPI/System/Video/capabilities-->
    <videoInputPortNums>
        <!--ro, opt, int, number of video input ports-->true
    </videoInputPortNums>
    <videoOutputPortNums>
        <!--ro, opt, int, number of video output ports-->true
    </videoOutputPortNums>
    <isSupportHeatmap>
        <!--ro, opt, bool, whether the device supports heat map-->true
    </isSupportHeatmap>
    <isSupportCounting>
        <!--ro, opt, bool, whether the device supports people counting-->true
    </isSupportCounting>
    <isSupportPicture>
        <!--ro, opt, bool, whether the device supports OSD picture overlay-->true
    </isSupportPicture>
    <isSupportPrivacyMask>
        <!--ro, opt, bool, whether the device supports privacy mask-->true
    </isSupportPrivacyMask>
    <isSupportBinocularPreviewSwitch>
        <!--ro, opt, bool, whether the device supports switching live view of the dual-lens camera-->true
    </isSupportBinocularPreviewSwitch>
    <isSupportCalibCheck>
        <!--ro, opt, bool, whether the device supports calibration verification-->true
    </isSupportCalibCheck>
    <isSupportPIP>
        <!--ro, opt, bool, whether the device supports PIP-->true
    </isSupportPIP>
    <isSupportVideoOutputMode>
        <!--ro, opt, bool, whether the device supports video output pattern parameters-->true
    </isSupportVideoOutputMode>
</VideoCap>
<AudioCap>
    <!--ro, opt, object, audio encoding capability, desc:related URI: /ISAPI/System/Audio/capabilities-->
    <audioInputNums>
        <!--ro, req, int, number of audio inputs-->1
    </audioInputNums>
    <audioOutputNums>
        <!--ro, req, int, number of audio outputs-->1
    </audioOutputNums>
    <isSupportDeviceAudioCapture>
        <!--ro, opt, bool, whether the device supports audio collection, desc:GET/PUT /ISAPI/System/Audio/DeviceAudioCapture?format=json-->true
    </isSupportDeviceAudioCapture>
</AudioCap>
<isSupportExternalDevice>
    <!--ro, opt, bool, whether the device supports connecting to peripherals: true (support), desc:related URI: /ISAPI/System/externalDevice/capabilities-
-->true
    </isSupportExternalDevice>
    <isSupportSubscribeEvent>

```

```

    <!--ro, opt, bool, whether the device supports subscribing to events, desc:related URI: /ISAPI/Event/notification/subscribeEventCap-->true
  </isSupportSubscribeEvent>
  <isSupportDiagnosedData>
    <!--ro, opt, bool, whether the device supports exporting the device diagnosis data, desc:true (support), this node is not returned (not support).
    Related URI: /ISAPI/System/diagnosedData-->true
  </isSupportDiagnosedData>
  <isSupportMetadata>
    <!--ro, opt, bool, whether the device supports metadata, desc:related URI: /ISAPI/Streaming/channels/<ID>/metadata/capabilities-->true
  </isSupportMetadata>
  <isSupportTimeCap>
    <!--ro, opt, bool, whether the device supports the time configuration, desc:related URI: /ISAPI/System/time/capabilities-->true
  </isSupportTimeCap>
</SysCap>
<voicetalkNums>
  <!--ro, opt, int, number of two-way audio channels-->2
</voicetalkNums>
<isSupportSnapshot>
  <!--ro, opt, bool, whether the device supports capturing pictures-->true
</isSupportSnapshot>
<SecurityCap>
  <!--ro, opt, object, encryption capability set-->
  <supportUserNums>
    <!--ro, opt, int, supported maximum number of users-->1
  </supportUserNums>
  <userBondIpNums>
    <!--ro, opt, int, supported maximum number of IP addresses that can be bound-->1
  </userBondIpNums>
  <userBondMacNums>
    <!--ro, opt, int, supported maximum number of MAC addresses that can be bound-->1
  </userBondMacNums>
  <isSupCertificate>
    <!--ro, opt, bool, whether the device supports authentication-->true
  </isSupCertificate>
  <issupIllegalLoginLock>
    <!--ro, opt, bool, whether the device supports Locking Login-->true
  </issupIllegalLoginLock>
  <isSupportOnlineUser>
    <!--ro, opt, bool, whether the device supports the online user configuration-->true
  </isSupportOnlineUser>
  <isSupportAnonymous>
    <!--ro, opt, bool, whether the device supports anonymous Login-->true
  </isSupportAnonymous>
  <isSupportStreamEncryption>
    <!--ro, opt, bool, whether the device supports stream encryption-->true
  </isSupportStreamEncryption>
  <securityVersion opt="1,2,3,4,7">
    <!--ro, opt, string, encryption capability, attr:opt{opt, string}, desc:the encryption capability of each version consists of two parts: encryption
    algorithm and the range of encrypted nodes. Currently 1 refers to AES128 encryption and 2 refers to AES256 encryption. The range of encrypted nodes is
    described in each protocol-->test
  </securityVersion>
  <keyIterateNum>
    <!--ro, opt, int, iteration times, desc:the value is usually between 100 and 1000-->100
  </keyIterateNum>
  <isSupportUserCheck>
    <!--ro, opt, bool, whether the device supports verifying the Login password when editing (editing/adding/deleting) user parameters, desc:this node
    depends on the node <securityVersion>, which means that it is only valid for the versions that support encrypting the sensitive information-->true
  </isSupportUserCheck>
  <isSupportSecurityQuestionConfig>
    <!--ro, opt, bool, whether the device supports answering security questions-->true
  </isSupportSecurityQuestionConfig>
  <supportSecurityNode opt="wirelessServer,wirelessDial">
    <!--ro, opt, string, additional node for supporting sensitive information encryption, attr:opt{opt, string}, desc:in the earlier version of the
    solution for encrypting the sensitive information via ISAPI (i.e., the solution for transmitting plaintext via ISAPI), some URIs containing sensitive
    information are left out. Now these URIs need to be encrypted for transmission. This capability node is added to be compatible with old devices-->test
  </supportSecurityNode>
  <SecurityLimits>
    <!--ro, opt, object, capability of configuring security Limit parameters-->
    <LoginPasswordLenLimit min="1" max="16">
      <!--ro, opt, string, length limit of the user's Login password, attr:min{opt, string},max{opt, string}-->test
    </LoginPasswordLenLimit>
    <SecurityAnswerLenLimit min="1" max="128">
      <!--ro, opt, string, length limit of the security question's answer, attr:min{opt, string},max{opt, string}-->test
    </SecurityAnswerLenLimit>
  </SecurityLimits>
  <RSAKeyLength opt="512,1024,2048,3072" def="3072">
    <!--ro, opt, enum, HTTPS certificate length, subType:string, attr:opt{opt, string},def{opt, string}, desc:512, 1024, 2048-->3072
  </RSAKeyLength>
  <isSupportONVIFUserManagement>
    <!--ro, opt, bool, whether the device supports ONVIF user management-->true
  </isSupportONVIFUserManagement>
  <WebCertificateCap>
    <!--ro, opt, object, HTTP authentication capability-->
    <CertificateType opt="basic,digest,digest/basic">
      <!--ro, req, string, certificate type: basic (authentication), attr:opt{opt, string}-->test
    </CertificateType>
    <SecurityAlgorithm>
      <!--ro, opt, object, encryption algorithm, dep:or,{$.DeviceCap.SecurityCap.WebCertificateCap.CertificateType,eq,degist},
      {$.DeviceCap.SecurityCap.WebCertificateCap.CertificateType,eq,digest/basic}-->
      <algorithmType opt="MD5,SHA256,MD5/SHA256">
        <!--ro, opt, string, algorithm type, attr:opt{req, string}-->test
      </algorithmType>
    </SecurityAlgorithm>
  </WebCertificateCap>
  <isSupportConfigFileImport>

```

```

<!--ro, opt, bool, whether the device supports importing the configuration file-->true
</isSupportConfigFileImport>
<isSupportConfigFileExport>
<!--ro, opt, bool, whether the device supports exporting the configuration file-->true
</isSupportConfigFileExport>
<cfgFileSecretKeyLenLimit min="0" max="16">
<!--ro, opt, string, length limit of the configuration file's verification key, attr:min{opt, string},max{opt, string}-->0
</cfgFileSecretKeyLenLimit>
<isIrreversible>
<!--ro, opt, bool, whether the device supports irreversible password storage, desc:if this function is not supported, the plaintext password of the
user information will be stored in the device; otherwise, the password will be hashed for storage in the device-->true
</isIrreversible>
<salt>
<!--ro, opt, string, the specific salt used by the user to log in-->test
</salt>
<isSupportOnvifInfo>
<!--ro, opt, bool, whether the device supports getting the ONVIF protocol information-->true
</isSupportOnvifInfo>
<isSupportDeviceCertificatesManagement>
<!--ro, opt, bool, whether the device supports certificate management-->true
</isSupportDeviceCertificatesManagement>
<isSupportSIPCertificatesManagement>
<!--ro, opt, bool, whether the device supports SIP certificate management-->true
</isSupportSIPCertificatesManagement>
<isSupportDeviceSelfSignCertExport>
<!--ro, opt, bool, whether the device supports exporting the self-signed certificate-->true
</isSupportDeviceSelfSignCertExport>
<isSupportSecurityEmail>
<!--ro, opt, bool, whether the device supports configuring the security email-->true
</isSupportSecurityEmail>
<isSupportGB35114Certificate>
<!--ro, opt, bool, N/A-->true
</isSupportGB35114Certificate>
<maxIllegalLoginTimes min="3" max="20" def="5">
<!--ro, opt, string, maximum failed illegal login attempts, attr:min{opt, string},max{opt, string},def{opt, string}, desc:this node is valid when the
value of the node <issupportIllegalLoginLock> is true and will be returned when the maximum failed attempts of illegally logging in to the device reach the
limit-->1
</maxIllegalLoginTimes>
<SecurityAdvanced>
<!--ro, opt, object, advanced security configuration-->
<noOperationEnabled>
<!--ro, req, bool, whether to enable the control timeout when there is no operation-->true
</noOperationEnabled>
<noOperationTime min="1" max="60" def="15">
<!--ro, req, int, control timeout when there is no operation, unit:分钟, attr:min{opt, string},max{opt, string},def{opt, string}-->1
</noOperationTime>
</SecurityAdvanced>
<LoginLinkNum>
<!--ro, opt, object, number of users logging in at the same time-->
<maxLinkNum min="1" max="128" def="50">
<!--ro, req, int, number of controls logging in at the same time, attr:min{opt, string},max{opt, string},def{opt, string}-->64
</maxLinkNum>
</LoginLinkNum>
<DoubleVerificationCap>
<!--ro, opt, object, secondary authentication capability-->
<isSupportUsersConfig>
<!--ro, opt, bool, whether the device supports configuring users for secondary authentication-->true
</isSupportUsersConfig>
<isSupportUsersPermissionConfig>
<!--ro, opt, bool, whether the device supports configuring user permission for secondary authentication-->true
</isSupportUsersPermissionConfig>
</DoubleVerificationCap>
<isSupportEncryptCertificate>
<!--ro, opt, bool, whether the device supports certificate encryption, desc:/ISAPI/Security/deviceCertificate-->true
</isSupportEncryptCertificate>
<maxIllegalLoginLockTime min="1" max="120" def="30">
<!--ro, opt, int, lock time range, range:[1,120], unit:min, attr:min{req, int},max{req, int},def{req, int}-->1
</maxIllegalLoginLockTime>
<isSupportCertificateCustomID>
<!--ro, opt, bool, whether the device supports using the user's custom ID to configure the certificate-->true
</isSupportCertificateCustomID>
<isSupportSoftwareLicense>
<!--ro, opt, bool, whether support configuring the product open source statement, desc:if this function is supported, this node will be returned and
its value is true; otherwise, this node will not be returned. Related URI: /ISAPI/Security/softwareLicense?format=json-->true
</isSupportSoftwareLicense>
<isSupportGetProtocolFirewallRulesFileImportStatus>
<!--ro, opt, bool, N/A, desc:GET /ISAPI/Security/GetProtocolFirewallRulesFileImportStatus?format=json-->true
</isSupportGetProtocolFirewallRulesFileImportStatus>
<isSupportImportProtocolFirewallRulesFile>
<!--ro, opt, bool, N/A, desc:PUT /ISAPI/Security/ImportProtocolFirewallRulesFile?format=json-->true
</isSupportImportProtocolFirewallRulesFile>
<isSupportGetProtocolFirewallEngineUpgradeStatus>
<!--ro, opt, bool, N/A, desc:GET /ISAPI/Security/GetProtocolFirewallEngineUpgradeStatus?format=json-->true
</isSupportGetProtocolFirewallEngineUpgradeStatus>
<isSupportUpgradeProtocolFirewallEngine>
<!--ro, opt, bool, N/A, desc:PUT /ISAPI/Security/UpgradeProtocolFirewallEngine?format=json-->true
</isSupportUpgradeProtocolFirewallEngine>
<isSupportProtocolFirewallVersionInfo>
<!--ro, opt, bool, N/A, desc:GET /ISAPI/Security/ProtocolFirewallVersionInfo?format=json-->true
</isSupportProtocolFirewallVersionInfo>
<isSupportProtocolFirewallParams>
<!--ro, opt, bool, N/A, desc:GET/PUT /ISAPI/Security/ProtocolFirewallParams?format=json-->true
</isSupportProtocolFirewallParams>

```

```

<isSupportGetIntrusionPreventionEngineUpgradeStatus>
  <!--ro, opt, bool, whether the device supports getting the upgrade status of intrusion prevention engine library, desc:GET
  /ISAPI/Security/GetIntrusionPreventionEngineUpgradeStatus?format=json-->true
</isSupportGetIntrusionPreventionEngineUpgradeStatus>
<isSupportIntrusionPreventionEngineVersionInfo>
  <!--ro, opt, bool, whether the device supports version information of intrusion prevention engine, desc:GET
  /ISAPI/Security/IntrusionPreventionEngineVersionInfo?format=json-->true
</isSupportIntrusionPreventionEngineVersionInfo>
<isSupportIntrusionPreventionParams>
  <!--ro, opt, bool, whether the device supports intrusion prevention parameters, desc:GET/PUT /ISAPI/Security/IntrusionPreventionParams?format=json--
>true
</isSupportIntrusionPreventionParams>
<isSupportUpgradeIntrusionPreventionEngine>
  <!--ro, opt, bool, whether the device supports upgrading intrusion prevention engine library, desc:PUT
  /ISAPI/Security/UpgradeIntrusionPreventionEngine?format=json-->true
</isSupportUpgradeIntrusionPreventionEngine>
<isSupportPasswordProtection>
  <!--ro, opt, bool, whether it supports parameter configuration of SDK protocol authentication mode, desc:PUT/GET
  /ISAPI/Security/adminAccesses/SDKPasswordProtection?format=json&security=<security>&iv=<iv>-->true
</isSupportPasswordProtection>
</SecurityCap>
<EventCap>
  <!--ro, opt, object, event capability-->
<isSupportHDFull>
  <!--ro, opt, bool, whether the device supports HDD full alarm-->true
</isSupportHDFull>
<isSupportHDError>
  <!--ro, opt, bool, whether the device supports HDD error alarm-->true
</isSupportHDError>
<isSupportNicBroken>
  <!--ro, opt, bool, whether the device supports the network disconnected event-->true
</isSupportNicBroken>
<isSupportIpConflict>
  <!--ro, opt, bool, whether the device supports the IP address conflict event-->true
</isSupportIpConflict>
<isSupportIllAccess>
  <!--ro, opt, bool, whether the device supports the illegal login event-->true
</isSupportIllAccess>
<isSupportViException>
  <!--ro, opt, bool, whether the device supports video input exception (only for analog channels)-->true
</isSupportViException>
<isSupportViMismatch>
  <!--ro, opt, bool, whether the device supports the event of video standard mismatch-->true
</isSupportViMismatch>
<isSupportRecordException>
  <!--ro, opt, bool, whether the device supports the recording exception event-->true
</isSupportRecordException>
<isSupportTriggerFocus>
  <!--ro, opt, bool, whether the device supports defocus exception-->true
</isSupportTriggerFocus>
<isSupportMotionDetection>
  <!--ro, opt, bool, whether the device supports motion detection-->true
</isSupportMotionDetection>
<isSupportVideoLoss>
  <!--ro, opt, bool, whether the device supports video loss events-->true
</isSupportVideoLoss>
<isSupportTamperDetection>
  <!--ro, opt, bool, whether the device supports tampering detection-->true
</isSupportTamperDetection>
<isSupportFireDetection>
  <!--ro, opt, bool, whether the device supports fire detection events-->true
</isSupportFireDetection>
<isSupportFaceContrast>
  <!--ro, opt, bool, whether the device supports face picture comparison events-->true
</isSupportFaceContrast>
<isSupportFaceLib>
  <!--ro, opt, bool, Front-end devices support linkage by face picture library., desc:related URI: /ISAPI/Event/schedules/faceLib/<ID>/<FDID>-->true
</isSupportFaceLib>
<isSupportStudentsStoodUp>
  <!--ro, opt, bool, whether the device supports the student standing up detection event-->true
</isSupportStudentsStoodUp>
<isSupportFramesPeopleCounting>
  <!--ro, opt, bool, whether the device supports the regional people counting event-->true
</isSupportFramesPeopleCounting>
<isSupportFaceSnap>
  <!--ro, opt, bool, whether the device supports face capture events-->true
</isSupportFaceSnap>
<isSupportPersonDensityDetection>
  <!--ro, opt, bool, whether the device supports people density detection-->true
</isSupportPersonDensityDetection>
<isSupportPersonQueueDetection>
  <!--ro, opt, bool, whether the device supports queue detection events-->true
</isSupportPersonQueueDetection>
<isSupportTeacherBehaviorDetect>
  <!--ro, opt, bool, whether the device supports teacher's behavior detection-->true
</isSupportTeacherBehaviorDetect>
<isSupportCityManagement>
  <!--ro, opt, bool, whether the device supports the city management function-->true
</isSupportCityManagement>
<isSupportMixedTargetDetection>
  <!--ro, opt, bool, whether the device supports multi-target-type detection events-->true
</isSupportMixedTargetDetection>
<isSupportFaceSnapModeling>
  <!--ro, opt, bool, whether the device supports face modeling events-->true

```

```

<!--ro, opt, bool, whether the device supports face modeling events-->true
</isSupportFaceSnapModeling>
<isSupportIntersectionAnalysis>
  <!--ro, opt, bool, whether the device supports the intersection analysis-->true
</isSupportIntersectionAnalysis>
<isSupportLuma>
  <!--ro, opt, bool, VQD brightness exception-->true
</isSupportLuma>
<isSupportChroma>
  <!--ro, opt, bool, VQD image color cast-->true
</isSupportChroma>
<isSupportSnow>
  <!--ro, opt, bool, VQD snow noise-->true
</isSupportSnow>
<isSupportStreak>
  <!--ro, opt, bool, VQD stripe noise-->true
</isSupportStreak>
<isSupportFreeze>
  <!--ro, opt, bool, VQD image freeze-->true
</isSupportFreeze>
<isSupportSigLose>
  <!--ro, opt, bool, VQD signal loss-->true
</isSupportSigLose>
<isSupportClarity>
  <!--ro, opt, bool, VQD resolution exception-->true
</isSupportClarity>
<isSupportJitter>
  <!--ro, opt, bool, VQD image flutter-->true
</isSupportJitter>
<isSupportBlock>
  <!--ro, opt, bool, VQD video tampering-->true
</isSupportBlock>
<isSupportFlowers>
  <!--ro, opt, bool, VQD blurred image alarm-->true
</isSupportFlowers>
<isSupportNoise>
  <!--ro, opt, bool, VQD blurred screen-->true
</isSupportNoise>
<isSupportGhost>
  <!--ro, opt, bool, VQD image noise-->true
</isSupportGhost>
<isSupportPurple>
  <!--ro, opt, bool, VQD purple fringing-->true
</isSupportPurple>
<isSupportICR>
  <!--ro, opt, bool, VQD ICP-->true
</isSupportICR>
<isSupportProtectiveFilm>
  <!--ro, opt, bool, VQD protective film unremoved-->true
</isSupportProtectiveFilm>
<isSupportAppAbnormal>
  <!--ro, opt, bool, whether the device supports the App exception alarm or event-->true
</isSupportAppAbnormal>

```

```

</EventCap>

```

```

<RacmCap>

```

```

  <!--ro, opt, object, UI before picture search-->

```

```

  <nasNums>

```

```

    <!--ro, opt, int, supported number of NAS devices, desc:related URI: /ISAPI/ContentMgmt/Storage/nas-->1

```

```

  </nasNums>

```

```

  <pictureSearchType>

```

```

opt="AllEvent,CMR,MOTION,ALARM,EDR,ALARMANDMOTION,Command,pir,wlsensor,callhelp,facedetection,FieldDetection,scenechangedetection,LineDetection,
regionEntrance,regionExiting,loitering,group,rapidMove,parking,unattendedBaggage,attendedBaggage,vehicleDetection>manual>manualSnapshot,playSnapshot,safetyH
elmet,
personQueueCounting,personQueueTime,violentMotion,leavePosition,advReachHeight,peopleNumChange,mixedTargetDetection,illegalParking,pedestrian,construction,r
oadblock,
abandonedObject,trafficAccident,fogDetection,smokeDetection,personDensity,failDown,accessController,videoInterCom,GJD,Luminate,OPTEX,securityControlPanel,ge
tUp,toiletTarry,
playCellphone,vehicleMonitor,vibrationDetection,running,retention,spacingChange,yardTarry,keyPersonGetUp,sitQuietly,standUp,plateRecognition,smoking,onThePh
one,fatigueDriving,
notLookingStraightAhead,leaveThePost,seatBelt,sunglasses,identityAbnormal,ForwardCollisionWarning,LaneDepartureWarning,BlindSpotDetection,HeadwayMonitoringW
arning,
PedestrianCollisionWarning,SuddenSpeedUp,SuddenSpeedDown,SuddenLeftTurn,SuddenRightTurn,Turnover,NotYieldToPedestrian,unregisteredStreetVendor,stallOutsideS
hop,stallOccupyingRoad,illegalHeap,illegalParkingofNon-
MotorVehicle,illegalOutdoorAdvertisement,packGarbage,stallUnderUmbrella,dustbinOverflow,exposeGarbage,hangClothingAlongStreet,allPic,ATMPanel,
ATMSurround,ATMFace,ATMSafetyCabin,loitering,smokeDetectAlarm,alarmResult">

```

```

  <!--ro, opt, string, picture search type, attr:opt{opt, string}-->test

```

```

  </pictureSearchType>

```

```

  <recordSearchType>

```

```

opt="AllEvent,CMR,MOTION,ALARM,EDR,ALARMANDMOTION,Command,pir,wlsensor,callhelp,facedetection,FieldDetection,scenechangedetection,LineDetection,
regionEntrance,regionExiting,loitering,group,rapidMove,parking,unattendedBaggage,attendedBaggage,vehicleDetection>manual>manualSnapshot,playSnapshot,safetyH
elmet,
failDown,personDensityDetection,smokeDetection,vibrationDetection,unregisteredStreetVendor,stallOutsideShop,stallOccupyingRoad,illegalHeap,illegalParkingofN
on-MotorVehicle,
illegalOutdoorAdvertisement,packGarbage,stallUnderUmbrella,dustbinOverflow,exposeGarbage,hangClothingAlongStreet,ATMPanel,ATMSurround,ATMFace,ATMSafetyCabin
">

```

```

  <!--ro, opt, string, video search type, attr:opt{opt, string}, desc:"AllEvent" (all events), "CMR" (capture by schedule), "MOTION" (capture motion
detection pictures), "ALARM" (capture alarm pictures), "EDR" (capture alarm pictures or motion detection pictures), "ALARMANDMOTION" (capture alarm pictures
and motion detection pictures), "Command", "pir" (pir alarm), "wlsensor" (wireless alarm), "callhelp" (panic alarm), "facedetection" (face detection),
"FieldDetection" (intrusion detection), "scenechangedetection" (scene change detection), "LineDetection" (Line crossing detection)-->test

```

```

  </recordSearchType>

```

```

  <isSupportRacmChannelsCap opt="true,false">

```

```

    <!--ro, opt, bool, whether the device supports the Racm capability by channel, attr:opt{opt, string}, desc:related URI:

```

```

    /ISAPI/ContentMgmt/channels/<ID>/capabilities-->true

```

```

  </isSupportRacmChannelsCap>

```



```

<SecurityLog>
  <!--ro, opt, object, device's capability of security Log-->
  <isSupportSecurityLog>
    <!--ro, opt, bool, whether the device supports the security Log-->true
  </isSupportSecurityLog>
  <isSupportLogServer>
    <!--ro, opt, bool, whether it supports security Log server configuration-->true
  </isSupportLogServer>
  <isSupportLogServerTest>
    <!--ro, opt, bool, whether it supports security Log server test-->true
  </isSupportLogServerTest>
  <SecurityLogTypeList>
    <!--ro, req, array, List of security Log types, subType:object-->
    <SecurityLogType>
      <!--ro, opt, object, security Log type-->
      <primaryType>
        <!--ro, req, string, main Log type, desc:"Event", "Operation", "Other", "ALL"-->test
      </primaryType>
      <secondaryType opt="all">
        <!--ro, req, string, minor Log type, attr:opt[opt, string], desc:for other types, refer to the appendix-->test
      </secondaryType>
    </SecurityLogType>
  </SecurityLogTypeList>
</SecurityLog>
</RacmCap>
<PTZCtrlCap>
  <!--ro, opt, object, device's PTZ capability-->
  <isSupportPatrols>
    <!--ro, opt, bool, whether the device supports patrol-->true
  </isSupportPatrols>
</PTZCtrlCap>
<SmartCap>
  <!--ro, opt, object, compact and smart capability, desc:/ISAPI/Smart/capabilities-->
  <isSupportROI>
    <!--ro, opt, bool, whether the device supports ROI encoding configuration-->true
  </isSupportROI>
  <isSupportFaceDetect>
    <!--ro, opt, bool, whether the device supports face detection-->true
  </isSupportFaceDetect>
  <isSupportIntelliTrace>
    <!--ro, opt, bool, whether the device supports smart tracking-->true
  </isSupportIntelliTrace>
  <isSupportFieldDetection>
    <!--ro, opt, bool, whether the device supports intrusion detection-->true
  </isSupportFieldDetection>
  <isSupportDefocusDetection>
    <!--ro, opt, bool, whether the device supports defocus detection-->true
  </isSupportDefocusDetection>
  <isSupportAudioDetection>
    <!--ro, opt, bool, whether the device supports audio detection-->true
  </isSupportAudioDetection>
  <isSupportSceneChangeDetection>
    <!--ro, opt, bool, whether the device supports scene change detection-->true
  </isSupportSceneChangeDetection>
  <isSupportLineDetection>
    <!--ro, opt, bool, whether the device supports line crossing detection-->true
  </isSupportLineDetection>
  <isSupportRegionEntrance>
    <!--ro, opt, bool, whether the device supports region entrance detection-->true
  </isSupportRegionEntrance>
  <isSupportRegionExiting>
    <!--ro, opt, bool, whether the device supports region exiting detection-->true
  </isSupportRegionExiting>
  <isSupportLoitering>
    <!--ro, opt, bool, whether the device supports loitering detection-->true
  </isSupportLoitering>
  <isSupportGroup>
    <!--ro, opt, bool, whether the device supports people gathering detection-->true
  </isSupportGroup>
  <isSupportRapidMove>
    <!--ro, opt, bool, whether the device supports fast moving detection-->true
  </isSupportRapidMove>
  <isSupportParking>
    <!--ro, opt, bool, whether the device supports parking detection-->true
  </isSupportParking>
  <isSupportUnattendedBaggage>
    <!--ro, opt, bool, whether the device supports unattended baggage detection-->true
  </isSupportUnattendedBaggage>
  <isSupportAttendedBaggage>
    <!--ro, opt, bool, whether the device supports object removal detection-->true
  </isSupportAttendedBaggage>
  <isSupportPeopleDetection>
    <!--ro, opt, bool, whether the device supports human body detection-->true
  </isSupportPeopleDetection>
  <isSupportSmartCalibration>
    <!--ro, opt, bool, whether the device supports calibration filter size-->true
  </isSupportSmartCalibration>
  <isSupportStorageDetection>
    <!--ro, opt, bool, whether the device supports health monitoring storage-->true
  </isSupportStorageDetection>
  <isSupportChannelResource>
    <!--ro, opt, bool, whether the device supports channel resources-->true
  </isSupportChannelResource>
  <isSupportEventDetectionParameters>
    <!--ro, opt, bool, whether the device supports event detection parameters-->true
  </isSupportEventDetectionParameters>

```

```

</isSupportSmartOverLapParams>
  <!--ro, opt, bool, whether it supports smart overLay parameters, desc:related URI: /ISAPI/Smart/channels/<channelID>/SmartOverLapParams?format=json-->
  >true
  </isSupportSmartOverLapParams>
</SmartCap>
<TestCap>
  <!--ro, opt, object, test capability-->
  <isSupportFTPTest>
    <!--ro, opt, bool, whether it supports FTP test-->true
  </isSupportFTPTest>
  <isSupportPingTest>
    <!--ro, opt, bool, whether it supports PING test-->true
  </isSupportPingTest>
  <isSupportNTPTest>
    <!--ro, opt, bool, whether it supports NTP test-->true
  </isSupportNTPTest>
  <isSupportNASTest>
    <!--ro, opt, bool, whether it supports NAS test-->true
  </isSupportNASTest>
  <isSupportEmailTest>
    <!--ro, opt, bool, whether the device supports email test-->true
  </isSupportEmailTest>
</TestCap>
<PanoramaCap>
  <!--ro, opt, object, capability of panoramic channels, desc:the object cannot be extended. You can extend it in /ISAPI/Panorama/capabilities-->
  <isSupportGeneratePanorama>
    <!--ro, opt, bool, whether the device supports generating panoramic images-->true
  </isSupportGeneratePanorama>
  <isSupportPanoramaPosition3D>
    <!--ro, opt, bool, whether the device supports panoramic 3D position-->true
  </isSupportPanoramaPosition3D>
  <isSupportPreset>
    <!--ro, opt, bool, whether the device supports configuring panoramic preset-->true
  </isSupportPreset>
  <isSupportGetPanoramicSplicingStatus>
    <!--ro, opt, bool-->true
  </isSupportGetPanoramicSplicingStatus>
  <isSupportStopPanoramicSplicing>
    <!--ro, opt, bool-->true
  </isSupportStopPanoramicSplicing>
  <isSupportSplicingChannelMotionControl>
    <!--ro, opt, bool-->true
  </isSupportSplicingChannelMotionControl>
  <isSupportGetPanoramaSplicingPictures>
    <!--ro, opt, bool-->true
  </isSupportGetPanoramaSplicingPictures>
  <isSupportImportPanoramaSplicingParamFile>
    <!--ro, opt, bool-->true
  </isSupportImportPanoramaSplicingParamFile>
  <isSupportExportPanoramaSplicingParamFile>
    <!--ro, opt, bool-->true
  </isSupportExportPanoramaSplicingParamFile>
  <isSupportImportPanoramicSplicingPicture>
    <!--ro, opt, bool-->true
  </isSupportImportPanoramicSplicingPicture>
  <isSupportExportPanoramicSplicingPicture>
    <!--ro, opt, bool-->true
  </isSupportExportPanoramicSplicingPicture>
</PanoramaCap>
<WLAlarmCap>
  <!--ro, opt, object, wireless alarm capability-->
  <isSupportTeleControl>
    <!--ro, opt, bool, whether the device supports remote control-->true
  </isSupportTeleControl>
  <isSupportPIR>
    <!--ro, opt, bool, whether the device supports PIR configuration-->true
  </isSupportPIR>
  <isSupportWLSensors>
    <!--ro, opt, bool, N/A-->true
  </isSupportWLSensors>
  <isSupportCallHelp>
    <!--ro, opt, bool, whether the device supports calling for help-->true
  </isSupportCallHelp>
  <WLSensorsNum>
    <!--ro, opt, int, N/A-->1
  </WLSensorsNum>
</WLAlarmCap>
<isSupportGIS>
  <!--ro, opt, bool, whether the device supports GIS, desc:related URI: /ISAPI/GIS/channels-->true
</isSupportGIS>
<isSupportCompass>
  <!--ro, opt, bool, whether the device supports compass configuration, desc:related URI: /ISAPI/Compass/channels/<ID>/capabilities-->true
</isSupportCompass>
<isSupportRoadInfoOverlays>
  <!--ro, opt, bool, whether the device supports overLaying the Lane information-->true
</isSupportRoadInfoOverlays>
<isSupportFaceCaptureStatistics>
  <!--ro, opt, bool, whether the device supports face capture statistics, desc:related URI: /ISAPI/Intelligent/channels/<ID>/faceCaptureStatistics/search-->
  >true
  </isSupportFaceCaptureStatistics>
  <isSupportElectronicsEnlarge>
    <!--ro, opt, bool, whether the device supports electronics enlarge-->true
  </isSupportElectronicsEnlarge>
  <isSupportRemoveStorage>

```



```

    <!--ro, opt, bool, whether the device supports remote storage-->true
</isSupportRemoveStorage>
<isSupportGPSLabelTracking>
    <!--ro, opt, bool, whether the device supports GPS tag tracking, desc:related URI:/ISAPI/GIS/channels/<ID>/GPSLabelTracking?format=json-->true
</isSupportGPSLabelTracking>
<isSupportFirmwareVersionInfo>
    <!--ro, opt, bool, whether the device supports displaying the firmware version information-->true
</isSupportFirmwareVersionInfo>
<isSupportSetupCalibration>
    <!--ro, opt, bool, whether the device supports configuring calibration-->true
</isSupportSetupCalibration>
<isSupportStreamDualVCA>
    <!--ro, opt, bool, whether the device supports overlaying intelligent private data on the stream, desc:related URI: in the
/ISAPI/Intelligent/channels/<ID>/intelliResource; corresponding node: <isOverlapIntelli-->true
</isSupportStreamDualVCA>
<isSupportLaserSpotManual>
    <!--ro, opt, bool, whether the device supports configuring Laser Light spot-->true
</isSupportLaserSpotManual>
<isSupportRTMP>
    <!--ro, opt, bool, whether the device supports RTMP configuration, desc:related URI: /ISAPI/Streaming/channels/<ID>/RTMPCfg/capabilities-->true
</isSupportRTMP>
<isSupportTraffic>
    <!--ro, opt, bool, traffic service capability-->true
</isSupportTraffic>
<isSupportPicInfoOverlap>
    <!--ro, opt, bool, whether the device supports overlaying pictures and texts-->true
</isSupportPicInfoOverlap>
<isSupportChannelEventCap>
    <!--ro, opt, bool, whether the device supports getting the event capability by channel, desc:related URI: /ISAPI/Event/channels/<ID>/capabilities-->true
</isSupportChannelEventCap>
<isSupportGPSCalibration>
    <!--ro, opt, bool, whether the device supports the GPS calibration function-->true
</isSupportGPSCalibration>
<supportSnapshotChannel opt="1">
    <!--ro, opt, string, the capability supported by the capture schedule channel, attr:opt{opt, string}-->test
</supportSnapshotChannel>
<isSupportActiveMulticast>
    <!--ro, opt, bool, whether the device supports multicast configuration (/ISAPI/Streaming/channels/<ID>/capabilities)-->true
</isSupportActiveMulticast>
<isSupportChannelEventListCap>
    <!--ro, opt, bool, it indicates that whether the device supports getting the event capability of all channels of the device-->true
</isSupportChannelEventListCap>
<VCAResourceChannelsCap>
    <!--ro, opt, array, it indicates that the device supports the independent switch of intelligent resources by channel, subType:object-->
    <ChannelsList>
        <!--ro, opt, object, channel list-->
    </ChannelsList>
</VCAResourceChannelsCap>
<isSupportAutoMaintenance>
    <!--ro, opt, bool, whether the device supports automatic maintenance, desc:related URI: /ISAPI/System/autoMaintenance/capabilities?format=json-->true
</isSupportAutoMaintenance>
<isSupportRtspOverHTTPS>
    <!--ro, opt, bool, supports tspOverHTTPS-->true
</isSupportRtspOverHTTPS>
<isSupportAUXInfoCap>
    <!--ro, opt, bool, it indicates that whether the device supports getting the capability of getting the attributes of device's all channels-->true
</isSupportAUXInfoCap>
<regionClip>
    <!--ro, opt, object, the channels and streams that supports area cropping-->
    <channels opt="101">
        <!--ro, opt, string, the channels and streams that supports area cropping, attr:opt{opt, string}, desc:101: channel No.*100+stream type-->test
    </channels>
</regionClip>
<isSupportEmmcInfo>
    <!--ro, opt, bool, the capability of supporting the EMMC configuration, desc:related URI: /ISAPI/System/emmcInfo/capabilities?format=json-->true
</isSupportEmmcInfo>
<isSupportAIOpenPlatform>
    <!--ro, opt, bool, whether the device supports AI open platform device capability, desc:related URI: /ISAPI/Intelligent/AIOpenPlatform/capabilities?
format=json-->true
</isSupportAIOpenPlatform>
<isSupportISUPHttpPassthrough>
    <!--ro, opt, bool, whether the device supports HTTP transparent transmission via ISUP V5.0-->true
</isSupportISUPHttpPassthrough>
<isSupportDataPrealarm>
    <!--ro, opt, bool, whether the device supports network traffic pre-alarm event, desc:eventType: dataPrealarm-->true
</isSupportDataPrealarm>
<isSupportPatchUpgrade>
    <!--ro, opt, bool, whether it supports incremental upgrade, desc:related URI: /ISAPI/Custom/OpenPlatform/patchUpgrade/capabilities?format=json-->true
</isSupportPatchUpgrade>
<isSupportSnapshotAsync>
    <!--ro, opt, bool, whether the device supports capturing pictures asynchronously (the picture URL will be returned), desc:related URI:
/ISAPI/Streaming/channels/<ID>/picture/async?format=json-->true
</isSupportSnapshotAsync>
<isSupportVehicleMonitor>
    <!--ro, opt, bool, whether the device supports intelligent arming and tracking of vehicles, desc:related URI:
/ISAPI/Traffic/channels/<ID>/vehicleMonitor/capabilities?format=json-->true
</isSupportVehicleMonitor>
<isSupportManualVehicleMonitor>
    <!--ro, opt, bool, whether the device supports manual arming and tracking of vehicles, desc:related URI:
/ISAPI/Traffic/channels/<ID>/vehicleMonitor/manual/capabilitis?format=json-->true
</isSupportManualVehicleMonitor>
<isSupportCalibrationStream>
    <!--ro, opt, bool, supported capability of calibration stream, desc:related URI: /ISAPI/Streaming/calibStream/capabilities?format=json-->true
    </isSupportCalibrationStream>

```

```

</isSupportCalibrationStream>
<isSupportTimeZone>
  <!--ro, opt, bool, whether the device supports configuring the DST (DayLight Saving Time), desc:related URI: /ISAPI/System/time/timeZone-->true
</isSupportTimeZone>
<isSupportRemovePlaybackRecord>
  <!--ro, opt, bool, whether to support removing playback (the device does not support playback), desc:if this function is supported, this node will be
returned and its value is true; otherwise, this node will not be returned. This node will be returned when the value of isSupportRemoveStorage is true;
otherwise, this node will not be returned-->true
</isSupportRemovePlaybackRecord>
<isSupportOnlineUpgradeTask>
  <!--ro, opt, bool, whether device online upgrading is supported-->true
</isSupportOnlineUpgradeTask>
<isSupportICCID>
  <!--ro, opt, bool, whether the device supports getting the ICCID information, desc:related URI: /ISAPI/System/deviceInfo/ICCID?format=json-->true
</isSupportICCID>
<isSupportConvergenceCloud>
  <!--ro, opt, bool, whether the device supports the URI for EZ interconnection channels, desc:URI for capability of all channels:
/ISAPI/Event/convergenceCloud/channels/capabilities?format=json; URI for capability of specified channel:
/ISAPI/Event/convergenceCloud/channels/<ID>/capabilities?format=json-->true
</isSupportConvergenceCloud>
<characteristicCode min="1" max="128">
  <!--ro, opt, string, device attribute code, range:[1,128], attr:min{opt, string},max{opt, string}, desc:related URI:
/ISAPI/System/deviceInfo/characteristicCode?format=json-->test
</characteristicCode>
<isSupportSIMCardStatus>
  <!--ro, opt, bool, whether the device supports getting the information of SIM card status, desc:related URI: /ISAPI/System/SIMCardStatus?format=json--
>true
</isSupportSIMCardStatus>
<OpenPlatformCap>
  <!--ro, opt, object, detailed HEOP capability supported by the device, desc:related URI: /ISAPI/Custom/OpenPlatform/capabilities-->
<isSupportOpenPlatform>
  <!--ro, req, bool, whether the device supports HEOP (Embedded Open Platform)-->true
</isSupportOpenPlatform>
<maxAPPNum>
  <!--ro, opt, int, the maximum number of third-party application packages allowed to be installed-->0
</maxAPPNum>
</OpenPlatformCap>
<manualEvent
opt="fieldDetection,linedetection,ANPR,faceCapture,mixedTargetDetection,studentsStoodUp,headRiseRate,teacherBehavior,ElevatorRunningDetectionEvent,offDuty,b
atteryCardIsobey,fireExtinguisherRecog,indoorPasswayBlock,fireSmartFireDetect,smokeAlarm,gasTankMonitoring,smokeDetectAlarm,TelephoningBehaviorAlarmEvent,sl
eepDuty,playCellphone,audioAnalysis,TemperatureEvent,TemperatureEventUp,TemperatureEventDown,TMA">
  <!--ro, opt, string, whether the device supports URI for manual triggering event, attr:opt{req, string}, desc:related URI:
/ISAPI/Intelligent/channels/<ID>/manualEvent/<eventType>?format=json-->test
</manualEvent>
<zoomFocusWebDisplay
opt="ROI,roadTrafficDetection,SMD,mixedTargetDetection,faceCapture,personCounting,multidimensionalPeopleCounting,AIOP,heelPDC,packingSpaceRecognition,tunnel
Detection,cityManagement">
  <!--ro, opt, string, whether the web supports displaying the zoomfocus page, attr:opt{req, string},
desc:ROI page path: Configuration-Vedio/Audio-ROI
roadTrafficDetection:Configuration-Road Traffic-Detection Configuration; SMD: mixedTargetDetection; faceCapture-->ROI
</zoomFocusWebDisplay>
<isSupportDeviceStatusUploadStrategy>
  <!--ro, opt, bool, whether the device supports configuring the parameters of device status uploading strategy, desc:related URL:
/ISAPI/System/status/uploadStrategy/capabilities?format=json-->true
</isSupportDeviceStatusUploadStrategy>
<isSupportTOFShelterAlarm>
  <!--ro, opt, bool, whether the device supports TOF tampering alarm, desc:/ISAPI/Event/channels/<channelID>/TOFShelterAlarm/capabilities?format=json--
>true
</isSupportTOFShelterAlarm>
<isSupportT1Test>
  <!--ro, opt, bool, whether the device supports the configuration of controlling T1 tool-->true
</isSupportT1Test>
<isSupportTimeTypeSTD>
  <!--ro, opt, bool, whether the device supports the time type of ISO8601, desc:if "true" is returned, it indicates that all the devices containing
ISO8601 parameters support adding the timeType=STD, such as /ISAPI/ContentMgmt/search?timeType=STD; the time will be implemented according to the standard--
>true
</isSupportTimeTypeSTD>
<isSupportFalseAlarmMaterialLibMgr>
  <!--ro, opt, bool, whether the device supports false alarm library management, desc:GET /ISAPI/Intelligent/falseAlarmMaterialLibMgr/capabilities?
format=json-->true
</isSupportFalseAlarmMaterialLibMgr>
<isSupportWebPTZCfg>
  <!--ro, opt, bool, whether it supports displaying the web page for PTZ configuration, desc:this node is to determine whether to display the web page for
PTZ configuration and is irrelevant to whether PTZ is supported; default process logic: when this node does not exist, whether to display the web page for
PTZ configuration is subject to the device type-->true
</isSupportWebPTZCfg>
<isSupportEDRAccessList>
  <!--ro, opt, bool, whether the device supports accessing address parameters of EDR service, desc:GET/PUT /ISAPI/System/Network/EDRAccessList?
format=json-->true
</isSupportEDRAccessList>
<isSupportRealTimeStreamInfo>
  <!--ro, opt, bool, whether the device supports getting the real-time stream information, desc:GET /ISAPI/Streaming/RealTimeStreamInfo?format=json-->true
</isSupportRealTimeStreamInfo>
<isSupportGetPlaybackStreamInfo>
  <!--ro, opt, bool, whether the device supports getting video playback stream information, desc:GET /ISAPI/Streaming/GetPlaybackStreamInfo?format=json--
>true
</isSupportGetPlaybackStreamInfo>
<isSupportAuthorizeMicAcquisitionParam>
  <!--ro, opt, bool, whether the device supports audio authorization information, desc:GET/PUT
/ISAPI/System/InformedConsentMgr/AuthorizeMicAcquisitionParam?format=json-->true
</isSupportAuthorizeMicAcquisitionParam>
<isSupportElectricSaveModeParams>
  <!--ro, opt, bool, whether the device supports power-saving mode parameters, desc:GET/PUT /ISAPI/System/ElectricSaveModeParams?format=json-->true
</isSupportElectricSaveModeParams>

```

```

<DualVCA>
  <!--ro, opt, object, intelligent information overlay-->
  <overlapRangeType opt="ruleRegion,fullScreen" def="ruleRegion">
    <!--ro, opt, string, type of overlay area, attr:opt{req, string},def{req, string}-->ruleRegion
  </overlapRangeType>
</DualVCA>
<isSupportPosOverlayTest>
  <!--ro, opt, bool, whether it supports the test of enabling POS information overlay configuration, desc:POST
/ISAPI/System/Video/inputs/channels/<channelID>/PosOverlayTest?format=json-->true
</isSupportPosOverlayTest>
<isSupportFullScreenPosOverlay>
  <!--ro, opt, bool, whether it supports full-screen POS information overlay parameters, desc:GET/PUT
/ISAPI/System/Video/inputs/channels/<channelID>/FullScreenPosOverlay?format=json-->true
</isSupportFullScreenPosOverlay>
<isSupportFullScreenPosOverlayCap>
  <!--ro, opt, bool, whether to get the dynamic capability of full-screen POS information overlay parameters, desc:GET
/ISAPI/System/Video/inputs/channels/<channelID>/FullScreenPosOverlayCap?format=json-->true
</isSupportFullScreenPosOverlayCap>
<isSupportGetFlashLifespanInfo>
  <!--ro, opt, bool, whether it supports getting the lifespan information of the built-in disk storage medium, desc:GET
/ISAPI/System/GetFlashLifespanInfo?format=json-->true
</isSupportGetFlashLifespanInfo>
<videoEncodeChannel opt="1,2,3,4,5,6">
  <!--ro, opt, string, channel supporting video parameter display on the web, attr:opt{req, string}, desc:N/A-->1,2
</videoEncodeChannel>
<isSupportFlashLifespanProtectParams>
  <!--ro, opt, bool, whether it supports flash life protection parameter, desc:GET/PUT /ISAPI/System/FLASHMgr/FlashLifespanProtectParams?format=json--
>true
</isSupportFlashLifespanProtectParams>
<isOnlySupportAnalogChannel>
  <!--ro, opt, bool-->true
</isOnlySupportAnalogChannel>
</DeviceCap>

```

14.1.6.5 Export device configuration file

Request URL

GET /ISAPI/System/configurationData?secretkey= <secretkey> &mode= <mode>

Query Parameter

Parameter Name	Parameter Type	Description
secretkey	string	The verification key, it is provided by the upper-layer. It should be encrypted for exporting and recorded for importing.
mode	enum	--

Request Message

None

Response Message

Binary Data

14.1.6.6 Get the device attribute code

Request URL

GET /ISAPI/System/deviceInfo/characteristicCode?format=json

Query Parameter

None

Request Message

None

Response Message

```

{
  "Characteristic": {
    /*ro, req, object, attribute code, desc:attribute code*/
    "code": "+/"
    /*ro, opt, string, device attribute code, range:[1,128], desc:device attribute code*/
  }
}

```

14.1.6.7 Set restoring devices' default parameters

Request URL

PUT /ISAPI/System/factoryReset?mode=<mode>&childDevID=<devIndex>&loginPassword=<loginPassword>&module=<module>

Query Parameter

Parameter Name	Parameter Type	Description
mode	enum	--
devIndex	string	--
loginPassword	string	--
module	enum	--

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status description, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code-->OK
  </subStatusCode>
</ResponseStatus>

```

14.1.6.8 Get the network service capability

Request URL

GET /ISAPI/System/Network/capabilities

Query Parameter

None

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>
<NetworkCap xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, get the network service capability, attr:version{opt, string, protocolVersion}-->
  <isSupportWireless>
    <!--ro, req, bool, whether the device supports wireLess network-->true
  </isSupportWireless>
  <isSupportPPPoE>
    <!--ro, req, bool, whether the device supports PPPoE (Point to Point Protocol over Ethernet)-->true
  </isSupportPPPoE>

```

```

<isSupportBond>
  <!--ro, req, bool, whether the device supports NIC (Network Interface Card) bonding-->true
</isSupportBond>
<isSupport802_1x>
  <!--ro, req, bool, whether the device supports 802.1x protocol-->true
</isSupport802_1x>
<isSupportNtp>
  <!--ro, opt, bool, whether the device supports NTP (Network Time Protocol)-->true
</isSupportNtp>
<isSupportFtp>
  <!--ro, opt, bool, whether the device supports FTP (File Transfer Protocol)-->true
</isSupportFtp>
<isSupportUpnp>
  <!--ro, opt, bool, whether the device supports UPnP (Universal Plug and Play) protocol-->true
</isSupportUpnp>
<isSupportDdns>
  <!--ro, opt, bool, whether the device supports DDNS (Dynamic Domain Name System) service-->true
</isSupportDdns>
<isSupportHttps>
  <!--ro, opt, bool, whether the device supports HTTPS (Hypertext Transfer Protocol Secure)-->true
</isSupportHttps>
<SnmpCap>
  <!--ro, opt, object, SNMP (Simple Network Management Protocol) capability-->
  <isSupport>
    <!--ro, req, bool, whether the device supports SNMP-->true
  </isSupport>
</SnmpCap>
<isSupportExtNetCfg>
  <!--ro, opt, bool, whether the device supports configuring extended network parameters-->true
</isSupportExtNetCfg>
<isSupportIPFilter>
  <!--ro, opt, bool, whether the device supports IP filtering-->true
</isSupportIPFilter>
<isSupportSSH>
  <!--ro, opt, bool, whether the device supports SSH-->true
</isSupportSSH>
<isSupportEZVIZ>
  <!--ro, opt, bool, whether the device supports EZ protocol-->true
</isSupportEZVIZ>
<isSupportEhome>
  <!--ro, opt, bool, whether the device supports EHome (ISUP) protocol-->true
</isSupportEhome>
<isSupportWirelessDial>
  <!--ro, opt, bool, whether the device supports wireless dial-up protocol-->true
</isSupportWirelessDial>
<isSupportWirelessServer>
  <!--ro, opt, bool, whether the device supports wireless server-->true
</isSupportWirelessServer>
<isSupportWPS>
  <!--ro, opt, bool, whether the device supports Wi-Fi Protected Setup-->true
</isSupportWPS>
<isWirelessMuxedWithWirelessServer>
  <!--ro, opt, bool, whether the device supports mutual exclusion of wireless access and wireless service-->true
</isWirelessMuxedWithWirelessServer>
<isSupportMACFilter>
  <!--ro, opt, bool, whether the device supports physical address filtering-->true
</isSupportMACFilter>
<isSupportRFIDData>
  <!--ro, opt, bool, whether the device supports RFID collection configuration-->true
</isSupportRFIDData>
<isSupportwifiProbeSSID>
  <!--ro, opt, bool, whether the device supports configuration of Wi-Fi signal detection-->true
</isSupportwifiProbeSSID>
<isSupportwifiProbe>
  <!--ro, opt, bool, whether the device supports Wi-Fi signal detection-->true
</isSupportwifiProbe>
<verificationCode min="1" max="10">
  <!--ro, opt, string, verification code, attr:min{req, int},max{req, int}-->test
</verificationCode>
<VerificationCodeModification>
  <!--ro, opt, object, verification code editing-->
  <verificationCodeType opt="normal,empty">
    <!--ro, opt, string, verification code type, attr:opt{req, string}-->test
  </verificationCodeType>
  <isSupportDeclarationURL>
    <!--ro, opt, bool, whether the device supports the hyperlink to the Terms of Service-->true
  </isSupportDeclarationURL>
  <isSupportPrivacyPolicyURL>
    <!--ro, opt, bool, whether the device supports the hyperlink to the Privacy Policy-->true
  </isSupportPrivacyPolicyURL>
  <verificationCodeModify opt="true,false">
    <!--ro, opt, bool, whether the device verification code has been modified, attr:opt{req, string}-->true
  </verificationCodeModify>
</VerificationCodeModification>
<Hyperlinks>
  <!--ro, opt, object, hyperlink-->
  <declarationURL>
    <!--ro, opt, string, hyperlink to the Terms of Service-->test
  </declarationURL>
  <privacyPolicyURL>
    <!--ro, opt, string, hyperlink to the Privacy Policy-->test
  </privacyPolicyURL>
</Hyperlinks>
</VerificationCodeModification>

```

```

<isSupportIntegrate>
  <!--ro, opt, bool, whether the device supports access protocol configuration-->true
</isSupportIntegrate>
<isSupportPlatformAccess>
  <!--ro, opt, bool, whether the device supports platform access, desc:GET /ISAPI/System/Network/platformAccessFilter/capabilities (platform access IP
address filtering configuration (Ehome allowList configuration))-->true
</isSupportPlatformAccess>
<isSupportGetLinkSocketIP>
  <!--ro, opt, bool, whether the device supports getting the SocketIP of the current Link-->true
</isSupportGetLinkSocketIP>
<isSupportWebSocket>
  <!--ro, opt, bool, whether the device supports WebSocket-->true
</isSupportWebSocket>
<isSupportWebSockets>
  <!--ro, opt, bool, whether the device supports WebSockets-->true
</isSupportWebSockets>
<isSupportVideoImgDB>
  <!--ro, opt, bool, whether the device supports image and video library configuration-->true
</isSupportVideoImgDB>
<isSupportEventDataOverWebSocket opt="true,false">
  <!--ro, opt, bool, whether the device supports uploading the event data via WebSocket, attr:opt{req, string}-->true
</isSupportEventDataOverWebSocket>
<isSupportDynamicHostName>
  <!--ro, opt, bool, whether the device supports DDNS (Dynamic Domain Name System) configuration-->true
</isSupportDynamicHostName>
<isSupportTrafficMonitor>
  <!--ro, opt, bool, whether the device supports traffic monitoring-->true
</isSupportTrafficMonitor>
<isSupportEmailEncrypt>
  <!--ro, opt, bool, whether the device supports email encryption configuration-->true
</isSupportEmailEncrypt>
<isSupportIntranetSegment>
  <!--ro, opt, bool, whether the device supports LAN segment configuration, desc:if this function is supported, this node will be returned and its value
is true; otherwise, this node will be returned and its value is false or not be returned. Related URI: /ISAPI/System/Network/intranetSegment/capabilities?
format=json-->true
</isSupportIntranetSegment>
<isSupportBasebandCapture>
  <!--ro, opt, bool, whether the device supports capturing packets of the baseband, desc:you can capture packets transmitted between the 4G module and the
base station using the ping command. Related URI: /ISAPI/System/Network/cellularNetwork/basebandCapture/capabilities?format=json-->true
</isSupportBasebandCapture>
<isSupportCellularNetworkCellInfo>
  <!--ro, opt, bool, whether the device supports getting a cell's information of the cellular network, desc:you can get the information of the cellular
network where the device is. Related URI: /ISAPI/System/Network/cellularNetwork/cellInfo?format=json&security=<security>&iv=<iv>-->true
</isSupportCellularNetworkCellInfo>
<isSupportCellularNetworkLockBand>
  <!--ro, opt, bool, whether the device supports accessing the Locked frequency band of the cellular network, desc:related URI:
/ISAPI/System/Network/cellularNetwork/LockBand/capabilities?format=json-->true
</isSupportCellularNetworkLockBand>
<isSupportNetworkModuleUpgrade>
  <!--ro, opt, bool, whether the device supports upgrading network module, desc:including importing upgrade package
(ISAPI/System/Network/WirelessDial/ImportUpgradePackage?format=json), getting importing progress
(ISAPI/System/Network/WirelessDial/GetUpgradePackageImportStatus?format=json), starting upgrading
(ISAPI/System/Network/WirelessDial/StartUpgradeNetworkModule?format=json), get upgrade status
(ISAPI/System/Network/WirelessDial/GetUpgradeNetworkModuleStatus?format=json)-->true
</isSupportNetworkModuleUpgrade>
<isSupportNetworkModuleVersionInfo>
  <!--ro, opt, bool, whether the device supports getting the version information of network module, desc:GET
/ISAPI/System/Network/WirelessDial/NetworkModuleVersionInfo?format=json-->true
</isSupportNetworkModuleVersionInfo>
<isSupportAutoRecampParams>
  <!--ro, opt, bool, whether the device supports parameters of auto re-camping on a regular basis, desc:GET/PUT
/ISAPI/System/Network/WirelessDial/AutoRecampParams?format=json-->true
</isSupportAutoRecampParams>
<isSupportDSTPServerCfg>
  <!--ro, opt, bool, whether the device supports DTSP server address configuration, desc:GET/PUT /ISAPI/System/Network/DSTPAccess/DSTPServerCfg?
format=json-->true
</isSupportDSTPServerCfg>
<isSupportDSTPProtocolCap>
  <!--ro, opt, bool, whether the device supports DTSP capability, desc:GET /ISAPI/System/Network/DSTPAccess/DSTPProtocolCap?format=json-->true
</isSupportDSTPProtocolCap>
<isSupportMQTTAccessCfg>
  <!--ro, opt, bool, whether the device supports MQTT access configuration, desc:GET/PUT /ISAPI/System/Network/MQTTAccess/MQTTAccessCfg?format=json-->true
</isSupportMQTTAccessCfg>
<isSupportWirelessDialSchedule>
  <!--ro, opt, bool-->true
</isSupportWirelessDialSchedule>
<isSupportVoiceTalkOverWebSocket>
  <!--ro, opt, bool-->true
</isSupportVoiceTalkOverWebSocket>
<isSupportPlaybackOverWebSocket>
  <!--ro, opt, bool-->true
</isSupportPlaybackOverWebSocket>
<WebSocketPlaybackCap>
  <!--ro, opt, object-->
  <cmdType opt="speed,pause,resume,single,stop,seek,startExtracting,stopExtracting,transcoding">
    <!--ro, req, string, attr:opt{opt, string}-->speed
  </cmdType>
</WebSocketPlaybackCap>
</NetworkCap>

```

14.1.6.9 Set SSH parameters

Request URL

PUT /ISAPI/System/Network/ssh?readerID= <readerID> &type= <type> &SOCChipID= <SOCChipID> &controllerID= <controllerID>

Query Parameter

Parameter Name	Parameter Type	Description
readerID	string	--
type	enum	--
SOCChipID	string	--
controllerID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<SSH xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--wo, opt, object, attr:version{opt, string, protocolVersion}-->
  <enabled>
    <!--wo, req, bool, whether to enable the function-->true
  </enabled>
  <port>
    <!--wo, opt, int-->22
  </port>
</SSH>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, read-only, status description: OK, Device Busy, Device Error, Invalid Operation, Invalid XML Format, Invalid XML Content, Reboot, Additional Error, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.1.6.10 Reboot device

Request URL

PUT /ISAPI/System/reboot?childDevID= <devIndex> &module= <module> &loginPassword= <loginPassword> &controllerID= <controllerID>

Query Parameter

Parameter Name	Parameter Type	Description
devIndex	string	Reboot a sub-device via specifying sub-device ID. The ID of the sub-device connected to the current device can be searched via /ISAPI/loTGateway/Childmanage/SearchChild?format=json.
module	enum	The "module" specifies a module to restart, without requiring a device reboot, corresponding to the capability (/ISAPI/System/capabilities/deviceReboot->module). "algorithmProgram (traffic terminal radar-assisted algorithm program, supports independent algorithm program startup), "radar" (restart radar module of the radar-assisted camera).
loginPassword	string	--
controllerID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, opt, string, request URL, range:[0,1024]-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status description, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code-->OK
  </subStatusCode>
  <description>
    <!--ro, opt, string, custom error message description, range:[0,1024], desc:the custom error message description returned by the application is used to quickly identify and evaluate issues-->badxmlFormat
  </description>
  <MErrCode>
    <!--ro, opt, string, error codes categorized by functional modules, desc:all general error codes are in the range of this field-->0x00000000
  </MErrCode>
  <MErrDevSelfEx>
    <!--ro, opt, string, error codes categorized by functional modules, desc:N/A-->0x00000000
  </MErrDevSelfEx>
</ResponseStatus>
```

14.1.6.11 Get the capability of configuring the upload strategy of device status

Request URL

GET /ISAPI/System/status/uploadStrategy/capabilities?format=json

Query Parameter

None

Request Message

None

Response Message


```

{
  "enabled": {
    /*ro, req, object, whether to enable the function, desc:whether to enable the function*/
    "@opt": [true, false]
    /*ro, req, array, options, subType:bool*/
  },
  "uploadInterval": {
    /*ro, opt, object, uploading interval*/
    "@min": 5,
    /*ro, req, int, the minimum value, range:[5,300], unit:s*/
    "@max": 300
    /*ro, req, int, the maximum value, range:[5,300], unit:s*/
  }
}

```

14.1.6.12 Get device status

Request URL

GET /ISAPI/System/status?controllerID=<controllerID>

Query Parameter

Parameter Name	Parameter Type	Description
controllerID	string	--

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>
<DeviceStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, device status, attr:version{opt, string, protocolVersion}-->
  <currentDeviceTime>
    <!--ro, opt, datetime, device current time-->1970-01-01T00:00:00+08:00
  </currentDeviceTime>
  <deviceUpTime>
    <!--ro, opt, int, device running time, unit:s-->1200
  </deviceUpTime>
  <CPUList>
    <!--ro, opt, array, CPU data List, subType:object-->
    <CPU>
      <!--ro, opt, object, CPU data-->
      <cpuDescription>
        <!--ro, req, string, description-->test
      </cpuDescription>
      <cpuUtilization>
        <!--ro, req, int, CPU usage, range:[0,100], desc:CPU usage-->1
      </cpuUtilization>
    </CPU>
  </CPUList>
  <MemoryList>
    <!--ro, opt, array, memory List, subType:object-->
    <Memory>
      <!--ro, opt, object, memory-->
      <memoryDescription>
        <!--ro, req, string, description-->test
      </memoryDescription>
      <memoryUsage>
        <!--ro, req, float, used memory size, unit:MB-->1.0
      </memoryUsage>
      <memoryAvailable>
        <!--ro, req, float, available memory size, unit:MB-->1.0
      </memoryAvailable>
    </Memory>
  </MemoryList>
  <CameraList>
    <!--ro, opt, array, camera List, subType:object, desc:camera List-->
    <Camera>
      <!--ro, opt, object, camera-->
      <zoomReverseTimes>
        <!--ro, req, int, zoom reverse times-->0
      </zoomReverseTimes>
      <zoomTotalSteps>
        <!--ro, req, int, zoom total steps-->0
      </zoomTotalSteps>
      <focusReverseTimes>
        <!--ro, req, int, focus reverse times-->0
      </focusReverseTimes>
      <focusTotalSteps>
        <!--ro, req, int, focus total steps-->0
      </focusTotalSteps>
    </Camera>
  </CameraList>

```

```

<irisShiftTimes>
  <!--ro, req, int, iris shift times-->0
</irisShiftTimes>
<irisTotalSteps>
  <!--ro, req, int, iris total steps-->0
</irisTotalSteps>
<icrShiftTimes>
  <!--ro, req, int, ICR shift times-->0
</icrShiftTimes>
<icrTotalSteps>
  <!--ro, req, int, ICR total steps-->0
</icrTotalSteps>
<lensIntirTimes>
  <!--ro, req, int, lens Initialization times-->0
</lensIntirTimes>
<cameraRunTotalTime>
  <!--ro, req, int, camera total running time-->0
</cameraRunTotalTime>
</Camera>
</CameraList>
<DomeInfoList>
  <!--ro, opt, array, PTZ information List, subType:object-->
  <DomeInfo>
    <!--ro, opt, object, PTZ information-->
    <domeRunTotalTime>
      <!--ro, opt, int, the combination of running time at -20° below/40° above/-20°- 40°-->1
    </domeRunTotalTime>
    <runTimeUnderNegativetwenty>
      <!--ro, opt, int, running time at -20° below-->1
    </runTimeUnderNegativetwenty>
    <runTimeBetweenNtentyPforty>
      <!--ro, opt, int, running time at -20°- 40°-->1
    </runTimeBetweenNtentyPforty>
    <runtimeOverPositiveforty>
      <!--ro, opt, int, running time at 40° above-->1
    </runtimeOverPositiveforty>
    <panTotalRounds>
      <!--ro, opt, int, pan rounds-->1
    </panTotalRounds>
    <tiltTotalRounds>
      <!--ro, opt, int, tilt rounds-->1
    </tiltTotalRounds>
    <heatState>
      <!--ro, opt, enum, heater status, subType:int, desc:0 (temperature control), 1 (remain open), 2 (remain closed)-->1
    </heatState>
    <fanState>
      <!--ro, opt, enum, fan status, subType:int, desc:0 (temperature control), 1 (remain open), 2 (remain closed)-->1
    </fanState>
    <panFrecRecord>
      <!--ro, opt, int, pan calling times, range:[0,2147483647]-->1
    </panFrecRecord>
    <tiltFrecRecord>
      <!--ro, opt, int, tilt calling times, range:[0,2147483647]-->1
    </tiltFrecRecord>
  </DomeInfo>
</DomeInfoList>
<totalRebootCount>
  <!--ro, opt, int, device reboot times-->1
</totalRebootCount>
<AlarmInfoList>
  <!--ro, opt, array, alarm information List, subType:object, desc:add-->
  <AlarmInfo>
    <!--ro, opt, object, alarm information-->
    <channelId>
      <!--ro, req, int, channel No.-->1
    </channelId>
    <FaceAlarm>
      <!--ro, opt, object, face picture alarm-->
      <faceSnapRecvAlarm>
        <!--ro, req, int, alarm times of DSP received via face picture-->1
      </faceSnapRecvAlarm>
      <faceSnapSendAlarm>
        <!--ro, req, int, alarm times of face picture sent to the platform-->1
      </faceSnapSendAlarm>
    </FaceAlarm>
    <MixTargetAlarm>
      <!--ro, opt, object, multi-target-type detection alarm-->
      <mixTargetRecvAlarm>
        <!--ro, req, int, alarm times of DSP received via multi-target-type detection-->1
      </mixTargetRecvAlarm>
      <mixTargetSendAlarm>
        <!--ro, req, int, times of face picture alarm sent to the platform-->1
      </mixTargetSendAlarm>
    </MixTargetAlarm>
  </AlarmInfo>
</AlarmInfoList>
</DeviceStatus>

```

14.1.6.13 Get the video analysis task capability

Request URL

GET /ISAPI/System/Video/capabilities

Query Parameter

None

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<VideoCap xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{req, string, protocolVersion}-->
  <videoInputPortNums>
    <!--ro, opt, int, number of video input ports-->0
  </videoInputPortNums>
  <videoOutputPortNums>
    <!--ro, opt, int, number of video output ports-->0
  </videoOutputPortNums>
  <menuNums>
    <!--ro, opt, int, number of Local menus that can be displayed-->0
  </menuNums>
  <externalChannelNum>
    <!--ro, opt, bool, number of extended analog channels-->true
  </externalChannelNum>
  <isSupportHeatmap>
    <!--ro, opt, bool, whether the device supports heat map-->true
  </isSupportHeatmap>
  <isSupportCounting>
    <!--ro, opt, bool, whether the device supports people counting-->true
  </isSupportCounting>
  <countingType>
    <!--ro, opt, enum, statistics type, subType:string, desc:statistics type-->human
  </countingType>
  <isSupportPicture>
    <!--ro, opt, bool, whether the device supports OSD picture overlay, desc:related URI: /ISAPI/System/Video/inputs/channels/<channelID>/image/picture-->true
  </isSupportPicture>
  <isSupportPreviewSwitch>
    <!--ro, opt, bool, whether the device supports switching Live view-->true
  </isSupportPreviewSwitch>
  <isSupportRecodStatus>
    <!--ro, opt, bool, whether the device supports searching for the recording status-->true
  </isSupportRecodStatus>
  <isSupportPrivacyMask>
    <!--ro, opt, bool, whether the device supports privacy mask-->true
  </isSupportPrivacyMask>
  <isSupportBinocularPreviewSwitch>
    <!--ro, opt, bool, whether the device supports switching Live view of the dual-Lens camera-->true
  </isSupportBinocularPreviewSwitch>
  <isSupportCalibCheck>
    <!--ro, opt, bool, whether the device supports calibration verification-->true
  </isSupportCalibCheck>
  <isSupportPIP>
    <!--ro, opt, bool-->true
  </isSupportPIP>
  <isSupportFocusVideoMode>
    <!--ro, opt, bool-->true
  </isSupportFocusVideoMode>
  <isSupportExternalChannel>
    <!--ro, opt, bool, whether the device supports extended analog channels-->true
  </isSupportExternalChannel>
  <isSupportMultiChannelCounting>
    <!--ro, opt, bool-->true
  </isSupportMultiChannelCounting>
  <isSupportCountingCollection>
    <!--ro, opt, bool, whether the device supports people counting ANR-->true
  </isSupportCountingCollection>
  <isSupportHeatmapCollection>
    <!--ro, opt, bool, whether the device supports heat map data ANR-->true
  </isSupportHeatmapCollection>
  <channelFlexible opt="name,enable,online,linknum">
    <!--ro, opt, enum, subType:string, attr:opt{req, string}-->name
  </channelFlexible>
  <isSupportOutputsResource>
    <!--ro, opt, bool, related URI: /ISAPI/System/Video/outputs/resource?format=json, desc:related URI: /ISAPI/System/Video/outputs/resource?format=json-->true
  </isSupportOutputsResource>
  <OSDLanguage opt="GBK,EUC-KR,Hebrew" def="GBK">
    <!--ro, opt, enum, subType:string, attr:opt{req, string},def{req, string}-->GBK
  </OSDLanguage>
  <isSupportMixedChannel>
    <!--ro, opt, bool-->true
  </isSupportMixedChannel>
  <isSupportMixedChannelStatus>
    <!--ro, opt, bool-->true
  </isSupportMixedChannelStatus>
</VideoCap>
```

```

</isSupportMixedChannelStatus>
<isSupportOutputCourseware>
  <!--ro, opt, bool, related URI: /ISAPI/System/Video/outputs/courseware/capabilities?format=json, desc:related URI:
/ISAPI/System/Video/outputs/courseware/capabilities?format=json-->true
</isSupportOutputCourseware>
<isSupportVideoInputMode>
  <!--ro, opt, bool, related URI: /ISAPI/System/Video/inputs/mode/capabilities, desc:related URI: /ISAPI/System/Video/inputs/mode/capabilities-->true
</isSupportVideoInputMode>
<isSupportVideoOutputMode>
  <!--ro, opt, bool, related URI: /ISAPI/System/Video/outputs/mode/capabilities?format=json, desc:related URI:
/ISAPI/System/Video/outputs/mode/capabilities?format=json-->true
</isSupportVideoOutputMode>
<PreviewMode>
  <!--ro, opt, object-->
  <PIType>
    <!--ro, opt, object-->
    <mainScreenChannelID>
      <!--ro, opt, int-->0
    </mainScreenChannelID>
    <subScreenChannelID>
      <!--ro, opt, int-->0
    </subScreenChannelID>
  </PIType>
</PreviewMode>
<isSupportViewTag>
  <!--ro, opt, bool-->true
</isSupportViewTag>
<isSupportMenuStatus>
  <!--ro, opt, bool-->true
</isSupportMenuStatus>
</VideoCap>

```

14.1.6.14 Get the wireless alarm capabilities

Request URL

GET /ISAPI/WLAlarm/capabilities

Query Parameter

None

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<WLAlarmCap xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, attr:version{req, string, protocolVersion}-->
  <isSupportTeleControl>
    <!--ro, opt, bool-->true
  </isSupportTeleControl>
  <isSupportPIR>
    <!--ro, opt, bool-->true
  </isSupportPIR>
  <isSupportWLSensors>
    <!--ro, opt, bool-->true
  </isSupportWLSensors>
  <isSupportCallHelp>
    <!--ro, opt, bool-->true
  </isSupportCallHelp>
  <WLSensorsNum>
    <!--ro, opt, int-->0
  </WLSensorsNum>
</WLAlarmCap>

```

14.1.7 System Upgrade

14.1.7.1 Get the device upgrading status and progress

Request URL

GET /ISAPI/System/upgradeStatus?type=<type>&childDevID=<childDevID>&id=<id>

Query Parameter

Parameter Name	Parameter Type	Description
type	string	"usbmic" (array microphone module)
childDevID	string	--
id	string	The id indicates the peripheral No. to be upgraded.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<upgradeStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, upgrade status and result, attr:version{req, string, protocolVersion}-->
  <upgrading>
    <!--ro, req, bool, upgrade status-->true
  </upgrading>
  <percent>
    <!--ro, req, int, upgrade progress (% complete), range:[0,100]-->1
  </percent>
  <reboot>
    <!--ro, opt, bool, dep:and,{$.upgradeStatus.percent,eq,100}-->false
  </reboot>
  <upgradeStage>
    <!--ro, opt, enum, subType:string-->software
  </upgradeStage>
</upgradeStatus>
```

14.1.8 Time Settings

14.1.8.1 Get device time synchronization management parameters

Request URL

GET /ISAPI/System/time

Query Parameter

None

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<Time xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, time management, attr:version{opt, string, protocolVersion}-->
  <timeMode>
    <!--ro, req, enum, time synchronization mode, subType:string, desc:"NTP" (NTP time synchronization), "manual" (manual time synchronization), "satellite"
    (satellite time synchronization), "platform" (platform time synchronization), "NONE" (time synchronization is not allowed or no time synchronization
    source), "GB28181" (GB28181 time synchronization)-->NTP
  </timeMode>
  <localTime>
    <!--ro, opt, string, Local time, range:[0,256], dep:and,{$.Time.timeMode,eq>manual}-->2019-02-28T10:50:44+08:30
  </localTime>
  <timeZone>
    <!--ro, opt, string, time zone, range:[0,256], dep:and,{$.Time.timeMode,eq>manual},{$.Time.timeMode,eq,NTP}, desc:dayLight saving time configuration in
    time zone-->CST-8:00:00DST00:30:00,M4.1.0/02:00:00,M10.5.0/02:00:00
  </timeZone>
  <satelliteInterval>
    <!--ro, opt, int, satellite time synchronization interval, step:1, unit:min, dep:and,{$.Time.timeMode,eq,satellite}, desc:unit: minute-->60
  </satelliteInterval>
  <isSummerTime>
    <!--ro, opt, bool, whether the device time returned currently is in DST (Daylight Saving Time) system, desc:whether the device time returned currently
    is in DST (Daylight Saving Time) system-->true
  </isSummerTime>
  <platformType>
    <!--ro, opt, enum, platform type, subType:string, dep:and,{$.Time.timeMode,eq,platform}, desc:exists only when the timeMode is selected as platform--
    EZVIZ
  </platformType>
  <platformNo>
    <!--ro, opt, int, platform No., range:[1,2], dep:and,{$.Time.timeMode,eq,GB28181}, desc:it is the only ID, which is configured via platformNo in
    GB28181List, related URI: /ISAPI/System/Network/SIP/<SIPServerID>-->1
  </platformNo>
  <ethernetPort>
    <!--ro, opt, int, range:[0,255], dep:and,{$.Time.timeMode,eq,PTP}-->0
  </ethernetPort>
  <IANA>
    <!--ro, opt, enum, subType:string-->Africa/Abidjan
  </IANA>
  <windowsZone>
    <!--ro, opt, enum, subType:string-->Dateline Standard Time
  </windowsZone>
  <standard>
    <!--ro, opt, enum, format, subType:string, desc:"PAL", "NTSC"-->PAL
  </standard>
</Time>

```

14.1.8.2 Set device time synchronization management parameters

Request URL

PUT /ISAPI/System/time

Query Parameter

None

Request Message

```

<?xml version="1.0" encoding="UTF-8"?>

<Time xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, time management, attr:version{opt, string, protocolVersion}-->
  <timeMode>
    <!--req, enum, time synchronization mode, subType:string, desc:"NTP" (NTP time synchronization), "manual" (manual time synchronization), "satellite" (satellite time synchronization), "platform" (platform time synchronization), "NONE" (time synchronization is not allowed or no time synchronization source), "GB28181" (GB28181 time synchronization)-->NTP
  </timeMode>
  <localTime>
    <!--opt, string, local time, range:[0,256], dep:and,{$.Time.timeMode,eq,manual}, desc:the time difference between local time and coordinated universal time (UTC) is configured via the timeZone field-->2019-02-28T10:50:44
  </localTime>
  <timeZone>
    <!--opt, string, time zone, range:[0,256], dep:and,{$.Time.timeMode,eq,manual},{$.Time.timeMode,eq,NTP}, desc:time zone-->CST-8:00:00DST00:30:00,M4.1.0/02:00:00,M10.5.0/02:00:00
  </timeZone>
  <satelliteInterval>
    <!--opt, int, satellite time synchronization interval, step:1, unit:min, dep:and,{$.Time.timeMode,eq,satellite}, desc:unit: minute-->60
  </satelliteInterval>
  <isSummerTime>
    <!--ro, opt, bool, whether the time returned by the current device is that in the DST (daylight saving time), desc:whether the time returned by the current device is that in the DST (daylight saving time)-->true
  </isSummerTime>
  <platformType>
    <!--opt, enum, platform type, subType:string, dep:and,{$.Time.timeMode,eq,platform}, desc:exists only when the timeMode is selected as platform, related URI: /ISAPI/System/Network/EZVIZ-->EZVIZ
  </platformType>
  <platformNo>
    <!--opt, int, platform No., range:[1,2], dep:and,{$.Time.timeMode,eq,GB28181}, desc:it is the only ID, which is configured via platformNo in GB28181List, related URI: /ISAPI/System/Network/SIP/<SIPServerID-->1
  </platformNo>
  <ethernetPort>
    <!--opt, int, range:[0,255], dep:and,{$.Time.timeMode,eq,PTP-->0
  </ethernetPort>
  <IANA>
    <!--opt, enum, subType:string-->Africa/Abidjan
  </IANA>
  <windowsZone>
    <!--opt, enum, subType:string-->Dateline Standard Time
  </windowsZone>
  <standard>
    <!--opt, enum, format, subType:string, desc:"PAL", "NTSC"-->PAL
  </standard>
</Time>

```

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, opt, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status description, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code-->OK
  </subStatusCode>
  <FailedNodeInfoList>
    <!--ro, opt, object, information list of failed nodes, desc:for the manual time synchronization of central analysis cluster, this field is returned if time synchronization failed-->
    <FailedNodeInfo>
      <!--ro, opt, object, information of failed nodes-->
      <nodeID>
        <!--ro, req, string, node ID, range:[0,64]-->test
      </nodeID>
      <nodeIP>
        <!--ro, req, string, node IP, range:[0,20]-->test
      </nodeIP>
      <reason>
        <!--ro, opt, string, reason why the node failed to synchronize time, range:[0,128]-->test
      </reason>
    </FailedNodeInfo>
  </FailedNodeInfoList>
  <description>
    <!--ro, opt, string, custom error message description, range:[0,1024], desc:the custom error message description returned by the application is used to quickly identify and evaluate issues-->badXmlFormat
  </description>
</ResponseStatus>

```

Request URL

Query Parameter

None

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>
<Time xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, time management capability set, attr:version{opt, string, protocolVersion}-->
  <timeMode opt="NTP,manual,satellite,SDK,28181,ONVIF,ALL(任何支持的校时方式都允许校时),NONE(不允校时或无校时源),platform,PTP">
    <!--ro, req, enum, time synchronization mode, subType:string, attr:opt{opt, string}, desc:"NTP" (NTP time synchronization), "manual" (manual time synchronization), "satellite" (satellite time synchronization), "platform" (platform time synchronization), "NONE" (time synchronization is not allowed or no time synchronization source), "GB28181" (GB28181 time synchronization)-->NTP
  </timeMode>
  <localTime min="0" max="256">
    <!--ro, opt, string, local time, range:[0,256], attr:min{opt, string},max{opt, string}-->test
  </localTime>
  <timeZone min="0" max="256">
    <!--ro, opt, string, time zone, range:[0,256], attr:min{opt, string},max{opt, string}-->test
  </timeZone>
  <satelliteInterval min="0" max="3600">
    <!--ro, opt, int, satellite time synchronization interval, step:1, unit:min, attr:min{opt, string},max{opt, string}, desc:unit: minute-->60
  </satelliteInterval>
  <timeType opt="local,UTC">
    <!--ro, opt, enum, time type, subType:string, attr:opt{opt, string}, desc:"Local" (Local time), "UTC" (UTC time)-->local
  </timeType>
  <platformType opt="EZVIZ">
    <!--ro, opt, enum, platform type, subType:string, dep:and,{$.Time.timeMode,eq,platform}, attr:opt{opt, string}, desc:platform type-->EZVIZ
  </platformType>
  <platformNo min="1" max="2">
    <!--ro, opt, int, platform No., range:[1,2], dep:and,{$.Time.timeMode,eq,GB28181}, attr:min{req, int},max{req, int}, desc:it is the only ID, which is configured via platformNo in GB28181List, related URI: /ISAPI/System/Network/SIP/<SIPServerID-->1
  </platformNo>
  <isSupportHistoryTime>
    <!--ro, opt, bool, supported capability of the historical time synchronization list, desc:related URI: /ISAPI/System/time/historyInfo?format=json-->true
  </isSupportHistoryTime>
  <isSupportTimeFilter>
    <!--ro, opt, bool, supported capability of filtering time synchronization, desc:related URI: /ISAPI/System/time/filter/capabilities?format=json-->true
  </isSupportTimeFilter>
  <displayFormat opt="MM/dd/yyyy hh:mm,mm,dd-MM-yyyy hh:mm,yyyy-MM-dd hh:mm,MM/dd/yyyy hh:mm:ss,dd-MM-yyyy hh:mm:ss,MM-dd-yyyy hh:mm:ss,yyyy-MM-dd hh:mm:ss,yyyy-MM-dd,dd-MM-yyyy,MM-dd-yyyy">
    <!--ro, opt, enum, time display format, subType:string, attr:opt{req, string}, desc:if this node is returned, it indicates that the device supports configuring time display format, related URI: /ISAPI/System/time/timeType?format=json-->MM/dd/yyyy hh:mm
  </displayFormat>
  <isSupportSyncDeviceNTPInfoToCamera>
    <!--ro, opt, bool, the capability of synchronizing device's NTP service information with the camera, desc:related URI: /ISAPI/System/time/SyncDeviceNTPInfoToCamera/capabilities?format=json-->true
  </isSupportSyncDeviceNTPInfoToCamera>
  <isSupportNTPService>
    <!--ro, opt, bool-->true
  </isSupportNTPService>
  <isSupportTimeZoneListInfo>
    <!--ro, opt, bool-->true
  </isSupportTimeZoneListInfo>
  <isSupportAutoEnterSummerTime>
    <!--ro, opt, bool-->true
  </isSupportAutoEnterSummerTime>
  <ethernetPort min="0" max="255">
    <!--ro, opt, int, range:[0,255], dep:and,{$.Time.timeMode,eq,PTP}, attr:min{req, int},max{req, int}-->1
  </ethernetPort>
  <IANA>
    opt="Africa/Abidjan,Africa/Accra,Africa/Addis_Ababa,Africa/Algiers,Africa/Blantyre,Africa/Brazzaville,Africa/Cairo,Africa/Casablanca,Africa/Conakry,Africa/Dakar,Africa/Dar_es_Salaam,Africa/Djibouti,Africa/Freetown,Africa/Gaborone,Africa/Harare,Africa/Johannesburg,Africa/Kampala,Africa/Khartoum,Africa/Kigali,Africa/Kinshasa,Africa/Lagos,Africa/Maseru,Africa/Mogadishu,Africa/Nairobi,Africa/Sao_Tome,Africa/Timbuktu,Africa/Tripoli,Africa/Tunis,Africa/Anchorage,America/Aruba,America/Asuncion,America/Barbados,America/Belize,America/Bogota,America/Buenos_Aires,America/Cancun,America/Caracas,America/Cayman,America/Chicago,America/Curacao,America/Dawson_Creek,America/Denver,America/Detroit,America/Dominica,America/Edmonton,America/El_Salvador,America/Fortaleza,America/Grand_Turkey,America/Grenada,America/Guatemala,America/Guyana,America/Halifax,America/Havana,America/Indiana/Indianapolis,America/Indiana/Knox,America/Indiana/Marengo,America/Indiana/Petersburg,America/Indiana/Tell_City,America/Indiana/Vevay,America/Indiana/Vincennes,America/Indiana/Winamac,America/Jamaica,America/La_Paz,America/Lima,America/Los_Angeles,America/Louisville,America/Managua,America/Martinique,America/Mendoza,America/Metlakatla,America/Mexico_City,America/Monterrey,America/Montevideo,America/Montreal,America/Nassau,America/New_York,America/North_Dakota/Beulah,America/North_Dakota/Center,America/North_Dakota/New_Salem,America/Panama,America/Phoenix,America/Port_of_Spain,America/Port-au-Prince,America/Puerto_Rico,America/Santo_Domingo,America/Sao_Paulo,America/St_Johns,America/St_Kitts,America/St_Lucia,America/St_Thomas,America/Tijuana,America/Toronto,America/Vancouver,America/Winnipeg,Antarctica/South_Pole,Arctic/Longyearbyen,Asia/Almaty,Asia/Amman,Asia/Anadyr,Asia/Aqtou,Asia/Baghdad,Asia/Bahrain,Asia/Baku,Asia/Bangkok,Asia/Beirut,Asia/Calcutta,Asia/Damascus,Asia/Dhaka,Asia/Dubai,Asia/Gaza,Asia/Hebron,Asia/Ho_Chi_Minh,Asia/Hong_Kong,Asia/Jakarta,Asia/Jerusalem,Asia/Kabul,Asia/Karachi,Asia/Kathmandu,Asia/Kuala_Lumpur,Asia/Kuwait,Asia/Macau(China),Asia/Manila,Asia/Muscat,Asia/Phnom_Penh,Asia/Pyeongyang,Asia/Rangoon,Asia/Riyadh,Asia/Seoul,Asia/Shanghai,Asia/Singapore,Asia/Taipei,Asia/Tehran,Asia/Tel_Aviv,Asia/Tokyo,Asia/Ulaanbaatar,Atlantic/Bermuda,Atlantic/Canary,Atlantic/Cape_Verde,Atlantic/Reykjavik,Atlantic/Stanley,Australia/Adelaide,Australia/Brisbane,Australia/Canberra,Australia/Darwin,Australia/Melbourne,Australia/NSW,Australia/Perth,Australia/Queensland,Australia/Sydney,Australia/Victoria,Canada/Newfoundland,Canada/Saskatchewan,Chile/EasterIsland,Europe/Amsterdam,Europe/Andorra,Europe/Athens,Europe/Belfast,Europe/Belgrade,Europe/Berlin,Europe/Bratislava,Europe/Brussels,Europe/Bucharest,Europe/Budapest,Europe/Chisinau,Europe/Copenhagen,Europe/Dublin,Europe/Gibraltar,Europe/Helsinki,Europe/Isle_of_Man,Europe/Istanbul,Europe/Kiev,Europe/Lisbon,Europe/London,Europe/Luxembourg,Europe/Madrid,Europe/Malta,Europe/Moscow,Europe/Nicosia,Europe/Oslo,Europe/Paris,Europe/Rome,Europe/Samara,Europe/Saratov,Europe/Simferopol,Europe/Sofia,Europe/Tbilisi,Europe/Tirane,Europe/Uzhhorod,Europe/Vaduz,Europe/Vienna,Europe/Vilnius,Europe/Warsaw,Europe/Zagreb,Zimbabwe/Harare"
  </IANA>
</Time>

```



```

pe/Luxembourg,Europe/Madrid,Europe/Malta,Europe/Minsk,Europe/Monaco,Europe/Moscow,Europe/Oslo,Europe/Paris,Europe/Prague,Europe/Riga,Europe/Rome,Europe/San_Marino,Europe/Sarajevo,Europe/Simferopol,Europe/Skopje,Europe/Sofia,Europe/Stockholm,Europe/Tallinn,Europe/Vatican,Europe/Vienna,Europe/Vilnius,Europe/Warsaw,Europe/Zagreb,Europe/Zurich,Indian/Antananarivo,Indian/Maldives,Indian/Mauritius,Pacific/Auckland,Pacific/Fiji,Pacific/Guam,Pacific/Honolulu,Pacific/Kiritimati,Pacific/Noumea,America/Antigua,MST,Asia/Kolkata,America/Santiago,Africa/Monrovia,Asia/Colombo,America/Chihuahua,America/Tegucigalpa,America/Paramaribo,Europe/Ljubljana,Asia/Ashgabat,Africa/Asmara,Asia/Brunei,Africa/Bangui,Africa/Banjul,Asia/Bishkek,Africa/Bissau,Africa/Bujumbura,Asia/Dili,Asia/Dushanbe,Pacific/Funafuti,Pacific/Guadacanal,Africa/Juba,America/St_Vincent,Africa/Libreville,Africa/Lome,Africa/Luanda,Africa/Lusaka,Pacific/Majuro,Africa/Malabo,Africa/Maputo,Africa/Mbabane,Indian/Comoro,Africa/Ndjamena,Pacific/Palau,Africa/Niamey,Europe/Nicosia,Africa/Nouakchott,Pacific/Tongatapu,Africa/Ouagadougou,America/Lower_Principes,Europe/Podgorica,Pacific/Efate,Africa/Porto-Novo,Asia/Tashkent,Asia/Tbilisi,Asia/Thimphu,Europe/Tirane,Europe/Vaduz,Asia/Vientiane,Africa/Windhoek,Africa/Douala,Pacific/Nauru,Asia/Yerevan,Etc/GMT+12,Etc/GMT+11,America/Adak,Pacific/Marquesas,Etc/GMT+9,Etc/GMT+8,America/Whitehorse,Pacific/Easter,America/Regina,America/Indianapolis,America/Cuiaba,America/Araguaina,America/Cayenne,America/Godthab,America/Punta_Arenas,America/Miquelon,America/Bahia,Etc/GMT+2,Atlantic/Azores,Etc/UTC,Europe/Kaliningrad,Europe/Astrakhan,Europe/Samara,Europe/Saratov,Europe/Volgograd,Asia/Yekaterinburg,Asia/Qyzylorda,Asia/Katmandu,Asia/Omsk,Asia/Barnaul,Asia/Hovd,Asia/Krasnoyarsk,Asia/Novosibirsk,Asia/Tomsk,Asia/Irkutsk,Australia/Eucla,Asia/Chita,Asia/Yakutsk,Pacific/Port_Moresby,Australia/Hobart,Asia/Vladivostok,Australia/Lord_Howe,Pacific/Bougainville,Asia/Srednekolymsk,Asia/Magadan,Pacific/Norfolk,Asia/Sakhalin,Asia/Kamchatka,Etc/GMT-12,Pacific/Chatham,Etc/GMT-13,Pacific/Apiia">
  <!--ro, opt, enum, IANA synchronization, subtype:string, attr:opt{opt, string}-->Africa/Abidjan
</IANA>
<isSupportSearchDeviceIANAList>
  <!--ro, opt, bool, whether the device supports searching for supported IANA List, desc:POST /ISAPI/System/time/SearchDeviceIANAList?format=json-->true
</isSupportSearchDeviceIANAList>
<windowsZone opt="Dateline Standard Time,UTC-11,Aleutian Standard Time,Hawaiian Standard Time,Marquesas Standard Time,Alaskan Standard Time,UTC-09,Pacific Standard Time (Mexico),UTC-08,Pacific Standard Time,US Mountain Standard Time,Mountain Standard Time (Mexico),Mountain Standard Time,Yukon Standard Time,Central America Standard Time,Central Standard Time,Easter Island Standard Time,Central Standard Time (Mexico),Canada Central Standard Time,SA Pacific Standard Time,Eastern Standard Time (Mexico),Eastern Standard Time,Haiti Standard Time,Cuba Standard Time,US Eastern Standard Time,Turks And Caicos Standard Time,Paraguay Standard Time,Atlantic Standard Time,Venezuela Standard Time,Central Brazilian Standard Time,SA Western Standard Time,Pacific SA Standard Time,Newfoundland Standard Time,Tocantins Standard Time,E. South America Standard Time,SA Eastern Standard Time,Argentina Standard Time,Greenland Standard Time,Montevideo Standard Time,Magallanes Standard Time,Saint Pierre Standard Time,Bahia Standard Time,UTC-02,Azores Standard Time,Cape Verde Standard Time,UTC,GMT Standard Time,Greenwich Standard Time,Sao Tome Standard Time,Morocco Standard Time,W. Europe Standard Time,Central Europe Standard Time,Romance Standard Time,Central European Standard Time,W. Central Africa Standard Time,Jordan Standard Time,GTB Standard Time,Middle East Standard Time,Egypt Standard Time,E. Europe Standard Time,Syria Standard Time,West Bank Standard Time,South Africa Standard Time,FLE Standard Time,Israel Standard Time,South Sudan Standard Time,Kaliningrad Standard Time,Sudan Standard Time,Libya Standard Time,Namibia Standard Time,Arabic Standard Time,Turkey Standard Time,Arab Standard Time,Belarus Standard Time,Russian Standard Time,E. Africa Standard Time,Iran Standard Time,Arabian Standard Time,Astrakhan Standard Time,Azerbaijan Standard Time,Russia Time Zone 3,Mauritius Standard Time,Saratov Standard Time,Georgian Standard Time,Volgograd Standard Time,Caucasus Standard Time,Afghanistan Standard Time,West Asia Standard Time,Ekaterinburg Standard Time,Pakistan Standard Time,Qyzylorda Standard Time,India Standard Time,Sri Lanka Standard Time,Nepal Standard Time,Central Asia Standard Time,Bangladesh Standard Time,Omsk Standard Time,Myanmar Standard Time,SE Asia Standard Time,Altai Standard Time,W. Mongolia Standard Time,North Asia Standard Time,N. Central Asia Standard Time,Tomsk Standard Time,China Standard Time,North Asia East Standard Time,Singapore Standard Time,W. Australia Standard Time,Taipei Standard Time,Ulaanbaatar Standard Time,Aus Central W. Standard Time,Transbaikal Standard Time,Tokyo Standard Time,North Korea Standard Time,Korea Standard Time,Yakutsk Standard Time,Cen. Australia Standard Time,AUS Central Standard Time,E. Australia Standard Time,AUS Eastern Standard Time,West Pacific Standard Time,Tasmania Standard Time,Vladivostok Standard Time,Lord Howe Standard Time,Bougainville Standard Time,Russia Time Zone 10,Magadan Standard Time,Norfolk Standard Time,Sakhalin Standard Time,Central Pacific Standard Time,Russia Time Zone 11,New Zealand Standard Time,UTC+12,Fiji Standard Time,Chatham Islands Standard Time,UTC+13,Tonga Standard Time,Samoa Standard Time,Line Islands Standard Time">
  <!--ro, opt, enum, subtype:string, attr:opt{opt, string}-->Dateline Standard Time
</windowsZone>
<isSupportTimeStateParam>
  <!--ro, opt, bool, desc:GET /ISAPI/System/time/TimeStateParam?format=json-->true
</isSupportTimeStateParam>
<localTimeDST min="0" max="256">
  <!--ro, opt, string, range:[0,256], attr:min{opt, string},max{opt, string}-->test
</localTimeDST>
<isSupportStandard>
  <!--ro, opt, bool-->true
</isSupportStandard>
<isSupportPTPPParams>
  <!--ro, opt, bool, desc:GET/PUT /ISAPI/System/time/PTPPParams?format=json-->true
</isSupportPTPPParams>
<isSupportTimeZoneLock>
  <!--ro, opt, bool, desc:GET /ISAPI/System/time/TimeZoneLock?format=json-->true
</isSupportTimeZoneLock>
</Time>

```

14.1.8.4 Get device local time

Request URL

GET /ISAPI/System/time/localTime

Query Parameter

None

Request Message

None

Response Message

Binary Data

14.1.8.5 Set device local time

Request URL

PUT /ISAPI/System/time/localTime

Query Parameter

None

Request Message

Binary Data

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, opt, string, request URL, range:[0,1024]-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code description-->OK
  </subStatusCode>
  <description>
    <!--ro, opt, string, custom error message description, range:[0,1024], desc:the custom error message description returned by the application is used to quickly identify and evaluate issues-->badXmlFormat
  </description>
  <MErrCode>
    <!--ro, opt, string, error codes categorized by functional modules, desc:all general error codes are in the range of this field-->0x00000000
  </MErrCode>
  <MErrDevSelfEx>
    <!--ro, opt, string, error codes categorized by functional modules, desc:N/A-->0x00000000
  </MErrDevSelfEx>
</ResponseStatus>
```

14.1.8.6 Set parameters of all NTP servers

Request URL

PUT /ISAPI/System/time/ntpServers

Query Parameter

None

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<NTPServerList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, array, NTP server information List, subType:object, attr:version{opt, string, protocolVersion}-->
  <NTPServer>
    <!--opt, object, NTP server information-->
    <id>
      <!--req, string, ID-->1
    </id>
    <addressingFormatType>
      <!--req, enum, NTP server address type, subType:string, desc:"ipaddress" (IP address), "hostname" (domain name)-->hostname
    </addressingFormatType>
    <hostName>
      <!--opt, string, NTP server domain name, range:[1,64]-->12345
    </hostName>
    <ipAddress>
      <!--opt, string, IPv4 address, range:[1,32]-->192.168.1.112
    </ipAddress>
    <ipv6Address>
      <!--opt, string, IPv6 address, range:[1,128]-->1030:C9B4:FF12:48AA:1A2B
    </ipv6Address>
    <portNo>
      <!--opt, int, port No., range:[1,65535], desc:the default port No. is 123-->123
    </portNo>
    <synchronizeInterval>
      <!--opt, int, time synchronization interval, range:[1,10800], unit:min-->1440
    </synchronizeInterval>
    <enabled>
      <!--opt, bool, whether to enable, desc:disabled (by default)-->>false
    </enabled>
  </NTPServer>
</NTPServerList>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->/ISAPI/xxxx
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status description, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code-->OK
  </subStatusCode>
</ResponseStatus>
```

14.1.8.7 Get the parameters of a specific NTP (Network Time Protocol) server

Request URL

GET /ISAPI/System/time/ntpServers

Query Parameter

None

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<NTPServerList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, array, NTP server information List, subType:object, attr:version{req, string, protocolVersion}-->
  <NTPServer>
    <!--ro, opt, object, NTP server information-->
    <id>
      <!--ro, req, string, ID-->1
    </id>
    <addressingFormatType>
      <!--ro, req, enum, NTP server address type, subType:string, desc:"ipaddress" (IP address), "hostname" (domain name)-->hostname
    </addressingFormatType>
    <hostName>
      <!--ro, opt, string, NTP server domain name, range:[1,64]-->12345
    </hostName>
    <ipAddress>
      <!--ro, opt, string, IPv4 address, range:[1,32]-->192.168.1.112
    </ipAddress>
    <ipv6Address>
      <!--ro, opt, string, IPv6 address, range:[1,128]-->1030:C9B4:FF12:48AA:1A2B
    </ipv6Address>
    <portNo>
      <!--ro, opt, int, port No., range:[1,65535], desc:the default port No. is 123-->123
    </portNo>
    <synchronizeInterval>
      <!--ro, opt, int, time synchronization interval, range:[1,10800], unit:min-->1440
    </synchronizeInterval>
    <enabled>
      <!--ro, opt, bool, whether to enable, desc:disabled (by default)-->>false
    </enabled>
  </NTPServer>
</NTPServerList>
```

14.1.8.8 Set the parameters of a NTP server

Request URL

PUT /ISAPI/System/time/ntpServers/<NTPServerID>

Query Parameter

Parameter Name	Parameter Type	Description
NTPServerID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<NTPServer xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, NTP server information, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string, ID-->1
  </id>
  <addressingFormatType>
    <!--req, enum, IP address type of NTP server, subType:string, desc:"ipaddress" (IP address), "hostname" (domain name)-->hostname
  </addressingFormatType>
  <hostName>
    <!--opt, string, NTP server domain name地址去掉, range:[1,64]-->12345
  </hostName>
  <ipAddress>
    <!--opt, string, IPv4 address, range:[1,32], desc:IPv4 address-->192.168.1.112
  </ipAddress>
  <ipv6Address>
    <!--opt, string, IPv6 address, range:[1,128], desc:IPv6 address-->1030:C9B4:FF12:48AA:1A2B
  </ipv6Address>
  <portNo>
    <!--opt, int, port No., range:[1,65535], step:1, desc:port No.-->1
  </portNo>
  <synchronizeInterval>
    <!--opt, int, time synchronization interval, range:[1,10000], step:1, unit:min, desc:NTP time synchronization interval, unit: minute-->1440
  </synchronizeInterval>
  <enabled>
    <!--opt, bool-->false
  </enabled>
</NTPServer>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status description, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code-->OK
  </subStatusCode>
</ResponseStatus>
```

14.1.8.9 Get the parameters of a NTP server

Request URL

GET /ISAPI/System/time/ntpServers/<NTPServerID>

Query Parameter

Parameter Name	Parameter Type	Description
NTPServerID	string	NTP server No.

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<NTPServer xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, NTP server information, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string, ID-->1
  </id>
  <addressingFormatType>
    <!--ro, req, enum, IP address type of NTP server, subType:string, desc:"ipaddress" (IP address), "hostname" (domain name)-->hostname
  </addressingFormatType>
  <hostName>
    <!--ro, opt, string, NTP server domain name, range:[1,64], dep:and,{$.NTPServer.addressingFormatType,eq,hostname}-->xxx12345
  </hostName>
  <ipAddress>
    <!--ro, opt, string, IPv4 address, range:[1,32], dep:and,{$.NTPServer.addressingFormatType,eq,ipAddress}-->192.168.1.112
  </ipAddress>
  <ipv6Address>
    <!--ro, opt, string, IPv6 address, range:[1,128]-->1030:C9B4:FF12:48AA:1A2B
  </ipv6Address>
  <portNo>
    <!--ro, opt, int, port No., range:[1,65535], step:1, desc:port No.-->1
  </portNo>
  <synchronizeInterval>
    <!--ro, opt, int, time synchronization interval, range:[1,10000], step:1, unit:min, desc:NTP time synchronization interval, unit: minute-->1440
  </synchronizeInterval>
  <enabled>
    <!--ro, opt, bool-->>false
  </enabled>
  <devicePortNoValid>
    <!--ro, opt, enum, subType:string-->yes
  </devicePortNoValid>
  <portType>
    <!--ro, opt, enum, subType:string-->auto
  </portType>
  <customPortNo>
    <!--ro, opt, int, range:[1,65535], step:1, dep:and,{$.NTPServer.portType,eq,custom}-->1
  </customPortNo>
  <hostNameExampleList>
    <!--ro, opt, array, subType:object-->
    <hostNameExample>
      <!--ro, opt, object-->
      <hostName>
        <!--ro, opt, string-->xxx12345
      </hostName>
    </hostNameExample>
  </hostNameExampleList>
</NTPServer>

```

14.1.8.10 Get the configuration capability of parameters of a specific NTP (Network Time Protocol) server

Request URL

GET /ISAPI/System/time/ntpServers/capabilities

Query Parameter

None

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<NTPServerList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, array, NTP server information List, subType:object, attr:version{opt, string, protocolVersion}-->
  <NTPServer>
    <!--ro, opt, object, NTP server information-->
    <id>
      <!--ro, req, string, ID-->1
    </id>
    <addressingFormatType opt="ipaddress,hostname">
      <!--ro, req, enum, NTP server address type, subType:string, attr:opt{req, string}, desc:"ipaddress" (IP address), "hostname" (domain name)-->hostname
    </addressingFormatType>
    <hostName min="1" max="64">
      <!--ro, opt, string, NTP server domain name, range:[1,64], attr:min{req, int},max{req, int}-->12345
    </hostName>
    <ipAddress min="1" max="32">
      <!--ro, opt, string, IPv4 address, range:[1,32], attr:min{req, int},max{req, int}, desc:IPv4 address-->192.168.1.112
    </ipAddress>
    <ipv6Address min="1" max="128">
      <!--ro, opt, string, IPv6 address, range:[1,128], attr:min{req, int},max{req, int}, desc:IPv6 address-->1030:C9B4:FF12:48AA:1A2B
    </ipv6Address>
    <portNo min="1" max="65535">
      <!--ro, opt, int, port No., range:[1,65535], attr:min{req, int},max{req, int}, desc:the default port No. is 123-->123
    </portNo>
    <synchronizeInterval min="1" max="10800">
      <!--ro, opt, int, time synchronization interval, unit:min, attr:min{req, int},max{req, int}-->1440
    </synchronizeInterval>
    <enabled opt="true,false">
      <!--ro, opt, bool, whether to enable, attr:opt{req, string}, desc:true (enable), false (disable)-->true
    </enabled>
  </NTPServer>
</NTPServerList>

```

14.1.8.11 Get time zone

Request URL

GET /ISAPI/System/time/timeZone

Query Parameter

None

Request Message

None

Response Message

None

14.1.8.12 Set time zone

Request URL

PUT /ISAPI/System/time/timeZone

Query Parameter

None

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status description, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code-->OK
  </subStatusCode>
</ResponseStatus>
```

14.2 Video (General)

14.2.1 Backlight Compensation

14.2.1.1 Set the BLC (Backlight Compensation) parameters of a specific channel

Request URL

PUT /ISAPI/Image/channels/<channelID>/BLC

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<BLC xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, BLC area, attr:version{req, string, protocolVersion}-->
  <enabled>
    <!--req, bool, whether to enable BLC-->true
  </enabled>
  <BLCMode>
    <!--opt, enum, BLC mode, subType:string, desc:"UP", "DOWN", "LEFT", "RIGHT", "CENTER", "MULTI-AREA", "Region", "AUTO"-->UP
  </BLCMode>
  <BLCLevel>
    <!--opt, int, BLC Level-->1
  </BLCLevel>
  <BLCRegionList>
    <!--opt, array, List of BLC areas, subType:object-->
    <BLCRegion>
      <!--opt, object, BLC area-->
      <id>
        <!--req, int, area No.-->1
      </id>
      <RegionCoordinatesList>
        <!--req, array, coordinate list, subType:object, range:[3,10]-->
        <RegionCoordinates>
          <!--opt, object, coordinates, desc:the origin is the Lower-Left corner of the screen-->
          <positionX>
            <!--req, int, X-coordinate, range:[0,704]-->1
          </positionX>
          <positionY>
            <!--req, int, Y-coordinate, range:[0,576]-->1
          </positionY>
        </RegionCoordinates>
      </RegionCoordinatesList>
    </BLCRegion>
  </BLCRegionList>
</BLC>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.2.1.2 Get the BLC (Backlight Compensation) parameters of a specific channel

Request URL

GET /ISAPI/Image/channels/<channelID>/BLC

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message


```
<?xml version="1.0" encoding="UTF-8"?>

<BLC xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, BLC mode: "UP, DOWN, LEFT, RIGHT, CENTER, MULTI-AREA, Region", attr:version{req, string, protocolVersion}-->
  <enabled>
    <!--ro, req, bool-->true
  </enabled>
  <BLCMode>
    <!--ro, opt, enum, BLC mode, subType:string, desc:"UP", "DOWN", "LEFT", "RIGHT", "CENTER", "MULTI-AREA", "Region", "AUTO"-->UP
  </BLCMode>
  <BLCLevel>
    <!--ro, opt, int-->1
  </BLCLevel>
  <BLCRegionList>
    <!--ro, opt, array, subType:object-->
    <BLCRegion>
      <!--ro, opt, object-->
      <id>
        <!--ro, req, int-->1
      </id>
      <RegionCoordinatesList>
        <!--ro, req, array, subType:object, range:[3,10]-->
        <RegionCoordinates>
          <!--ro, opt, object, coordinates, desc:the origin is the Lower-Left corner of the screen-->
          <positionX>
            <!--ro, req, int, X-coordinate, range:[0,704]-->1
          </positionX>
          <positionY>
            <!--ro, req, int, Y-coordinate, range:[0,576]-->1
          </positionY>
        </RegionCoordinates>
      </RegionCoordinatesList>
    </BLCRegion>
  </BLCRegionList>
  <switchMode>
    <!--ro, opt, enum, subType:string-->time
  </switchMode>
  <timeMode>
    <!--ro, opt, object, dep:and,{$.BLC.switchMode,eq,time}-->
    <timeRangeList>
      <!--ro, req, array, subType:object, range:[0,1]-->
      <timeRange>
        <!--ro, req, object-->
        <startTime>
          <!--ro, req, time-->08:00:00
        </startTime>
        <endTime>
          <!--ro, req, time-->18:00:00
        </endTime>
      </timeRange>
    </timeRangeList>
  </timeMode>
</BLC>
```

14.2.1.3 Get the backlight compensation (in day mode) parameters of a specified channel

Request URL

GET /ISAPI/Image/channels/<channelID>/BLC/day

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<BLC xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{req, string, protocolVersion}-->
  <enabled>
    <!--ro, req, bool-->true
  </enabled>
  <BLCMode>
    <!--ro, opt, enum, subType:string-->UP
  </BLCMode>
  <BLCLevel>
    <!--ro, opt, int-->1
  </BLCLevel>
  <BLCRegionList>
    <!--ro, opt, array, subType:object-->
    <BLCRegion>
      <!--ro, opt, object-->
      <id>
        <!--ro, req, int-->1
      </id>
      <RegionCoordinatesList>
        <!--ro, req, array, subType:object, range:[3,10]-->
        <RegionCoordinates>
          <!--ro, opt, object-->
          <positionX>
            <!--ro, req, int, range:[0,704]-->1
          </positionX>
          <positionY>
            <!--ro, req, int, range:[0,576]-->1
          </positionY>
        </RegionCoordinates>
      </RegionCoordinatesList>
    </BLCRegion>
  </BLCRegionList>
</BLC>

```

14.2.1.4 Set the backlight compensation (in day mode) parameters of a specified channel

Request URL

PUT /ISAPI/Image/channels/<channelID>/BLC/day

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<BLC xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, attr:version{req, string, protocolVersion}-->
  <enabled>
    <!--req, bool-->true
  </enabled>
  <BLCMode>
    <!--opt, enum, subType:string-->UP
  </BLCMode>
  <BLCLevel>
    <!--opt, int-->1
  </BLCLevel>
  <BLCRegionList>
    <!--opt, array, subType:object-->
    <BLCRegion>
      <!--opt, object-->
      <id>
        <!--req, int-->1
      </id>
      <RegionCoordinatesList>
        <!--req, array, subType:object, range:[3,10]-->
        <RegionCoordinates>
          <!--opt, object-->
          <positionX>
            <!--req, int, range:[0,704]-->1
          </positionX>
          <positionY>
            <!--req, int, range:[0,576]-->1
          </positionY>
        </RegionCoordinates>
      </RegionCoordinatesList>
    </BLCRegion>
  </BLCRegionList>
</BLC>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.2.1.5 Get the backlight compensation (in night mode) parameters of a specified channel

Request URL

GET /ISAPI/Image/channels/<channelID>/BLC/night

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<BLC xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{req, string, protocolVersion}-->
  <enabled>
    <!--ro, req, bool-->true
  </enabled>
  <BLCMode>
    <!--ro, opt, enum, subType:string-->UP
  </BLCMode>
  <BLCLevel>
    <!--ro, opt, int-->1
  </BLCLevel>
  <BLCRegionList>
    <!--ro, opt, array, subType:object-->
    <BLCRegion>
      <!--ro, opt, object-->
      <id>
        <!--ro, req, int-->1
      </id>
      <RegionCoordinatesList>
        <!--ro, req, array, subType:object, range:[3,10]-->
        <RegionCoordinates>
          <!--ro, opt, object-->
          <positionX>
            <!--ro, req, int, range:[0,704]-->1
          </positionX>
          <positionY>
            <!--ro, req, int, range:[0,576]-->1
          </positionY>
        </RegionCoordinates>
      </RegionCoordinatesList>
    </BLCRegion>
  </BLCRegionList>
</BLC>

```

14.2.1.6 Set the backlight compensation (in night mode) parameters of a specified channel

Request URL

PUT /ISAPI/Image/channels/<channelID>/BLC/night

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```

<?xml version="1.0" encoding="UTF-8"?>

<BLC xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, attr:version{req, string, protocolVersion}-->
  <enabled>
    <!--req, bool-->true
  </enabled>
  <BLCMode>
    <!--opt, enum, subType:string-->UP
  </BLCMode>
  <BLCLevel>
    <!--opt, int-->1
  </BLCLevel>
  <BLCRegionList>
    <!--opt, array, subType:object-->
    <BLCRegion>
      <!--opt, object-->
      <id>
        <!--req, int-->1
      </id>
      <RegionCoordinatesList>
        <!--req, array, subType:object, range:[3,10]-->
        <RegionCoordinates>
          <!--opt, object-->
          <positionX>
            <!--req, int, range:[0,704]-->1
          </positionX>
          <positionY>
            <!--req, int, range:[0,576]-->1
          </positionY>
        </RegionCoordinates>
      </RegionCoordinatesList>
    </BLCRegion>
  </BLCRegionList>
</BLC>

```

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>

```

14.2.1.7 Get the highlight compensation (in auto mode) parameters of a specified channel

Request URL

GET /ISAPI/Image/channels/<channelID>/HLC

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<HLC xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, attr:version{req, string, protocolVersion}-->
  <enabled>
    <!--ro, req, bool-->true
  </enabled>
  <HLCMode>
    <!--ro, opt, enum, subType:string-->close
  </HLCMode>
  <HCLLevel>
    <!--ro, opt, int-->1
  </HCLLevel>
  <timePlanList>
    <!--ro, opt, array, subType:object, dep:and,{$.HLC.HLCMode,eq,timing}-->
    <startTime>
      <!--ro, req, time-->08:00:00
    </startTime>
    <endTime>
      <!--ro, req, time-->10:00:00
    </endTime>
  </timePlanList>
</HLC>
```

14.2.1.8 Set the highlight compensation (in auto mode) parameters of a specified channel

Request URL

PUT /ISAPI/Image/channels/<channelID>/HLC

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<HLC xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, attr:version{req, string, protocolVersion}-->
  <enabled>
    <!--req, bool-->true
  </enabled>
  <HLCMode>
    <!--opt, enum, subType:string-->[close
  </HLCMode>
  <HCLLevel>
    <!--opt, int-->1
  </HCLLevel>
</HLC>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.2.1.9 Set the wide dynamic range (WDR) parameters in auto mode of a specified channel

Request URL

PUT /ISAPI/Image/channels/<channelID>/WDR

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<WDR xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, attr:version{req, string, protocolVersion}-->
  <mode>
    <!--req, enum, subType:string-->auto
  </mode>
  <WDRLevel1>
    <!--opt, int, range:[1,100]-->50
  </WDRLevel1>
  <WDRContrastLevel>
    <!--opt, int-->1
  </WDRContrastLevel>
  <WDRLevel1>
    <!--opt, int-->1
  </WDRLevel1>
</WDR>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.2.1.10 Get the WDR (Wide Dynamic Range) parameters in auto mode of a specific channel

Request URL

GET /ISAPI/Image/channels/<channelID>/WDR

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Video channel No.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<WDR xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{req, string, protocolVersion}-->
  <mode>
    <!--ro, req, enum, WDR mode, subType:string, desc:WDR mode-->auto
  </mode>
  <WDRLevel>
    <!--ro, opt, int, WDR Level, range:[0,100], desc:WDR Level-->50
  </WDRLevel>
  <WDRContrastLevel>
    <!--ro, opt, int-->1
  </WDRContrastLevel>
  <WDRLevel1>
    <!--ro, opt, int-->1
  </WDRLevel1>
  <timeMode>
    <!--ro, opt, object, dep:and,{$.WDR.mode,eq,time}-->
    <timeRangeList>
      <!--ro, req, array, subType:object, range:[0,1]-->
      <timeRange>
        <!--ro, req, object-->
        <startTime>
          <!--ro, req, time-->08:00:00
        </startTime>
        <endTime>
          <!--ro, req, time-->18:00:00
        </endTime>
      </timeRange>
    </timeRangeList>
  </timeMode>
  <WDRStreakInhibition>
    <!--ro, opt, bool-->>false
  </WDRStreakInhibition>
  <WDRCloseToOpenFilterLevel>
    <!--ro, opt, int, range:[1,9]-->5
  </WDRCloseToOpenFilterLevel>
  <WDROpenToCloseFilterLevel>
    <!--ro, opt, int, range:[1,9]-->5
  </WDROpenToCloseFilterLevel>
</WDR>
```

14.2.2 Exposure Settings

14.2.2.1 Set the exposure mode for a specified channel

Request URL

PUT /ISAPI/Image/channels/<channelID>/exposure

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message


```

<?xml version="1.0" encoding="UTF-8"?>

<Exposure xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, exposure mode, attr:version{req, string, protocolVersion}-->
  <ExposureType>
    <!--req, enum, exposure type, subType:string, desc:exposure type-->auto
  </ExposureType>
  <autoIrisLevel>
    <!--opt, int, automatic aperture level-->1
  </autoIrisLevel>
  <OverexposeSuppress>
    <!--opt, object-->
    <enabled>
      <!--req, bool-->true
    </enabled>
    <Type>
      <!--opt, enum, "AUTO", "MANUAL", subType:string, desc:"AUTO", "MANUAL"-->AUTO
    </Type>
    <DistanceLevel>
      <!--opt, int, focal length-->1
    </DistanceLevel>
    <shortIRDistanceLevel>
      <!--opt, int, this node depends on <Type-->1
    </shortIRDistanceLevel>
    <longIRDistanceLevel>
      <!--opt, int, this node depends on <Type-->1
    </longIRDistanceLevel>
    <supplementLightIntensity1>
      <!--opt, int, range:[1,100], dep:and,{$.Exposure.OverexposeSuppress.Type,eq,MANUAL}-->1
    </supplementLightIntensity1>
    <supplementLightIntensity2>
      <!--opt, int, range:[1,100], dep:and,{$.Exposure.OverexposeSuppress.Type,eq,MANUAL}-->1
    </supplementLightIntensity2>
    <supplementLightIntensity3>
      <!--opt, int, range:[1,100], dep:and,{$.Exposure.OverexposeSuppress.Type,eq,MANUAL}-->1
    </supplementLightIntensity3>
    <supplementLightIntensity4>
      <!--opt, int, range:[1,100], dep:and,{$.Exposure.OverexposeSuppress.Type,eq,MANUAL}-->1
    </supplementLightIntensity4>
  </OverexposeSuppress>
  <pIris>
    <!--opt, object, aperture-->
    <pIrisType>
      <!--opt, enum, aperture type, subType:string, desc:aperture type-->AUTO
    </pIrisType>
    <IrisLevel>
      <!--opt, int, aperture level-->1
    </IrisLevel>
  </pIris>
  <faceExposure>
    <!--opt, object, face exposure-->
    <enabled>
      <!--opt, bool, whether to enable face exposure-->true
    </enabled>
    <sensitivity>
      <!--opt, int, sensitivity of face exposure-->1
    </sensitivity>
  </faceExposure>
  <PIrisGeneral>
    <!--opt, object, it is available when <ExposureType> is set to "pIris-General", desc:it is available when ExposureType is set to "pIris-General"-->
    <irisLevel>
      <!--opt, int, aperture level of general lens, range:[1,100]-->1
    </irisLevel>
  </PIrisGeneral>
</Exposure>

```

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>

```

14.2.2.2 Get the exposure mode of a specific channel

Request URL

GET /ISAPI/Image/channels/<channelID>/exposure?parameterType= <parameterType>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Camera ID
parameterType	string	When parameterType is recommendation, the obtained value is recommended by device. If parameterType is not configured as an input parameter, it will be the value of the parameter in the current PUT URL.

Request Message

None

Response Message

<?xml version="1.0" encoding="UTF-8"?>

```
<Exposure xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, exposure mode, attr:version{req, string, protocolVersion}-->
  <ExposureType>
    <!--ro, req, enum, lens type, subType:string, desc:Lens type-->auto
  </ExposureType>
  <autoIrisLevel>
    <!--ro, opt, int-->1
  </autoIrisLevel>
  <OverexposeSuppress>
    <!--ro, opt, object-->
    <enabled>
      <!--ro, req, bool-->true
    </enabled>
    <Type>
      <!--ro, opt, enum, this node depends on <enabled>,"AUTO,MANUAL", subType:string, desc:this node depends on <enabled>,"AUTO,MANUAL"-->AUTO
    </Type>
    <DistanceLevel>
      <!--ro, opt, int, this node depends on <Type-->1
    </DistanceLevel>
    <shortIRDistanceLevel>
      <!--ro, opt, int, this node depends on <Type-->1
    </shortIRDistanceLevel>
    <longIRDistanceLevel>
      <!--ro, opt, int, this node depends on <Type-->1
    </longIRDistanceLevel>
    <supplementLightIntensity1>
      <!--ro, opt, int, range:[1,100], dep:and,{$.Exposure.OverexposeSuppress.Type,eq,MANUAL}-->1
    </supplementLightIntensity1>
    <supplementLightIntensity2>
      <!--ro, opt, int, range:[1,100], dep:and,{$.Exposure.OverexposeSuppress.Type,eq,MANUAL}-->1
    </supplementLightIntensity2>
    <supplementLightIntensity3>
      <!--ro, opt, int, range:[1,100], dep:and,{$.Exposure.OverexposeSuppress.Type,eq,MANUAL}-->1
    </supplementLightIntensity3>
    <supplementLightIntensity4>
      <!--ro, opt, int, range:[1,100], dep:and,{$.Exposure.OverexposeSuppress.Type,eq,MANUAL}-->1
    </supplementLightIntensity4>
    <highLightDistanceLevel>
      <!--ro, opt, int, range:[1,100]-->50
    </highLightDistanceLevel>
    <lowLightDistanceLevel>
      <!--ro, opt, int, range:[1,100]-->50
    </lowLightDistanceLevel>
  </OverexposeSuppress>
  <pIris>
    <!--ro, opt, object, this node depends on <ExposureType>,"AUTO,MANUAL"-->
    <pIrisType>
      <!--ro, opt, enum, subType:string-->AUTO
    </pIrisType>
    <IrisLevel>
      <!--ro, opt, int, this node depends on <pIrisType-->1
    </IrisLevel>
  </pIris>
  <faceExposure>
    <!--ro, opt, object, face exposure-->
    <enabled>
      <!--ro, opt, bool-->true
    </enabled>
    <sensitivity>
      <!--ro, opt, int, sensitivity-->1
    </sensitivity>
  </faceExposure>
  <PIrisGeneral>
    <!--ro, opt, object, it is available when <ExposureType> is set to "pIris-General", desc:it is valid when <ExposureType> is set to "pIris-General"-->
    <irisLevel>
      <!--ro, opt, int, iris level of general lens, range:[1,100]-->1
    </irisLevel>
  </PIrisGeneral>
  <combinationParams>
    <!--ro, opt, int, range:[0,100]-->50
  </combinationParams>
  <opticalFilter>
    <!--ro, opt, enum, subType:string-->none
  </opticalFilter>
  <lowGhostingExposure>
    <!--ro, opt, object-->
    <lowGhostingShutterLevel>
      <!--ro, opt, enum, subType:string-->1/100
    </lowGhostingShutterLevel>
  </lowGhostingExposure>
  <exposureCompensateLevel>
    <!--ro, opt, int, range:[-100,100]-->0
  </exposureCompensateLevel>
  <exposureControl>
    <!--ro, opt, enum, subType:string-->center
  </exposureControl>
</Exposure>
```

14.2.2.3 Set the exposure time parameters of a specific channel

Request URL

PUT /ISAPI/Image/channels/<channelID>/shutter

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<Shutter xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, attr:version{req, string, protocolVersion}-->
  <ShutterLevel>
    <!--opt, enum, exposure level, subType:string, desc:"1/1", "1/2", "1/3", "1/6", "1/12", "1/25", "1/50", "1/75", "1/100", "1/120", "1/125", "1/150",
    "1/175", this node is valid when exposure type is "shutter first"-->1/1
    </ShutterLevel>
    <scheduleEnabled>
      <!--opt, bool-->true
    </scheduleEnabled>
    <scheduleShutterLevel>
      <!--opt, int-->1
    </scheduleShutterLevel>
    <ScheduleList>
      <!--opt, array, subType:object-->
      <Schedule>
        <!--opt, object-->
        <startHour>
          <!--opt, int, start time (hour)-->1
        </startHour>
        <startMinute>
          <!--opt, int, start time (minute)-->1
        </startMinute>
        <endHour>
          <!--opt, int, end time (hour)-->1
        </endHour>
        <endMinute>
          <!--opt, int, end time (minute)-->1
        </endMinute>
      </Schedule>
    </ScheduleList>
    <redShutterLevel>
      <!--opt, int, range:[0,20000]-->1
    </redShutterLevel>
  </Shutter>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6
    (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format",
    "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.2.2.4 Get the exposure time parameters of a specific channel

Request URL

GET /ISAPI/Image/channels/<channelID>/shutter?parameterType=<parameterType>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--
parameterType	string	When parameterType is recommendation, the obtained value is recommended by device. If parameterType is not configured as an input parameter, it will be the value of the parameter in the current PUT URL.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<Shutter xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{req, string, protocolVersion}-->
  <ShutterLevel>
    <!--ro, opt, enum, exposure level, subType:string, desc:"1/1", "1/2", "1/3", "1/6", "1/12", "1/25", "1/50", "1/75", "1/100", "1/120", "1/125", "1/150", "1/175", this node is valid when exposure type is "shutter first"-->1/1
  </ShutterLevel>
  <scheduleEnabled>
    <!--ro, opt, bool-->true
  </scheduleEnabled>
  <scheduleShutterLevel>
    <!--ro, opt, int-->1
  </scheduleShutterLevel>
  <ScheduleList>
    <!--ro, opt, array, subType:object-->
    <Schedule>
      <!--ro, opt, object-->
      <startHour>
        <!--ro, opt, int, start time (hour)-->1
      </startHour>
      <startMinute>
        <!--ro, opt, int, start time (minute)-->1
      </startMinute>
      <endHour>
        <!--ro, opt, int, end time (hour)-->1
      </endHour>
      <endMinute>
        <!--ro, opt, int, end time (minute)-->1
      </endMinute>
    </Schedule>
  </ScheduleList>
  <redShutterLevel>
    <!--ro, opt, int, range:[0,20000]-->1
  </redShutterLevel>
  <maxShutterLevelLimit>
    <!--ro, opt, enum, subType:string-->1/1
  </maxShutterLevelLimit>
  <minShutterLevelLimit>
    <!--ro, opt, enum, subType:string-->1/1
  </minShutterLevelLimit>
</Shutter>
```

14.2.3 Image Adjustment Settings

14.2.3.1 Get image rotate mode of a specific channel

Request URL

GET /ISAPI/Image/channels/<channelID>/corridor

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<corridor xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, mode, attr:version{req, string, protocolVersion}-->
  <enabled>
    <!--ro, req, bool, whether to enable the function-->true
  </enabled>
</corridor>
```

14.2.3.2 Set parameters of the image rotate mode for a specified channel

Request URL

PUT /ISAPI/Image/channels/<channelID>/corridor

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<corridor xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, mode, attr:version{req, string, protocolVersion}-->
  <enabled>
    <!--req, bool, whether to enable-->true
  </enabled>
</corridor>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.2.3.3 Set the display parameters of a specific channel

Request URL

PUT /ISAPI/Image/channels/<channelID>/displayParamSwitch

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<DisplayParamSwitch xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, display parameters, attr:version{req, string, protocolVersion}-->
  <mode>
    <!--req, enum, mode, subType:string, desc:mode-->disable
  </mode>
  <LinkPresetList>
```

```

<!--opt, array, subtype:object-->
<LinkPreset>
  <!--opt, object-->
  <id>
    <!--req, string, ID-->test
  </id>
  <presetID>
    <!--req, string-->test
  </presetID>
  <linkEnabled>
    <!--req, bool-->true
  </linkEnabled>
  <PeriodList size="4">
    <!--req, array, subtype:object, attr:size{req, int}-->
    <Period>
      <!--opt, object-->
      <id>
        <!--req, string-->test
      </id>
      <enabled>
        <!--req, bool-->true
      </enabled>
      <TimeRange>
        <!--req, object-->
        <beginTime>
          <!--req, time, start time-->00:00:00+08:00
        </beginTime>
        <endTime>
          <!--req, time, end time-->00:00:00+08:00
        </endTime>
      </TimeRange>
      <linkScene>
        <!--req, enum, link mode, subtype:string, desc:link mode-->indoor
      </linkScene>
    </Period>
  </PeriodList>
</LinkPreset>
</LinkPresetList>
<TimingSwitch>
  <!--opt, object, dep:and,{$.DisplayParamSwitch.mode,eq,timingSwitch}-->
  <PeriodList size="4">
    <!--req, array, subtype:object, attr:size{req, int}-->
    <Period>
      <!--opt, object-->
      <id>
        <!--req, string-->test
      </id>
      <enabled>
        <!--req, bool-->true
      </enabled>
      <TimeRange>
        <!--req, object-->
        <beginTime>
          <!--req, time, start time-->00:00:00+08:00
        </beginTime>
        <endTime>
          <!--req, time, end time-->00:00:00+08:00
        </endTime>
      </TimeRange>
      <linkScene>
        <!--req, enum, link mode, subtype:string, desc:link mode-->indoor
      </linkScene>
    </Period>
  </PeriodList>
</TimingSwitch>
<Month>
  <!--opt, object, dep:and,{$.DisplayParamSwitch.mode,eq,month}-->
  <PeriodList size="4">
    <!--req, array, subtype:object, attr:size{req, int}-->
    <Period>
      <!--opt, object-->
      <id>
        <!--req, string-->test
      </id>
      <enabled>
        <!--req, bool-->true
      </enabled>
      <TimeRangeList size="4">
        <!--req, array, subtype:object, attr:size{req, int}-->
        <TimeRange>
          <!--req, object-->
          <beginTime>
            <!--req, time, start time-->00:00:00+08:00
          </beginTime>
          <endTime>
            <!--req, time, end time-->00:00:00+08:00
          </endTime>
          <linkScene>
            <!--req, enum, link mode, subtype:string, desc:link mode-->indoor
          </linkScene>
        </TimeRange>
      </TimeRangeList>
    </Period>
  </PeriodList>

```

```
</Month>
</DisplayParamSwitch>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.2.4 Image Adjustment

14.2.4.1 Set image parameters of a specific channel

Request URL

PUT /ISAPI/Image/channels/<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>
<ImageChannel xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, int-->1
  </id>
  <enabled>
    <!--req, bool, whether to enable the function-->true
  </enabled>
  <videoInputID>
    <!--req, int-->1
  </videoInputID>
  <ImageFlip>
    <!--opt, object-->
    <enabled>
      <!--req, bool, whether to enable the function-->true
    </enabled>
  </ImageFlip>
  <WDR>
    <!--opt, object-->
    <mode>
      <!--req, enum, subType:string-->open
    </mode>
    <WDRLevel>
      <!--opt, int, range:[1,100]-->1
    </WDRLevel>
  </WDR>
  <BLC>
    <!--opt, object-->
    <enabled>
      <!--req, bool, whether to enable the function-->true
    </enabled>
    <BLCRegionList>
      <!--opt, array, subType:object-->
      <BLCRegion>
        <!--opt, object-->
        <id>
          <!--req, int, area No., range:[1,10]-->1
        </id>
        <RegionCoordinatesList>
          <!--req, array, subType:object, range:[0,4], desc:rectangle-->
        </RegionCoordinates>
      </BLCRegion>
    </BLCRegionList>
  </BLC>
</ImageChannel>
```



```

        <!--opt, object, coordinates, desc:the origin is the lower-left corner of the screen-->
        <positionX>
            <!--req, int, X-coordinate, range:[0,704]-->1
        </positionX>
        <positionY>
            <!--req, int, Y-coordinate, range:[0,576]-->1
        </positionY>
    </RegionCoordinates>
</RegionCoordinatesList>
</BLCRegion>
</BLCRegionList>
</BLC>
<NoiseReduce>
    <!--opt, object-->
    <mode>
        <!--req, enum, subType:string-->close
    </mode>
    <GeneralMode>
        <!--opt, object-->
        <generalLevel>
            <!--req, int, range:[0,100]-->1
        </generalLevel>
    </GeneralMode>
</NoiseReduce>
<WhiteBalance>
    <!--opt, object, white balance-->
    <WhiteBalanceStyle>
        <!--opt, enum, subType:string-->auto
    </WhiteBalanceStyle>
    <WhiteBalanceRed>
        <!--opt, int, range:[0,100]-->1
    </WhiteBalanceRed>
    <WhiteBalanceBlue>
        <!--opt, int, range:[0,100]-->1
    </WhiteBalanceBlue>
</WhiteBalance>
<Exposure>
    <!--opt, object-->
    <ExposureType>
        <!--req, enum, subType:string-->auto
    </ExposureType>
    <OverexposeSuppress>
        <!--opt, object-->
        <enabled>
            <!--req, bool, whether to enable the function-->true
        </enabled>
    </OverexposeSuppress>
</Exposure>
<Sharpness>
    <!--opt, object-->
    <SharpnessLevel>
        <!--req, int, range:[0,100]-->1
    </SharpnessLevel>
</Sharpness>
<Shutter>
    <!--opt, object-->
    <ShutterLevel>
        <!--opt, enum, subType:string-->1/1
    </ShutterLevel>
</Shutter>
<powerLineFrequency>
    <!--opt, object-->
    <powerLineFrequencyMode>
        <!--opt, enum, subType:string-->50hz
    </powerLineFrequencyMode>
</powerLineFrequency>
<Gain>
    <!--opt, object, gain-->
    <GainLevel>
        <!--opt, string, range:[0,10]-->test
    </GainLevel>
</Gain>
<Color>
    <!--opt, object-->
    <brightnessLevel>
        <!--opt, int, brightness, range:[0,100]-->0
    </brightnessLevel>
    <contrastLevel>
        <!--opt, int, contrast, range:[0,100]-->0
    </contrastLevel>
    <saturationLevel>
        <!--opt, int, saturation, range:[0,100]-->0
    </saturationLevel>
    <grayScale>
        <!--opt, object-->
        <grayScaleMode>
            <!--opt, enum, subType:string-->indoor
        </grayScaleMode>
    </grayScale>
</Color>
<IrcutFilter>
    <!--opt, object-->
    <IrcutFilterType>
        <!--opt, enum, subType:string-->indoor
    </IrcutFilterType>
</IrcutFilter>

```

```

    <!--opt, enum, subType:string-->auto
  </IrcutFilterType>
  <nightToDayFilterLevel>
    <!--opt, enum, subType:string-->low
  </nightToDayFilterLevel>
  <nightToDayFilterTime>
    <!--opt, int, range:[0,10]-->1
  </nightToDayFilterTime>
</IrcutFilter>
<PTZ>
  <!--opt, object, PTZ-->
  <enabled>
    <!--opt, bool, whether to enable the function-->true
  </enabled>
</PTZ>
<HLC>
  <!--opt, object-->
  <enabled>
    <!--req, bool, whether to enable the function-->true
  </enabled>
  <HLCLevel>
    <!--opt, int, range:[0,10]-->0
  </HLCLevel>
</HLC>
<Dehaze>
  <!--opt, object-->
  <DehazeMode>
    <!--opt, enum, subType:string-->open
  </DehazeMode>
  <DehazeLevel>
    <!--opt, int, range:[0,10]-->0
  </DehazeLevel>
</Dehaze>
<CaptureMode>
  <!--opt, object, capture mode-->
  <mode>
    <!--req, enum, subType:string-->close
  </mode>
</CaptureMode>
<SupplementLight>
  <!--opt, object-->
  <supplementLightMode>
    <!--opt, enum, mode of supplement light, subType:string-->mixed
  </supplementLightMode>
  <irLightBrightness>
    <!--opt, int, brightness of IR supplement light, range:[0,100], desc:this node is valid when supplementLightMode is set to "mixed" and mixedLightBrightnessRegulatMode is set to "manual"-->80
  </irLightBrightness>
  <mixedLightBrightnessRegulatMode>
    <!--opt, enum, brightness adjustment mode of mixed supplement light, subType:string, desc:"manual" (in this mode, you need to set the parameters irLightBrightness and brightnessLimit), "auto" (brightness-related parameters are not required). This node is valid when supplementLightMode is set to "mixed"-->auto
  </mixedLightBrightnessRegulatMode>
  <whiteLightBrightness>
    <!--opt, int, light brightness (regardless of far or near light), range:[0,100], desc:it is shared by different supplement light modes, including "mixed", "whiteLight", "colorVulWhiteLight", "irLight", and "dualLight", when the adjustment mode of the supplement light is "auto"-->80
  </whiteLightBrightness>
</SupplementLight>
<LaserLight>
  <!--opt, object-->
  <mode>
    <!--opt, enum, subType:string-->auto
  </mode>
</LaserLight>
</ImageChannel>

```

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status description, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code-->OK
  </subStatusCode>
</ResponseStatus>

```

14.2.4.2 Get image configuration capability of a specific channel

Request URL

GET /ISAPI/Image/channels/<channelID>/capabilities

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Video channel No.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>
<ImageChannel xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, temperature range capability, see XML_Cap_tempRange for details, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, int-->1
  </id>
  <enabled>
    <!--ro, req, bool, whether to enable the function-->true
  </enabled>
  <videoInputID>
    <!--ro, req, int-->1
  </videoInputID>
  <ImageFlip>
    <!--ro, opt, object-->
    <enabled opt="true,false">
      <!--ro, req, bool, whether to enable the function, attr:opt{req, string}-->true
    </enabled>
    <ImageFlipStyle opt="LEFTRIGHT,UPDOWN,CENTER,AUTO">
      <!--ro, opt, string, type, attr:opt{req, string}-->LEFTRIGHT
    </ImageFlipStyle>
  </ImageFlip>
  <WDR>
    <!--ro, opt, object-->
    <mode opt="open,close,auto,SDR,time">
      <!--ro, req, enum, WDR mode: "open,close,auto", subType:string, attr:opt{req, string}, desc:WDR mode: "open,close,auto"-->open
    </mode>
    <WDRLevel min="1" max="100">
      <!--ro, opt, int, attr:min{req, int},max{req, int}-->1
    </WDRLevel>
  </WDR>
  <BLC>
    <!--ro, opt, object-->
    <enabled opt="true,false">
      <!--ro, req, bool, attr:opt{req, string}-->true
    </enabled>
    <BLCMode opt="UP,DOWN,LEFT,RIGHT,CENTER,MULTI-AREA,Region,AUTO">
      <!--ro, opt, enum, subType:string, attr:opt{req, string}-->UP
    </BLCMode>
  </BLC>
  <NoiseReduce>
    <!--ro, opt, object-->
    <mode opt="close,general,advanced">
      <!--ro, req, enum, subType:string, attr:opt{req, string}, desc:WDR mode: "open,close,auto"-->close
    </mode>
    <GeneralMode>
      <!--ro, opt, object-->
      <generalLevel min="0" max="10">
        <!--ro, req, int, attr:min{req, int},max{req, int}-->1
      </generalLevel>
    </GeneralMode>
    <AdvancedMode>
      <!--ro, opt, object-->
      <FrameNoiseReduceLevel min="0" max="10">
        <!--ro, req, int, attr:min{req, int},max{req, int}-->1
      </FrameNoiseReduceLevel>
      <InterFrameNoiseReduceLevel min="0" max="10">
        <!--ro, req, int, attr:min{req, int},max{req, int}-->1
      </InterFrameNoiseReduceLevel>
    </AdvancedMode>
  </NoiseReduce>
  <WhiteBalance>
    <!--ro, opt, object, white balance-->
    <WhiteBalanceStyle opt="manual, auto1, auto2, locked, outdoor, indoor, daylightLamp, sodiumlight, autotrace, onece, autooutdoor, autosodiumLight, mercuryLight, auto, incandescentlight, warmlight, naturallight,customColorTemperature,highTemperature">
      <!--ro, req, string, attr:opt{req, string}-->test
    </WhiteBalanceStyle>
    <WhiteBalanceRed min="-127" max="127">
      <!--ro, opt, int, attr:min{req, int},max{req, int}-->1
    </WhiteBalanceRed>
    <WhiteBalanceBlue min="-127" max="127">
      <!--ro, opt, int, attr:min{req, int},max{req, int}-->1
    </WhiteBalanceBlue>
  </WhiteBalance>
</ImageChannel>
```

```

    </WhiteBalanceBlue>
</WhiteBalance>
<Exposure>
  <!--ro, opt, object-->
  <ExposureType opt="auto,IrisFirst,ShutterFirst,gainFirst>manual,pIris,T5280-PQ1,T5289-PQ1,T1140-PQ1,T2712-PQ1,HV1250P-MPIR,pc,pIris-General,HZ1140P-8MPIRA,HZ1135P-8MP5GA,MV1550P-12MPIR,MZ1545P-12MP,HZ0618P-4MP5G,MZ1050P-12MP,SF5014M-12MP,SF3018M-10MP,MZ1140M,MZ2514M-10MP,MZ7018M-8MP,MZ2516M-10MPIR,indoor50HZ,indoor60HZ,lowGhosting,customize">
    <!--ro, req, string, attr:opt{req, string}-->test
  </ExposureType>
  <OverexposeSuppress>
    <!--ro, opt, object-->
    <enabled opt="true,false">
      <!--ro, req, bool, whether to enable the function, attr:opt{req, string}-->true
    </enabled>
  </OverexposeSuppress>
</Exposure>
<Sharpness>
  <!--ro, opt, object-->
  <SharpnessLevel min="0" max="255">
    <!--ro, req, int, attr:min{req, int},max{req, int}-->1
  </SharpnessLevel>
</Sharpness>
<Shutter>
  <!--ro, opt, object-->
  <ShutterLevel
opt="1/1,1/2,1/3,1/6,1/12,1/25,1/50,1/60,1/75,1/100,1/120,1/125,1/150,1/175,1/15,1/20,1/30,1/60,1/180,1/200,1/250,1/500,1/1000,1/2000,1/4000,1/8000,1/5000,1/10000,1/225,1/300,1/400,,1/425,1/600,1/750,1/1250,1/1750,1/2500,1/3500,1/6000,1/30000,1/100000">
    <!--ro, opt, string, attr:opt{req, string}-->test
  </ShutterLevel>
</Shutter>
<powerLineFrequency>
  <!--ro, opt, object-->
  <powerLineFrequencyMode opt="50hz,60hz">
    <!--ro, opt, string, mode, attr:opt{req, string}-->test
  </powerLineFrequencyMode>
</powerLineFrequency>
<Color>
  <!--ro, opt, object, image adjustment capability-->
  <brightnessLevel min="0" max="255">
    <!--ro, opt, int, brightness, attr:min{req, int},max{req, int}-->0
  </brightnessLevel>
  <contrastLevel min="0" max="255">
    <!--ro, opt, int, contrast, attr:min{req, int},max{req, int}-->0
  </contrastLevel>
  <saturationLevel min="0" max="255">
    <!--ro, opt, int, saturation, attr:min{req, int},max{req, int}-->0
  </saturationLevel>
  <grayScale>
    <!--ro, opt, object, gray scale-->
    <grayScaleMode opt="indoor,outdoor">
      <!--ro, opt, string, gray scale mode, attr:opt{req, string}-->test
    </grayScaleMode>
  </grayScale>
</Color>
<IrcutFilter>
  <!--ro, opt, object-->
  <IrcutFilterType opt="auto,day,night,schedule,eventTrigger,videoAuto,IrcutFilterType,darkFighterX,darkFighterXAuto,darkFighterXSchedule,colorVuAuto">
    <!--ro, opt, enum, subType:string, attr:opt{req, string}-->auto
  </IrcutFilterType>
  <nightToDayFilterLevel min="0" max="7">
    <!--ro, opt, int, range:[0,7], attr:min{req, int},max{req, int}-->4
  </nightToDayFilterLevel>
  <nightToDayFilterTime min="0" max="10">
    <!--ro, opt, int, attr:min{req, int},max{req, int}-->1
  </nightToDayFilterTime>
  <Schedule>
    <!--ro, opt, object-->
    <scheduleType opt="day,night">
      <!--ro, req, enum, subType:string, attr:opt{req, string}-->day
    </scheduleType>
    <TimeRange>
      <!--ro, req, object, time period-->
      <beginTime>
        <!--ro, req, time, start time-->00:00:00+08:00
      </beginTime>
      <endTime>
        <!--ro, req, time, end time-->00:00:00+08:00
      </endTime>
    </TimeRange>
  </Schedule>
</IrcutFilter>
<HLC>
  <!--ro, opt, object-->
  <enabled opt="true,false">
    <!--ro, req, bool, whether to enable the function, attr:opt{req, string}-->true
  </enabled>
  <HLCLevel min="0" max="10">
    <!--ro, opt, int, attr:min{req, int},max{req, int}-->0
  </HLCLevel>
</HLC>
<Dehaze>
  <!--ro, opt, object-->
  <DehazeMode opt="open,close,auto,advancedMode">

```

```

    <!--ro, opt, enum, subType:string, attr:opt{req, string}-->open
  </DehazeMode>
  <DehazeLevel min="0" max="10">
    <!--ro, opt, int, attr:min{req, int},max{req, int}-->0
  </DehazeLevel>
</Dehaze>
<SupplementLight>
  <!--ro, opt, object-->
  <supplementLightMode
opt="mixed,whiteLight,colorVuWhiteLight,irLight,dualLight,close,eventIntelligence,multiAzimuthMixed,multiAzimuthWhiteLight,multiAzimuthIrLight,panoramicWhit
eLight,panoramicIrLight">
    <!--ro, opt, enum, mode of supplement light, subType:string, attr:opt{req, string}, desc:mode of supplement light-->mixed
  </supplementLightMode>
  <irLightBrightness min="0" max="100">
    <!--ro, opt, int, brightness of IR supplement light, range:[0,100], attr:min{req, int},max{req, int}, desc:this node is valid when supplementLightMode
is set to "mixed" and mixedLightBrightnessRegulatMode is set to "manual"-->80
  </irLightBrightness>
  <mixedLightBrightnessRegulatMode opt="manual,auto">
    <!--ro, opt, enum, brightness adjustment mode of mixed supplement light, subType:string, attr:opt{req, string}, desc:"manual" (in this mode, you need
to set the parameters irLightBrightness and brightnessLimit), "auto" (brightness-related parameters are not required). This node is valid when
supplementLightMode is set to "mixed"-->auto
  </mixedLightBrightnessRegulatMode>
  <isAutoModeBrightnessCfg>
    <!--ro, opt, bool-->true
  </isAutoModeBrightnessCfg>
</SupplementLight>
<isSupportLaserSpotManual>
  <!--ro, opt, bool-->true
</isSupportLaserSpotManual>
</ImageChannel>

```

14.2.4.3 Set the image adjustment parameters in auto mode of a specific channel

Request URL

PUT /ISAPI/Image/channels/<channelID>/color

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```

<?xml version="1.0" encoding="UTF-8"?>

<Color xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, attr:version{opt, string, protocolVersion}-->
  <brightnessLevel>
    <!--opt, int, brightness-->24
  </brightnessLevel>
  <contrastLevel>
    <!--opt, int, contrast-->22
  </contrastLevel>
  <saturationLevel>
    <!--opt, int, saturation, dep:and,{$.Color.nightMode,eq,true}-->33
  </saturationLevel>
  <hueLevel>
    <!--opt, int, hue-->55
  </hueLevel>
  <grayScale>
    <!--opt, object, gray scale-->
    <grayScaleMode>
      <!--opt, enum, gray scale mode, subType:string, desc:"indoor", "outdoor"-->outdoor
    </grayScaleMode>
  </grayScale>
  <nightMode>
    <!--opt, bool, whether to enable night mode, when its value is "true", the saturation can be adjusted, otherwise, the saturation cannot be adjusted-->true
  </nightMode>
  <redBrightnessLevel>
    <!--opt, int, range:[0,100]-->0
  </redBrightnessLevel>
  <sharpnessLevel>
    <!--opt, int, range:[0,100]-->0
  </sharpnessLevel>
</Color>

```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->/ISAPI/xxxx
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.2.4.4 Get the image adjustment parameters in auto mode of a specific channel

Request URL

GET /ISAPI/Image/channels/<channelID>/color?parameterType=<parameterType>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.
parameterType	string	When parameterType is recommendation, the obtained value is recommended by device. If parameterType is not configured as an input parameter, it will be the value of the parameter in the current PUT URL.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<Color xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, attr:version{opt, string, protocolVersion}-->
  <brightnessLevel>
    <!--ro, opt, int, brightness-->24
  </brightnessLevel>
  <contrastLevel>
    <!--ro, opt, int, contrast-->22
  </contrastLevel>
  <saturationLevel>
    <!--ro, opt, int, saturation, dep:and,{$.Color.nightMode,eq,true}-->33
  </saturationLevel>
  <hueLevel>
    <!--ro, opt, int, hue-->55
  </hueLevel>
  <grayScale>
    <!--ro, opt, object-->
    <grayScaleMode>
      <!--ro, opt, enum, gray scale mode, subType:string, desc:"indoor", "outdoor"-->outdoor
    </grayScaleMode>
  </grayScale>
  <nightMode>
    <!--ro, opt, bool, whether to enable night mode-->true
  </nightMode>
  <redBrightnessLevel>
    <!--ro, opt, int, range:[0,100]-->0
  </redBrightnessLevel>
  <sharpnessLevel>
    <!--ro, opt, int, sharpness, range:[0,100]-->0
  </sharpnessLevel>
  <hueMode>
    <!--ro, opt, enum, subType:string-->warm
  </hueMode>
</Color>
```

14.2.4.5 Get the parameters of switching e-PTZ mode

Request URL

GET /ISAPI/Image/channels/<channelID>/EPTZ/mode?format=json

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```
{
  "EPTZMode": {
    /*ro, req, object, modes supported by e-PTZ*/
    "mode": "autoTrack",
    /*ro, opt, enum, mode, subType:string, desc:"cruise" (patrol), "autoTrack" (automatic tracking)*/
    "AutoTrack": {
      /*ro, opt, object, auto-tracking mode configuration, dep:and,{$.EPTZMode.mode,eq,autoTrack}*/
      "sensitivity": 10,
      /*ro, opt, int, sensitivity*/
      "detectionTarget": ["human", "vehicle"],
      /*ro, opt, array, subType:string*/
      "RegionList": [
        /*ro, req, array, region list, subType:object*/
        {
          "id": 1,
          /*ro, req, int, rule ID*/
          "Region": [
            /*ro, req, array, rule region, subType:object, range:[3,10], desc:the origin is the upper-left corner of the screen*/
            {
              "x": 0.120,
              /*ro, req, float, X-coordinate, range:[0.000,1.000]*/
              "y": 0.120,
              /*ro, opt, float, Y-coordinate, range:[0.000,1.000]*/
            }
          ]
        }
      ]
    },
    "FilterSize": {
      /*ro, opt, object, size filter*/
      "MaxTargetRect": {
        /*ro, req, object, the origin is the upper-left corner of the screen, desc:the origin is the upper-left corner of the screen*/
        "height": 1.0,
        /*ro, req, float, height, range:[0.000,1.000]*/
        "width": 1.0,
        /*ro, req, float, width, range:[0.000,1.000]*/
        "x": 0.0,
        /*ro, req, float, X-coordinate, range:[0.000,1.000]*/
        "y": 0.0,
        /*ro, opt, float, Y-coordinate, range:[0.000,1.000]*/
      },
      "MinTargetRect": {
        /*ro, req, object, the origin is the upper-left corner of the screen, desc:the origin is the upper-left corner of the screen*/
        "height": 1.0,
        /*ro, req, float, width, range:[0.000,1.000]*/
        "width": 1.0,
        /*ro, req, float, width, range:[0.000,1.000]*/
        "x": 0.0,
        /*ro, req, float, X-coordinate, range:[0.000,1.000]*/
        "y": 0.0,
        /*ro, opt, float, Y-coordinate*/
      }
    }
  }
}
```

14.2.4.6 Set parameters of switching the e-PTZ mode for a specified channel

Request URL

PUT /ISAPI/Image/channels/<channelID>/EPTZ/mode?format=json

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
{
  "EPTZMode": {
    /*req, object, modes supported by e-PTZ*/
    "mode": "autoTrack",
    /*opt, enum, e-PTZ mode, subType:string, desc:"cruise" (patrol), "autoTrack" (automatic tracking)*/
    "AutoTrack": {
      /*opt, object, auto-tracking mode configurations, dep:and,{$.EPTZMode.mode,eq,autoTrack}*/
      "sensitivity": 10,
      /*opt, int, sensitivity*/
      "detectionTarget": ["human", "vehicle"],
      /*opt, array, detection target, subType:string, desc:"human", "vehicle", "all" (human and vehicle)*/
      "RegionList": [
        /*req, array, area list, subType:object*/
        {
          "id": 1,
          /*req, int, rule ID*/
          "Region": [
            /*req, array, rule area, subType:object, range:[3,10], desc:the origin is the upper-left corner of the screen*/
            {
              "x": 0.120,
              /*req, float, X-coordinate, range:[0.000,1.000]*/
              "y": 0.120
              /*opt, float, Y-coordinate, range:[0.000,1.000]*/
            }
          ]
        }
      ]
    },
    /*opt, object, size filter*/
    "FilterSize": {
      "MaxTargetRect": {
        /*req, object, the maximum target area, desc:the origin is the upper-left corner of the screen*/
        "height": 1.0,
        /*req, float, height, range:[0.000,1.000]*/
        "width": 1.0,
        /*req, float, width, range:[0.000,1.000]*/
        "x": 0.0,
        /*req, float, X-coordinate, range:[0.000,1.000]*/
        "y": 0.0
        /*opt, float, Y-coordinate, range:[0.000,1.000]*/
      },
      "MinTargetRect": {
        /*req, object, the minimum target area, desc:the origin is the upper-left corner of the screen*/
        "height": 1.0,
        /*req, float, width, range:[0.000,1.000]*/
        "width": 1.0,
        /*req, float, width, range:[0.000,1.000]*/
        "x": 0.0,
        /*req, float, X-coordinate, range:[0.000,1.000]*/
        "y": 0.0
        /*opt, float, Y-coordinate*/
      }
    }
  }
}
```

Response Message

```
{
  "statusCode": 1,
  /*ro, opt, int, status code, desc:1 (succeeded). It is required when an error occurred*/
  "statusString": "ok",
  /*ro, opt, string, status description, range:[1,64], desc:"ok" (succeeded). It is required when an error occurred*/
  "subStatusCode": "ok",
  /*ro, opt, string, sub status code, range:[1,64], desc:"ok" (succeeded). It is required when an error occurred*/
  "errorCode": 1,
  /*ro, opt, int, error code, desc:it is required when the value of statusCode is not 1, it corresponds to subStatusCode*/
  "errorMsg": "ok"
  /*ro, opt, string, error description, desc:this field is required when the value of statusCode is not 1*/
}
```

14.2.4.7 Get the image capability of a specified channel

Request URL

GET /ISAPI/Image/channels/<channelID>/imageCap

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ImageCap xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{req, string, protocolVersion}-->
  <isSupportRegionalExposure>
    <!--ro, opt, bool-->true
  </isSupportRegionalExposure>
  <isSupportRegionalFocus>
    <!--ro, opt, bool-->true
  </isSupportRegionalFocus>
  <isSupportManualBackGroundCorrect>
    <!--ro, opt, bool-->true
  </isSupportManualBackGroundCorrect>
  <isSupportManualShutterCorrect>
    <!--ro, opt, bool-->true
  </isSupportManualShutterCorrect>
  <RegionalExposure>
    <!--ro, opt, object-->
    <enabled opt="true,false" def="false">
      <!--ro, opt, bool, attr:opt{req, string},def{req, string}-->true
    </enabled>
    <showRlueEnabled opt="true,false" def="false">
      <!--ro, opt, bool, attr:opt{req, string},def{req, string}-->true
    </showRlueEnabled>
  </RegionalExposure>
</ImageCap>
```

14.2.4.8 Set the mounting scenario mode of a camera

Request URL

PUT /ISAPI/Image/channels/<channelID>/mountingScenario

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<MountingScenario xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, attr:version{req, string, protocolVersion}-->
  <mode>
    <!--req, enum, "indoor,outdoor,day,night,morning,nightfall,mode1,mode2,mode3,mode4,highway,road2,faceSnap,backlight,frontlight","LowILLumination"-Low
illumination,"backlight"-back light,"frontlight"-front light,"faceSnap"-face picture capture, subType:string, desc:"indoor", "outdoor", "day", "night",
"morning", "nightfall", "mode1", "mode2", "mode3", "mode4", "street", "LowILLumination"-Low illumination, "custom1", "custom2", "normal", "road",
"faceSnap"-face picture capture, "highway", "road2", "backlight"-back light, "frontlight"-front light, "facenight", "fastRoadAndLight", "fastRoadNoLight",
"normalRoadAndLight", "normalRoadNoLight", "cityRoadAndBright"-->indoor
  </mode>
</MountingScenario>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0-OK, 1-OK, 2-Device Busy, 3-Device Error, 4-Invalid Operation, 5-Invalid XML Format, 6-Invalid XML Content, 7-Reboot Required-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status description, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code-->OK
  </subStatusCode>
</ResponseStatus>
```

14.2.4.9 Get the capability of configurations of mounting scenario mode

Request URL

GET /ISAPI/Image/channels/<channelID>/mountingScenario/capabilities

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<MountingScenario xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{req, string, protocolVersion}-->
  <mode
    opt="indoor,outdoor,day,night,morning,nightfall,model,model2,model3,model4,street,lowIllumination,custom1,custom2,normal,road,faceSnap,highway,road2,backlight,
    frontlight,facelight,fastRoadAndLight,fastRoadNoLight,normalRoadAndLight,normalRoadNoLight,riverSeaProtection,perimeterProtection,forestFirePrevention,foggy
    ,faceFirst,plateFirst,moveFirst,autoWDR,sportSnap,dustMoisture,rampWay">
    <!--ro, req, enum, Mode, subType:string, attr:opt{req, string}, desc:"LowIllumination"-Low illumination, "backlight"-back light, "frontlight"-front
    light, "faceSnap"-face picture capture-->indoor
  </mode>
  <isSupportRecommendation>
    <!--ro, opt, bool-->true
  </isSupportRecommendation>
  <modeNameList size="2">
    <!--ro, opt, object, attr:size{req, int}-->
    <modeNameItem>
      <!--ro, opt, object-->
      <mode
        opt="indoor,outdoor,day,night,morning,nightfall,model,model2,model3,model4,street,lowIllumination,custom1,custom2,normal,road,faceSnap,highway,road2,backlight,
        frontlight,facelight,fastRoadAndLight,fastRoadNoLight,normalRoadAndLight,normalRoadNoLight,riverSeaProtection,perimeterProtection,forestFirePrevention,foggy
        ,faceFirst,plateFirst,moveFirst,autoWDR">
        <!--ro, req, enum, subType:string, attr:opt{req, string}-->indoor
      </mode>
      <modeName>
        <!--ro, req, string-->test
      </modeName>
    </modeNameItem>
  </modeNameList>
</MountingScenario>
```

14.2.4.10 Get the mounting scenario mode of a camera

Request URL

GET /ISAPI/Image/channels/<channelID>/mountingScenario?parameterType=<parameterType>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--
parameterType	string	Parameter type. When parameterType is recommendation, the obtained value is recommended by device. If parameterType is not configured, it will be the value of the parameter configured on the device.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<MountingScenario xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{req, string, protocolVersion}-->
  <mode>
    <!--ro, req, enum, "indoor,outdoor,day,night,morning,nightfall,mode1,mode2,mode3,mode4,highway,road2,faceSnap,backlight,frontlight","LowIllumination"-
    Low illumination,"backlight"-back light,"frontlight"-front light,"faceSnap"-face picture capture, subType:string, desc:"indoor", "outdoor", "day", "night",
    "morning", "nightfall", "mode1", "mode2", "mode3", "mode4", "highway", "road2", "faceSnap", "backlight", "frontlight", "LowIllumination"-Low illumination,
    "backlight"-back light, "frontlight"-front light, "faceSnap"-face picture capture-->indoor
  </mode>
  <modeNameList>
    <!--ro, opt, array, subType:object-->
    <modeNameItem>
      <!--ro, opt, object-->
      <mode>
        <!--ro, req, enum, subType:string-->indoor
      </mode>
      <modeName>
        <!--ro, req, string-->test
      </modeName>
    </modeNameItem>
  </modeNameList>
</MountingScenario>
```

14.2.4.11 Reset the image parameters of a specific channel

Request URL

PUT /ISAPI/Image/channels/<channelID>/reset

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, opt, string, request URL, range:[0,1024]-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status description, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:error reason description in detail-->OK
  </subStatusCode>
  <description>
    <!--ro, opt, string, range:[0,1024]-->badXmlFormat
  </description>
  <MErrCode>
    <!--ro, opt, string-->0x00000000
  </MErrCode>
  <MErrDevSelfEx>
    <!--ro, opt, string-->0x00000000
  </MErrDevSelfEx>
</ResponseStatus>
```

14.2.4.12 Restore the image parameters of a specific channel to default settings

Request URL

PUT /ISAPI/Image/channels/<channelID>/restore

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel ID

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string}-->
  <requestURL>
    <!--ro, opt, string, request URL, range:[0,1024]-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
  <description>
    <!--ro, opt, string, range:[0,1024]-->badXmlFormat
  </description>
  <MErrCode>
    <!--ro, opt, string-->0x00000000
  </MErrCode>
  <MErrDevSelfEx>
    <!--ro, opt, string-->0x00000000
  </MErrDevSelfEx>
</ResponseStatus>
```

14.2.4.13 Set the sharpness control parameters of a specific channel

Request URL

PUT /ISAPI/Image/channels/<channelID>/sharpness

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<Sharpness xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, sharpness, attr:version{opt, string, protocolVersion}-->
  <SharpnessMode>
    <!--opt, enum, mode, subType:string, desc:"manual", "auto"-->manual
  </SharpnessMode>
  <SharpnessLevel>
    <!--req, int, sharpness level-->1
  </SharpnessLevel>
</Sharpness>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->/ISAPI/xxxx
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.2.4.14 Get the sharpness control parameters of a specific channel

Request URL

GET /ISAPI/Image/channels/<channelID>/sharpness?parameterType=<parameterType>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--
parameterType	string	When parameterType is recommendation, the obtained value is recommended by device. If parameterType is not configured as an input parameter, it will be the value of the parameter in the current PUT URL.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<Sharpness xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, sharpness, attr:version{opt, string, protocolVersion}-->
  <SharpnessMode>
    <!--ro, opt, enum, mode, subType:string, desc:"manual", "auto"-->manual
  </SharpnessMode>
  <SharpnessLevel>
    <!--ro, req, int, sharpness level-->1
  </SharpnessLevel>
</Sharpness>
```

14.2.4.15 Get the image processing parameters of a specified channel

Request URL

GET /ISAPI/Image/channels/<channelID>?parameterType=<parameterType>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Video channel No.
parameterType	string	When parameterType is recommendation, the obtained value is recommended by device. If parameterType is not configured as an input parameter, it will be the value of the parameter in the current PUT URL.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>
<ImageChannel xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, int-->1
  </id>
  <enabled>
    <!--ro, req, bool-->true
  </enabled>
  <videoInputID>
    <!--ro, req, int-->1
  </videoInputID>
  <ImageFlip>
    <!--ro, opt, object-->
    <enabled>
      <!--ro, req, bool-->true
    </enabled>
  </ImageFlip>
  <WDR>
    <!--ro, opt, object-->
    <mode>
      <!--ro, req, enum, subType:string-->open
    </mode>
    <WDRLevel>
      <!--ro, opt, int, range:[1,100]-->1
    </WDRLevel>
  </WDR>
  <BLC>
    <!--ro, opt, object-->
    <enabled>
      <!--ro, req, bool-->true
    </enabled>
    <BLCRegionList>
      <!--ro, opt, array, subType:object-->
      <BLCRegion>
        <!--ro, opt, object-->
        <id>
          <!--ro, req, int, range:[1,10]-->1
        </id>
        <RegionCoordinatesList>
          <!--ro, req, array, subType:object, range:[0,4]-->
          <RegionCoordinates>
            <!--ro, opt, object-->
            <positionX>
              <!--ro, req, int, range:[0,768]-->1
            </positionX>
            <positionY>
              <!--ro, req, int, range:[0,576]-->1
            </positionY>
          </RegionCoordinates>
        </RegionCoordinatesList>
      </BLCRegion>
    </BLCRegionList>
  </BLC>
</ImageChannel>
```

```

<!--ro, req, int, range:[0,360]-->1
</positionY>
</RegionCoordinates>
</RegionCoordinatesList>
</BLCRegion>
</BLCRegionList>
</BLC>
<NoiseReduce>
<!--ro, opt, object-->
<mode>
<!--ro, req, enum, subType:string-->close
</mode>
<GeneralMode>
<!--ro, opt, object-->
<generalLevel>
<!--ro, req, int, range:[0,100]-->1
</generalLevel>
</GeneralMode>
</NoiseReduce>
<WhiteBalance>
<!--ro, opt, object-->
<WhiteBalanceStyle>
<!--ro, opt, enum, subType:string-->auto
</WhiteBalanceStyle>
<WhiteBalanceRed>
<!--ro, opt, int, range:[-127,127]-->1
</WhiteBalanceRed>
<WhiteBalanceBlue>
<!--ro, opt, int, range:[-127,127]-->1
</WhiteBalanceBlue>
</WhiteBalance>
<Exposure>
<!--ro, opt, object-->
<ExposureType>
<!--ro, req, enum, subType:string-->auto
</ExposureType>
<OverexposeSuppress>
<!--ro, opt, object-->
<enabled>
<!--ro, req, bool-->true
</enabled>
</OverexposeSuppress>
</Exposure>
<Sharpness>
<!--ro, opt, object-->
<SharpnessLevel>
<!--ro, req, int, range:[0,100]-->1
</SharpnessLevel>
</Sharpness>
<Shutter>
<!--ro, opt, object-->
<ShutterLevel>
<!--ro, opt, enum, subType:string-->1/1
</ShutterLevel>
</Shutter>
<powerLineFrequency>
<!--ro, opt, object-->
<powerLineFrequencyMode>
<!--ro, opt, enum, subType:string-->50hz
</powerLineFrequencyMode>
</powerLineFrequency>
<Gain>
<!--ro, opt, object-->
<GainLevel>
<!--ro, opt, string, range:[0,10]-->test
</GainLevel>
</Gain>
<Color>
<!--ro, opt, object-->
<brightnessLevel>
<!--ro, opt, int, range:[0,255]-->0
</brightnessLevel>
<contrastLevel>
<!--ro, opt, int, range:[0,255]-->0
</contrastLevel>
<saturationLevel>
<!--ro, opt, int, range:[0,255]-->0
</saturationLevel>
<grayScale>
<!--ro, opt, object-->
<grayScaleMode>
<!--ro, opt, enum, subType:string-->indoor
</grayScaleMode>
</grayScale>
</Color>
<IrcutFilter>
<!--ro, opt, object-->
<IrcutFilterType>
<!--ro, opt, enum, subType:string-->auto
</IrcutFilterType>
<nightToDayFilterLevel>
<!--ro, opt, int, range:[0,7]-->4
</nightToDayFilterLevel>
<nightToDayFilterTime>

```

```

    <!--ro, opt, int, range:[0,10]-->1
  </nightToDayFilterTime>
</IrcutFilter>
<PTZ>
  <!--ro, opt, object-->
  <enabled>
    <!--ro, opt, bool-->true
  </enabled>
</PTZ>
<HLC>
  <!--ro, opt, object-->
  <enabled>
    <!--ro, req, bool-->true
  </enabled>
  <HLCLevel>
    <!--ro, opt, int, range:[0,10]-->0
  </HLCLevel>
</HLC>
<Dehaze>
  <!--ro, opt, object-->
  <DehazeMode>
    <!--ro, opt, enum, subType:string-->open
  </DehazeMode>
  <DehazeLevel>
    <!--ro, opt, int, range:[0,10]-->0
  </DehazeLevel>
</Dehaze>
<CaptureMode>
  <!--ro, opt, object-->
  <mode>
    <!--ro, req, enum, subType:string-->close
  </mode>
</CaptureMode>
<SupplementLight>
  <!--ro, opt, object-->
  <supplementLightMode>
    <!--ro, opt, enum, subType:string-->mixed
  </supplementLightMode>
  <irLightBrightness>
    <!--ro, opt, int, range:[0,100]-->80
  </irLightBrightness>
  <mixedLightBrightnessRegulatMode>
    <!--ro, opt, enum, subType:string-->auto
  </mixedLightBrightnessRegulatMode>
  <whiteLightBrightness>
    <!--ro, opt, int, range:[0,100]-->80
  </whiteLightBrightness>
</SupplementLight>
<LaserLight>
  <!--ro, opt, object-->
  <mode>
    <!--ro, opt, enum, subType:string-->auto
  </mode>
</LaserLight>
</ImageChannel>

```

14.2.5 Image Enhancement

14.2.5.1 Get defog mode parameters of a specific channel

Request URL

GET /ISAPI/Image/channels/<channelID>/dehaze

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message


```
<?xml version="1.0" encoding="UTF-8"?>

<Dehaze xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, "open,close,auto", attr:version{req, string, protocolVersion}-->
  <DehazeMode>
    <!--ro, opt, enum, defog mode, subType:string, desc:"open", "close", "auto"-->open
  </DehazeMode>
  <DehazeLevel>
    <!--ro, opt, int, defog level-->1
  </DehazeLevel>
  <dehazeIntensity>
    <!--ro, opt, int, range:[0,100], dep:and,{$.Dehaze.DehazeMode,eq,advancedMode}-->0
  </dehazeIntensity>
  <smoothIntensity>
    <!--ro, opt, int, range:[0,100], dep:and,{$.Dehaze.DehazeMode,eq,advancedMode}-->0
  </smoothIntensity>
</Dehaze>
```

14.2.5.2 Set defog mode parameters of a specific channel

Request URL

PUT /ISAPI/Image/channels/<channelID>/dehaze

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<Dehaze xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, "open,close,auto", attr:version{req, string, protocolVersion}-->
  <DehazeMode>
    <!--opt, enum, defog mode, subType:string, desc:"open", "close", "auto"-->open
  </DehazeMode>
  <DehazeLevel>
    <!--opt, int, defog level-->1
  </DehazeLevel>
</Dehaze>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.2.5.3 Set the picture gain parameters of a specific channel

Request URL

PUT /ISAPI/Image/channels/<channelID>/gain

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<Gain xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, gain, attr:version{req, string, protocolVersion}-->
  <GainLevel>
    <!--opt, int, gain level-->1
  </GainLevel>
  <GainWindow>
    <!--opt, object-->
    <RegionCoordinatesList>
      <!--opt, array, subType:object, range:[3,10]-->
      <RegionCoordinates>
        <!--opt, object, region coordinates, desc:the origin is the upper-left corner of the screen-->
        <positionX>
          <!--req, int, X-coordinate, range:[0,1000]-->1
        </positionX>
        <positionY>
          <!--req, int, Y-coordinate, range:[0,1000]-->1
        </positionY>
      </RegionCoordinates>
    </RegionCoordinatesList>
  </GainWindow>
  <scheduleEnabled>
    <!--opt, bool-->true
  </scheduleEnabled>
  <scheduleGainLevel>
    <!--opt, int, dep:and,{$.Gain.scheduleEnabled,eq,true}-->1
  </scheduleGainLevel>
  <Schedule>
    <!--opt, object, dep:and,{$.Gain.scheduleEnabled,eq,true}-->
    <startHour min="0" max="23">
      <!--opt, int, start time, range:[0,23], attr:min{req, int},max{req, int}-->1
    </startHour>
    <startMinute min="0" max="59">
      <!--opt, int, start time (minute), range:[0,59], attr:min{req, int},max{req, int}-->1
    </startMinute>
    <endHour min="0" max="23">
      <!--opt, int, end time, range:[0,23], attr:min{req, int},max{req, int}-->1
    </endHour>
    <endMinute min="0" max="59">
      <!--opt, int, end time (minute), range:[0,59], attr:min{req, int},max{req, int}-->1
    </endMinute>
  </Schedule>
  <redGainLevel>
    <!--opt, int, range:[0,100]-->1
  </redGainLevel>
</Gain>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.2.5.4 Get the picture gain parameters of a specific channel

Request URL

GET /ISAPI/Image/channels/<channelID>/gain?parameterType=<parameterType>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--
parameterType	string	When parameterType is recommendation, the obtained value is recommended by device. If parameterType is not configured as an input parameter, it will be the value of the parameter in the current PUT URL.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<Gain xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, gain, attr:version{req, string, protocolVersion}-->
  <GainLevel>
    <!--ro, opt, int, gain level-->1
  </GainLevel>
  <GainWindow>
    <!--ro, opt, object-->
    <RegionCoordinatesList>
      <!--ro, opt, array, subType:object, range:[3,10]-->
      <RegionCoordinates>
        <!--ro, opt, object, the origin is the upper-left corner of the screen, desc:the origin is the upper-left corner of the screen-->
        <positionX>
          <!--ro, req, int, X-coordinate, range:[0,1000]-->1
        </positionX>
        <positionY>
          <!--ro, req, int, Y-coordinate, range:[0,1000]-->1
        </positionY>
      </RegionCoordinates>
    </RegionCoordinatesList>
  </GainWindow>
  <scheduleEnabled>
    <!--ro, opt, bool-->true
  </scheduleEnabled>
  <scheduleGainLevel>
    <!--ro, opt, int, dep:and,{$.Gain.scheduleEnabled,eq,true}-->1
  </scheduleGainLevel>
  <Schedule>
    <!--ro, opt, object, time range, dep:and,{$.Gain.scheduleEnabled,eq,true}-->
    <startHour min="0" max="23">
      <!--ro, opt, int, start time, range:[0,23], attr:min{req, int},max{req, int}-->1
    </startHour>
    <startMinute min="0" max="59">
      <!--ro, opt, int, start time (minute), range:[0,59], attr:min{req, int},max{req, int}-->1
    </startMinute>
    <endHour min="0" max="23">
      <!--ro, opt, int, end time, range:[0,23], attr:min{req, int},max{req, int}-->1
    </endHour>
    <endMinute min="0" max="59">
      <!--ro, opt, int, end time (minute), range:[0,59], attr:min{req, int},max{req, int}-->1
    </endMinute>
  </Schedule>
  <redGainLevel>
    <!--ro, opt, int, range:[0,100]-->1
  </redGainLevel>
  <minExposureGainLevel>
    <!--ro, opt, int, range:[0,10]-->0
  </minExposureGainLevel>
  <maxExposureGainLevel>
    <!--ro, opt, int, range:[0,10]-->0
  </maxExposureGainLevel>
</Gain>
```

14.2.5.5 Get the capability of image distortion correction of a specific channel

Request URL

GET /ISAPI/Image/channels/<channelID>/lensDistortionCorrection/capabilities

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<LensDistortionCorrection xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, the capability of image distortion correction, attr:version{req, string, protocolVersion}-->
  <enabled opt="true,false">
    <!--ro, req, bool, whether to enable the function, attr:opt{req, string}-->true
  </enabled>
  <level opt="level1,level2,level3,custom,visualEffect,viewingAngle">
    <!--ro, opt, enum, distortion correction level, subType:string, attr:opt{req, string}, desc:"Level 1", "Level 2", "Level 3", "custom"-->level1
  </level>
  <accurateLevel min="0" max="100">
    <!--ro, opt, int, correction strength, range:[0,100], attr:min{req, int},max{req, int}-->0
  </accurateLevel>
  <zoomedInDistantViewLevel min="0" max="100">
    <!--ro, opt, int, zoomed-in distant view, range:[0,100], attr:min{req, int},max{req, int}-->0
  </zoomedInDistantViewLevel>
  <horizontalFOV min="0" max="100">
    <!--ro, opt, int, horizontal field of view, range:[0,100], attr:min{req, int},max{req, int}-->0
  </horizontalFOV>
  <verticalFOV min="0" max="100">
    <!--ro, opt, int, vertical field of view, range:[0,100], attr:min{req, int},max{req, int}-->0
  </verticalFOV>
  <correctionFOV min="0" max="100">
    <!--ro, opt, int, range:[0,100], attr:min{req, int},max{req, int}-->0
  </correctionFOV>
  <isSupportLevelTypeAccurate>
    <!--ro, opt, bool-->true
  </isSupportLevelTypeAccurate>
  <supportPrompt opt="levelPrompt">
    <!--ro, opt, enum, subType:string, attr:opt{req, string}-->levelPrompt
  </supportPrompt>
  <isLDCModifyResolution>
    <!--ro, opt, bool-->true
  </isLDCModifyResolution>
  <mode opt="custom,visualEffect,viewingAngle" def="viewingAngle">
    <!--ro, opt, enum, subType:string, attr:opt{req, string},def{opt, string}-->custom
  </mode>
</LensDistortionCorrection>
```

14.2.5.6 Set the DNR (Digital Noise Reduction) parameters in auto mode of a specific channel

Request URL

PUT /ISAPI/Image/channels/<channelID>/noiseReduce

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<NoiseReduce xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, noise reduction parameters, attr:version{req, string, protocolVersion}-->
  <mode>
    <!--req, enum, mode, subType:string, desc:"close", "general", "advanced"-->close
  </mode>
  <GeneralMode>
    <!--opt, object, mode-->
    <generalLevel>
      <!--req, int, level-->1
    </generalLevel>
  </GeneralMode>
  <AdvancedMode>
    <!--opt, object, advanced mode-->
    <FrameNoiseReduceLevel>
      <!--req, int-->1
    </FrameNoiseReduceLevel>
    <InterFrameNoiseReduceLevel>
      <!--req, int-->1
    </InterFrameNoiseReduceLevel>
    <secondarySpatialNoiseReduceLevel>
      <!--opt, int, range:[0,100]-->1
    </secondarySpatialNoiseReduceLevel>
    <secondaryTemporalNoiseReduceLevel>
      <!--opt, int, range:[0,100]-->1
    </secondaryTemporalNoiseReduceLevel>
  </AdvancedMode>
</NoiseReduce>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.2.5.7 Get the DNR (Digital Noise Reduction) parameters in auto mode of a specific channel

Request URL

GET /ISAPI/Image/channels/<channelID>/noiseReduce

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<NoiseReduce xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, noise reduction parameters, attr:version{req, string, protocolVersion}-->
  <mode>
    <!--ro, req, enum, mode, subType:string, desc:"close", "general", "advanced"-->close
  </mode>
  <GeneralMode>
    <!--ro, opt, object, this node is valid only when <mode> is "general"-->
    <generalLevel>
      <!--ro, req, int-->1
    </generalLevel>
  </GeneralMode>
  <AdvancedMode>
    <!--ro, opt, object, advanced mode-->
    <FrameNoiseReduceLevel>
      <!--ro, req, int-->1
    </FrameNoiseReduceLevel>
    <InterFrameNoiseReduceLevel>
      <!--ro, req, int-->1
    </InterFrameNoiseReduceLevel>
    <secondarySpatialNoiseReduceLevel>
      <!--ro, opt, int, range:[0,100]-->1
    </secondarySpatialNoiseReduceLevel>
    <secondaryTemporalNoiseReduceLevel>
      <!--ro, opt, int, range:[0,100]-->1
    </secondaryTemporalNoiseReduceLevel>
  </AdvancedMode>
</NoiseReduce>
```

14.2.5.8 Set the digital noise reduction (DNR) parameters in day mode of a specified channel

Request URL

PUT /ISAPI/Image/channels/<channelID>/noiseReduce/day

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<NoiseReduce xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, attr:version{req, string, protocolVersion}-->
  <mode>
    <!--req, enum, subType:string-->close
  </mode>
  <GeneralMode>
    <!--opt, object, dep:and,{$.NoiseReduce.mode,eq,general}-->
    <generalLevel>
      <!--req, int, range:[0,100]-->0
    </generalLevel>
  </GeneralMode>
  <AdvancedMode>
    <!--opt, object, dep:and,{$.NoiseReduce.mode,eq,advanced}-->
    <FrameNoiseReduceLevel>
      <!--req, int, range:[0,100]-->0
    </FrameNoiseReduceLevel>
    <InterFrameNoiseReduceLevel>
      <!--req, int, range:[0,100]-->0
    </InterFrameNoiseReduceLevel>
    <secondarySpatialNoiseReduceLevel>
      <!--opt, int, range:[0,100]-->1
    </secondarySpatialNoiseReduceLevel>
    <secondaryTemporalNoiseReduceLevel>
      <!--opt, int, range:[0,100]-->1
    </secondaryTemporalNoiseReduceLevel>
  </AdvancedMode>
</NoiseReduce>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.2.5.9 Get the digital noise reduction (DNR) parameters in day mode of a specified channel

Request URL

GET /ISAPI/Image/channels/<channelID>/noiseReduce/day

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<NoiseReduce xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{req, string, protocolVersion}-->
  <mode>
    <!--ro, req, enum, subType:string-->close
  </mode>
  <GeneralMode>
    <!--ro, opt, object, dep:and,{$.NoiseReduce.mode,eq,general}-->
    <generalLevel>
      <!--ro, req, int, range:[0,100]-->0
    </generalLevel>
  </GeneralMode>
  <AdvancedMode>
    <!--ro, opt, object, dep:and,{$.NoiseReduce.mode,eq,advanced}-->
    <FrameNoiseReduceLevel>
      <!--ro, req, int, range:[0,100]-->0
    </FrameNoiseReduceLevel>
    <InterFrameNoiseReduceLevel>
      <!--ro, req, int, range:[0,100]-->0
    </InterFrameNoiseReduceLevel>
    <secondarySpatialNoiseReduceLevel>
      <!--ro, opt, int, range:[0,100]-->1
    </secondarySpatialNoiseReduceLevel>
    <secondaryTemporalNoiseReduceLevel>
      <!--ro, opt, int, range:[0,100]-->1
    </secondaryTemporalNoiseReduceLevel>
  </AdvancedMode>
</NoiseReduce>
```

14.2.5.10 Set the digital noise reduction (DNR) parameters in night mode a specified channel

Request URL

PUT /ISAPI/Image/channels/<channelID>/noiseReduce/night

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<NoiseReduce xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, attr:version{req, string, protocolVersion}-->
  <mode>
    <!--req, enum, subType:string-->close
  </mode>
  <GeneralMode>
    <!--opt, object, dep:and,{$.NoiseReduce.mode,eq,general}-->
    <generalLevel>
      <!--req, int, range:[0,100]-->0
    </generalLevel>
  </GeneralMode>
  <AdvancedMode>
    <!--opt, object, dep:and,{$.NoiseReduce.mode,eq,advanced}-->
    <FrameNoiseReduceLevel>
      <!--req, int, range:[0,100]-->0
    </FrameNoiseReduceLevel>
    <InterFrameNoiseReduceLevel>
      <!--req, int, range:[0,100]-->0
    </InterFrameNoiseReduceLevel>
    <secondarySpatialNoiseReduceLevel>
      <!--opt, int, range:[0,100]-->1
    </secondarySpatialNoiseReduceLevel>
    <secondaryTemporalNoiseReduceLevel>
      <!--opt, int, range:[0,100]-->1
    </secondaryTemporalNoiseReduceLevel>
  </AdvancedMode>
</NoiseReduce>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.2.5.11 Get the digital noise reduction (DNR) parameters in day mode of a specified channel

Request URL

GET /ISAPI/Image/channels/<channelID>/noiseReduce/night

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message


```

<?xml version="1.0" encoding="UTF-8"?>

<NoiseReduce xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{req, string, protocolVersion}-->
  <mode>
    <!--ro, req, enum, subType:string-->close
  </mode>
  <GeneralMode>
    <!--ro, opt, object, dep:and,{$.NoiseReduce.mode,eq,general}-->
    <generalLevel>
      <!--ro, req, int, range:[0,100]-->0
    </generalLevel>
  </GeneralMode>
  <AdvancedMode>
    <!--ro, opt, object, dep:and,{$.NoiseReduce.mode,eq,advanced}-->
    <FrameNoiseReduceLevel>
      <!--ro, req, int, range:[0,100]-->0
    </FrameNoiseReduceLevel>
    <InterFrameNoiseReduceLevel>
      <!--ro, req, int, range:[0,100]-->0
    </InterFrameNoiseReduceLevel>
    <secondarySpatialNoiseReduceLevel>
      <!--ro, opt, int, range:[0,100]-->1
    </secondarySpatialNoiseReduceLevel>
    <secondaryTemporalNoiseReduceLevel>
      <!--ro, opt, int, range:[0,100]-->1
    </secondaryTemporalNoiseReduceLevel>
  </AdvancedMode>
</NoiseReduce>

```

14.2.6 Image Light Supplement

14.2.6.1 Get day/night auto switch parameters of a specific channel

Request URL

GET /ISAPI/Image/channels/<channelID>/ircutFilter

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<IrcutFilter xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{req, string, protocolVersion}-->
  <IrcutFilterType>
    <!--ro, opt, enum, day/night auto switch mode, subType:string, desc:"auto, day, night, schedule, eventTrigger, darkFighterX, darkFighterXAuto, darkFighterXSchedule"-->auto
  </IrcutFilterType>
  <dayToNightFilterLevel>
    <!--ro, opt, int, Level of switching day to night, range:[0,7]-->4
  </dayToNightFilterLevel>
  <dayToNightFilterTime>
    <!--ro, opt, int, time interval of switching day to night-->1
  </dayToNightFilterTime>
  <nightToDayFilterLevel>
    <!--ro, opt, int, Level of switching night to day, range:[0,7]-->4
  </nightToDayFilterLevel>
  <nightToDayFilterTime>
    <!--ro, opt, int, time interval of switching night to day-->1
  </nightToDayFilterTime>
  <Schedule>
    <!--ro, opt, object-->
    <scheduleType>
      <!--ro, req, enum, schedule type, subType:string, desc:"day", "night"-->day
    </scheduleType>
    <TimeRange>
      <!--ro, req, object, time period on schedule-->
      <beginTime>
        <!--ro, req, time, start time-->00:00:00+08:00
      </beginTime>
      <endTime>
        <!--ro, req, time, end time-->00:00:00+08:00
      </endTime>
    </TimeRange>
  </Schedule>
  <EventTrigger>
    <!--ro, opt, object-->
    <eventType>
      <!--ro, req, enum, event type, subType:string, desc:event type-->IO
    </eventType>
    <IrcutFilterAction>
      <!--ro, req, enum, "day, night", subType:string, desc:"day", "night"-->day
    </IrcutFilterAction>
  </EventTrigger>
  <dayNightStatus>
    <!--ro, opt, enum, subType:string-->day
  </dayNightStatus>
</IrcutFilter>

```

14.2.6.2 Set day/night auto switch parameters of a specific channel

Request URL

PUT /ISAPI/Image/channels/<channelID>/ircutFilter

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```

<?xml version="1.0" encoding="UTF-8"?>

<IrcutFilter xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, IrcutFilter, attr:version{req, string, protocolVersion}-->
  <IrcutFilterType>
    <!--opt, enum, IrcutFilter type, subType:string, desc:"auto", "day", "night", "schedule", "eventTrigger", "videoAuto", "darkFighterX",
    "darkFighterXAuto", "darkFighterXSchedule", "colorVuAuto"-->auto
  </IrcutFilterType>
  <dayToNightFilterLevel>
    <!--opt, enum, Level of switching day to night, subType:string, desc:"Low", "normal", "high"-->low
  </dayToNightFilterLevel>
  <dayToNightFilterTime>
    <!--opt, int, time interval of switching day to night-->1
  </dayToNightFilterTime>
  <nightToDayFilterLevel>
    <!--opt, enum, Level of switching night to day, subType:string, desc:"Low", "normal", "high"-->low
  </nightToDayFilterLevel>
  <nightToDayFilterTime>
    <!--opt, int, time interval of switching night to day-->1
  </nightToDayFilterTime>
  <Schedule>
    <!--opt, object, schedule-->
    <scheduleType>
      <!--req, enum, schedule type, subType:string, desc:"day", "night"-->day
    </scheduleType>
    <TimeRange>
      <!--req, object, time period on schedule-->
      <beginTime>
        <!--req, time, start time-->00:00:00+08:00
      </beginTime>
      <endTime>
        <!--req, time, end time-->00:00:00+08:00
      </endTime>
    </TimeRange>
  </Schedule>
  <EventTrigger>
    <!--opt, object, event trigger-->
    <eventType>
      <!--req, enum, event type, subType:string, desc:"IO", "VMD"-->IO
    </eventType>
    <IrcutFilterAction>
      <!--req, enum, "day,night", subType:string, desc:"day", "night"-->day
    </IrcutFilterAction>
  </EventTrigger>
</IrcutFilter>

```

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0-OK, 1-OK, 2-Device Busy, 3-Device Error, 4-Invalid Operation, 5-Invalid XML Format, 6-Invalid XML
    Content, 7-Reboot Required-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status description, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format",
    "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code-->OK
  </subStatusCode>
</ResponseStatus>

```

14.2.6.3 Set the laser supplement light parameters of a specified channel

Request URL

PUT /ISAPI/Image/channels/<channelID>/laserLight

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<LaserLight xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, attr:version{req, string, protocolVersion}-->
  <mode>
    <!--req, enum, subType:string-->auto
  </mode>
  <sensitivityLevel>
    <!--opt, int, range:[0,100], dep:and,{$.LaserLight.mode,eq>manual}-->0
  </sensitivityLevel>
  <brightnessLevel>
    <!--opt, int, range:[0,255], dep:and,{$.LaserLight.mode,eq>manual}-->0
  </brightnessLevel>
  <laserangle>
    <!--opt, int, range:[1,36], dep:and,{$.LaserLight.mode,eq>manual}-->1
  </laserangle>
  <triggerMode>
    <!--opt, enum, subType:string, dep:and,{$.LaserLight.mode,eq>manual}-->camera
  </triggerMode>
  <brightnessLimit>
    <!--opt, int, range:[0,255], dep:and,{$.LaserLight.mode,eq,auto}-->0
  </brightnessLimit>
  <enabled>
    <!--opt, bool, dep:and,{$.LaserLight.mode,eq>manual}-->true
  </enabled>
  <illumination>
    <!--opt, int, range:[0,100], dep:and,{$.LaserLight.mode,eq>manual}-->0
  </illumination>
  <lightAngle>
    <!--opt, int, range:[0,100], dep:and,{$.LaserLight.mode,eq>manual}-->0
  </lightAngle>
  <LaserSpotManual>
    <!--opt, object-->
    <normalizedScreenSize>
      <!--req, object-->
      <normalizedScreenWidth>
        <!--req, int, range:[0,704]-->0
      </normalizedScreenWidth>
      <normalizedScreenHeight>
        <!--req, int, range:[0,576]-->0
      </normalizedScreenHeight>
    </normalizedScreenSize>
    <laserSpotLevel>
      <!--req, int, range:[1,3]-->1
    </laserSpotLevel>
    <LaserWarning>
      <!--opt, object-->
      <enabled>
        <!--opt, bool-->true
      </enabled>
      <warningWord>
        <!--opt, string, range:[0,44]-->test
      </warningWord>
      <TopLeftPoint>
        <!--opt, object-->
        <positionX>
          <!--req, int, range:[0,1000]-->0
        </positionX>
        <positionY>
          <!--req, int, range:[0,1000]-->0
        </positionY>
      </TopLeftPoint>
    </LaserWarning>
  </LaserSpotManual>
  <compensationRegionMode>
    <!--opt, enum, subType:string-->center
  </compensationRegionMode>
  <compensationLevel>
    <!--opt, enum, subType:string-->low
  </compensationLevel>
  <LaserColor>
    <!--opt, object-->
    <R>
      <!--req, int, range:[0,100]-->0
    </R>
    <G>
      <!--req, int, range:[0,100]-->0
    </G>
    <B>
      <!--req, int, range:[0,100]-->0
    </B>
  </LaserColor>
</LaserLight>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.2.6.4 Get the laser supplement light parameters of a specified channel

Request URL

GET /ISAPI/Image/channels/<channelID>/laserLight

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<LaserLight xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{req, string, protocolVersion}-->
  <mode>
    <!--ro, req, enum, subType:string-->auto
  </mode>
  <sensitivityLevel>
    <!--ro, opt, int, range:[0,100], dep:and,{$.LaserLight.mode,eq>manual}-->0
  </sensitivityLevel>
  <brightnessLevel>
    <!--ro, opt, int, range:[0,255], dep:and,{$.LaserLight.mode,eq>manual}-->0
  </brightnessLevel>
  <laserangle>
    <!--ro, opt, int, range:[1,36], dep:and,{$.LaserLight.mode,eq>manual}-->1
  </laserangle>
  <triggerMode>
    <!--ro, opt, enum, subType:string, dep:and,{$.LaserLight.mode,eq>manual}-->camera
  </triggerMode>
  <brightnessLimit>
    <!--ro, opt, int, range:[0,255], dep:and,{$.LaserLight.mode,eq>manual}-->0
  </brightnessLimit>
  <enabled>
    <!--ro, opt, bool, dep:and,{$.LaserLight.mode,eq>manual}-->true
  </enabled>
  <illumination>
    <!--ro, opt, int, range:[0,100], dep:and,{$.LaserLight.mode,eq>manual}-->0
  </illumination>
  <lightAngle>
    <!--ro, opt, int, range:[0,100], dep:and,{$.LaserLight.mode,eq>manual}-->0
  </lightAngle>
  <LaserSpotManual>
    <!--ro, opt, object-->
    <normalizedScreenSize>
      <!--ro, req, object-->
      <normalizedScreenWidth>
        <!--ro, req, int, range:[0,704]-->0
      </normalizedScreenWidth>
      <normalizedScreenHeight>
        <!--ro, req, int, range:[0,576]-->0
      </normalizedScreenHeight>
    </normalizedScreenSize>
    <laserSpotLevel>
      <!--ro, req, int, range:[1,3]-->1
    </laserSpotLevel>
    <LaserWarning>
      <!--ro, opt, object-->
      <enabled>
        <!--ro, opt, bool-->true
      </enabled>
      <warningWord>
        <!--ro, opt, string, range:[0,44]-->test
      </warningWord>
      <TopLeftPoint>
        <!--ro, opt, object-->
        <positionX>
          <!--ro, req, int, range:[0,1000]-->0
        </positionX>
        <positionY>
          <!--ro, req, int, range:[0,1000]-->0
        </positionY>
      </TopLeftPoint>
    </LaserWarning>
  </LaserSpotManual>
  <compensationRegionMode>
    <!--ro, opt, enum, subType:string-->center
  </compensationRegionMode>
  <compensationLevel>
    <!--ro, opt, enum, subType:string-->low
  </compensationLevel>
  <LaserColor>
    <!--ro, opt, object-->
    <R>
      <!--ro, req, int, range:[0,100]-->0
    </R>
    <G>
      <!--ro, req, int, range:[0,100]-->0
    </G>
    <B>
      <!--ro, req, int, range:[0,100]-->0
    </B>
  </LaserColor>
  <beamAngle>
    <!--ro, opt, int, range:[0,180], unit:°-->15
  </beamAngle>
</LaserLight>

```

14.2.7 Manual Capture

14.2.7.1 Get the manual capture result information of a specified channel

Request URL

GET /ISAPI/Streaming/channels/<trackStreamID>/picture?snapShotImageType=<snapShotImageType>&videoResolutionWidth=<videoResolutionWidth>&videoResolutionHeight=<videoResolutionHeight>&imageQuality=<imageQuality>&x=<x>&y=<y>&hight=<hight>&width=<width>&maxSnapResolution=<maxSnapResolution>&livingBodyDetect=<livingBodyDetect>

Query Parameter

Parameter Name	Parameter Type	Description
trackStreamID	string	Channel No. * 100 + stream type (-1: main stream, -2: sub-stream).
snapShotImageType	string	Image formats: "bayer" (image not processed by ISP, which can be used to test whether the image clarity of the factory equipment meets the standard), "JPEGWITHRULE" (this type of image is specially for HIKMICRO devices, indicating a JPEG image captured with temperature rule information overlaid), "JPEGWITHOUTRULE" (when this type is used by HIKMICRO devices, it indicates a JPEG image captured without temperature rule information overlaid), "JPEG" (when this type is used by HIKMICRO devices, whether the captured JPEG image includes rule information depends on the enabling status of overlay temperature information on stream function. If it is enabled, the image returned will have rule information overlaid; otherwise, it will not. If the HIKMICRO device calls the URL without using this parameter, the logic for the returned JPEG image is consistent with the above JPEG type, depending on the enabling status of overlay temperature information on stream function).
videoResolutionWidth	string	Resolution width, and if not configured, it is 704 by default (D1 resolution width).
videoResolutionHeight	string	Resolution height, and if not configured, it is 576 by default (D1 resolution height).
imageQuality	string	Image quality: "best", "better", "general"
x	string	x-coordinate of the specified area, the value ranges from 0.000 to 1.000. The origin is the upper-left corner of the screen
y	string	y-coordinate of the specified area, the value ranges from 0.000 to 1.000. The origin is the upper-left corner of the screen
hight	string	Height of the specified area. The value ranges from 0.000 to 1.000. The origin is the upper-left corner of the screen.
width	string	Width of the specified area. The value ranges from 0.000 to 1.000. The origin is the upper-left corner of the screen.
maxSnapResolution	enum	Capture images using the maximum image capture resolution. For certain devices, such as low-power devices, the actual maximum image capture resolution differs from the video encoding resolution. During certain intelligent detections, images are captured at the maximum image capture resolution. If not configured, the default value is 1.
livingBodyDetect	enum	Whether to perform face anti-spoofing detection when capturing images.

Request Message

None

Response Message

14.2.8 Meta Data

14.2.8.1 Get all metadata parameters of the specified channel

Request URL

GET /ISAPI/Streaming/channels/<channelID>/metadata

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<MetadataCfg xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, metadata configurations, attr:version{req, string, protocolVersion}-->
  <MetadataList>
    <!--ro, req, array, metadata information List, subType:object-->
    <Metadata>
      <!--ro, req, object, metadata information-->
      <type>
        <!--ro, req, enum, event types that support metadata, subType:string, desc:"thermometry" (real-time temperature measurement), "fireDetection" (fire detection), "shipsDetection" (ship detection), "behaviorAnalysis" (abnormal event detection), "ANPR" (automatic number plate recognition), "personQueue" (queue management, including people queuing-up detection and waiting time detection), "faceSnap" (face capture), "mixedTargetDetection" (multi-target-detection), "AIOP" (AIOP detection), "radarDetection" (radar detection), "personalTrack" (personal tracking)-->thermometry
      </type>
      <enable>
        <!--ro, req, bool, whether to enable uploading metadata-->true
      </enable>
    </Metadata>
  </MetadataList>
  <uploadDataFormat>
    <!--ro, opt, enum, uploaded message format, subType:string, desc:"xml" (XML format), "json" (JSON format)-->xml
  </uploadDataFormat>
</MetadataCfg>
```

14.2.8.2 Set all metadata parameters for a specified channel

Request URL

PUT /ISAPI/Streaming/channels/<channelID>/metadata

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message


```
<?xml version="1.0" encoding="UTF-8"?>

<MetadataCfg xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, metadata configurations, attr:version{req, string, protocolVersion}-->
  <MetadataList>
    <!--req, array, metadata information list, subType:object-->
    <Metadata>
      <!--req, object, metadata information-->
      <type>
        <!--req, enum, event types that support metadata, subType:string, desc:"thermometry" (real-time temperature measurement), "fireDetection" (fire detection), "shipsDetection" (ship detection), "behaviorAnalysis" (abnormal event detection), "ANPR" (automatic number plate recognition), "personQueue" (queue management, including people queuing-up detection and waiting time detection), "faceSnap" (face capture), "mixedTargetDetection" (multi-target-detection), "AIOP" (AIOP detection)-->thermometry
      </type>
      <enable>
        <!--req, bool, whether to enable uploading metadata-->true
      </enable>
    </Metadata>
  </MetadataList>
  <uploadDataFormat>
    <!--opt, enum, uploaded message format, subType:string, desc:"xml" (XML format), "json" (JSON format)-->xml
  </uploadDataFormat>
</MetadataCfg>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL, range:[0,1024]-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
  <description>
    <!--ro, opt, string, range:[0,1024]-->badXmlFormat
  </description>
</ResponseStatus>
```

14.2.8.3 Set parameters of a specific metadata type

Request URL

PUT /ISAPI/Streaming/channels/<channelID>/metadata/<eventType>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--
eventType	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<SingleMetadataCfg xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, configurations of a single metadata, attr:version{req, string, protocolVersion}-->
  <Metadata>
    <!--req, object, metadata information-->
    <type>
      <!--req, enum, event types that support metadata, subType:string, desc:"thermometry" (real-time temperature measurement), "fireDetection" (fire detection), "shipsDetection" (ship detection), "behaviorAnalysis" (abnormal event detection), "ANPR" (automatic number plate recognition), "personQueue" (queue management, including people queuing-up detection and waiting time detection), "faceSnap" (face capture), "mixedTargetDetection" (multi-target-detection), "AIOP" (AIOP detection), "radarDetection" (radar detection), "personalTrack" (personal tracking)-->thermometry
    </type>
    <enable>
      <!--req, bool, whether to enable uploading metadata-->true
    </enable>
  </Metadata>
</SingleMetadataCfg>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL, range:[0,1024]-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0-OK, 1-OK, 2-Device Busy, 3-Device Error, 4-Invalid Operation, 5-Invalid XML Format, 6-Invalid XML Content, 7-Reboot Required-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status description, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code-->OK
  </subStatusCode>
  <description>
    <!--ro, opt, string, range:[0,1024]-->badXmlFormat
  </description>
</ResponseStatus>
```

14.2.8.4 Get metadata configuration capabilities of the specified channel

Request URL

GET /ISAPI/Streaming/channels/<channelID>/metadata/capabilities

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<MetadataCfg xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, metadata configurations, attr:version{req, string, protocolVersion}-->
  <MetadataList size="10">
    <!--ro, req, array, metadata information list, subType:object, attr:size{req, int}-->
    <Metadata>
      <!--ro, req, object, metadata information-->
      <type>
        <!--ro, req, enum, event types that support metadata, subType:string, desc:"thermometry" (real-time temperature measurement), "fireDetection" (fire
        detection), "shipsDetection" (ship detection), "behaviorAnalysis" (abnormal event detection), "ANPR" (automatic number plate recognition), "personQueue"
        (queue management, including people queuing-up detection and waiting time detection), "faceSnap" (face capture), "mixedTargetDetection" (multi-target-
        detection), "AIOP" (AIOP detection)-->thermometry
      </type>
      <enable>
        <!--ro, req, bool, whether to enable uploading metadata-->true
      </enable>
    </Metadata>
  </MetadataList>
  <uploadDataFormat opt="xml,json">
    <!--ro, opt, string, message format, attr:opt{req, string}-->test
  </uploadDataFormat>
  <isSupportSubscribeType>
    <!--ro, opt, bool, whether the device supports subscribing to the metadata, desc:this field is returned when the device supports subscribing to the
    metadata. By default, the subscription of metadata is according to channels-->true
  </isSupportSubscribeType>
</MetadataCfg>
```

14.2.8.5 Subscribe to metadata RTSP signaling of a specified channel

Request URL

POST /ISAPI/Streaming/channels/<channelID>/metadata/subscribeType?format=json

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
{
  "type": ["thermometry", "fireDetection", "mixedTargetDetection"]
  /*req, array, event types that support metadata, subType:string, desc:"thermometry"-real-time temperature measurement, "fireDetection"-fire source
  detection, "shipsDetection"-ship detection, "behaviorAnalysis"-abnormal event detection, "ANPR", "personQueue"-queue management, "faceSnap"-face capture,
  "mixedTargetDetection", "AIOP", "AIOPModelDescription";*/
}
```

Response Message

```
{
  "rtspURI": "/ISAPI/Streaming/channels/101?type=personalTrack"
  /*ro, req, string, RTSP URI, range:[1,128], desc:RTSP URI*/
}
```

14.2.9 Motion Detection

14.2.9.1 Get arming schedule of motion detection of all channels

Request URL

GET /ISAPI/Event/schedules/motionDetections

Query Parameter

None

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<MotionDetectionScheduleList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, array, arming time list, subType:object, attr:version{req, string, protocolVersion}-->
  <Schedule>
    <!--ro, opt, object-->
    <id>
      <!--ro, req, string, ID, desc:ID-->VMD_video1
    </id>
    <eventType>
      <!--ro, opt, enum, event type, subType:string, desc:event type-->VMD
    </eventType>
    <inputIOPortID>
      <!--ro, opt, string-->test
    </inputIOPortID>
    <outputIOPortID>
      <!--ro, opt, string-->test
    </outputIOPortID>
    <videoInputChannelID>
      <!--ro, opt, string, video input channel ID-->1
    </videoInputChannelID>
    <TimeBlockList size="8">
      <!--ro, req, array, arming time list, subType:object, attr:size{opt, int}-->
      <TimeBlock>
        <!--ro, opt, object, arming time-->
        <dayOfWeek>
          <!--ro, opt, enum, days of the week, subType:int, desc:1 (Monday), 2 (Tuesday), 3 (Wednesday), 4 (Thursday), 5 (Friday), 6 (Saturday), 7 (Sunday)-->
          1
        </dayOfWeek>
        <TimeRange>
          <!--ro, req, object, time range-->
          <beginTime>
            <!--ro, req, time, start time-->10:00:00
          </beginTime>
          <endTime>
            <!--ro, req, time, end time-->10:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </TimeBlockList>
    <HolidayBlockList>
      <!--ro, opt, array, holiday arming time, subType:object-->
      <TimeBlock>
        <!--ro, opt, object, arming time-->
        <TimeRange>
          <!--ro, req, object-->
          <beginTime>
            <!--ro, req, time, start time-->10:00:00
          </beginTime>
          <endTime>
            <!--ro, req, time, end time-->10:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </HolidayBlockList>
  </Schedule>
</MotionDetectionScheduleList>

```

14.2.9.2 Set arming schedule of motion detection of all channels

Request URL

PUT /ISAPI/Event/schedules/motionDetections

Query Parameter

None

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<MotionDetectionScheduleList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, array, arming time list, subType:object, attr:version{req, string, protocolVersion}-->
  <Schedule>
    <!--opt, object-->
    <id>
      <!--req, string, No., desc:No.-->VMD_video1
    </id>
    <eventType>
      <!--opt, enum, event type, subType:string, desc:"VMD" (motion detection)-->VMD
    </eventType>
    <inputIOPortID>
      <!--opt, string-->test
    </inputIOPortID>
    <outputIOPortID>
      <!--opt, string-->test
    </outputIOPortID>
    <videoInputChannelID>
      <!--opt, string, video input channel ID-->1
    </videoInputChannelID>
    <TimeBlockList size="8">
      <!--req, array, arming time list, subType:object, attr:size{opt, int}-->
      <TimeBlock>
        <!--opt, object, arming time-->
        <dayOfWeek>
          <!--opt, enum, days of the week, subType:int, desc:1 (Monday), 2 (Tuesday), 3 (Wednesday), 4 (Thursday), 5 (Friday), 6 (Saturday), 7 (Sunday)-->1
        </dayOfWeek>
        <TimeRange>
          <!--req, object, time range-->
          <beginTime>
            <!--req, time, start time-->10:00:00
          </beginTime>
          <endTime>
            <!--req, time, end time-->10:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </TimeBlockList>
    <HolidayBlockList>
      <!--opt, array, holiday arming time, subType:object-->
      <TimeBlock>
        <!--opt, object, arming time-->
        <TimeRange>
          <!--req, object, time range-->
          <beginTime>
            <!--req, time, start time-->10:00:00
          </beginTime>
          <endTime>
            <!--req, time, end time-->10:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </HolidayBlockList>
  </Schedule>
</MotionDetectionScheduleList>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.2.9.3 Get the arming schedule of motion detection for a specified channel

Request URL

GET /ISAPI/Event/schedules/motionDetections/VMD_video<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<Schedule xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string-->VMD_video1
  </id>
  <eventType>
    <!--ro, opt, string-->VMD
  </eventType>
  <inputIOPortID>
    <!--ro, opt, string-->test
  </inputIOPortID>
  <outputIOPortID>
    <!--ro, opt, string-->test
  </outputIOPortID>
  <videoInputChannelID>
    <!--ro, opt, string-->1
  </videoInputChannelID>
  <TimeBlockList size="8">
    <!--ro, req, array, subType:object, attr:size{opt, int}-->
    <TimeBlock>
      <!--ro, opt, object-->
      <dayOfWeek>
        <!--ro, opt, enum, subType:int-->1
      </dayOfWeek>
      <TimeRange>
        <!--ro, req, object-->
        <beginTime>
          <!--ro, req, time-->10:00:00
        </beginTime>
        <endTime>
          <!--ro, req, time-->10:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </TimeBlockList>
  <HolidayBlockList>
    <!--ro, opt, array, subType:object-->
    <TimeBlock>
      <!--ro, opt, object-->
      <TimeRange>
        <!--ro, req, object-->
        <beginTime>
          <!--ro, req, time-->10:00:00
        </beginTime>
        <endTime>
          <!--ro, req, time-->10:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </HolidayBlockList>
</Schedule>
```

14.2.9.4 Set the arming schedule of motion detection for a specified channel

Request URL

PUT /ISAPI/Event/schedules/motionDetections/VMD_video<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<Schedule xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string-->VMD_video1
  </id>
  <eventType>
    <!--opt, string-->VMD
  </eventType>
  <inputIOPortID>
    <!--opt, string-->test
  </inputIOPortID>
  <outputIOPortID>
    <!--opt, string-->test
  </outputIOPortID>
  <videoInputChannelID>
    <!--opt, string-->1
  </videoInputChannelID>
  <TimeBlockList size="8">
    <!--req, array, subType:object, attr:size{opt, int}-->
    <TimeBlock>
      <!--opt, object-->
      <dayOfWeek>
        <!--opt, enum, subType:int-->1
      </dayOfWeek>
      <TimeRange>
        <!--req, object-->
        <beginTime>
          <!--req, time-->10:00:00
        </beginTime>
        <endTime>
          <!--req, time-->10:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </TimeBlockList>
  <HolidayBlockList>
    <!--opt, array, subType:object-->
    <TimeBlock>
      <!--opt, object-->
      <TimeRange>
        <!--req, object-->
        <beginTime>
          <!--req, time-->10:00:00
        </beginTime>
        <endTime>
          <!--req, time-->10:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </HolidayBlockList>
</Schedule>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.2.9.5 Delete the linkage of motion detection for a specified channel

Request URL

DELETE /ISAPI/Event/triggers/VMD-<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, opt, string, range:[0,1024]-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
  <description>
    <!--ro, opt, string, range:[0,1024]-->badXmlFormat
  </description>
  <MErrCode>
    <!--ro, opt, string-->0x00000000
  </MErrCode>
  <MErrDevSelfEx>
    <!--ro, opt, string-->0x00000000
  </MErrDevSelfEx>
</ResponseStatus>
```

14.2.9.6 Set the linkage triggering parameters of motion detection for a specified channel

Request URL

PUT /ISAPI/Event/triggers/VMD-<channelID>/notifications

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message


```
<?xml version="1.0" encoding="UTF-8"?>

<EventTriggerNotification xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string-->test
  </id>
  <notificationMethod>
    <!--req, enum, subType:string-->[email
  </notificationMethod>
  <notificationRecurrence>
    <!--opt, enum, subType:string-->beginning
  </notificationRecurrence>
  <notificationInterval>
    <!--opt, int, unit:ms-->1
  </notificationInterval>
  <outputIOPortID>
    <!--opt, string-->1
  </outputIOPortID>
  <dynOutputIOPortID>
    <!--opt, string-->1
  </dynOutputIOPortID>
  <videoInputID>
    <!--opt, string-->1
  </videoInputID>
  <dynVideoInputID>
    <!--opt, string-->1
  </dynVideoInputID>
  <ptzAction>
    <!--opt, object-->
    <ptzChannelID>
      <!--req, string-->1
    </ptzChannelID>
    <actionName>
      <!--req, enum, subType:string-->preset
    </actionName>
    <actionNum>
      <!--opt, int-->1
    </actionNum>
    <presetDurationTime>
      <!--opt, int, unit:s-->1
    </presetDurationTime>
  </ptzAction>
  <cellphoneNumber>
    <!--opt, string, range:[1,11]-->test
  </cellphoneNumber>
  <targetNotificationInterval>
    <!--opt, int, range:[0,1000], unit:s-->30
  </targetNotificationInterval>
  <SupplementLightAlarm>
    <!--opt, object-->
    <durationTime>
      <!--opt, int, range:[0,90], unit:s-->5
    </durationTime>
  </SupplementLightAlarm>
</EventTriggerNotification>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.2.9.7 Get the linkage triggering parameters of motion detection for a specified channel

Request URL

GET /ISAPI/Event/triggers/VMD-<channelID>/notifications

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<EventTriggerNotificationList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, array, subType:object, attr:version{req, float, protocolVersion}-->
  <EventTriggerNotification>
    <!--ro, req, object-->
    <id>
      <!--ro, req, string-->test
    </id>
    <notificationMethod>
      <!--ro, req, enum, subType:string-->email
    </notificationMethod>
    <notificationRecurrence>
      <!--ro, opt, enum, subType:string-->beginning
    </notificationRecurrence>
    <notificationInterval>
      <!--ro, opt, int, unit:ms-->1
    </notificationInterval>
    <outputIOPortID>
      <!--ro, opt, string-->1
    </outputIOPortID>
    <dynOutputIOPortID>
      <!--ro, opt, string-->1
    </dynOutputIOPortID>
    <videoInputID>
      <!--ro, opt, string-->1
    </videoInputID>
    <dynVideoInputID>
      <!--ro, opt, string-->1
    </dynVideoInputID>
    <ptzAction>
      <!--ro, opt, object-->
      <ptzChannelID>
        <!--ro, req, string-->1
      </ptzChannelID>
      <actionName>
        <!--ro, req, enum, subType:string-->preset
      </actionName>
      <actionNum>
        <!--ro, opt, int-->1
      </actionNum>
      <presetDurationTime>
        <!--ro, opt, int, unit:s-->1
      </presetDurationTime>
    </ptzAction>
    <cellphoneNumber>
      <!--ro, opt, string, range:[1,11]-->test
    </cellphoneNumber>
    <targetNotificationInterval>
      <!--ro, opt, int, range:[0,1000], unit:s-->30
    </targetNotificationInterval>
    <SupplementLightAlarm>
      <!--ro, opt, object-->
      <durationTime>
        <!--ro, opt, int, range:[0,90], unit:s-->5
      </durationTime>
    </SupplementLightAlarm>
  </EventTriggerNotification>
</EventTriggerNotificationList>
```

14.2.9.8 Get the linkage parameters of motion detection for a specified channel

Request URL

GET /ISAPI/Event/triggers/VMD-<channelID>?triggersEnabledStatus=<triggersEnabledStatus>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.
triggersEnabledStatus	string	Linkage enabling status (if this node is included in the URL, the enabling and disabling of the linkage mode should be determined based on the triggerEnabled status in the linkage list). This node is supported if the value of isSupporttriggersEnabled in /ISAPI/Event/triggersCap contains is true.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>
<EventTrigger xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string-->1
  </id>
  <eventType>
    <!--ro, req, string-->VMD
  </eventType>
  <eventDescription>
    <!--ro, opt, string-->test
  </eventDescription>
  <videoInputChannelID>
    <!--ro, opt, string-->1
  </videoInputChannelID>
  <dynVideoInputChannelID>
    <!--ro, opt, string-->1
  </dynVideoInputChannelID>
  <EventTriggerNotificationList>
    <!--ro, opt, array, subType:object-->
    <EventTriggerNotification>
      <!--ro, opt, object-->
      <id>
        <!--ro, req, string-->test
      </id>
      <notificationMethod>
        <!--ro, req, enum, subType:string-->[email
      </notificationMethod>
      <notificationRecurrence>
        <!--ro, opt, enum, subType:string-->beginning
      </notificationRecurrence>
      <videoInputID>
        <!--ro, opt, string-->1
      </videoInputID>
      <SupplementLightAlarm>
        <!--ro, opt, object-->
        <durationTime>
          <!--ro, opt, int, range:[0,90], unit:s-->5
        </durationTime>
      </SupplementLightAlarm>
    </EventTriggerNotification>
  </EventTriggerNotificationList>
</EventTrigger>
```

14.2.9.9 Set the linkage parameters of motion detection for a specified channel

Request URL

PUT /ISAPI/Event/triggers/VMD- <channelID> ?triggersEnabledStatus= <triggersEnabledStatus>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--
triggersEnabledStatus	string	--

Request Message

```

<?xml version="1.0" encoding="UTF-8"?>
<EventTrigger xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string-->1
  </id>
  <eventType>
    <!--req, enum, subType:string-->VMD
  </eventType>
  <eventDescription>
    <!--opt, string-->test
  </eventDescription>
  <videoInputChannelID>
    <!--opt, string-->1
  </videoInputChannelID>
  <dynVideoInputChannelID>
    <!--opt, string-->1
  </dynVideoInputChannelID>
  <EventTriggerNotificationList>
    <!--opt, array, subType:object-->
    <EventTriggerNotification>
      <!--opt, object-->
      <id>
        <!--req, string-->test
      </id>
      <notificationMethod>
        <!--req, enum, subType:string-->email
      </notificationMethod>
      <notificationRecurrence>
        <!--opt, enum, subType:string-->beginning
      </notificationRecurrence>
    </EventTriggerNotification>
  </EventTriggerNotificationList>
</EventTrigger>

```

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>
<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>

```

14.2.9.10 Set the motion detection parameters of a specific channel

Request URL

PUT /ISAPI/System/Video/inputs/channels/<channelID>/motionDetection

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```

<?xml version="1.0" encoding="UTF-8"?>

<MotionDetection xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, motion detection parameters, attr:version{req, string, protocolVersion}-->
  <enabled>
    <!--req, bool, whether to enable motion detection-->true
  </enabled>
  <enableHighlight>
    <!--opt, bool, whether to enable dynamic analysis-->true
  </enableHighlight>
  <samplingInterval>
    <!--opt, int, frame interval, range:[0,2]-->0
  </samplingInterval>
  <startTriggerTime>
    <!--opt, int, start time, range:[0,500], unit:ms-->0
  </startTriggerTime>
  <endTriggerTime>
    <!--opt, int, end time, range:[0,500], unit:ms-->0
  </endTriggerTime>
  <regionType>
    <!--req, enum, region type, subType:string, desc:"grid", "roi" (region of interest), "none", "region" (multiple regions)-->grid
  </regionType>
  <Grid>
    <!--opt, object, grid-->
    <rowGranularity>
      <!--req, int, total number of rows, range:[0,18]-->0
    </rowGranularity>
    <columnGranularity>
      <!--req, int, total number of columns, range:[0,22]-->0
    </columnGranularity>
  </Grid>
  <ROI>
    <!--opt, object, region of interest (ROI)-->
    <normalizedScreenWidth>
      <!--req, int, normalized width, range:[0,1000]-->0
    </normalizedScreenWidth>
    <normalizedScreenHeight>
      <!--req, int, normalized height, range:[0,1000]-->0
    </normalizedScreenHeight>
  </ROI>
  <MotionDetectionLayout>
    <!--opt, object, layout configuration-->
    <sensitivityLevel>
      <!--req, int, sensitivity, range:[0,100]-->0
    </sensitivityLevel>
    <layout>
      <!--opt, object, layout information-->
      <gridMap>
        <!--opt, string, grid map, desc:the image is divided in to N * N grids, and motion detection can be enabled (value: 1) or disabled (value 0) for each grid. Each four horizontal grids consist of a hexadecimal number, e.g., the corresponding hexadecimal number of "0011" is 3-->test
      </gridMap>
      <roiMap>
        <!--opt, string, ROI map-->test
      </roiMap>
      <RegionList>
        <!--opt, array, region List, subType:object-->
        <Region>
          <!--opt, object, region information-->
          <id>
            <!--req, string, region ID, range:[1,4]-->test
          </id>
          <RegionCoordinatesList>
            <!--opt, array, region coordinate List, subType:object, range:[0,4], desc:rectangle-->
            <RegionCoordinates>
              <!--opt, object, region coordinates, desc:the origin is the lower-left corner of the screen-->
              <positionX>
                <!--req, int, X-coordinate, range:[0,1000]-->0
              </positionX>
              <positionY>
                <!--req, int, Y-coordinate, range:[0,1000]-->0
              </positionY>
            </RegionCoordinates>
          </RegionCoordinatesList>
        </Region>
      </RegionList>
    </layout>
    <targetType>
      <!--opt, enum, target classification, subType:string, desc:"human", "vehicle"-->human
    </targetType>
  </MotionDetectionLayout>
  <enableWithMoving>
    <!--opt, bool, whether to enable motion detection-->true
  </enableWithMoving>
</MotionDetection>

```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL, range:[0,1024]-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6
    (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format",
    "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
  <description>
    <!--ro, opt, string, custom error information description, range:[0,1024], desc:the detailed information of custom error returned by device
    applications, which is used for fast debugging-->badXmlFormat
  </description>
</ResponseStatus>
```

14.2.9.11 Get the motion detection parameters of a specific channel

Request URL

GET /ISAPI/System/Video/inputs/channels/<channelID>/motionDetection

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<MotionDetection xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, motion detection parameters, attr:version{req, string, protocolVersion}-->
  <enabled>
    <!--ro, req, bool, whether to enable motion detection-->true
  </enabled>
  <enableHighlight>
    <!--ro, opt, bool, whether to enable dynamic analysis-->true
  </enableHighlight>
  <samplingInterval>
    <!--ro, opt, int, frame interval, range:[0,2]-->0
  </samplingInterval>
  <startTriggerTime>
    <!--ro, opt, int, start time, range:[0,500], unit:ms-->0
  </startTriggerTime>
  <endTriggerTime>
    <!--ro, opt, int, end time, range:[0,500], unit:ms-->0
  </endTriggerTime>
  <regionType>
    <!--ro, req, enum, region type, subType:string, desc:"grid", "roi" (region of interest), "none", "region" (multiple regions)-->grid
  </regionType>
  <Grid>
    <!--ro, opt, object, grid-->
    <rowGranularity>
      <!--ro, req, int, total number of rows, range:[0,18]-->0
    </rowGranularity>
    <columnGranularity>
      <!--ro, req, int, total number of columns, range:[0,22]-->0
    </columnGranularity>
  </Grid>
  <ROI>
    <!--ro, opt, object, region of interest (ROI)-->
    <normalizedScreenWidth>
      <!--ro, req, int, normalized width, range:[0,1000]-->0
    </normalizedScreenWidth>
    <normalizedScreenHeight>
      <!--ro, req, int, normalized height, range:[0,1000]-->0
    </normalizedScreenHeight>
  </ROI>
  <MotionDetectionLayout>
    <!--ro, opt, object, layout configuration-->
    <sensitivityLevel>
      <!--ro, req, int, sensitivity, range:[0,100]-->0
    </sensitivityLevel>
    <layout>
      <!--ro, opt, object, layout information-->
      <gridMap>
        <!--ro, opt, string, grid map, desc:the image is divided in to N x N grids, and motion detection can be enabled (value: 1) or disabled (value: 0)
        for each grid. Each four horizontal grids consist of a hexadecimal number, e.g., the corresponding hexadecimal number of "0011" is 3-->test
      </gridMap>
      <roiMap>
        <!--ro, opt, string, ROI map-->test
      </roiMap>
      <RegionList>
        <!--ro, opt, array, this node is available when the regionType is set to "region", subType:object-->
        <Region>
          <!--ro, opt, object, List-->
          <id>
            <!--ro, req, string, region ID, range:[1,4]-->test
          </id>
          <RegionCoordinatesList>
            <!--ro, opt, array, rectangle, subType:object, range:[0,4], desc:rectangle-->
            <RegionCoordinates>
              <!--ro, opt, object, List, desc:the origin is the lower-left corner of the screen-->
              <positionX>
                <!--ro, req, int, X-coordinate, range:[0,1000]-->0
              </positionX>
              <positionY>
                <!--ro, req, int, Y-coordinate, range:[0,1000]-->0
              </positionY>
            </RegionCoordinates>
          </RegionCoordinatesList>
        </Region>
      </RegionList>
    </layout>
    <targetType>
      <!--ro, opt, enum, target classification, subType:string, desc:"human", "vehicle"-->human
    </targetType>
  </MotionDetectionLayout>
  <enableWithMoving>
    <!--ro, opt, bool, whether to enable motion detection-->true
  </enableWithMoving>
</MotionDetection>

```

14.2.9.12 Get the motion detection capability of a specific channel

Request URL

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<MotionDetection xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, motion detection parameters, attr:version{req, string, protocolVersion}-->
  <enabled opt="true,false">
    <!--ro, req, bool, whether to enable motion detection, attr:opt{req, string}-->true
  </enabled>
  <enableHighlight opt="true,false">
    <!--ro, opt, bool, whether to enable dynamic analysis, attr:opt{req, string}-->true
  </enableHighlight>
  <samplingInterval>
    <!--ro, opt, int, frame interval-->0
  </samplingInterval>
  <startTriggerTime>
    <!--ro, opt, int, start time, unit:ms-->0
  </startTriggerTime>
  <endTriggerTime>
    <!--ro, opt, int, end time, unit:ms-->0
  </endTriggerTime>
  <regionType opt="grid,roi,none,region">
    <!--ro, req, enum, region type, subType:string, attr:opt{req, string}, desc:"grid" "roi" (region of interest), "none", "region" (multiple regions)-->grid
  </regionType>
  <Grid>
    <!--ro, opt, object, grid-->
    <rowGranularity>
      <!--ro, req, int, total number of rows-->0
    </rowGranularity>
    <columnGranularity>
      <!--ro, req, int, total number of columns-->0
    </columnGranularity>
  </Grid>
  <ROI>
    <!--ro, opt, object, region of interest (ROI)-->
    <normalizedScreenWidth>
      <!--ro, req, int, normalized width-->0
    </normalizedScreenWidth>
    <normalizedScreenHeight>
      <!--ro, req, int, normalized height-->0
    </normalizedScreenHeight>
  </ROI>
  <MotionDetectionLayout>
    <!--ro, req, object, layout configuration capability-->
    <sensitivityLevel min="0" max="100" step="20">
      <!--ro, req, int, sensitivity, range:[0,100], attr:min{req, int},max{req, int},step{opt, int}-->0
    </sensitivityLevel>
    <layout>
      <!--ro, opt, object, layout information-->
      <gridMap>
        <!--ro, opt, string, grid map, desc:the image is divided in to N x N grids, and motion detection can be enabled (value: 1) or disabled (value: 0) for each grid. Each four horizontal grids consist of a hexadecimal number, e.g., the corresponding hexadecimal number of "0011" is 3-->test
      </gridMap>
      <roiMap>
        <!--ro, opt, string, ROI map-->test
      </roiMap>
      <RegionList size="4">
        <!--ro, opt, array, this node is available when the regionType is set to "region", subType:object, attr:size{req, int}-->
        <Region>
          <!--ro, opt, object, List-->
          <id>
            <!--ro, req, string, region ID-->test
          </id>
          <RegionCoordinatesList>
            <!--ro, opt, array, rectangle, subType:object, range:[0,4], desc:rectangle-->
            <RegionCoordinates>
              <!--ro, opt, object, List, desc:the origin is the lower-left corner of the screen-->
              <positionX>
                <!--ro, req, int, X-coordinate, range:[0,1000]-->0
              </positionX>
              <positionY>
                <!--ro, req, int, Y-coordinate, range:[0,1000]-->0
              </positionY>
            </RegionCoordinates>
          </RegionCoordinatesList>
        </Region>
      </RegionList>
    </layout>
  </MotionDetectionLayout>
</MotionDetection>
```



```

</RegionList>
</layout>
<targetType opt="human,vehicle">
  <!--ro, opt, enum, target classification, subType:string, attr:opt{req, string}, desc:"human", "vehicle"-->human
</targetType>
<regionEdgesNum min="4" max="10">
  <!--ro, opt, int, number of detection area sides, range:[4,10], attr:min{req, int},max{req, int}, desc:if this node is not returned, the default
detection area is quadrilateral-->0
</regionEdgesNum>
</MotionDetectionLayout>
<enableWithMoving opt="true,false">
  <!--ro, opt, bool, whether to enable motion detection, attr:opt{req, string}-->true
</enableWithMoving>
<isSupportMotionDetectionResolution>
  <!--ro, opt, bool-->true
</isSupportMotionDetectionResolution>
</MotionDetection>

```

14.2.9.13 Set grid layout parameters of motion detection of a specific channel

Request URL

PUT /ISAPI/System/Video/inputs/channels/<channelID>/motionDetection/layout/gridLayout?regionType=
<regionType>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--
regionType	enum	--

Request Message

```

<?xml version="1.0" encoding="UTF-8"?>

<MotionDetectionGridLayout xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, grid layout parameters of motion detection, attr:version{req, string, protocolVersion}-->
  <sensitivityLevel>
    <!--req, int, sensitivity, range:[0,100], desc:sensitivity-->1
  </sensitivityLevel>
  <layout>
    <!--opt, object-->
    <gridMap>
      <!--opt, string, grid map, desc:the image is divided in to N x N grids, and motion detection can be enabled (value: 1) or disabled (value 0) for each
grid. Each four horizontal grids consist of a hexadecimal number-->0011
    </gridMap>
    <roiMap>
      <!--opt, string-->test
    </roiMap>
    <RegionList size="10">
      <!--opt, array, subType:object, attr:size{req, int}-->
      <Region>
        <!--opt, object-->
        <id>
          <!--req, string, region ID-->test
        </id>
        <RegionCoordinatesList>
          <!--opt, array, rectangle, subType:object, range:[0,4], desc:rectangle-->
          <RegionCoordinates>
            <!--opt, object, coordinates, desc:the origin is the Lower-Left corner of the screen-->
            <positionX>
              <!--req, int, X-coordinate, range:[0,1000]-->1
            </positionX>
            <positionY>
              <!--req, int, Y-coordinate, range:[0,1000]-->1
            </positionY>
          </RegionCoordinates>
        </RegionCoordinatesList>
      </Region>
    </RegionList>
  </layout>
  <targetType>
    <!--opt, enum, target classification, subType:string, desc:target classification-->human
  </targetType>
</MotionDetectionGridLayout>

```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.2.9.14 Get grid layout parameters of motion detection of a specific channel

Request URL

GET /ISAPI/System/Video/inputs/channels/<channelID>/motionDetection/layout/gridLayout?regionType=<regionType>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.
regionType	enum	Configure region: /ISAPI/System/Video/inputs/channels//motionDetection/layout/gridLayout? regionType=region; configure grid: /ISAPI/System/Video/inputs/channels//motionDetection/layout/gridLayout? regionType=grid.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<MotionDetectionGridLayout xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{req, string, protocolVersion}-->
  <sensitivityLevel>
    <!--ro, req, int, sensitivity, range:[0,100], desc:sensitivity-->1
  </sensitivityLevel>
  <layout>
    <!--ro, opt, object-->
    <gridMap>
      <!--ro, opt, string, grid map, desc:the image is divided in to N x N grids, and motion detection can be enabled (value: 1) or disabled (value 0) for each grid. Each four horizontal grids consist of a hexadecimal number-->0011
    </gridMap>
    <roiMap>
      <!--ro, opt, string-->test
    </roiMap>
    <RegionList size="10">
      <!--ro, opt, array, this node is available when the regionType is set to "region", subType:object, attr:size{req, int}-->
      <Region>
        <!--ro, opt, object, List-->
        <id>
          <!--ro, req, string-->test
        </id>
        <RegionCoordinatesList>
          <!--ro, opt, array, rectangle, subType:object, range:[0,4], desc:rectangle-->
          <RegionCoordinates>
            <!--ro, opt, object, coordinate, desc:the origin is the lower-left corner of the screen-->
            <positionX>
              <!--ro, req, int, X-coordinate, range:[0,1000]-->1
            </positionX>
            <positionY>
              <!--ro, req, int, Y-coordinate, range:[0,1000]-->1
            </positionY>
          </RegionCoordinates>
        </RegionCoordinatesList>
      </Region>
    </RegionList>
  </layout>
  <targetType>
    <!--ro, opt, enum, target classification, subType:string, desc:target classification-->human
  </targetType>
</MotionDetectionGridLayout>
```

14.2.9.15 Get the region parameters of motion detection of a specific channel

Request URL

GET /ISAPI/System/Video/inputs/channels/<channelID>/motionDetection/layout?regionType=<regionType>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.
regionType	enum	Configure region: /ISAPI/System/Video/inputs/channels//motionDetection/layout? regionType=region; configure grid: /ISAPI/System/Video/inputs/channels//motionDetection/layout?regionType=grid.

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<MotionDetectionLayout xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{req, string, protocolVersion}-->
  <sensitivityLevel>
    <!--ro, req, int, sensitivity-->1
  </sensitivityLevel>
  <layout>
    <!--ro, opt, object-->
    <gridMap>
      <!--ro, opt, string, grid map, desc:the image is divided in to N x N grids, and motion detection can be enabled (value: 1) or disabled (value 0) for each grid. Each four horizontal grids consist of a hexadecimal number-->0011
    </gridMap>
    <roiMap>
      <!--ro, opt, string-->test
    </roiMap>
    <RegionList>
      <!--ro, opt, array, this node is available when the regionType is set to "region", subType:object-->
      <Region>
        <!--ro, opt, object, List-->
        <id>
          <!--ro, req, string-->test
        </id>
        <RegionCoordinatesList>
          <!--ro, opt, array, rectangle, subType:object, range:[0,4], desc:rectangle-->
          <RegionCoordinates>
            <!--ro, opt, object, coordinate, desc:the origin is the lower-left corner of the screen-->
            <positionX>
              <!--ro, req, int, X-coordinate, range:[0,1000]-->1
            </positionX>
            <positionY>
              <!--ro, req, int, Y-coordinate, range:[0,1000]-->1
            </positionY>
          </RegionCoordinates>
        </RegionCoordinatesList>
      </Region>
    </RegionList>
  </layout>
  <targetType>
    <!--ro, opt, enum, target classification, subType:string, desc:"human", "vehicle"-->human
  </targetType>
</MotionDetectionLayout>

```

14.2.9.16 Set the region parameters of motion detection of a specific channel

Request URL

PUT /ISAPI/System/Video/inputs/channels/<channelID>/motionDetection/layout?regionType= <regionType>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--
regionType	enum	--

Request Message

```

<?xml version="1.0" encoding="UTF-8"?>

<MotionDetectionLayout xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, attr:version{req, string, protocolVersion}-->
  <sensitivityLevel>
    <!--req, int, sensitivity-->1
  </sensitivityLevel>
  <layout>
    <!--opt, object-->
    <gridMap>
      <!--opt, string, grid map, desc:the image is divided in to N x N grids, and motion detection can be enabled (value: 1) or disabled (value 0) for each grid. Each four horizontal grids consist of a hexadecimal number-->0011
    </gridMap>
    <roiMap>
      <!--opt, string-->test
    </roiMap>
    <RegionList>
      <!--opt, array, this node is available when the regionType is set to "region", subType:object-->
      <Region>
        <!--opt, object, List-->
        <id>
          <!--req, string, region ID-->test
        </id>
        <RegionCoordinatesList>
          <!--opt, array, rectangle, subType:object, range:[0,4], desc:rectangle-->
          <RegionCoordinates>
            <!--opt, object, coordinates, desc:the origin is the Lower-Left corner of the screen-->
            <positionX>
              <!--req, int, X-coordinate, range:[0,1000]-->1
            </positionX>
            <positionY>
              <!--req, int, Y-coordinate, range:[0,1000]-->1
            </positionY>
          </RegionCoordinates>
        </RegionCoordinatesList>
      </Region>
    </RegionList>
  </layout>
  <targetType>
    <!--opt, enum, target classification, subType:string, desc:"human", "vehicle"-->human
  </targetType>
</MotionDetectionLayout>

```

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:Version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>

```

14.2.9.17 Get motion detection parameters of a specified video input channel

Request URL

GET /ISAPI/System/Video/inputs/channels/<channelID>/motionDetectionExt

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>
```

```
<MotionDetectionExt xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, motion detection parameters of a specified video input channel, attr:version{req, string, protocolVersion}-->
  <enabled>
    <!--ro, req, bool, whether to enable the function-->true
  </enabled>
  <minObjectSize>
    <!--ro, opt, int, minimum target resolution-->0
  </minObjectSize>
  <maxObjectSize>
    <!--ro, opt, int, maximum target resolution-->0
  </maxObjectSize>
  <ROI>
    <!--ro, opt, object, region of interest (ROI)-->
    <normalizedScreenWidth>
      <!--ro, req, int, normalized width-->0
    </normalizedScreenWidth>
    <normalizedScreenHeight>
      <!--ro, req, int, normalized height-->0
    </normalizedScreenHeight>
  </ROI>
  <enableHighlight>
    <!--ro, opt, bool, whether to enable highlight-->true
  </enableHighlight>
  <MotionDetectionSwitch>
    <!--ro, opt, object, day/night settings switch-->
    <type>
      <!--ro, opt, enum, type, subType:string, desc:"off", "auto", "schedule" (scheduled)-->off
    </type>
    <Schedule>
      <!--ro, opt, object, schedule-->
      <scheduleType>
        <!--ro, req, enum, schedule type, subType:string, desc:"day" (daytime), "night" (night)-->day
      </scheduleType>
      <TimeRange>
        <!--ro, req, object, time period-->
        <beginTime>
          <!--ro, req, time, start time-->00:00:00+08:00
        </beginTime>
        <endTime>
          <!--ro, req, time, end time-->00:00:00+08:00
        </endTime>
      </TimeRange>
    </Schedule>
  </MotionDetectionSwitch>
  <activeMode>
    <!--ro, opt, enum, effective mode, subType:string, desc:"normal", "expert"-->normal
  </activeMode>
  <MotionDetectionRegionList size="10">
    <!--ro, opt, array, detection area List, subType:object, attr:size{req, int}-->
    <MotionDetectionRegion>
      <!--ro, opt, object, detection area-->
      <id>
        <!--ro, req, string, ID-->test
      </id>
      <enabled>
        <!--ro, req, bool, whether to enable the function-->true
      </enabled>
      <sensitivityLevel>
        <!--ro, opt, int, sensitivity, range:[0,100]-->0
      </sensitivityLevel>
      <daySensitivityLevel>
        <!--ro, opt, int, sensitivity (during day time), range:[0,100]-->0
      </daySensitivityLevel>
      <nightSensitivityLevel>
        <!--ro, opt, int, sensitivity (during night), range:[0,100]-->0
      </nightSensitivityLevel>
      <objectSize>
        <!--ro, opt, int, percentage, range:[0,100]-->0
      </objectSize>
      <dayObjectSize>
        <!--ro, opt, int, percentage (during day time), range:[0,100]-->0
      </dayObjectSize>
      <nightObjectSize>
        <!--ro, opt, int, percentage (during night), range:[0,100]-->0
      </nightObjectSize>
      <RegionCoordinatesList>
        <!--ro, req, array, rule region List, subType:object, range:[0,4], desc:rectangle-->
        <RegionCoordinates>
          <!--ro, opt, object, area, desc:the origin is the Lower-Left corner of the screen-->
          <positionX>
            <!--ro, req, int, x-coordinate, range:[0,1000]-->0
          </positionX>
          <positionY>
            <!--ro, req, int, y-coordinate, range:[0,1000]-->0
          </positionY>
        </RegionCoordinates>
      </RegionCoordinatesList>
    </MotionDetectionRegion>
  </MotionDetectionRegionList>
  <enableWithMoving>
    <!--ro, opt, bool, whether to enable dynamic analysis-->true
  </enableWithMoving>
</MotionDetectionExt>
```

```
</enableWithMoving>
</MotionDetectionExt>
```

14.2.9.18 Set motion detection parameters of a specified video input channel

Request URL

PUT /ISAPI/System/Video/inputs/channels/<channelID>/motionDetectionExt

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<MotionDetectionExt xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, motion detection parameters of a specified video input channel, attr:version{req, string, protocolVersion}-->
  <enabled>
    <!--req, bool, whether to enable the function-->true
  </enabled>
  <minObjectSize>
    <!--opt, int, minimum target resolution-->0
  </minObjectSize>
  <maxObjectSize>
    <!--opt, int, maximum target resolution-->0
  </maxObjectSize>
  <ROI>
    <!--opt, object, region of interest (ROI)-->
    <normalizedScreenWidth>
      <!--req, int, normalized width-->0
    </normalizedScreenWidth>
    <normalizedScreenHeight>
      <!--req, int, normalized height-->0
    </normalizedScreenHeight>
  </ROI>
  <enableHighlight>
    <!--opt, bool, whether to enable highlight-->true
  </enableHighlight>
  <MotionDetectionSwitch>
    <!--opt, object, day/night settings switch-->
    <type>
      <!--opt, enum, type, subType:string, desc:"off", "auto", "schedule" (scheduled)-->off
    </type>
    <Schedule>
      <!--opt, object, schedule-->
      <scheduleType>
        <!--req, enum, schedule type, subType:string, desc:"day" (daytime), "night" (night)-->day
      </scheduleType>
      <TimeRange>
        <!--req, object, time period-->
        <beginTime>
          <!--req, time, start time-->00:00:00+08:00
        </beginTime>
        <endTime>
          <!--req, time, end time-->00:00:00+08:00
        </endTime>
      </TimeRange>
    </Schedule>
  </MotionDetectionSwitch>
  <activeMode>
    <!--opt, enum, effective mode, subType:string, desc:"normal", "expert"-->normal
  </activeMode>
  <MotionDetectionRegionList size="10">
    <!--opt, array, detection area list, subType:object, attr:size{req, int}-->
    <MotionDetectionRegion>
      <!--opt, object, detection area-->
      <id>
        <!--req, string, ID-->test
      </id>
      <enabled>
        <!--req, bool, whether to enable the function-->true
      </enabled>
      <sensitivityLevel>
        <!--opt, int, sensitivity, range:[0,100]-->0
      </sensitivityLevel>
      <daySensitivityLevel>
        <!--opt, int, sensitivity (during day time), range:[0,100]-->0
      </daySensitivityLevel>
      <nightSensitivityLevel>
        <!--opt, int, sensitivity (during night), range:[0,100]-->0
      </nightSensitivityLevel>
      <objectSize>
        <!--opt, int, percentage, range:[0,100]-->0
      </objectSize>
    </MotionDetectionRegion>
  </MotionDetectionRegionList>
</MotionDetectionExt>
```

```

</objectSize>
<dayObjectSize>
  <!--opt, int, percentage (during day time), range:[0,100]-->0
</dayObjectSize>
<nightObjectSize>
  <!--opt, int, percentage (during night), range:[0,100]-->0
</nightObjectSize>
<RegionCoordinatesList>
  <!--req, array, rule region list, subType:object, range:[0,4], desc:rectangle-->
  <RegionCoordinates>
    <!--opt, object, area, desc:the origin is the Lower-Left corner of the screen-->
    <positionX>
      <!--req, int, x-coordinate, range:[0,1000]-->0
    </positionX>
    <positionY>
      <!--req, int, y-coordinate, range:[0,1000]-->0
    </positionY>
  </RegionCoordinates>
</RegionCoordinatesList>
</MotionDetectionRegion>
</MotionDetectionRegionList>
<enableWithMoving>
  <!--opt, bool, whether to enable dynamic analysis-->true
</enableWithMoving>
</MotionDetectionExt>

```

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL, range:[0,1024]-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code-->OK
  </subStatusCode>
  <description>
    <!--ro, opt, string, custom error information description, range:[0,1024], desc:the detailed information of custom error returned by device applications, which is used for fast debugging-->badXmlFormat
  </description>
</ResponseStatus>

```

14.2.9.19 Set the motion detection parameters of a single region of a specific channel

Request URL

PUT /ISAPI/System/Video/inputs/channels/<channelID>/motionDetectionExt/regions/<regionID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--
regionID	string	--

Request Message


```
<?xml version="1.0" encoding="UTF-8"?>

<MotionDetectionRegion xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, detection area, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string, ID-->test
  </id>
  <enabled>
    <!--req, bool-->true
  </enabled>
  <sensitivityLevel>
    <!--opt, int, sensitivity, range:[0,100]-->0
  </sensitivityLevel>
  <daySensitivityLevel>
    <!--opt, int, sensitivity (during day time), range:[0,100]-->0
  </daySensitivityLevel>
  <nightSensitivityLevel>
    <!--opt, int, sensitivity (during night), range:[0,100]-->0
  </nightSensitivityLevel>
  <objectSize>
    <!--opt, int, percentage, range:[0,100]-->0
  </objectSize>
  <dayObjectSize>
    <!--opt, int, percentage (during day time), range:[0,100]-->0
  </dayObjectSize>
  <nightObjectSize>
    <!--opt, int, percentage (during night), range:[0,100]-->0
  </nightObjectSize>
  <RegionCoordinatesList>
    <!--req, array, rectangle, subType:object, range:[0,4], desc:rectangle-->
    <RegionCoordinates>
      <!--opt, object, the origin is the lower-left corner of the screen, desc:the origin is the lower-left corner of the screen-->
      <positionX>
        <!--req, int, X-coordinate, range:[0,1000]-->0
      </positionX>
      <positionY>
        <!--req, int, Y-coordinate, range:[0,1000]-->0
      </positionY>
    </RegionCoordinates>
  </RegionCoordinatesList>
</MotionDetectionRegion>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.2.9.20 Motion detection

EventType:VMD

```
<?xml version="1.0" encoding="UTF-8"?>

<EventNotificationAlert xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, EventNotificationAlert, attr:version{req, string, protocolVersion}-->
  <ipAddress>
    <!--ro, opt, string, IPv4 address-->172.6.64.7
  </ipAddress>
  <ipv6Address>
    <!--ro, opt, string, IPv6 Address-->1080:0:0:0:8:800:200C:417A
  </ipv6Address>
  <portNo>
    <!--ro, opt, int, device's communication port No.-->1
  </portNo>
  <protocol>
    <!--ro, opt, enum, transmission communication protocol, subType:string, desc:"HTTP", "HTTPS", "EHome"-->HTTP
  </protocol>
  <macAddress>
```

```

<!--ro, opt, string, MAC address-->test
</macAddress>
<dynChannelID>
<!--ro, opt, string, digital channel No.-->1
</dynChannelID>
<channelID>
<!--ro, opt, string, channel No.-->1
</channelID>
<relatedChannelList>
<!--ro, opt, string, list of alarm related channels, which are of the same camera with channelID, desc:this parameter is used for Live view or playback
on the platform; multiple channel No.s are separated by commas-->1,2,3
</relatedChannelList>
<dateTime>
<!--ro, req, datetime, event occurred time-->2017-04-22T15:39:01+08:0
</dateTime>
<activePostCount>
<!--ro, req, int, event triggering frequency-->1
</activePostCount>
<eventType>
<!--ro, req, enum, event type, subType:string, desc:"VMD" (motion detection)-->VMD
</eventType>
<eventState>
<!--ro, req, enum, event status (for persistent event), subType:string, desc:for durative event: active (valid), inactive (invalid)-->active
</eventState>
<eventDescription>
<!--ro, req, string, event description-->test
</eventDescription>
<DetectionRegionList>
<!--ro, opt, array, detection area parameter List (for expert mode only), subType:object-->
<DetectionRegionEntry>
<!--ro, opt, object, parameters of a detection area (for expert mode only), desc:parameters of a detection area (for expert mode only)-->
<regionID>
<!--ro, req, string, detection area ID-->test
</regionID>
<sensitivityLevel>
<!--ro, req, int, sensitivity, range:[0,100]-->1
</sensitivityLevel>
<RegionCoordinatesList>
<!--ro, req, array, detection area coordinates, subType:object, range:[0,4], desc:rectangle-->
<RegionCoordinates>
<!--ro, opt, object, detection area origin coordinates, desc:the origin is the upper-left corner of the screen-->
<positionX>
<!--ro, req, int, x-coordinate, range:[0,1000]-->1
</positionX>
<positionY>
<!--ro, req, int, y-coordinate, range:[0,1000]-->1
</positionY>
</RegionCoordinates>
</RegionCoordinatesList>
</DetectionRegionEntry>
</DetectionRegionList>
<channelName>
<!--ro, opt, string, channel name-->test
</channelName>
<deviceID>
<!--ro, opt, string, device ID-->1
</deviceID>
<Extensions>
<!--ro, opt, object, extended information-->
<serialNumber>
<!--ro, req, string, serial No.-->test
</serialNumber>
<eventPush>
<!--ro, req, string, event notification contents-->test
</eventPush>
</Extensions>
<targetType>
<!--ro, opt, string, target classification, desc:"human", "vehicle", "human,vehicle" (human and vehicle). If detection target classification is not
supported, this field is not returned-->human
</targetType>
<bkgUrl>
<!--ro, opt, string, background picture URL-->test
</bkgUrl>
<URLCertificationType>
<!--ro, opt, enum, picture URL authentication method, subType:string, desc:"no" (it is for the cloud storage protocol), "digest" (digest authentication,
it is for the device local storage)-->no
</URLCertificationType>
</EventNotificationAlert>

```

14.2.10 OSD Settings

14.2.10.1 Get the OSD parameters of a specified channel

Request URL

GET /ISAPI/System/Video/inputs/channels/<channelID>/overlays

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>
<VideoOverlay xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, text overlay, attr:version{req, string, protocolVersion}-->
  <normalizedScreenSize>
    <!--ro, req, object, screen size-->
    <normalizedScreenWidth>
      <!--ro, req, int, normalized width-->1
    </normalizedScreenWidth>
    <normalizedScreenHeight>
      <!--ro, req, int, normalized height-->1
    </normalizedScreenHeight>
  </normalizedScreenSize>
  <attribute>
    <!--ro, opt, object, attributes-->
    <transparent>
      <!--ro, req, bool, whether it is transparent-->true
    </transparent>
    <flashing>
      <!--ro, req, bool, whether it is flickering-->true
    </flashing>
  </attribute>
  <TextOverlayList>
    <!--ro, opt, array, text content list, subType:object-->
  </TextOverlayList>
  <DateTimeOverlay>
    <!--ro, opt, object, channel time information overlay-->
    <enabled>
      <!--ro, req, bool, whether to enable-->true
    </enabled>
    <positionX>
      <!--ro, req, int, x-coordinate, range:[0,704], desc:the origin is the lower-left corner of the screen. The range is the same with that of normalizedScreenSize. Default value: x[0,704] y[0,576]-->1
    </positionX>
    <positionY>
      <!--ro, req, int, y-coordinate, range:[0,576], desc:the origin is the lower-left corner of the screen. The range is the same with that of normalizedScreenSize. Default value: x[0,704] y[0,576]-->1
    </positionY>
    <dateStyle>
      <!--ro, opt, enum, date format, subType:string, desc:"YYYY-MM-DD", "MM-DD-YYYY", "DD-MM-YYYY", "CHR-YYYY-MM-DD", "CHR-MM-DD-YYYY", "CHR-DD-MM-YYYY", "CHR-YYYY/MM/DD", "CHR-MM/DD/YYYY", "CHR-DD/MM/YYYY"-->YYYY-MM-DD
    </dateStyle>
    <timeStyle>
      <!--ro, opt, enum, time format, subType:string, desc:"12hour", "24hour"-->12hour
    </timeStyle>
    <displayWeek>
      <!--ro, opt, bool, whether to display week information-->true
    </displayWeek>
  </DateTimeOverlay>
  <channelNameOverlay>
    <!--ro, opt, object, channel name overlay-->
    <enabled>
      <!--ro, req, bool, whether to enable channel name overlay-->true
    </enabled>
    <positionX>
      <!--ro, req, int, x-coordinate, range:[0,704], desc:the origin is the lower-left corner of the screen. The range is the same with that of normalizedScreenSize. Default value: x[0,704] y[0,576]-->1
    </positionX>
    <positionY>
      <!--ro, req, int, y-coordinate, range:[0,576], desc:the origin is the lower-left corner of the screen. The range is the same with that of normalizedScreenSize. Default value: x[0,704] y[0,576]-->1
    </positionY>
    <channelNameOverlay>
    <fontSize>
      <!--ro, opt, enum, font size, subType:string, desc:"adaptive", "16*16", "32*32", "48*48", "64*64", "96*96", "128*128"-->96*96
    </fontSize>
    <frontColorMode>
      <!--ro, opt, enum, font color mode, subType:string, desc:"auto", "customize", "outline"-->auto
    </frontColorMode>
    <frontColor>
      <!--ro, opt, string, font color, desc:hexadecimal digit-->000000
    </frontColor>
  <BatteryPowerOverlay>
    <!--ro, opt, object, battery power information overlay-->
    <enabled>
      <!--ro, req, bool, whether to enable the function-->true
    </enabled>
    <positionX>
      <!--ro, req, int, x-coordinate, range:[0,704], desc:the origin is the lower-left corner of the screen. The range is the same with that of normalizedScreenSize. Default value: x[0,704] y[0,576]-->1
    </positionX>
```

```

</positionX>
<positionY>
  <!--ro, req, int, y-coordinate, range:[0,576], desc:the origin is the Lower-Left corner of the screen. The range is the same with that of
normalizedScreenSize. Default value: x[0,704] y[0,576]-->1
</positionY>
</BatteryPowerOverlay>
<alignment>
  <!--ro, opt, enum, alignment mode, subType:string, desc:"customize" (custom), "alignRight" (right align), "alignLeft" (left align), "GB", "adsorption"
(adsorption mode)-->alignRight
</alignment>
<boundary>
  <!--ro, opt, int, the minimum boundary, range:[0,2], dep:and,{$.VideoOverlay.alignment,eq,GB}, desc:unit: number of characters-->1
</boundary>
<upDownboundary>
  <!--ro, opt, int, range:[0,2]-->1
</upDownboundary>
<leftRightboundary>
  <!--ro, opt, int, range:[0,2]-->1
</leftRightboundary>
<GPSOverlay>
  <!--ro, opt, object, GPS information overlay-->
  <enabled>
    <!--ro, req, bool, whether to enable-->true
  </enabled>
  <positionX>
    <!--ro, req, int, x-coordinate, range:[0,704], desc:the origin is the Lower-Left corner of the screen. The range is the same with that of
normalizedScreenSize. Default value: x[0,704] y[0,576]-->1
  </positionX>
  <positionY>
    <!--ro, req, int, y-coordinate, range:[0,576], desc:the origin is the Lower-Left corner of the screen. The range is the same with that of
normalizedScreenSize. Default value: x[0,704] y[0,576]-->1
  </positionY>
</GPSOverlay>
<WirelessDialOverlay>
  <!--ro, opt, object, wireless dial-up status overlay-->
  <enabled>
    <!--ro, req, bool, whether to enable. If it is enabled, the information such as wireless network type (5G/4G), upstream speed, and downstream speed
will be overlaid-->true
  </enabled>
  <positionX>
    <!--ro, req, int, x-coordinate, range:[0,704], desc:the origin is the Lower-Left corner of the screen. The range is the same with that of
normalizedScreenSize. Default value: x[0,704] y[0,576]-->1
  </positionX>
  <positionY>
    <!--ro, req, int, y-coordinate, range:[0,576], desc:the origin is the Lower-Left corner of the screen. The range is the same with that of
normalizedScreenSize. Default value: x[0,704] y[0,576]-->1
  </positionY>
</WirelessDialOverlay>
<BatteryInfoOverlay>
  <!--ro, opt, object, battery information overlay, desc:display the output voltage and output current of battery-->
  <enabled>
    <!--ro, req, bool, whether to enable battery information overlay-->true
  </enabled>
  <positionX>
    <!--ro, req, int, x-coordinate, range:[0,704], desc:the origin is the Lower-Left corner of the screen. The range is the same with that of
normalizedScreenSize. Default value: x[0,704] y[0,576]-->1
  </positionX>
  <positionY>
    <!--ro, req, int, y-coordinate, range:[0,576], desc:the origin is the Lower-Left corner of the screen. The range is the same with that of
normalizedScreenSize. Default value: x[0,704] y[0,576]-->1
  </positionY>
</BatteryInfoOverlay>
<WirelessDataOverlay>
  <!--ro, opt, object-->
  <enabled>
    <!--ro, req, bool-->true
  </enabled>
  <positionX>
    <!--ro, req, int, x-coordinate, range:[0,704], desc:the origin is the Lower-Left corner of the screen. The range is the same with that of
normalizedScreenSize. Default value: x[0,704] y[0,576]-->1
  </positionX>
  <positionY>
    <!--ro, req, int, y-coordinate, range:[0,576], desc:the origin is the Lower-Left corner of the screen. The range is the same with that of
normalizedScreenSize. Default value: x[0,704] y[0,576]-->1
  </positionY>
</WirelessDataOverlay>
</VideoOverlay>

```

14.2.10.2 Set OSD parameters of a specific video input channel

Request URL

PUT /ISAPI/System/Video/inputs/channels/<channelID>/overlays

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

VISION E INGENIO SOFTWARE SA DE CV (VIINSOFT)
dzambrano@viinsoft.com.mx

```

<?xml version="1.0" encoding="UTF-8"?>
<VideoOverlay xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, text overlay, attr:version{req, string, protocolVersion}-->
  <normalizedScreenSize>
    <!--req, object, screen size-->
    <normalizedScreenWidth>
      <!--req, int, normalized width-->1
    </normalizedScreenWidth>
    <normalizedScreenHeight>
      <!--req, int, normalized height-->1
    </normalizedScreenHeight>
  </normalizedScreenSize>
  <attribute>
    <!--opt, object, attributes-->
    <transparent>
      <!--req, bool, whether it is transparent-->true
    </transparent>
    <flashing>
      <!--req, bool, whether it is flickering-->true
    </flashing>
  </attribute>
  <TextOverlayList>
    <!--opt, array, text content list, subType:object-->
  </TextOverlayList>
  <DateTimeOverlay>
    <!--opt, object, channel time information overlay-->
    <enabled>
      <!--req, bool, whether to enable-->true
    </enabled>
    <positionX>
      <!--req, int, x-coordinate, range:[0,704], desc:the origin is the Lower-Left corner of the screen. The range is the same with that of normalizedScreenSize. Default value: x[0,704] y[0,576]-->1
    </positionX>
    <positionY>
      <!--req, int, y-coordinate, range:[0,576], desc:the origin is the Lower-Left corner of the screen. The range is the same with that of normalizedScreenSize. Default value: x[0,704] y[0,576]-->1
    </positionY>
    <dateStyle>
      <!--opt, enum, date, subType:string, desc:"YYYY-MM-DD", "MM-DD-YYYY", "DD-MM-YYYY", "CHR-YYYY-MM-DD", "CHR-MM-DD-YYYY", "CHR-DD-MM-YYYY", "CHR-YYYY/MM/DD", "CHR-MM/DD/YYYY", "CHR-DD/MM/YYYY"-->YYYY-MM-DD
    </dateStyle>
    <timeStyle>
      <!--opt, enum, time format, subType:string, desc:time format-->12hour
    </timeStyle>
    <displayWeek>
      <!--opt, bool, whether to display week information-->true
    </displayWeek>
  </DateTimeOverlay>
  <channelNameOverlay>
    <!--opt, object, channel name overlay-->
    <enabled>
      <!--req, bool, whether to enable channel name overlay-->true
    </enabled>
    <positionX>
      <!--req, int, x-coordinate, range:[0,704], desc:the origin is the Lower-Left corner of the screen. The range is the same with that of normalizedScreenSize. Default value: x[0,704] y[0,576]-->1
    </positionX>
    <positionY>
      <!--req, int, y-coordinate, range:[0,576], desc:the origin is the Lower-Left corner of the screen. The range is the same with that of normalizedScreenSize. Default value: x[0,704] y[0,576]-->1
    </positionY>
  </channelNameOverlay>
  <fontSize>
    <!--opt, enum, font size, subType:string, desc:"adaptive", "16*16", "32*32", "48*48", "64*64", "96*96", "128*128"-->96*96
  </fontSize>
  <fontColorMode>
    <!--opt, enum, font color mode, subType:string, desc:"auto", "customize", "outline"-->auto
  </fontColorMode>
  <fontColor>
    <!--opt, string, font color, desc:hexadecimal digit-->000000
  </fontColor>
  <alignment>
    <!--opt, enum, alignment mode, subType:string, desc:"customize" (custom), "alignRight" (right align), "alignLeft" (left align), "GB", "adsorption" (adsorption mode)-->alignRight
  </alignment>
  <boundary>
    <!--opt, int, range:[0,2], dep:and,{$.VideoOverlay.alignment,eq,GB}, desc:unit: number of characters-->000000
  </boundary>
  <upDownboundary>
    <!--opt, int, range:[0,2]-->1
  </upDownboundary>
  <leftRightboundary>
    <!--opt, int, range:[0,2]-->1
  </leftRightboundary>
</VideoOverlay>

```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL, range:[0,1024]-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status description, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code-->OK
  </subStatusCode>
  <description>
    <!--ro, opt, string, custom error information description, range:[0,1024], desc:the detailed information of custom error returned by device applications, it is used for fast debugging-->badXmlFormat
  </description>
</ResponseStatus>
```

14.2.10.3 Get the battery overlay parameters of a specific video input channel

Request URL

GET /ISAPI/System/Video/inputs/channels/<channelID>/overlays/BatteryPowerOverlay

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<BatteryPowerOverlay xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, attr:version{opt, string, protocolVersion}-->
  <enabled>
    <!--ro, req, bool-->true
  </enabled>
  <positionX>
    <!--ro, req, int, X-coordinate, range:[0,764], desc:the origin is the Lower-Left corner of the screen-->1
  </positionX>
  <positionY>
    <!--ro, req, int, Y-coordinate, range:[0,576], desc:the origin is the Lower-Left corner of the screen-->1
  </positionY>
</BatteryPowerOverlay>
```

14.2.10.4 Set the battery overlay parameters for a specified video input channel

Request URL

PUT /ISAPI/System/Video/inputs/channels/<channelID>/overlays/BatteryPowerOverlay

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<BatteryPowerOverlay xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, battery overlay configurations of a video input channel, attr:version{req, string, protocolVersion}-->
  <enabled>
    <!--req, bool, whether to enable battery overlay-->true
  </enabled>
  <positionX>
    <!--req, int, X-coordinate of the upper-left corner of the overlaid position, range:[0,704], desc:the origin is the Lower-Left corner of the screen-->1
  </positionX>
  <positionY>
    <!--req, int, Y-coordinate of the upper-left corner of the overlaid position, range:[0,576], desc:the origin is the Lower-Left corner of the screen-->1
  </positionY>
</BatteryPowerOverlay>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.2.10.5 Get the OSD capability of a specific video input channel

Request URL

GET /ISAPI/System/Video/inputs/channels/<channelID>/overlays/capabilities

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>
<VideoOverlay xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, see details in the message of XML_BatteryPowerOverlay, attr:version{req, string, protocolVersion}-->
  <normalizedScreenSize>
    <!--ro, opt, object-->
    <normalizedScreenWidth>
      <!--ro, req, int, normalized width-->1
    </normalizedScreenWidth>
    <normalizedScreenHeight>
      <!--ro, req, int, normalized height-->1
    </normalizedScreenHeight>
  </normalizedScreenSize>
  <TextOverlayList size="8">
    <!--ro, opt, array, subType:object, attr:size{req, int}-->
  </TextOverlayList>
  <DateTimeOverlay>
    <!--ro, opt, object-->
    <enabled opt="true,false">
      <!--ro, req, bool, whether to enable, attr:opt{req, string}-->true
    </enabled>
    <positionX>
      <!--ro, req, int, range:[0,704]-->1
    </positionX>
    <positionY>
      <!--ro, req, int, range:[0,576]-->1
    </positionY>
    <dateStyle opt="YYYY-MM-DD,MM-DD-YYYY,DD-MM-YYYY,CHR-YYYY-MM-DD,CHR-MM-DD-YYYY,CHR-DD-MM-YYYY,CHR-YYYY/MM/DD,CHR-MM/DD/YYYY,CHR-DD/MM/YYYY">
      <!--ro, opt, string, attr:opt{req, string}-->YYYY-MM-DD
    </dateStyle>
  </DateTimeOverlay>
```



```

<!--ro, opt, string, attr:opt{req, string}-->1111-111-00
</dateStyle>
<timeStyle opt="12hour,24hour">
  <!--ro, opt, string, time format, attr:opt{req, string}-->12hour
</timeStyle>
<displayWeek opt="true,false">
  <!--ro, opt, bool, attr:opt{req, string}-->true
</displayWeek>
</DateTimeOverlay>
<channelNameOverlay>
  <!--ro, opt, object-->
  <enabled opt="true,false">
    <!--ro, req, bool, attr:opt{req, string}-->true
  </enabled>
  <positionX>
    <!--ro, opt, int, range:[0,1920]-->1
  </positionX>
  <positionY>
    <!--ro, opt, int, range:[0,1920]-->1
  </positionY>
  <name min="0" max="128">
    <!--ro, opt, string, range:[0,128], attr:min{req, int},max{req, int}-->Camera 01
  </name>
</channelNameOverlay>
<fontSize opt="16*16,32*32,48*48,64*64,80*80,96*96,128*128,adaptive">
  <!--ro, opt, string, font size, attr:opt{req, string}-->adaptive
</fontSize>
<frontColorMode opt="auto,customize,outline" def="auto">
  <!--ro, opt, string, font color mode, attr:opt{req, string},def{opt, string}-->outline
</frontColorMode>
<frontColor>
  <!--ro, opt, string, font color, desc:font color-->000000
</frontColor>
<BatteryPowerOverlay>
  <!--ro, opt, object-->
  <enabled>
    <!--ro, req, bool, whether to enable the function-->true
  </enabled>
  <positionX>
    <!--ro, req, int, range:[0,704]-->1
  </positionX>
  <positionY>
    <!--ro, req, int, range:[0,576]-->1
  </positionY>
</BatteryPowerOverlay>
<alignment opt="customize,alignRight,alignLeft,GB,GB2025,allRight,allLeft,adsorption">
  <!--ro, opt, string, alignment mode, attr:opt{req, string}-->customize
</alignment>
<TextOverlaySize min="0" max="44">
  <!--ro, opt, int, attr:min{req, int},max{req, int}-->1
</TextOverlaySize>
<upDownboundary min="0" max="5">
  <!--ro, opt, int, attr:min{opt, int},max{opt, int}-->1
</upDownboundary>
<leftRightboundary min="0" max="5">
  <!--ro, opt, int, attr:min{opt, int},max{opt, int}-->1
</leftRightboundary>
<GPSOverlay>
  <!--ro, opt, object-->
  <enabled opt="true,false">
    <!--ro, req, bool, whether to enable, attr:opt{req, string}-->true
  </enabled>
  <positionX min="0" max="704">
    <!--ro, req, int, range:[0,704], attr:min{req, int},max{req, int}-->1
  </positionX>
  <positionY min="0" max="576">
    <!--ro, req, int, range:[0,576], attr:min{req, int},max{req, int}-->1
  </positionY>
</GPSOverlay>
<WirelessDialOverlay>
  <!--ro, opt, object-->
  <enabled opt="true,false">
    <!--ro, req, bool, attr:opt{req, string}-->true
  </enabled>
  <positionX min="0" max="704">
    <!--ro, req, int, range:[0,704], attr:min{req, int},max{req, int}-->1
  </positionX>
  <positionY min="0" max="576">
    <!--ro, req, int, range:[0,576], attr:min{req, int},max{req, int}-->1
  </positionY>
</WirelessDialOverlay>
<BatteryInfoOverlay>
  <!--ro, opt, object-->
  <enabled opt="true,false">
    <!--ro, req, bool, attr:opt{req, string}-->true
  </enabled>
  <positionX min="0" max="704">
    <!--ro, req, int, range:[0,704], attr:min{req, int},max{req, int}-->1
  </positionX>
  <positionY min="0" max="576">
    <!--ro, req, int, range:[0,576], attr:min{req, int},max{req, int}-->1
  </positionY>
</BatteryInfoOverlay>
<WirelessDataOverlay>

```

```

<!--ro, opt, object-->
<enabled opt="true,false">
  <!--ro, req, bool, attr:opt{req, string}-->true
</enabled>
<positionX min="0" max="704">
  <!--ro, req, int, range:[0,704], attr:min{req, int},max{req, int}-->1
</positionX>
<positionY min="0" max="576">
  <!--ro, req, int, range:[0,576], attr:min{req, int},max{req, int}-->1
</positionY>
</WirelessDataOverlay>
</VideoOverlay>

```

14.2.10.6 Get the channel name overlay parameters of a specified video input channel

Request URL

GET /ISAPI/System/Video/inputs/channels/<channelID>/overlays/channelNameOverlay

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<channelNameOverlay xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, channel name overlay parameters, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, opt, int, ID-->1
  </id>
  <enabled>
    <!--ro, req, bool, whether to enable channel name overlay-->true
  </enabled>
  <positionX>
    <!--ro, req, int, X-coordinate-->1
  </positionX>
  <positionY>
    <!--ro, req, int, Y-coordinate-->1
  </positionY>
  <name>
    <!--ro, opt, string, channel name, range:[0,128]-->Camera 01
  </name>
  <OverlayRegion>
    <!--ro, opt, object, coordinates of overlaid string frame (the origin is the is the upper-left corner of the screen)-->
    <width>
      <!--ro, req, int, width, range:[0,1000]-->0
    </width>
    <height>
      <!--ro, req, int, height, range:[0,1000]-->0
    </height>
  </OverlayRegion>
</channelNameOverlay>

```

14.2.10.7 Set the channel name overlay parameters for a specified video input channel

Request URL

PUT /ISAPI/System/Video/inputs/channels/<channelID>/overlays/channelNameOverlay

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<channelNameOverlay xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--opt, int, ID-->1
  </id>
  <enabled>
    <!--req, bool, whether to enable channel name overlay-->true
  </enabled>
  <positionX>
    <!--req, int, X-coordinate-->1
  </positionX>
  <positionY>
    <!--req, int, Y-coordinate-->1
  </positionY>
  <name>
    <!--opt, string, channel name, range:[0,32]-->Camera 01
  </name>
  <OverlayRegion>
    <!--opt, object-->
    <width>
      <!--req, int, width, range:[0,1000]-->0
    </width>
    <height>
      <!--req, int, height, range:[0,1000]-->0
    </height>
  </OverlayRegion>
</channelNameOverlay>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.2.10.8 Set the parameters of date and time information overlay for a specified video input channel

Request URL

PUT /ISAPI/System/Video/inputs/channels/<channelID>/overlays/dateTimeOverlay

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<DateTimeOverlay xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, configurations of date and time information overlay of video input channels, attr:version{req, string, protocolVersion}-->
  <enabled>
    <!--req, bool, whether to enable date and time information overlay-->true
  </enabled>
  <positionX>
    <!--req, int, X-coordinate of the upper-left corner of the overlaid position, range:[0,704], desc:the origin is the Lower-Left corner of the screen-->1
  </positionX>
  <positionY>
    <!--req, int, Y-coordinate of the upper-left corner of the overlaid position, range:[0,576], desc:the origin is the Lower-Left corner of the screen-->1
  </positionY>
  <dateStyle>
    <!--opt, enum, date format, subType:string, desc:"YYYY-MM-DD", "MM-DD-YYYY", "DD-MM-YYYY", "CHR-YYYY-MM-DD", "CHR-MM-DD-YYYY", "CHR-DD-MM-YYYY", "CHR-YYYY/MM/DD", "CHR-MM/DD/YYYY", "CHR-DD/MM/YYYY"-->YYYY-MM-DD
  </dateStyle>
  <timeStyle>
    <!--opt, enum, time format, subType:string, desc:"12hour" (12-hour system), "24hour" (24-hour system)-->12hour
  </timeStyle>
  <displayWeek>
    <!--opt, bool, whether to display week information-->true
  </displayWeek>
  <displayDate>
    <!--opt, bool, whether to display date-->true
  </displayDate>
  <displayTime>
    <!--opt, bool, whether to display time-->true
  </displayTime>
  <OverlayRegion>
    <!--opt, object-->
    <width>
      <!--req, int, width, range:[0,1000]-->0
    </width>
    <height>
      <!--req, int, height, range:[0,1000]-->0
    </height>
  </OverlayRegion>
</DateTimeOverlay>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.2.10.9 Get the parameters of date and time information overlay of a specific channel

Request URL

GET /ISAPI/System/Video/inputs/channels/<channelID>/overlays/dateTimeOverlay

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<DateTimeOverlay xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{req, string, protocolVersion}-->
  <enabled>
    <!--ro, req, bool, whether to enable date and time overlay-->true
  </enabled>
  <positionX>
    <!--ro, req, int, X-coordinate of the upper-left corner of the overlay area, range:[0,704], desc:the origin is the lower-left corner of the screen-->1
  </positionX>
  <positionY>
    <!--ro, req, int, Y-coordinate of the upper-left corner of the overlay area, range:[0,576], desc:the origin is the lower-left corner of the screen-->1
  </positionY>
  <dateStyle>
    <!--ro, opt, enum, date format, subType:string, desc:"YYYY-MM-DD", "MM-DD-YYYY", "DD-MM-YYYY", "CHR-YYYY-MM-DD", "CHR-MM-DD-YYYY", "CHR-DD-MM-YYYY"--
    >YYYY-MM-DD
  </dateStyle>
  <timeStyle>
    <!--ro, opt, enum, time format, subType:string, desc:time format-->12hour
  </timeStyle>
  <displayWeek>
    <!--ro, opt, bool, whether to display week information-->true
  </displayWeek>
  <displayDate>
    <!--ro, opt, bool-->true
  </displayDate>
  <displayTime>
    <!--ro, opt, bool-->true
  </displayTime>
  <OverlayRegion>
    <!--ro, opt, object-->
    <width>
      <!--ro, req, int, width, range:[0,1000]-->0
    </width>
    <height>
      <!--ro, req, int, height, range:[0,1000]-->0
    </height>
  </OverlayRegion>
</DateTimeOverlay>

```

14.2.10.10 Delete the text overlay parameters of a specific video input channel

Request URL

DELETE /ISAPI/System/Video/inputs/channels/<channelID>/overlays/text

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, opt, string, request URL, range:[0,1024]-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code description-->OK
  </subStatusCode>
  <description>
    <!--ro, opt, string, range:[0,1024]-->badXmlFormat
  </description>
  <MErrCode>
    <!--ro, opt, string-->0x00000000
  </MErrCode>
  <MErrDevSelfEx>
    <!--ro, opt, string-->0x00000000
  </MErrDevSelfEx>
</ResponseStatus>
```

14.2.10.11 Set the text overlay parameters of a specific video input channel

Request URL

PUT /ISAPI/System/Video/inputs/channels/<channelID>/overlays/text

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<TextOverlayList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, array, see details in the message of XML_TextOverlay, subType:object, attr:version{opt, string, protocolVersion}-->
  <TextOverlay>
    <!--opt, object-->
    <id>
      <!--req, string, text No.-->test
    </id>
    <enabled>
      <!--req, bool-->true
    </enabled>
    <positionX>
      <!--req, int, X-coordinate-->1
    </positionX>
    <positionY>
      <!--req, int, Y-coordinate-->1
    </positionY>
    <displayText>
      <!--req, string, overlay character-->test
    </displayText>
    <OverlayRegion>
      <!--opt, object-->
      <width>
        <!--req, int, width, range:[0,1000]-->0
      </width>
      <height>
        <!--req, int, height, range:[0,1000]-->0
      </height>
    </OverlayRegion>
  </TextOverlay>
</TextOverlayList>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.2.10.12 Get parameters of text information overlay of a specified video input channel

Request URL

GET /ISAPI/System/Video/inputs/channels/<channelID>/overlays/text

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<TextOverlayList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, array, text information overlay, subType:object, attr:version{req, string, protocolVersion}-->
  <TextOverlay>
    <!--ro, opt, object, text overlay configuration-->
    <id>
      <!--ro, req, string, text No.-->test
    </id>
    <enabled>
      <!--ro, req, bool, whether to enable-->true
    </enabled>
    <positionX>
      <!--ro, req, int, X-coordinate of the upper-left corner of the overlaid position, range:[0,704], desc:the origin is the lower-left corner of the screen-->1
    </positionX>
    <positionY>
      <!--ro, req, int, Y-coordinate of the upper-left corner of the overlaid position, range:[0,576], desc:the origin is the lower-left corner of the screen-->1
    </positionY>
    <displayText>
      <!--ro, req, string, overlaid text-->test
    </displayText>
    <OverlayRegion>
      <!--ro, opt, object-->
      <width>
        <!--ro, req, int, width, range:[0,1000]-->0
      </width>
      <height>
        <!--ro, req, int, height, range:[0,1000]-->0
      </height>
    </OverlayRegion>
  </TextOverlay>
</TextOverlayList>
```

14.2.10.13 Add a text to overlay on the video for a specific video input channel

Request URL

POST /ISAPI/System/Video/inputs/channels/<channelID>/overlays/text

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<TextOverlay xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, text overlay settings, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string, ID-->test
  </id>
  <enabled>
    <!--req, bool, whether to enable-->true
  </enabled>
  <positionX>
    <!--req, int, range:[0,704]-->1
  </positionX>
  <positionY>
    <!--req, int, the origin is the Lower-Left corner of the screen, range:[0,576], desc:the origin is the Lower-Left corner of the screen-->1
  </positionY>
  <displayText>
    <!--req, string, text overlay-->test
  </displayText>
</TextOverlay>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, opt, string, request URL, range:[0,1024]-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status description, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:error reason description in detail-->OK
  </subStatusCode>
  <description>
    <!--ro, opt, string, range:[0,1024]-->badXmlFormat
  </description>
  <MErrCode>
    <!--ro, opt, string-->0x00000000
  </MErrCode>
  <MErrDevSelfEx>
    <!--ro, opt, string-->0x00000000
  </MErrDevSelfEx>
</ResponseStatus>
```

14.2.10.14 Set the parameters of a specific piece of text overlay information of a specific video input channel

Request URL

PUT /ISAPI/System/Video/inputs/channels/<channelID>/overlays/text/<textID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--
textID	string	--

Request Message


```
<?xml version="1.0" encoding="UTF-8"?>

<TextOverlay xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, attr:version{opt, string, protocolVersion}-->
  <id>
    <!--req, string, text No.-->test
  </id>
  <enabled>
    <!--req, bool-->true
  </enabled>
  <positionX>
    <!--req, int, x-coordinate, range:[0,704], desc:the origin is the lower-left corner of the screen-->1
  </positionX>
  <positionY>
    <!--req, int, y-coordinate, range:[0,576], desc:the origin is the lower-left corner of the screen-->1
  </positionY>
  <displayText>
    <!--req, string, overlay character-->test
  </displayText>
  <OverlayRegion>
    <!--opt, object-->
    <width>
      <!--req, int, width, range:[0,1000]-->0
    </width>
    <height>
      <!--req, int, height, range:[0,1000]-->0
    </height>
  </OverlayRegion>
</TextOverlay>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.2.10.15 Get the text overlay parameters of a specified video input channel

Request URL

GET /ISAPI/System/Video/inputs/channels/<channelID>/overlays/text/<textID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.
textID	string	Text overlay ID

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<TextOverlay xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, text overlay configuration, attr:version{opt, string, protocolVersion}-->
  <id>
    <!--ro, req, string, text No.-->test
  </id>
  <enabled>
    <!--ro, req, bool, whether to enable-->true
  </enabled>
  <positionX>
    <!--ro, req, int, X-coordinate of the upper-left corner of the overlaid position, range:[0,704], desc:the origin is the lower-left corner of the screen-->1
  </positionX>
  <positionY>
    <!--ro, req, int, Y-coordinate of the upper-left corner of the overlaid position, range:[0,576], desc:the origin is the lower-left corner of the screen-->1
  </positionY>
  <displayText>
    <!--ro, req, string, overlaid text-->test
  </displayText>
  <OverlayRegion>
    <!--ro, opt, object-->
    <width>
      <!--ro, req, int, width, range:[0,1000]-->0
    </width>
    <height>
      <!--ro, req, int, height, range:[0,1000]-->0
    </height>
  </OverlayRegion>
</TextOverlay>
```

14.2.10.16 Delete a specified piece of text overlay of a video input channel

Request URL

DELETE /ISAPI/System/Video/inputs/channels/<channelID>/overlays/text/<textID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.
textID	string	Text overlay ID

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, opt, string, request URL, range:[0,1024]-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
  <description>
    <!--ro, opt, string, range:[0,1024]-->badXmlFormat
  </description>
  <MErrCode>
    <!--ro, opt, string-->0x00000000
  </MErrCode>
  <MErrDevSelfEx>
    <!--ro, opt, string-->0x00000000
  </MErrDevSelfEx>
</ResponseStatus>
```

14.2.11 Privacy Mask

14.2.11.1 Get the privacy mask configuration capability of a specified channel

Request URL

GET /ISAPI/System/Video/inputs/channels/<channelID>/privacyMask/privacyMaskCap

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<PrivacyMaskCap xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, the privacy mask configuration capability, attr:version{req, string, protocolVersion}-->
  <maskTypeDescriptor opt="gray,red,yellow,blue,orange,green,transparent,half-transparent,mosaic,black,matchman,groundglass,custom">
    <!--ro, opt, enum, mask type, subType:string, attr:opt{req, string}, desc:"gray", "red", "yellow", "blue", "orange", "green", "transparent", "half-transparent", "mosaic", "black"-->gray
  </maskTypeDescriptor>
  <privacymaskName min="0" max="16">
    <!--ro, opt, string, attr:min{req, int},max{req, int}-->test
  </privacymaskName>
  <regionNum min="0" max="8">
    <!--ro, opt, int, attr:min{req, int},max{req, int}-->8
  </regionNum>
  <minZoomdoorlimit>
    <!--ro, opt, int, the minimum zooming in Limit-->1
  </minZoomdoorlimit>
  <maxZoomdoorlimit>
    <!--ro, opt, int, the maximum zooming in Limit-->1
  </maxZoomdoorlimit>
  <videoPrivacyType opt="privacyMask,privacyCover">
    <!--ro, opt, enum, privacy type, subType:string, attr:opt{req, string}, desc:"privacyMask"-privacy mask, "privacyCover"-video tampering-->privacyMask
  </videoPrivacyType>
  <supportRegionType>
    <!--ro, opt, enum, the default type of area drawing, subType:string, desc:"rectangle". If this node is not supported, the area is rectangular for privacy mask, and is polygon for video tampering by default-->rectangle
  </supportRegionType>
  <mediaObjectEncryption>
    <!--ro, opt, object, encryption of the private target in media data, desc:if it is enabled, the main steam of corresponding area will be covered, but the mask can be removed via keys (related URI: /ISAPI/Security/MediaObjectEncryption/channel/<videoID>?format=json). You can use the key to decrypt the encrypted area if this node is not returned, it indicates that device does not support this function-->
    <enabled opt="true,false" def="false">
      <!--ro, req, bool, whether to enable, attr:opt{req, string},def{req, string}-->true
    </enabled>
    <maskType opt="mosaic" def="mosaic">
      <!--ro, opt, string, mask type, attr:opt{req, string},def{req, string}, desc:"mosaic"-->mosaic
    </maskType>
  </mediaObjectEncryption>
  <polygonCoordinatesNum>
    <!--ro, opt, int, dep:and,{$.PrivacyMaskCap.supportRegionType,eq,polygon}-->1
  </polygonCoordinatesNum>
  <regionRangeType opt="fullScreen,region">
    <!--ro, opt, enum, subType:string, attr:opt{req, string}-->region
  </regionRangeType>
  <privacyMaskRegionListNum>
    <!--ro, opt, int, range:[0,8]-->4
  </privacyMaskRegionListNum>
  <switch opt="local,remote">
    <!--ro, opt, enum, subType:string, attr:opt{req, string}-->local
  </switch>
  <isSupportUpdateBackgroundPicture>
    <!--ro, opt, bool-->true
  </isSupportUpdateBackgroundPicture>
  <isSupportHumanBodyPrivacyMaskParams>
    <!--ro, opt, bool-->true
  </isSupportHumanBodyPrivacyMaskParams>
  <isSupportHeadShoulderPrivacyMaskParams>
    <!--ro, opt, bool-->true
  </isSupportHeadShoulderPrivacyMaskParams>
  <isSupportPlatePrivacyMaskParams>
    <!--ro, opt, bool-->true
  </isSupportPlatePrivacyMaskParams>
  <isSupportImportPrivacyMaskPicture>
    <!--ro, opt, bool-->true
  </isSupportImportPrivacyMaskPicture>
</PrivacyMaskCap>
```

14.2.11.2 Get the parameters of all privacy mask areas of a specified channel

Request URL

GET /ISAPI/System/Video/inputs/channels/<channelID>/privacyMask/regions

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<PrivacyMaskRegionList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, array, privacy mask area configurations, subType:object, attr:version(req, string, protocolVersion)-->
  <PrivacyMaskRegion>
    <!--ro, opt, object, configurations of a privacy mask area-->
    <id>
      <!--ro, req, int, area ID-->1
    </id>
    <enabled>
      <!--ro, req, bool, whether to enable the area-->true
    </enabled>
    <RegionCoordinatesList>
      <!--ro, opt, array, area coordinates List, subType:object, range:[0,4], desc:rectangle-->
      <RegionCoordinates>
        <!--ro, opt, object, the origin is the Lower-Left corner of the screen, desc:the origin is the Lower-Left corner of the screen-->
        <positionX>
          <!--ro, req, int, X-coordinate, range:[0,704]-->1
        </positionX>
        <positionY>
          <!--ro, req, int, Y-coordinate, range:[0,576]-->1
        </positionY>
      </RegionCoordinates>
    </RegionCoordinatesList>
    <privacymaskName>
      <!--ro, opt, string, privacy mask name-->test
    </privacymaskName>
    <maskType>
      <!--ro, opt, enum, mask type, subType:string, desc:"gray", "red", "yellow", "blue", "orange", "green", "transparent", "half-transparent", "mosaic", "black"-->gray
    </maskType>
    <zoomdoorlimit>
      <!--ro, opt, int, zooming in limit, when the zooming in value is larger than the limit, the private region will be displayed, range:[10,1000]-->1
    </zoomdoorlimit>
    <mediaObjectEncryption>
      <!--ro, opt, object, encryption of the private target in media data, desc:it is disabled when this field is not returned. If it is enabled, the main stream of corresponding area will be covered, but the mask can be removed via keys (related URI: /ISAPI/Security/MediaObjectEncryption/channel/<videoID>?format=json). You can use the key to decrypt the encrypted area-->
      <enabled>
        <!--ro, req, bool, whether to enable-->true
      </enabled>
      <maskType>
        <!--ro, opt, enum, mask type, subType:string, desc:"mosaic"-->mosaic
      </maskType>
    </mediaObjectEncryption>
    <regionRangeType>
      <!--ro, opt, enum, subType:string-->region
    </regionRangeType>
  </PrivacyMaskRegion>
</PrivacyMaskRegionList>
```

14.2.11.3 Set the parameters of all privacy mask areas of a specified channel

Request URL

PUT /ISAPI/System/Video/inputs/channels/<channelID>/privacyMask/regions

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<PrivacyMaskRegionList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, array, privacy mask area configurations, subType:object, attr:version{req, string, protocolVersion}-->
  <PrivacyMaskRegion>
    <!--opt, object, configurations of a privacy mask area-->
    <id>
      <!--req, int, area ID-->1
    </id>
    <enabled>
      <!--req, bool, whether to enable the area-->true
    </enabled>
    <RegionCoordinatesList>
      <!--req, array, area coordinate list, subType:object, range:[0,4], desc:rectangle-->
      <RegionCoordinates>
        <!--opt, object, area coordinates, desc:the origin is the Lower-Left corner of the screen-->
        <positionX>
          <!--req, int, X-coordinate, range:[0,768]-->1
        </positionX>
        <positionY>
          <!--req, int, Y-coordinate-->1
        </positionY>
      </RegionCoordinates>
    </RegionCoordinatesList>
    <privacymaskName>
      <!--opt, string, privacy mask name-->test
    </privacymaskName>
    <maskType>
      <!--opt, enum, mask type, subType:string, desc:"gray", "red", "yellow", "blue", "orange", "green", "transparent", "half-transparent", "mosaic", "black"-->gray
    </maskType>
    <zoomdoorlimit>
      <!--opt, int, zooming in limit, when the zooming in value is larger than the limit, the private area will be displayed, range:[10,1000]-->1
    </zoomdoorlimit>
    <mediaObjectEncryption>
      <!--opt, object, encryption of the private target in media data, desc:it is disabled when this field is not configured. If it is enabled, the main stream of corresponding area will be covered, but the mask can be removed via keys (related URI: /ISAPI/Security/MediaObjectEncryption/channel/<videoID>?format=json). You can use the key to decrypt the encrypted area-->
      <enabled>
        <!--req, bool, whether to enable-->true
      </enabled>
      <maskType>
        <!--opt, enum, mask type, subType:string, desc:"mosaic"-->mosaic
      </maskType>
    </mediaObjectEncryption>
  </PrivacyMaskRegion>
</PrivacyMaskRegionList>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.2.11.4 Delete parameters of all privacy mask areas of the specified channel

Request URL

DELETE /ISAPI/System/Video/inputs/channels/<channelID>/privacyMask/regions

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, opt, string, request URL, range:[0,1024]-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
  <description>
    <!--ro, opt, string, range:[0,1024]-->badXmlFormat
  </description>
  <MErrCode>
    <!--ro, opt, string-->0x00000000
  </MErrCode>
  <MErrDevSelfEx>
    <!--ro, opt, string-->0x00000000
  </MErrDevSelfEx>
</ResponseStatus>
```

14.2.11.5 Get parameters of a privacy mask area of a specified channel

Request URL

GET /ISAPI/System/Video/inputs/channels/<channelID>/privacyMask/regions/<regionID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--
regionID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<PrivacyMaskRegion xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, configurations of a privacy mask area, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, int, region ID-->1
  </id>
  <enabled>
    <!--ro, req, bool, whether to enable the area-->true
  </enabled>
  <RegionCoordinatesList>
    <!--ro, opt, array, area coordinate list, subType:object, range:[0,4], desc:rectangle-->
    <RegionCoordinates>
      <!--ro, opt, object, the origin is the lower-left corner of the screen, desc:the origin is the lower-left corner of the screen-->
      <positionX>
        <!--ro, req, int, X-coordinate, range:[0,704]-->1
      </positionX>
      <positionY>
        <!--ro, req, int, Y-coordinate, range:[0,576]-->1
      </positionY>
    </RegionCoordinates>
  </RegionCoordinatesList>
  <privacymaskName>
    <!--ro, opt, string, privacy mask name-->test
  </privacymaskName>
  <maskType>
    <!--ro, opt, enum, mask type, subType:string, desc:"gray", "red", "yellow", "blue", "orange", "green", "transparent", "half-transparent", "mosaic", "black"-->gray
  </maskType>
  <zoomdoorlimit>
    <!--ro, opt, int, zooming in limit, when the zooming in value is larger than the limit, the private region will be displayed, range:[10,1000]-->1
  </zoomdoorlimit>
  <mediaObjectEncryption>
    <!--ro, opt, object, encryption of the private target in media data, desc:If it is enabled, the main stream of corresponding region will be covered, but the mask can be removed via keys (related URI: /ISAPI/Security/MediaObjectEncryption/channel/<videoID>?format=json). You can use the key to decrypt the encrypted region.-->
    <enabled>
      <!--ro, req, bool, whether to enable-->true
    </enabled>
    <maskType>
      <!--ro, opt, enum, mask type, subType:string, desc:"mosaic"-->mosaic
    </maskType>
  </mediaObjectEncryption>
  <regionRangeType>
    <!--ro, opt, enum, subType:string-->region
  </regionRangeType>
</PrivacyMaskRegion>
```

14.2.11.6 Delete parameters of a privacy mask area of the specified channel

Request URL

DELETE /ISAPI/System/Video/inputs/channels/<channelID>/privacyMask/regions/<regionID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--
regionID	string	--

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, opt, string, request URL, range:[0,1024]-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6
    (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format",
    "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
  <description>
    <!--ro, opt, string, range:[0,1024]-->badXmlFormat
  </description>
  <MErrCode>
    <!--ro, opt, string-->0x00000000
  </MErrCode>
  <MErrDevSelfEx>
    <!--ro, opt, string-->0x00000000
  </MErrDevSelfEx>
</ResponseStatus>

```

14.2.11.7 Set parameters of a privacy mask area of a specified channel

Request URL

PUT /ISAPI/System/Video/inputs/channels/<channelID>/privacyMask/regions/<regionID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--
regionID	string	--

Request Message


```
<?xml version="1.0" encoding="UTF-8"?>

<PrivacyMaskRegion xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, configurations of a privacy mask area, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, int, area ID-->1
  </id>
  <enabled>
    <!--req, bool, whether to enable the area-->true
  </enabled>
  <RegionCoordinatesList>
    <!--req, array, area coordinates list, subType:object, range:[0,4], desc:rectangle-->
    <RegionCoordinates>
      <!--opt, object, region coordinates, desc:the origin is the lower-left corner of the screen-->
      <positionX>
        <!--req, int, X-coordinate, range:[0,704]-->1
      </positionX>
      <positionY>
        <!--req, int, Y-coordinate, range:[0,576]-->1
      </positionY>
    </RegionCoordinates>
  </RegionCoordinatesList>
  <privacymaskName>
    <!--opt, string, privacy mask name-->test
  </privacymaskName>
  <maskType>
    <!--opt, enum, mask type, subType:string, desc:"gray", "red", "yellow", "blue", "orange", "green", "transparent", "half-transparent", "mosaic", "black"-->gray
  </maskType>
  <zoomdoorlimit>
    <!--opt, int, zooming in limit, when the zooming in value is larger than the limit, the private area will be displayed, range:[10,1000]-->1
  </zoomdoorlimit>
  <mediaObjectEncryption>
    <!--opt, object, encryption of the private target in media data, desc:it is disabled when this parameter is not configured if it is enabled, the main stream of corresponding region will be covered, but the mask can be removed via keys (related URI: /ISAPI/Security/MediaObjectEncryption/channel/<videoID>?format=json). You can use the key to decrypt the encrypted region-->
    <enabled>
      <!--req, bool, whether to enable the function-->true
    </enabled>
    <maskType>
      <!--opt, enum, mask type, subType:string, desc:"mosaic"-->mosaic
    </maskType>
  </mediaObjectEncryption>
</PrivacyMaskRegion>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.2.11.8 Get the privacy mask parameters of a specific channel

Request URL

GET /ISAPI/System/Video/inputs/channels/<channelID>/privacyMask?switch=<switchType>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--
switchType	string	Analysis unit switch: "local" (analysis by local device, e.g., executed locally by NVR), "remote" (the device transmits data to sub-device for analysis, e.g., from the NVR to the network camera).

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<PrivacyMask xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, privacy mask configurations, attr:version{req, string, protocolVersion}-->
  <enabled>
    <!--ro, req, bool, whether to enable the privacy mask-->true
  </enabled>
  <normalizedScreenSize>
    <!--ro, opt, object, normalized size-->
    <normalizedScreenWidth>
      <!--ro, req, int, normalized width-->1
    </normalizedScreenWidth>
    <normalizedScreenHeight>
      <!--ro, req, int, normalized height-->1
    </normalizedScreenHeight>
  </normalizedScreenSize>
  <PrivacyMaskRegionList size="8">
    <!--ro, opt, array, list of video tampering region(s), subType:object, attr:size{req, int}-->
    <PrivacyMaskRegion>
      <!--ro, opt, object, configurations of a privacy mask region-->
      <id>
        <!--ro, req, int, region ID-->1
      </id>
      <enabled>
        <!--ro, req, bool, whether to enable the region-->true
      </enabled>
      <RegionCoordinatesList>
        <!--ro, opt, array, region coordinates List, subType:object, range:[0,4], desc:rectangle-->
        <RegionCoordinates>
          <!--ro, opt, object, region coordinates, desc:the origin is the lower-left corner of the screen-->
          <positionX>
            <!--ro, req, int, X-coordinate, range:[0,704]-->1
          </positionX>
          <positionY>
            <!--ro, req, int, Y-coordinate, range:[0,576]-->1
          </positionY>
        </RegionCoordinates>
      </RegionCoordinatesList>
      <privacymaskName>
        <!--ro, opt, string, privacy mask name-->test
      </privacymaskName>
      <maskType>
        <!--ro, opt, enum, mask type, subType:string, desc:"gray", "red", "yellow", "blue", "orange", "green", "transparent", "half-transparent", "mosaic", "black"-->gray
      </maskType>
      <zoomdoorLimit>
        <!--ro, opt, int, zooming in Limit, when the zooming in value is larger than the Limit, the private region will be displayed, range:[10,1000]-->1
      </zoomdoorLimit>
      <mediaObjectEncryption>
        <!--ro, opt, object, encryption of the private target in media data, desc:If it is enabled, the main steam of corresponding region will be covered, but the mask can be removed via keys (related URI: /ISAPI/Security/MediaObjectEncryption/channel/<videoID>?format=json). You can use the key to decrypt the encrypted region.-->
        <enabled>
          <!--ro, req, bool, whether to enable-->true
        </enabled>
        <maskType>
          <!--ro, opt, enum, mask type, subType:string, desc:"mosaic"-->mosaic
        </maskType>
      </mediaObjectEncryption>
      <regionRangeType>
        <!--ro, opt, enum, subType:string-->region
      </regionRangeType>
    </PrivacyMaskRegion>
  </PrivacyMaskRegionList>
  <regionType>
    <!--ro, opt, enum, region type, subType:string, desc:"quadrilateral"-->quadrilateral
  </regionType>
</PrivacyMask>
```

14.2.11.9 Set the privacy mask parameters of a specified channel

Request URL

PUT /ISAPI/System/Video/inputs/channels/<channelID>/privacyMask?switch=<switchType>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--
switchType	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<PrivacyMask xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, privacy mask configurations, attr:version{req, string, protocolVersion}-->
  <enabled>
    <!--req, bool, whether to enable the privacy mask-->true
  </enabled>
  <normalizedScreenSize>
    <!--opt, object, normalized size-->
    <normalizedScreenWidth>
      <!--req, int, normalized width-->1
    </normalizedScreenWidth>
    <normalizedScreenHeight>
      <!--req, int, normalized height-->1
    </normalizedScreenHeight>
  </normalizedScreenSize>
  <PrivacyMaskRegionList size="8">
    <!--opt, array, List of video privacy mask area(s), subType:object, attr:size{req, int}-->
    <PrivacyMaskRegion>
      <!--opt, object, configurations of a privacy mask area-->
      <id>
        <!--req, int, area ID-->1
      </id>
      <enabled>
        <!--req, bool, whether to enable the area-->true
      </enabled>
      <RegionCoordinatesList>
        <!--req, array, area coordinates List, subType:object, range:[0,4], desc:rectangle-->
        <RegionCoordinates>
          <!--opt, object, area coordinates, desc:the origin is the lower-left corner of the screen-->
          <positionX>
            <!--req, int, X-coordinate, range:[0,764]-->1
          </positionX>
          <positionY>
            <!--req, int, Y-coordinate, range:[0,576]-->1
          </positionY>
        </RegionCoordinates>
      </RegionCoordinatesList>
      <privacymaskName>
        <!--opt, string, privacy mask name-->test
      </privacymaskName>
      <maskType>
        <!--opt, enum, mask type, subType:string, desc:"gray", "red", "yellow", "blue", "orange", "green", "transparent", "half-transparent", "mosaic", "black"-->gray
      </maskType>
      <zoomdoorlimit>
        <!--opt, int, zooming value limit range, range:[10,1000]-->1
      </zoomdoorlimit>
      <mediaObjectEncryption>
        <!--opt, object, encryption of the private target in media data, desc:it is disabled when this field is not configured. If it is enabled, the main stream of corresponding area will be covered, but the mask can be removed via keys (related URI: /ISAPI/Security/MediaObjectEncryption/channel/<videoID>?format=json). You can use the key to decrypt the encrypted area-->
        <enabled>
          <!--req, bool, whether to enable-->true
        </enabled>
        <maskType>
          <!--opt, enum, mask type, subType:string, desc:"mosaic"-->mosaic
        </maskType>
      </mediaObjectEncryption>
    </PrivacyMaskRegion>
  </PrivacyMaskRegionList>
  <regionType>
    <!--opt, enum, area type, subType:string, desc:"quadrilateral"-->quadrilateral
  </regionType>
</PrivacyMask>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.2.12 Real-Time Streaming

14.2.12.1 Delete the third-party server information

Request URL

DELETE /ISAPI/OrgPreview/Channels/<channelID>/Server

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel ID

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string}-->
  <requestURL>
    <!--ro, opt, string, request URL, range:[0,1024]-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
  <description>
    <!--ro, opt, string, range:[0,1024]-->badXmlFormat
  </description>
  <MErrCode>
    <!--ro, opt, string-->0x00000000
  </MErrCode>
  <MErrDevSelfEx>
    <!--ro, opt, string-->0x00000000
  </MErrDevSelfEx>
</ResponseStatus>
```

14.2.12.2 Set address and port parameters of third-party server

Request URL

PUT /ISAPI/OrgPreview/Channels/<channelID>/Server

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<Server xmlns="http://www.isapi.org/ver20/XMLSchema" version="1.0">
  <!--req, object, the address and port parameters of third-party server, attr:version{req, string, protocolVersion}-->
  <addressingFormatType>
    <!--req, enum, address type, subType:string, desc:ipaddress; hostname;-->ipaddress
  </addressingFormatType>
  <hostName>
    <!--opt, string, domain name, range:[1,64]-->time.windows.com
  </hostName>
  <ipAddress>
    <!--opt, string, IPv4 address, range:[1,32]-->192.168.1.112
  </ipAddress>
  <ipv6Address>
    <!--opt, string, IPv6 address, range:[1,128], desc:IPv6 address-->1030::C9B4:FF12:48AA:1A2B
  </ipv6Address>
  <portNo>
    <!--opt, int, port No., range:[1,65535], desc:port No.-->74
  </portNo>
</Server>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code-->OK
  </subStatusCode>
</ResponseStatus>
```

14.2.12.3 Get the address and port No. of the third-party server

Request URL

GET /ISAPI/OrgPreview/Channels/<channelID>/Server

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<Server xmlns="http://www.isapi.org/ver20/XMLSchema" version="1.0">
  <!--ro, req, object, the address and port number of the third-party server, attr:version(req, string, protocolVersion)-->
  <addressingFormatType>
    <!--ro, req, enum, address type, subType:string, desc:"ipaddress", "hostname"-->ipaddress
  </addressingFormatType>
  <hostName>
    <!--ro, opt, string, host name, range:[1,64]-->time.windows.com
  </hostName>
  <ipAddress>
    <!--ro, opt, string, IPv4 address, range:[1,32]-->192.168.1.112
  </ipAddress>
  <ipv6Address>
    <!--ro, opt, string, IPv6 address, range:[1,128], desc:IPv6 address (not supported)-->1030::C9B4:FF12:48AA:1A2B
  </ipv6Address>
  <portNo>
    <!--ro, opt, int, Port No., range:[1,65535], desc:Port No.-->74
  </portNo>
</Server>
```

14.2.12.4 Get the Real-Time Transport Control Protocol (RTCP) parameters of a specified channel

Request URL

GET /ISAPI/Streaming/channels/<trackStreamID>/RTCP

Query Parameter

Parameter Name	Parameter Type	Description
trackStreamID	string	Channel No. * 100 + stream type (-1: main stream, -2: sub-stream, and so forth).

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<RTCP xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, attr:version(req, string, protocolVersion)-->
  <enabled>
    <!--ro, req, bool-->>true
  </enabled>
</RTCP>
```

14.2.12.5 Set the Real-Time Transport Control Protocol (RTCP) parameters of a specified channel

Request URL

PUT /ISAPI/Streaming/channels/<trackStreamID>/RTCP

Query Parameter

Parameter Name	Parameter Type	Description
trackStreamID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<RTCP xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, attr:version(req, string, protocolVersion)-->
  <enabled>
    <!--req, bool-->>true
  </enabled>
</RTCP>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.2.13 Scene Change Detection

14.2.13.1 Set the arming schedule of scene change detection for all channels

Request URL

PUT /ISAPI/Event/schedules/sceneChangeDetections

Query Parameter

None

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<SceneChangeDetectionScheduleList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, array, subType:object, attr:version{req, string, protocolVersion}-->
  <Schedule>
    <!--opt, object-->
    <id>
      <!--req, string-->sceneChangeDetection_video1
    </id>
    <eventType>
      <!--opt, enum, subType:string-->sceneChangeDetection
    </eventType>
    <videoInputChannelID>
      <!--opt, string-->1
    </videoInputChannelID>
    <TimeBlockList size="8">
      <!--req, array, subType:object, attr:size{opt, int}-->
      <TimeBlock>
        <!--opt, object-->
        <dayOfWeek>
          <!--opt, enum, subType:int-->1
        </dayOfWeek>
        <TimeRange>
          <!--req, object-->
          <beginTime>
            <!--req, time-->10:00:00
          </beginTime>
          <endTime>
            <!--req, time-->10:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </TimeBlockList>
    <HolidayBlockList>
      <!--opt, array, subType:object-->
      <TimeBlock>
        <!--opt, object-->
        <TimeRange>
          <!--req, object-->
          <beginTime>
            <!--req, time-->10:00:00
          </beginTime>
          <endTime>
            <!--req, time-->10:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </HolidayBlockList>
  </Schedule>
</SceneChangeDetectionScheduleList>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.2.13.2 Get the arming schedule of scene change detection for all channels

Request URL

GET /ISAPI/Event/schedules/sceneChangeDetections

Query Parameter

None

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<SceneChangeDetectionScheduleList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, array, subType:object, attr:version{req, string, protocolVersion}-->
  <Schedule>
    <!--ro, opt, object-->
    <id>
      <!--ro, req, string-->sceneChangeDetection_video1
    </id>
    <eventType>
      <!--ro, opt, enum, subType:string-->sceneChangeDetection
    </eventType>
    <videoInputChannelID>
      <!--ro, opt, string-->1
    </videoInputChannelID>
    <TimeBlockList size="8">
      <!--ro, req, array, subType:object, attr:size{opt, int}-->
      <TimeBlock>
        <!--ro, opt, object-->
        <dayOfWeek>
          <!--ro, opt, enum, subType:int-->1
        </dayOfWeek>
        <TimeRange>
          <!--ro, req, object-->
          <beginTime>
            <!--ro, req, time-->10:00:00
          </beginTime>
          <endTime>
            <!--ro, req, time-->10:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </TimeBlockList>
    <HolidayBlockList>
      <!--ro, opt, array, subType:object-->
      <TimeBlock>
        <!--ro, opt, object-->
        <TimeRange>
          <!--ro, req, object-->
          <beginTime>
            <!--ro, req, time-->10:00:00
          </beginTime>
          <endTime>
            <!--ro, req, time-->10:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </HolidayBlockList>
  </Schedule>
</SceneChangeDetectionScheduleList>
```


14.2.13.3 Get the arming schedule of scene change detection for a specified channel

Request URL

GET /ISAPI/Event/schedules/sceneChangeDetections/sceneChangeDetection_video<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<Schedule xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string-->sceneChangeDetection_video1
  </id>
  <eventType>
    <!--ro, opt, enum, subType:string-->sceneChangeDetection
  </eventType>
  <videoInputChannelID>
    <!--ro, opt, string-->1
  </videoInputChannelID>
  <TimeBlockList size="8">
    <!--ro, req, array, subType:object, attr:size{opt, int}-->
    <TimeBlock>
      <!--ro, opt, object-->
      <dayOfWeek>
        <!--ro, opt, enum, subType:int-->1
      </dayOfWeek>
      <TimeRange>
        <!--ro, req, object-->
        <beginTime>
          <!--ro, req, time-->10:00:00
        </beginTime>
        <endTime>
          <!--ro, req, time-->10:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </TimeBlockList>
  <HolidayBlockList>
    <!--ro, opt, array, subType:object-->
    <TimeBlock>
      <!--ro, opt, object-->
      <TimeRange>
        <!--ro, req, object-->
        <beginTime>
          <!--ro, req, time-->10:00:00
        </beginTime>
        <endTime>
          <!--ro, req, time-->10:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </HolidayBlockList>
</Schedule>
```

14.2.13.4 Set the arming schedule of scene change detection for a specified channel

Request URL

PUT /ISAPI/Event/schedules/sceneChangeDetections/sceneChangeDetection_video<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```

<?xml version="1.0" encoding="UTF-8"?>

<Schedule xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string-->sceneChangeDetection_video1
  </id>
  <eventType>
    <!--opt, enum, subType:string-->sceneChangeDetection
  </eventType>
  <videoInputChannelID>
    <!--opt, string-->1
  </videoInputChannelID>
  <TimeBlockList size="8">
    <!--req, array, subType:object, attr:size{opt, int}-->
    <TimeBlock>
      <!--opt, object-->
      <dayOfWeek>
        <!--opt, enum, subType:int-->1
      </dayOfWeek>
      <TimeRange>
        <!--req, object-->
        <beginTime>
          <!--req, time-->10:00:00
        </beginTime>
        <endTime>
          <!--req, time-->10:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </TimeBlockList>
  <HolidayBlockList>
    <!--opt, array, subType:object-->
    <TimeBlock>
      <!--opt, object-->
      <TimeRange>
        <!--req, object-->
        <beginTime>
          <!--req, time-->10:00:00
        </beginTime>
        <endTime>
          <!--req, time-->10:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </HolidayBlockList>
</Schedule>

```

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>

```

14.2.13.5 Sudden scene change detection

EventType:scenechangedetection

```

<?xml version="1.0" encoding="UTF-8"?>

<EventNotificationAlert xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, event information, attr:version{opt, string, protocolVersion}-->
  <ipAddress>
    <!--ro, req, string, IPv4 address of the device that triggers the alarm-->172.6.64.7
  </ipAddress>
  <ipv6Address>
    <!--ro, opt, string, IPv6 address of the device that triggers the alarm-->1080:0:0:0:8:800:200C:417A
  </ipv6Address>
  <portNo>
    <!--ro, opt, int, communication port No. of the device that triggers the alarm-->80
  </portNo>
  <protocol>
    <!--ro, opt, enum, transmission communication protocol type, subType:string, desc:when ISAPI protocol is transmitted via HCNetsDK, the channel No. is the video channel No. of private protocol. When ISAPI protocol is transmitted via EZ protocol, the channel No. is the video channel No. of EZ protocol. When ISAPI protocol is transmitted via ISUP, the channel No. is the video channel No. of ISUP-->HTTP
  </protocol>
  <macAddress>
    <!--ro, opt, string, MAC address-->01:17:24:45:D9:F4
  </macAddress>
  <dynChannelID>
    <!--ro, opt, string, digital channel No.-->test
  </dynChannelID>
  <channelID>
    <!--ro, opt, string, channel No. of the device that triggers the alarm, desc:video channel No. that triggers the alarm-->test
  </channelID>
  <relatedChannelList>
    <!--ro, opt, string, List of alarm related channels, which are of the same camera with channelID, desc:this parameter is used for live view or playback on the platform; multiple channel No.s are separated by commas-->1,2,3
  </relatedChannelList>
  <dateTime>
    <!--ro, req, datetime, alarm trigger time-->2004-05-03T17:30:08+08:00
  </dateTime>
  <activePostCount>
    <!--ro, opt, int, times that the same alarm has been uploaded, desc:event triggering frequency-->1
  </activePostCount>
  <eventType>
    <!--ro, req, enum, event type, subType:string, desc:"scenechangedetection" (sudden scene change detection)-->scenechangedetection
  </eventType>
  <eventState>
    <!--ro, req, enum, event status, subType:string, desc:for durative event: active (valid), inactive (invalid)-->active
  </eventState>
  <eventDescription>
    <!--ro, req, string, event description-->test
  </eventDescription>
  <channelName>
    <!--ro, opt, string, channel name, range:[1,64]-->test
  </channelName>
  <deviceID>
    <!--ro, opt, string, device ID, desc:it should be returned for ISUP alarms, e.g., test0123 (Ehome2.0, Ehome4.0, and ISUP5.0)-->12345
  </deviceID>
  <Extensions>
    <!--ro, opt, object, extended information-->
    <serialNumber>
      <!--ro, opt, string, serial No.-->test
    </serialNumber>
    <eventPush>
      <!--ro, opt, string, event notification-->test
    </eventPush>
  </Extensions>
</EventNotificationAlert>

```

14.2.14 Video Tampering

14.2.14.1 Set the arming schedule of video tampering detection for all channels

Request URL

PUT /ISAPI/Event/schedules/tamperDetections

Query Parameter

None

Request Message

```

<?xml version="1.0" encoding="UTF-8"?>

<TamperDetectionScheduleList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, array, subType:object, attr:version{req, string, protocolVersion}-->
  <Schedule>
    <!--req, object-->
    <id>
      <!--req, string-->tamperdetection_video1
    </id>
    <eventType>
      <!--opt, string-->tamperDetection
    </eventType>
    <videoInputChannelID>
      <!--opt, string-->1
    </videoInputChannelID>
    <TimeBlockList size="8">
      <!--req, array, subType:object, attr:size{opt, int}-->
      <TimeBlock>
        <!--opt, object-->
        <dayOfWeek>
          <!--opt, enum, subType:int-->1
        </dayOfWeek>
        <TimeRange>
          <!--req, object-->
          <beginTime>
            <!--req, time-->10:00:00
          </beginTime>
          <endTime>
            <!--req, time-->10:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </TimeBlockList>
    <HolidayBlockList>
      <!--opt, array, subType:object-->
      <TimeBlock>
        <!--opt, object-->
        <TimeRange>
          <!--req, object-->
          <beginTime>
            <!--req, time-->10:00:00
          </beginTime>
          <endTime>
            <!--req, time-->10:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </HolidayBlockList>
  </Schedule>
</TamperDetectionScheduleList>

```

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>

```

14.2.14.2 Get the arming schedule of video tampering detection for all channels

Request URL

GET /ISAPI/Event/schedules/tamperDetections

Query Parameter

None

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<TamperDetectionScheduleList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, array, subType:object, attr:version{req, string, protocolVersion}-->
  <Schedule>
    <!--ro, req, object-->
    <id>
      <!--ro, req, string-->tamperdetection_video1
    </id>
    <eventType>
      <!--ro, opt, string-->tamperDetection
    </eventType>
    <videoInputChannelID>
      <!--ro, opt, string-->1
    </videoInputChannelID>
    <TimeBlockList size="8">
      <!--ro, req, array, subType:object, attr:size{opt, int}-->
      <TimeBlock>
        <!--ro, opt, object-->
        <dayOfWeek>
          <!--ro, opt, enum, subType:int-->1
        </dayOfWeek>
        <TimeRange>
          <!--ro, req, object-->
          <beginTime>
            <!--ro, req, time-->10:00:00
          </beginTime>
          <endTime>
            <!--ro, req, time-->10:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </TimeBlockList>
    <HolidayBlockList>
      <!--ro, opt, array, subType:object-->
      <TimeBlock>
        <!--ro, opt, object-->
        <TimeRange>
          <!--ro, req, object-->
          <beginTime>
            <!--ro, req, time-->10:00:00
          </beginTime>
          <endTime>
            <!--ro, req, time-->10:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </HolidayBlockList>
  </Schedule>
</TamperDetectionScheduleList>
```

14.2.14.3 Get the arming schedule of video tampering detection for a specified channel

Request URL

GET /ISAPI/Event/schedules/tamperDetections/tamperdetection_video<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<Schedule xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string-->tamperdetection_video1
  </id>
  <eventType>
    <!--ro, opt, enum, subType:string-->tamperDetection
  </eventType>
  <videoInputChannelID>
    <!--ro, opt, string-->1
  </videoInputChannelID>
  <TimeBlockList size="8">
    <!--ro, req, array, subType:object, attr:size{opt, int}-->
    <TimeBlock>
      <!--ro, opt, object-->
      <dayOfWeek>
        <!--ro, opt, enum, subType:int-->1
      </dayOfWeek>
      <TimeRange>
        <!--ro, req, object-->
        <beginTime>
          <!--ro, req, time-->10:00:00
        </beginTime>
        <endTime>
          <!--ro, req, time-->10:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </TimeBlockList>
  <HolidayBlockList>
    <!--ro, opt, array, subType:object-->
    <TimeBlock>
      <!--ro, opt, object-->
      <TimeRange>
        <!--ro, req, object-->
        <beginTime>
          <!--ro, req, time-->10:00:00
        </beginTime>
        <endTime>
          <!--ro, req, time-->10:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </HolidayBlockList>
</Schedule>

```

14.2.14.4 Set the arming schedule of video tampering detection for a specified channel

Request URL

PUT /ISAPI/Event/schedules/tamperDetections/tamperdetection_video<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```

<?xml version="1.0" encoding="UTF-8"?>

<Schedule xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string-->tamperdetection_video1
  </id>
  <eventType>
    <!--opt, string-->tamperDetection
  </eventType>
  <videoInputChannelID>
    <!--opt, string-->1
  </videoInputChannelID>
  <TimeBlockList size="8">
    <!--req, array, subType:object, attr:size{opt, int}-->
    <TimeBlock>
      <!--opt, object-->
      <dayOfWeek>
        <!--opt, enum, subType:int-->1
      </dayOfWeek>
      <TimeRange>
        <!--req, object-->
        <beginTime>
          <!--req, time-->10:00:00
        </beginTime>
        <endTime>
          <!--req, time-->10:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </TimeBlockList>
  <HolidayBlockList>
    <!--opt, array, subType:object-->
    <TimeBlock>
      <!--opt, object-->
      <TimeRange>
        <!--req, object-->
        <beginTime>
          <!--req, time-->10:00:00
        </beginTime>
        <endTime>
          <!--req, time-->10:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </HolidayBlockList>
</Schedule>

```

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>

```

14.2.14.5 Get the linkage parameters of video tampering detection for a specified channel

Request URL

GET /ISAPI/Event/triggers/tamper-<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<EventTrigger xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string-->tamper-1
  </id>
  <eventType>
    <!--ro, req, string-->tamper
  </eventType>
  <eventDescription>
    <!--ro, opt, string-->test
  </eventDescription>
  <inputIOPortID>
    <!--ro, opt, string-->test
  </inputIOPortID>
  <dynInputIOPortID>
    <!--ro, opt, string-->test
  </dynInputIOPortID>
  <videoInputChannelID>
    <!--ro, opt, string-->1
  </videoInputChannelID>
  <dynVideoInputChannelID>
    <!--ro, opt, string-->1
  </dynVideoInputChannelID>
  <intervalBetweenEvents>
    <!--ro, opt, int, unit:s-->1
  </intervalBetweenEvents>
  <WLSensorID>
    <!--ro, opt, string-->1
  </WLSensorID>
  <EventTriggerNotificationList>
    <!--ro, opt, array, subType:object-->
    <EventTriggerNotification>
      <!--ro, opt, object-->
      <id>
        <!--ro, req, string-->test
      </id>
      <notificationMethod>
        <!--ro, req, enum, subType:string-->FTP
      </notificationMethod>
      <notificationRecurrence>
        <!--ro, opt, enum, subType:string-->beginning
      </notificationRecurrence>
      <notificationInterval>
        <!--ro, opt, int, unit:ms-->1
      </notificationInterval>
      <videoInputID>
        <!--ro, opt, string-->1
      </videoInputID>
      <dynVideoInputID>
        <!--ro, opt, string-->1
      </dynVideoInputID>
      <ptzAction>
        <!--ro, opt, object-->
        <ptzChannelID>
          <!--ro, req, string-->1
        </ptzChannelID>
        <actionName>
          <!--ro, req, enum, subType:string-->preset
        </actionName>
        <actionNum>
          <!--ro, opt, int-->1
        </actionNum>
        <presetDurationTime>
          <!--ro, opt, int, unit:s-->0
        </presetDurationTime>
      </ptzAction>
      <cellphoneNumber>
        <!--ro, opt, string, range:[0,11]-->test
      </cellphoneNumber>
      <modbus>
        <!--ro, opt, object-->
        <outputPortID>
          <!--ro, opt, int, range:[0,15]-->1
        </outputPortID>
        <delayTime>
          <!--ro, opt, int, range:[1,10], unit:s-->1
        </delayTime>
        <alarmStatus>
          <!--ro, opt, enum, subType:string-->open
        </alarmStatus>
      </modbus>
    </EventTriggerNotification>
  </EventTriggerNotificationList>
</EventTrigger>
```


14.2.14.6 Delete the linkage of video tampering detection for a specified channel

Request URL

DELETE /ISAPI/Event/triggers/tamper-<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, opt, string, range:[0,1024]-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
  <description>
    <!--ro, opt, string, range:[0,1024]-->badXmlFormat
  </description>
  <MErrCode>
    <!--ro, opt, string-->0x00000000
  </MErrCode>
  <MErrDevSelfEx>
    <!--ro, opt, string-->0x00000000
  </MErrDevSelfEx>
</ResponseStatus>
```

14.2.14.7 Set the linkage parameters of video tampering detection for a specified channel

Request URL

PUT /ISAPI/Event/triggers/tamper-<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```

<?xml version="1.0" encoding="UTF-8"?>

<EventTrigger xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string-->tamper-1
  </id>
  <eventType>
    <!--req, string-->tamper
  </eventType>
  <eventDescription>
    <!--opt, string-->test
  </eventDescription>
  <inputIOPortID>
    <!--opt, string-->test
  </inputIOPortID>
  <dynInputIOPortID>
    <!--opt, string-->test
  </dynInputIOPortID>
  <videoInputChannelID>
    <!--opt, string-->1
  </videoInputChannelID>
  <dynVideoInputChannelID>
    <!--opt, string-->1
  </dynVideoInputChannelID>
  <intervalBetweenEvents>
    <!--opt, int, unit:s-->1
  </intervalBetweenEvents>
  <WLSensorID>
    <!--opt, string-->1
  </WLSensorID>
  <EventTriggerNotificationList>
    <!--opt, array, subType:object-->
    <EventTriggerNotification>
      <!--opt, object-->
      <id>
        <!--req, string-->test
      </id>
      <notificationMethod>
        <!--req, enum, subType:string-->FTP
      </notificationMethod>
      <notificationRecurrence>
        <!--opt, enum, subType:string-->beginning
      </notificationRecurrence>
      <notificationInterval>
        <!--opt, int, unit:ms-->1
      </notificationInterval>
      <videoInputID>
        <!--opt, string-->1
      </videoInputID>
      <dynVideoInputID>
        <!--opt, string-->1
      </dynVideoInputID>
      <ptzAction>
        <!--opt, object-->
        <ptzChannelID>
          <!--req, string-->1
        </ptzChannelID>
        <actionName>
          <!--req, enum, subType:string-->preset
        </actionName>
        <actionNum>
          <!--opt, int-->1
        </actionNum>
        <presetDurationTime>
          <!--opt, int, unit:s-->0
        </presetDurationTime>
      </ptzAction>
      <cellphoneNumber>
        <!--opt, string, range:[0,11]-->test
      </cellphoneNumber>
      <modbus>
        <!--opt, object-->
        <outputPortID>
          <!--opt, int, range:[0,15]-->1
        </outputPortID>
        <delayTime>
          <!--opt, int, range:[1,10], unit:s-->1
        </delayTime>
        <alarmStatus>
          <!--opt, enum, subType:string-->open
        </alarmStatus>
      </modbus>
    </EventTriggerNotification>
  </EventTriggerNotificationList>
</EventTrigger>

```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.2.14.8 Delete the linkage triggering parameters of video tampering detection for a specified channel

Request URL

DELETE /ISAPI/Event/triggers/tamper-<channelID>/notifications

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, opt, string, range:[0,1024]-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
  <description>
    <!--ro, opt, string, range:[0,1024]-->badXmlFormat
  </description>
  <MErrCode>
    <!--ro, opt, string-->0x00000000
  </MErrCode>
  <MErrDevSelfEx>
    <!--ro, opt, string-->0x00000000
  </MErrDevSelfEx>
</ResponseStatus>
```

14.2.14.9 Set the linkage triggering parameters of video tampering detection for a specified channel

Request URL

PUT /ISAPI/Event/triggers/tamper-<channelID>/notifications

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<EventTriggerNotification xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string-->test
  </id>
  <notificationMethod>
    <!--req, enum, subType:string-->FTP
  </notificationMethod>
  <notificationRecurrence>
    <!--opt, enum, subType:string-->beginning
  </notificationRecurrence>
  <notificationInterval>
    <!--opt, int, unit:ms-->1
  </notificationInterval>
  <outputIOPortID>
    <!--opt, string-->test
  </outputIOPortID>
  <dynOutputIOPortID>
    <!--opt, string-->test
  </dynOutputIOPortID>
  <videoInputID>
    <!--opt, string-->1
  </videoInputID>
  <dynVideoInputID>
    <!--opt, string-->1
  </dynVideoInputID>
  <ptzAction>
    <!--opt, object-->
    <ptzChannelID>
      <!--req, string-->1
    </ptzChannelID>
    <actionName>
      <!--req, enum, subType:string-->preset
    </actionName>
    <actionNum>
      <!--opt, int-->1
    </actionNum>
    <presetDurationTime>
      <!--opt, int, unit:s-->0
    </presetDurationTime>
  </ptzAction>
  <cellphoneNumber>
    <!--opt, string, range:[0,11]-->test
  </cellphoneNumber>
  <modbus>
    <!--opt, object-->
    <outputPortID>
      <!--opt, int, range:[0,15]-->1
    </outputPortID>
    <delayTime>
      <!--opt, int, range:[1,10], unit:s-->1
    </delayTime>
    <alarmStatus>
      <!--opt, enum, subType:string-->open
    </alarmStatus>
  </modbus>
</EventTriggerNotification>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.2.14.10 Get the linkage triggering parameters of video tampering detection for a specified channel

Request URL

GET /ISAPI/Event/triggers/tamper-<channelID>/notifications

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<EventTriggerNotification xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string-->test
  </id>
  <notificationMethod>
    <!--ro, req, enum, subType:string-->FTP
  </notificationMethod>
  <notificationRecurrence>
    <!--ro, opt, enum, subType:string-->beginning
  </notificationRecurrence>
  <notificationInterval>
    <!--ro, opt, int, unit:ms-->1
  </notificationInterval>
  <outputIOPortID>
    <!--ro, opt, string-->test
  </outputIOPortID>
  <dynOutputIOPortID>
    <!--ro, opt, string-->test
  </dynOutputIOPortID>
  <videoInputID>
    <!--ro, opt, string-->1
  </videoInputID>
  <dynVideoInputID>
    <!--ro, opt, string-->1
  </dynVideoInputID>
  <ptzAction>
    <!--ro, opt, object-->
    <ptzChannelID>
      <!--ro, req, string-->1
    </ptzChannelID>
    <actionName>
      <!--ro, req, enum, subType:string-->preset
    </actionName>
    <actionNum>
      <!--ro, opt, int-->1
    </actionNum>
    <presetDurationTime>
      <!--ro, opt, int, unit:s-->0
    </presetDurationTime>
  </ptzAction>
  <cellphoneNumber>
    <!--ro, opt, string, range:[0,11]-->test
  </cellphoneNumber>
  <modbus>
    <!--ro, opt, object-->
    <outputPortID>
      <!--ro, opt, int, range:[0,15]-->1
    </outputPortID>
    <delayTime>
      <!--ro, opt, int, range:[1,10], unit:s-->1
    </delayTime>
    <alarmStatus>
      <!--ro, opt, enum, subType:string-->open
    </alarmStatus>
  </modbus>
</EventTriggerNotification>
```

14.2.14.11 Get the video tampering parameters of a specific channel

Request URL

GET /ISAPI/System/Video/inputs/channels/<channelID>/tamperDetection

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	channel No.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<TamperDetection xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, video tampering parameters, attr:version{req, string, protocolVersion}-->
  <enabled>
    <!--ro, req, bool, whether to enable video tampering-->true
  </enabled>
  <normalizedScreenSize>
    <!--ro, req, object, normalized coordinates-->
    <normalizedScreenWidth>
      <!--ro, req, int, normalized width-->1
    </normalizedScreenWidth>
    <normalizedScreenHeight>
      <!--ro, req, int, normalized height-->1
    </normalizedScreenHeight>
  </normalizedScreenSize>
  <tampersensitivityLevel>
    <!--ro, req, int, video tampering sensitivity, range:[0,100]-->1
  </tampersensitivityLevel>
  <TamperDetectionRegionList>
    <!--ro, req, array, video tampering detection area List, subType:object-->
    <TamperDetectionRegion>
      <!--ro, opt, object, video tampering detection area-->
      <id>
        <!--ro, req, string, area ID-->test
      </id>
      <enabled>
        <!--ro, opt, bool, whether to enable the area-->true
      </enabled>
      <sensitivityLevel>
        <!--ro, req, int, area sensitivity, range:[0,100]-->1
      </sensitivityLevel>
      <RegionCoordinatesList>
        <!--ro, req, array, area coordinate List, subType:object, range:[0,4], desc:rectangle-->
        <RegionCoordinates>
          <!--ro, req, object, area coordinates, desc:the origin is the lower-left corner of the screen-->
          <positionX>
            <!--ro, req, int, x-coordinate, range:[0,704]-->1
          </positionX>
          <positionY>
            <!--ro, req, int, y-coordinate, range:[0,576]-->1
          </positionY>
        </RegionCoordinates>
      </RegionCoordinatesList>
    </TamperDetectionRegion>
  </TamperDetectionRegionList>
  <onlyRecordEnabled>
    <!--ro, opt, bool-->false
  </onlyRecordEnabled>
  <alarmTriggerDelay>
    <!--ro, opt, int, range:[2,30], unit:s-->3
  </alarmTriggerDelay>
</TamperDetection>
```

14.2.14.12 Set the video tampering parameters of a specific channel

Request URL

PUT /ISAPI/System/Video/inputs/channels/<channelID>/tamperDetection

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	channel No.

Request Message

```

<?xml version="1.0" encoding="UTF-8"?>

<TamperDetection xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, video tampering parameters, attr:version{req, string, protocolVersion}-->
  <enabled>
    <!--req, bool, whether to enable video tampering-->true
  </enabled>
  <normalizedScreenSize>
    <!--req, object, normalized coordinates-->
    <normalizedScreenWidth>
      <!--req, int, normalized width-->1
    </normalizedScreenWidth>
    <normalizedScreenHeight>
      <!--req, int, normalized height-->1
    </normalizedScreenHeight>
  </normalizedScreenSize>
  <tampersensitivityLevel>
    <!--req, int, video tampering sensitivity, range:[0,100]-->1
  </tampersensitivityLevel>
  <TamperDetectionRegionList>
    <!--req, array, video tampering detection area list, subType:object-->
    <TamperDetectionRegion>
      <!--opt, object, video tampering detection area-->
      <id>
        <!--req, string, area ID-->test
      </id>
      <enabled>
        <!--opt, bool, whether to enable the area-->true
      </enabled>
      <sensitivityLevel>
        <!--req, int, area sensitivity, range:[0,100]-->1
      </sensitivityLevel>
      <RegionCoordinatesList>
        <!--req, array, area coordinate list, subType:object, range:[0,4], desc:rectangle-->
        <RegionCoordinates>
          <!--req, object, area coordinates, desc:the origin is the Lower-Left corner of the screen-->
          <positionX>
            <!--req, int, x-coordinate, range:[0,704]-->1
          </positionX>
          <positionY>
            <!--req, int, y-coordinate, range:[0,576]-->1
          </positionY>
        </RegionCoordinates>
      </RegionCoordinatesList>
    </TamperDetectionRegion>
  </TamperDetectionRegionList>
  <onlyRecordEnabled>
    <!--opt, bool-->false
  </onlyRecordEnabled>
  <alarmTriggerDelay>
    <!--opt, int, range:[2,30], unit:s-->3
  </alarmTriggerDelay>
</TamperDetection>

```

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, opt, string, request URL, range:[0,1024]-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, error code description, desc:error code description-->OK
  </subStatusCode>
  <description>
    <!--ro, opt, string, custom error message description, range:[0,1024], desc:the custom error message description returned by the application is used to quickly identify and evaluate issues-->badXMLFormat
  </description>
  <MErrCode>
    <!--ro, opt, string, error codes categorized by functional modules, desc:all general error codes are in the range of this field-->0x00000000
  </MErrCode>
  <MErrDevSelfEx>
    <!--ro, opt, string, error codes categorized by functional modules, desc:N/A-->0x00000000
  </MErrDevSelfEx>
</ResponseStatus>

```

14.2.14.13 Set the video tampering parameters of a single detection area for a specified channel

Request URL

PUT /ISAPI/System/Video/inputs/channels/<channelID>/tamperDetection/regions/<regionID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--
regionID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<TamperDetectionRegion xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, video tampering detection areas, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string, area ID-->test
  </id>
  <enabled>
    <!--opt, bool, whether to enable area detection-->true
  </enabled>
  <sensitivityLevel>
    <!--req, int, area detection sensitivity, range:[0,100]-->1
  </sensitivityLevel>
  <RegionCoordinatesList>
    <!--req, array, list of area coordinates, subType:object, range:[0,4], desc:rectangle-->
    <RegionCoordinates>
      <!--req, object, area coordinates, desc:the origin is the Lower-Left corner of the screen-->
      <positionX>
        <!--req, int, X-coordinate, range:[0,704]-->1
      </positionX>
      <positionY>
        <!--req, int, Y-coordinate, range:[0,576]-->1
      </positionY>
    </RegionCoordinates>
  </RegionCoordinatesList>
</TamperDetectionRegion>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.2.14.14 Video tampering alarm

EventType:shelteralarm


```
<?xml version="1.0" encoding="UTF-8"?>

<EventNotificationAlert xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, event details, attr:version{req, string, protocolVersion}-->
  <ipAddress>
    <!--ro, opt, string, IPv4 Address-->10.10.10.10
  </ipAddress>
  <ipAddress>
  <ipV6Address>
    <!--ro, opt, string, IPv6 Address-->ABCD:EF01:2345:6789:ABCD:EF01:2345:6789
  </ipV6Address>
  <portNo>
    <!--ro, opt, int, device's communication port No.-->1
  </portNo>
  <protocol>
    <!--ro, opt, enum, transmission communication protocol type, subType:string, desc:"HTTP, HTTPS, EHome". The value should be "HTTP" when ISAPI protocol is transmitted via EZ protocol. The value should be "EHome" when ISAPI protocol is transmitted via ISUP.-->HTTP
  </protocol>
  <macAddress>
    <!--ro, opt, string, MAC address-->test
  </macAddress>
  <dynChannelID>
    <!--ro, opt, string, digital channel No.-->test
  </dynChannelID>
  <channelID>
    <!--ro, opt, string, channel No.-->1
  </channelID>
  <relatedChannelList>
    <!--ro, opt, string, List of alarm related channels, which are of the same camera with channelID, desc:this parameter is used for Live view or playback on the platform; multiple channel No.s are separated by commas-->1,2,3
  </relatedChannelList>
  <dateTime>
    <!--ro, req, datetime, event occurred time-->1970-01-01T00:00:00+08:00
  </dateTime>
  <activePostCount>
    <!--ro, req, int, event triggering frequency-->1
  </activePostCount>
  <eventType>
    <!--ro, req, enum, event type: shelteralarm, subType:string, desc:event type: shelteralarm-->shelteralarm
  </eventType>
  <eventState>
    <!--ro, req, enum, event status (for persistent event), subType:string, desc:for durative event: active (valid), inactive (invalid)-->active
  </eventState>
  <eventDescription>
    <!--ro, req, string, event description-->test
  </eventDescription>
  <channelName>
    <!--ro, opt, string, channel name-->test
  </channelName>
  <deviceID>
    <!--ro, opt, string, device ID-->test
  </deviceID>
  <Extensions>
    <!--ro, opt, object, extended information-->
    <serialNumber>
      <!--ro, req, string, serial No.-->test
    </serialNumber>
    <eventPush>
      <!--ro, req, string, event notification contents-->test
    </eventPush>
  </Extensions>
  <Image>
    <!--ro, opt, object, event related pictures-->
    <resourcesContentType>
      <!--ro, opt, enum, resource transmission type, subType:string, desc:"url" (transmitted via URL), "binary" (transmitted in binary format). When the returned alarm message contains additional resource (e.g., pictures), this field should be returned.-->binary
    </resourcesContentType>
    <resourcesContentID>
      <!--ro, opt, string, resource ID, range:[1,128], desc:when the returned alarm message contains additional resources (e.g., pictures), this field should be returned. When the value of resourcesContentType is "binary", it must be the same as Content-ID of the resource. When the value of resourcesContentType is "url", its value is the resource URL-->image
    </resourcesContentID>
  </Image>
</EventNotificationAlert>
```

Parameter Name	Parameter Value	Parameter Type(Content-Type)	Content-ID	File Name	Description
EventNotificationAlert	[Message content]	application/xml	--	--	--
image	[Binary picture data]	image/jpeg	image	image.jpg	--

Note: The protocol is transmitted in form format. See Chapter 4.5.1.4 for form framework description, as shown in the instance below.

```
--<frontier>
Content-Disposition: form-data; name=Parameter Name;filename=File Name
Content-Type: Parameter Type
Content-Length: ****
Content-ID: Content ID
Parameter Value
```

- Parameter Name: the name property of Content-Disposition in the header of form unit; it refers to the form unit name.
- Parameter Type (Content-Type): the Content-Type property in the header of form unit.
- File Name (filename): the filename property of Content-Disposition of form unit Headers. It exists only when the transmitted data of form unit is file, and it refers to the file name of form unit body.
- Parameter Value: the body content of form unit.

14.2.15 White Balance

14.2.15.1 Set the white balance parameters of s specific channel

Request URL

PUT /ISAPI/Image/channels/<channelID>/whiteBalance

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<WhiteBalance xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, white balance, attr:version{req, string, protocolVersion}-->
  <WhiteBalanceStyle>
    <!--opt, enum, white balance type, subType:string, desc:"auto", "auto1", "auto2" "manual", "indoor", "outdoor", "autotrace", "onece", "sodiumLight",
    "mercuryLight"-->auto
  </WhiteBalanceStyle>
  <WhiteBalanceRed>
    <!--req, int, this node depends on <WhiteBalanceStyle>, desc:this node depends on <WhiteBalanceStyle>-->1
  </WhiteBalanceRed>
  <WhiteBalanceBlue>
    <!--req, int, this node depends on <WhiteBalanceStyle>, desc:this node depends on <WhiteBalanceStyle>-->1
  </WhiteBalanceBlue>
</WhiteBalance>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0-OK, 1-OK, 2-Device Busy, 3-Device Error, 4-Invalid Operation, 5-Invalid XML Format, 6-Invalid XML
    Content, 7-Reboot Required-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status description, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format",
    "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code-->OK
  </subStatusCode>
</ResponseStatus>
```

14.2.15.2 Get the white balance (in day mode) parameters of a specified channel

Request URL

GET /ISAPI/Image/channels/<channelID>/whiteBalance/day

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<WhiteBalance xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version(req, string, protocolVersion)-->
  <WhiteBalanceStyle>
    <!--ro, opt, enum, subType:string-->auto
  </WhiteBalanceStyle>
  <WhiteBalanceRed>
    <!--ro, req, int-->1
  </WhiteBalanceRed>
  <WhiteBalanceBlue>
    <!--ro, req, int-->1
  </WhiteBalanceBlue>
  <WhiteBalanceLevel>
    <!--ro, opt, int-->1
  </WhiteBalanceLevel>
  <customColorTemperatureLevel>
    <!--ro, opt, int, range:[2700,7500], dep:and,{$.WhiteBalance,eq,customColorTemperature}-->1
  </customColorTemperatureLevel>
</WhiteBalance>
```

14.2.15.3 Set the white balance (in day mode) parameters of a specified channel

Request URL

PUT /ISAPI/Image/channels/<channelID>/whiteBalance/day

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<WhiteBalance xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, attr:version(req, string, protocolVersion)-->
  <WhiteBalanceStyle>
    <!--opt, enum, subType:string-->auto
  </WhiteBalanceStyle>
  <WhiteBalanceRed>
    <!--req, int-->1
  </WhiteBalanceRed>
  <WhiteBalanceBlue>
    <!--req, int-->1
  </WhiteBalanceBlue>
  <customColorTemperatureLevel>
    <!--opt, int, range:[2700,7500], dep:and,{$.WhiteBalance,eq,customColorTemperature}-->1
  </customColorTemperatureLevel>
</WhiteBalance>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.2.15.4 Get the white balance parameters of s specified channel

Request URL

GET /ISAPI/Image/channels/<channelID>/whiteBalance?parameterType=<parameterType>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--
parameterType	string	When parameterType is recommendation, the obtained value is recommended by device. If parameterType is not configured as an input parameter, it will be the value of the parameter in the current PUT URL.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<WhiteBalance xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, white balance, attr:version{req, string, protocolVersion}-->
  <WhiteBalanceStyle>
    <!--ro, opt, enum, "auto,manual,indoor,outdoor,autotracer,onece,sodiumLight,mercuryLight,auto0,auto1,fluorescent,natural,warm,incandescent",
    subType:string, desc:"auto", "auto1", "auto2", "manual", "indoor", "outdoor", "autotracer", "onece", "sodiumLight", "mercuryLight"-->auto
  </WhiteBalanceStyle>
  <WhiteBalanceRed>
    <!--ro, req, int, white balance, range:[0,100], desc:white balance-->1
  </WhiteBalanceRed>
  <WhiteBalanceBlue>
    <!--ro, req, int, white balance, range:[0,100], desc:white balance-->1
  </WhiteBalanceBlue>
  <WhiteBalanceLevel>
    <!--ro, opt, int, range:[0,100], dep:or,{$.WhiteBalance.WhiteBalanceStyle,eq,auto},{$.WhiteBalance.WhiteBalanceStyle,eq,auto1},
    {$.WhiteBalance.WhiteBalanceStyle,eq,auto2}-->1
  </WhiteBalanceLevel>
  <customColorTemperatureLevel>
    <!--ro, opt, int, range:[1800,10000]-->1
  </customColorTemperatureLevel>
  <WhiteBalanceRedFineTuning>
    <!--ro, opt, int, range:[0,100]-->1
  </WhiteBalanceRedFineTuning>
  <WhiteBalanceBlueFineTuning>
    <!--ro, opt, int, range:[0,100]-->1
  </WhiteBalanceBlueFineTuning>
  <autoMode>
    <!--ro, opt, enum, subType:string, dep:and,{$.WhiteBalance.WhiteBalanceStyle,eq,auto}-->video
  </autoMode>
  <manualMode>
    <!--ro, opt, enum, subType:string, dep:and,{$.WhiteBalance.WhiteBalanceStyle,eq,manual}-->colorFineTuning
  </manualMode>
</WhiteBalance>
```

14.3 Video Management

14.3.1 Manual Recording

14.3.1.1 Start the manual recording

Request URL

PUT /ISAPI/ContentMgmt/record/control/manual/start/tracks/<trackStreamID>

Query Parameter

Parameter Name	Parameter Type	Description
trackStreamID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.3.1.2 Stop the manual recording

Request URL

PUT /ISAPI/ContentMgmt/record/control/manual/stop/tracks/<trackStreamID>

Query Parameter

Parameter Name	Parameter Type	Description
trackStreamID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.3.2 Scheduled Recording

14.3.2.1 Add a recording schedule

Request URL

POST /ISAPI/ContentMgmt/record/tracks

Query Parameter

None

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<Track xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, search all recording schedules, attr:version{req, string, protocolVersion}-->
  <id>
    <!--opt, int, channel corresponding to the stream type, desc:the values of <id> and <Channel> are the same. For example, 201 refers to the main stream of channel 2, 202 refers to the sub-stream of channel 2, and so on. If the field SrcUrl of video source description is valid, the channel stream type should be subject to that of SrcUrl-->201
  </id>
  <Channel>
    <!--req, int, channel No.-->1
  </Channel>
  <Enable>
    <!--req, bool, whether to enable, desc:this node is retained, and returned by some devices, but has no practical meaning-->true
  </Enable>
  <Description>
    <!--req, string, recording description-->trackType=standard,sourceTag=AXIS210a,contentType=video,codecType=MPEG4-SP,resolution=640x480,frameRate=20fps,bitrate=6000 kbps
  </Description>
  <TrackGUID>
    <!--req, string, GUID, desc:generated by the client-->{A01AAAAA-BBBB-CCCC-DDDD-033595353625}
  </TrackGUID>
  <Size>
    <!--opt, int, recording size-->1
  </Size>
  <Duration min="0" max="750">
    <!--opt, string, video expiry time, attr:min{req, int},max{req, int}, desc:e.g., P100T15H indicates the video will be expired in 10 days and 15 hours; 0 indicates the video is valid until it is recurrently overwritten-->P100T15H
  </Duration>
  <DefaultRecordingMode>
    <!--req, enum, default record type, subType:string, desc:"CMR" (capture by schedule), "MOTION" (capture motion detection pictures), "ALARM" (capture alarm pictures), "EDR" (capture alarm pictures or motion detection pictures), "ALARMANDMOTION" (capture alarm pictures and motion detection pictures), "ALLEvent" (all events), "POS" (POS recording), "PECCANCY" (forensic marking recording), "SMART" (smart recording), "temperatureIntervalMeasurement" (temperature range detection), "methaneConcentrationException" (dangerous gas detection: methane concentration exception by default), "thermalVehicleDetection" (thermal imaging vehicle detection), "fishingShipDetection" (fishing ship detection), "consultation", "panicAlarm" (panic alarm), "zoneAlarm" (zone alarm), "parallelParking" (vehicle entering or exiting during parallel parking), "parallelParkingContinuousRecord" (from vehicle entering to vehicle exiting for parallel parking), "linedetection" (line crossing detection), "toiletTarry" (in-toilet overtime detection), "getUp" (get-off-bed detection), "retention" (overstay detection), "failDown" (getting up or falling down detection)-->CMR
  </DefaultRecordingMode>
  <LoopEnable>
    <!--opt, bool, whether to support recurrently overwriting-->true
  </LoopEnable>
  <SrcDescriptor>
    <!--opt, object, video source description-->
    <SrcGUID>
      <!--req, string, GUID generated by the client-->{E800A543-9D53-4520-8BB8-9509062C692D}
    </SrcGUID>
    <SrcChannel>
      <!--req, int, source channel-->1
    </SrcChannel>
    <StreamHint>
      <!--req, string, stream description-->video,mp4,640x480,20 fps,6000 kbps
    </StreamHint>
    <SrcDriver>
      <!--req, string, stream executable driver name-->RTP/RTSP
    </SrcDriver>
    <SrcType>
      <!--opt, string, source type-->mp4 video
    </SrcType>
    <SrcUrl>
      <!--req, string, source URL, desc:the format of source URL is: rtsp://localhost/ISAPI/Streaming/channels/<trackStreamID>. The <trackStreamID> refers to the channel stream ID = channel number * 100 + stream type (1 indicates main stream, 2 indicates sub stream). For example, 201 indicates the main stream of channel 2-->rtsp://localhost/ISAPI/Streaming/channels/101
    </SrcUrl>
    <SrcUrlMethods>
      <!--req, enum, methods supported by the source, subType:string, desc:"DESCRIBE" (subscribe), "SETUP", "PLAY", "TEARDOWN" (stop)-->DESCRIBE
    </SrcUrlMethods>
    <SrcLogin>
      <!--req, string, Login source password-->admin:admin
    </SrcLogin>
  </SrcDescriptor>
  <TrackSchedule>
    <!--opt, object, recording schedule-->
    <ScheduleBlockList>
      <!--opt, array, recording schedule List, subType:object-->
      <ScheduleBlock>
        <!--opt, object, recording schedule module-->
        <ScheduleBlockGUID>
          <!--opt, string, schedule GUID-->{ABC12345-CDEF-4520-8BB8-7135789C8790}
        </ScheduleBlockGUID>
        <ScheduleBlockType>
```

```

<!--req, string, schedule type-->/ISAPI/recording/schedule/default
</ScheduleBlockType>
<ScheduleAction>
  <!--opt, array, schedule, subType:object, desc:N/A-->
  <id>
    <!--req, int, ID-->1
  </id>
  <ScheduleActionStartTime>
    <!--opt, object, scheduled start time-->
    <DayOfWeek>
      <!--req, enum, day of a week, subType:string, desc:"Monday", "Tuesday", "Wednesday", "Thursday", "Friday", "Saturday", "Sunday"-->Monday
    </DayOfWeek>
    <TimeOfDay>
      <!--opt, time, time-->08:00:00
    </TimeOfDay>
  </ScheduleActionStartTime>
  <ScheduleActionEndTime>
    <!--opt, object, scheduled end time-->
    <DayOfWeek>
      <!--req, enum, day of a week, subType:string, desc:"Monday", "Tuesday", "Wednesday", "Thursday", "Friday", "Saturday", "Sunday"-->Monday
    </DayOfWeek>
    <TimeOfDay>
      <!--opt, time, time-->08:00:00
    </TimeOfDay>
  </ScheduleActionEndTime>
  <ScheduleDSTEnable>
    <!--req, bool, whether to enable Daylight Saving Time (DST)-->true
  </ScheduleDSTEnable>
  <Description>
    <!--req, string, Description-->PreMorning (Midnight to 8am,local time)
  </Description>
  <Actions>
    <!--opt, object, trigger action, desc:alarm or motion detection that triggers a recording-->
    <Record>
      <!--opt, bool, record, desc:this node is retained, and returned by some devices, but has no practical meaning-->true
    </Record>
    <Log>
      <!--opt, bool, log, desc:this node is retained, and returned by some devices, but has no practical meaning-->true
    </Log>
    <SaveImg>
      <!--opt, bool, save image, desc:this node is retained, and returned by some devices, but has no practical meaning-->true
    </SaveImg>
    <ActionRecordingMode>
      <!--req, enum, recording schedule type, subType:string, desc:"CMR" (capture by schedule), "MOTION" (capture motion detection pictures),
      "ALARM" (capture alarm pictures), "EDR" (capture alarm pictures or motion detection pictures), "ALARMANDMOTION" (capture alarm pictures and motion detection
      pictures), "COMMAND" (recording by commands), "SMART" (smart recording), "thermalVehicleDetection" (thermal imaging vehicle detection),
      "fishingShipDetection" (fishing ship detection), "methaneConcentrationException" (dangerous gas detection: methane concentration exception by default),
      "ALLEvent" (all events), "consultation", "panicAlarm" (panic alarm), "zoneAlarm" (zone alarm), "temperatureIntervalMeasurement" (temperature range
      detection), "linedetection" (line crossing detection), "toiletTarry" (in-toilet overtime detection), "getUp" (get-off-bed detection), "retention" (overstay
      detection), "failDown" (getting up or falling down detection)-->CMR
    </ActionRecordingMode>
    <PreRecordTimeSeconds>
      <!--opt, int, pre-record duration, unit:s, desc:from 0 to 10 seconds; default: 5 seconds-->5
    </PreRecordTimeSeconds>
    <PostRecordTimeSeconds>
      <!--opt, int, post-record duration, unit:s, desc:from 0 to 20 seconds; default: 5 seconds-->5
    </PostRecordTimeSeconds>
  </Actions>
</ScheduleAction>
</ScheduleBlock>
</ScheduleBlockList>
</TrackSchedule>
<CustomExtensionList>
  <!--opt, array, custom extension list, subType:object-->
  <CustomExtension>
    <!--opt, object, custom extension-->
    <CustomExtensionName>
      <!--opt, string, custom extension name-->www.xxx.com/RaCM/trackExt/ver10
    </CustomExtensionName>
    <enableSchedule>
      <!--opt, bool, whether to enable recording schedule configuration-->true
    </enableSchedule>
    <SaveAudio>
      <!--opt, bool, whether to enable audio recording-->true
    </SaveAudio>
    <PreRecordTimeSeconds>
      <!--opt, int, pre-record, unit:s-->1
    </PreRecordTimeSeconds>
    <PostRecordTimeSeconds>
      <!--opt, int, post-record, unit:s-->1
    </PostRecordTimeSeconds>
    <HolidaySchedule>
      <!--opt, object, holiday schedule-->
      <ScheduleBlock>
        <!--opt, object, schedule module-->
        <ScheduleBlockGUID>
          <!--req, string, schedule module GUID-->{00000000-0000-0000-0000-000000000000}
        </ScheduleBlockGUID>
        <ScheduleBlockType>
          <!--opt, string, schedule module type-->www.xxx.com/racm/schedule/ver10
        </ScheduleBlockType>
      </ScheduleBlock>
    </HolidaySchedule>
  </CustomExtension>

```

```

</CustomExtensionList>
<IntelligentRecord>
  <!--opt, bool, whether to enable VCA recording function-->false
</IntelligentRecord>
<delayTime>
  <!--opt, int, capture delay time, unit:s-->1
</delayTime>
</Track>

```

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL, range:[0,1024]-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status description, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code-->OK
  </subStatusCode>
  <description>
    <!--ro, opt, string, custom error information description, range:[0,1024], desc:detailed information of custom error returned by device applications, used for fast debugging-->badXmlFormat
  </description>
</ResponseStatus>

```

14.3.2.2 Get all parameters of a recording schedule

Request URL

GET /ISAPI/ContentMgmt/record/tracks

Query Parameter

None

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<TrackList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, array, get all parameters of a recording schedule, subType:object, attr:version{req, string, protocolVersion}-->
  <Track>
    <!--ro, opt, object, recording schedule configuration-->
    <id>
      <!--ro, opt, int, channel number corresponding to stream type, desc:the values of <id> and <Channel> are the same. For example, 201 refers to the main stream of channel 2, 202 refers to the sub-stream of channel 2, and so on. If the field SrcUrl of video source description is valid, the channel stream type should be subject to that of SrcUrl-->201
    </id>
    <Channel>
      <!--ro, req, int, channel No.-->1
    </Channel>
    <Enable>
      <!--ro, req, bool, whether to enable, desc:this node is retained, and returned by some devices, but has no practical meaning-->true
    </Enable>
    <Description>
      <!--ro, req, string, recording description-->trackType=standard,sourceTag=AXIS210a,contentype=video,codecType=MPEG4-SP,resolution=640x480,frameRate=20 fps,bitrate=6000 kbps
    </Description>
    <TrackGUID>
      <!--ro, req, string, GUID, desc:generated by the client-->{A01AAAAA-BBBB-CCCC-DDDD-033595353625}
    </TrackGUID>
    <Size>
      <!--ro, opt, int, recording size-->1
    </Size>
    <Duration min="0" max="750">
      <!--ro, opt, string, video expiry time, attr:min{req, int},max{req, int}, desc:e.g., P10DT15H indicates the video will be expired in 10 days and 15 hours; 0 indicates the video is valid until it is recurrently overwritten-->P10DT15H
    </Duration>
    <DefaultRecordingMode>
      <!--ro, req, enum, default record type, subType:string, desc:"CMR" (capture by schedule), "MOTION" (capture motion detection pictures), "ALARM" (capture alarm pictures), "EDR" (capture alarm pictures or motion detection pictures), "ALARMANDMOTION" (capture alarm pictures and motion detection pictures), "AllEvent" (all events), "DPS" (DPS recording), "DEFCAMCV" (forensic marking recording), "SMART" (smart recording)
    </DefaultRecordingMode>
  </Track>

```


pictures), "ALARM" (alarm pictures), "EDR" (capture alarm pictures or motion detection pictures), "ALARMANDMOTION" (capture alarm pictures and motion detection pictures), "ALL_EVENTS" (all events), "FIS" (FIS recording), "FISCMR" (FIS capture marking recording), "SMR" (SMR recording), "temperatureIntervalMeasurement" (temperature range detection), "methaneConcentrationException" (dangerous gas detection: methane concentration exception by default), "thermalVehicleDetection" (thermal imaging vehicle detection), "FishingShipDetection" (fishing ship detection), "consultation", "panicAlarm" (panic alarm), "zoneAlarm" (zone alarm), "parallelParking" (vehicle entering or exiting during parallel parking), "parallelParkingContinuousRecord" (from vehicle entering to vehicle exiting for parallel parking), "LineDetection" (Line crossing detection), "toiletTarry" (in-toilet overtime detection), "getUp" (get-off-bed detection), "retention" (overstay detection), "failDown" (getting up or falling down detection)-->CMR

```

</DefaultRecordingMode>
<LoopEnable>
  <!--ro, opt, bool, whether to support recurrently overwriting-->true
</LoopEnable>
<SrcDescriptor>
  <!--ro, opt, object, video source description-->
  <SrcGUID>
    <!--ro, req, string, GUID generated by the client-->{E800A543-9D53-4520-8BB8-9509062C692D}
  </SrcGUID>
  <SrcChannel>
    <!--ro, req, int, source channel-->1
  </SrcChannel>
  <StreamHint>
    <!--ro, req, string, stream description-->video,mp4,640x480,20 fps,6000 kbps
  </StreamHint>
  <SrcDriver>
    <!--ro, req, string, stream executable driver name-->RTP/RTSP
  </SrcDriver>
  <SrcType>
    <!--ro, opt, string, source type-->mp4 video
  </SrcType>
  <SrcUrl>
    <!--ro, req, string, source URL, desc:the format of source URL is: rtsp://localhost/ISAPI/Streaming/channels/<trackStreamID>. The <trackStreamID> refers to the channel stream ID = channel number * 100 + stream type (1 indicates main stream, 2 indicates sub stream). For example, 201 indicates the main stream of channel 2-->rtsp://localhost/ISAPI/Streaming/channels/101
  </SrcUrl>
  <SrcUrlMethods>
    <!--ro, req, enum, methods supported by the source, subType:string, desc:"DESCRIBE" (subscribe), "SETUP", "PLAY", "TEARDOWN" (stop)-->DESCRIBE
  </SrcUrlMethods>
  <SrcLogin>
    <!--ro, req, string, Login source password-->admin:admin
  </SrcLogin>
</SrcDescriptor>
<TrackSchedule>
  <!--ro, opt, object, recording schedule-->
  <ScheduleBlockList>
    <!--ro, opt, array, recording schedule list, subType:object-->
    <ScheduleBlock>
      <!--ro, opt, object, recording schedule module-->
      <ScheduleBlockGUID>
        <!--ro, opt, string, schedule GUID-->{ABC12345-CDEF-4520-8BB8-7135789C8790}
      </ScheduleBlockGUID>
      <ScheduleBlockType>
        <!--ro, req, string, schedule type-->/ISAPI/recording/schedule/default
      </ScheduleBlockType>
      <ScheduleAction>
        <!--ro, opt, array, schedule, subType:object, desc:N/A-->
        <id>
          <!--ro, req, int, ID-->1
        </id>
        <ScheduleActionStartTime>
          <!--ro, opt, object, scheduled start time-->
          <DayOfWeek>
            <!--ro, req, enum, day of a week, subType:string, desc:"Monday", "Tuesday", "Wednesday", "Thursday", "Friday", "Saturday", "Sunday"-->Monday
          </DayOfWeek>
          <TimeOfDay>
            <!--ro, opt, time, time-->08:00:00
          </TimeOfDay>
          </ScheduleActionStartTime>
          <ScheduleActionEndTime>
            <!--ro, opt, object, scheduled end time-->
            <DayOfWeek>
              <!--ro, req, enum, day of a week, subType:string, desc:"Monday", "Tuesday", "Wednesday", "Thursday", "Friday", "Saturday", "Sunday"-->Monday
            </DayOfWeek>
            <TimeOfDay>
              <!--ro, opt, time, time-->08:00:00
            </TimeOfDay>
            </ScheduleActionEndTime>
          <ScheduleDSTEnable>
            <!--ro, req, bool, whether to enable Daylight Saving Time (DST)-->true
          </ScheduleDSTEnable>
          <Description>
            <!--ro, req, string, description-->PreMorning (Midnight to 8am,local time)
          </Description>
          <Actions>
            <!--ro, opt, object, trigger action, desc:alarm or motion detection that triggers a recording-->
            <Record>
              <!--ro, opt, bool, record, desc:this node is retained, and returned by some devices, but has no practical meaning-->true
            </Record>
            <Log>
              <!--ro, opt, bool, Log, desc:this node is retained, and returned by some devices, but has no practical meaning-->true
            </Log>
            <SaveImg>
              <!--ro, opt, bool, save image, desc:this node is retained, and returned by some devices, but has no practical meaning-->true
            </SaveImg>
          </ActionRecordingMode>
          <!--ro, req, enum, recording schedule type, subType:string, desc:"CMR" (capture by schedule), "MOTION" (capture motion detection pictures), "ALARM" (capture alarm pictures), "EDR" (capture alarm pictures or motion detection pictures), "ALARMANDMOTION" (capture alarm pictures and motion detection
  
```

```

pictures), "COMMAND" (recording by commands), "SMART" (smart recording), "thermalVehicleDetection" (thermal imaging vehicle detection),
"fishingShipDetection" (fishing ship detection), "methaneConcentrationException" (dangerous gas detection: methane concentration exception by default),
"AlEvent" (all events), "consultation", "panicAlarm" (panic alarm), "zoneAlarm" (zone alarm), "temperatureIntervalMeasurement" (temperature range
detection), "LineDetection" (line crossing detection), "toiletTarry" (in-toilet overtime detection), "getUp" (get-off-bed detection), "retention" (overstay
detection), "failDown" (getting up or falling down detection)-->CMR
</ActionRecordingMode>
<PreRecordTimeSeconds>
  <!--ro, opt, int, pre-record duration, unit:s, desc:from 0 to 10 seconds; default: 5 seconds-->5
</PreRecordTimeSeconds>
<PostRecordTimeSeconds>
  <!--ro, opt, int, post-record duration, unit:s, desc:from 0 to 20 seconds; default: 5 seconds-->5
</PostRecordTimeSeconds>
</Actions>
</ScheduleAction>
</ScheduleBlock>
</ScheduleBlockList>
</TrackSchedule>
<CustomExtensionList>
  <!--ro, opt, array, custom extension list, subType:object-->
  <CustomExtension>
    <!--ro, opt, object, custom extension-->
    <CustomExtensionName>
      <!--ro, opt, string, custom extension name-->www.xxxx.com/RaCM/trackExt/ver10
    </CustomExtensionName>
    <enableSchedule>
      <!--ro, opt, bool, whether to enable recording schedule configuration-->true
    </enableSchedule>
    <SaveAudio>
      <!--ro, opt, bool, whether to enable audio recording-->true
    </SaveAudio>
    <PreRecordTimeSeconds>
      <!--ro, opt, int, pre-record, unit:s-->1
    </PreRecordTimeSeconds>
    <PostRecordTimeSeconds>
      <!--ro, opt, int, post-record, unit:s-->1
    </PostRecordTimeSeconds>
    <HolidaySchedule>
      <!--ro, opt, object, holiday schedule-->
      <ScheduleBlock>
        <!--ro, opt, object, schedule module-->
        <ScheduleBlockGUID>
          <!--ro, req, string, schedule module GUID-->{00000000-0000-0000-0000-000000000000}
        </ScheduleBlockGUID>
        <ScheduleBlockType>
          <!--ro, opt, string, schedule module type-->www.xxxx.com/racm/schedule/ver10
        </ScheduleBlockType>
      </ScheduleBlock>
    </HolidaySchedule>
  </CustomExtension>
</CustomExtensionList>
<IntelligentRecord>
  <!--ro, opt, bool, whether to enable VCA recording function-->>false
</IntelligentRecord>
<delayTime>
  <!--ro, opt, int, capture delay time, unit:s-->1
</delayTime>
<durationEnabled>
  <!--ro, opt, bool, whether to enable video expiry time, desc:this node is not returned when it is not supported; you can configure video expiry time
via the node "Duration" when it is supported-->true
</durationEnabled>
<redundancyRec>
  <!--ro, opt, bool, whether it is redundant recording, desc:it is false when this node does not exist-->>false
</redundancyRec>
<passbackRecord>
  <!--ro, opt, bool, whether to copy back recording, desc:it is false when this node does not exist-->>false
</passbackRecord>
<lockDuration>
  <!--ro, opt, int, recording Locking duration, unit:h, desc:0-unlocked or this node does not exist, 0xffff-Locked permanently; if the total recording
is longer than the locked part, it will not be locked-->0
</lockDuration>
<recordBackup>
  <!--ro, opt, bool, whether to enable video archiving, desc:it is false when this node does not exist-->>false
</recordBackup>
<SVCLevel>
  <!--ro, opt, enum, SVC frame extracting type, subType:int, desc:0-not extracted or this node does not exist, 1-half extracted, 2-three quarters
extracted-->0
</SVCLevel>
<recordManage>
  <!--ro, opt, bool, whether to enable video scheduling, desc:true (enabled scheduled recording), false (no scheduled recording but the recording
schedule is still in use, e.g., motion detection and copy-back); it is false when this node does not exist-->>false
</recordManage>
<extraSaveAudio>
  <!--ro, opt, bool, whether to enable separate audio storage, desc:it is false when this node does not exist-->>false
</extraSaveAudio>
</Track>
</TrackList>

```

14.3.2.3 Set all recording schedules

Request URL

PUT /ISAPI/ContentMgmt/record/tracks

Query Parameter

None

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>
<TrackList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, array, all recording schedules parameters, subType:object, attr:version{req, string, protocolVersion}-->
  <Track>
    <!--opt, object, recording schedule configuration-->
    <id>
      <!--opt, int, channel corresponding to the stream type, desc:the values of <id> and <Channel> are the same. For example, 201 refers to the main stream
of channel 2, 202 refers to the sub-stream of channel 2, and so on. If the field SrcUrl of video source description is valid, the channel stream type should
be subject to that of SrcUrl-->201
    </id>
    <Channel>
      <!--req, int, channel No.-->1
    </Channel>
    <Enable>
      <!--req, bool, whether to enable, desc:this node is retained, and returned by some devices, but has no practical meaning-->true
    </Enable>
    <Description>
      <!--req, string, recording description-->trackType=standard,sourceTag=AXIS210a,contentype=video,codecType=MPEG4-SP,resolution=640x480,frameRate=20
fps,bitrate=6000 kbps
    </Description>
    <TrackGUID>
      <!--req, string, GUID, desc:generated by the client-->{A01AAAAA-BBBB-CCCC-DDDD-033595353625}
    </TrackGUID>
    <Duration min="0" max="750">
      <!--opt, string, video expiry time, attr:min{req, int},max{req, int}, desc:e.g., P10DT15H indicates the video will be expired in 10 days and 15 hours;
0 indicates the video is valid until it is recurrently overwritten-->P10DT15H
    </Duration>
    <DefaultRecordingMode>
      <!--req, enum, default recording type, subType:string, desc:"CMR" (capture by schedule), "MOTION" (capture motion detection pictures), "ALARM"
(capture alarm pictures), "EDR" (capture alarm pictures or motion detection pictures), "ALARMANDMOTION" (capture alarm pictures and motion detection
pictures), "AllEvent" (all events), "POS" (POS recording), "PECCANCY" (forensic marking recording), "SMART" (smart recording),
"temperatureIntervalMeasurement" (temperature range detection), "methaneConcentrationException" (dangerous gas detection: methane concentration exception by
default), "thermalVehicleDetection" (thermal imaging vehicle detection), "fishingShipDetection" (fishing ship detection), "consultation", "panicAlarm"
(panic alarm), "zoneAlarm" (zone alarm), "parallelParking" (vehicle entering or exiting during parallel parking, "parallelParkingContinuousRecord" (from
vehicl entering to vehicle exiting for parallel parking), "Linedetection" (line crossing detection), "toiletTarry" (in-toilet overtime detection), "getUp"
(get-off-bed detection), "retention" (overstay detection), "fallDown" (getting up or falling down detection)-->CMR
    </DefaultRecordingMode>
    <LoopEnable>
      <!--opt, bool, whether to support recurrently overwriting-->true
    </LoopEnable>
    <SrcDescriptor>
      <!--opt, object, video source description-->
      <SrcGUID>
        <!--req, string, GUID generated by the client-->{E800A543-9D53-4520-8BB8-9509062C692D}
      </SrcGUID>
      <SrcChannel>
        <!--req, int, source channel-->1
      </SrcChannel>
      <StreamHint>
        <!--req, string, stream description-->video,mp4,640x480,20 fps,6000 kbps
      </StreamHint>
      <SrcDriver>
        <!--req, string, stream executable driver name-->RTP/RTSP
      </SrcDriver>
      <SrcType>
        <!--opt, string, source type-->mp4 video
      </SrcType>
      <SrcUrl>
        <!--req, string, source URL, desc:the format of source URL is: rtsp://localhost/ISAPI/Streaming/channels/<trackStreamID>. The <trackStreamID> refers
to the channel stream ID = channel number * 100 + stream type (1 indicates main stream, 2 indicates sub stream). For example, 201 indicates the main stream
of channel 2-->rtsp://localhost/ISAPI/Streaming/channels/101
      </SrcUrl>
      <SrcLogin>
        <!--req, string, login source password-->admin:admin
      </SrcLogin>
      <SrcDescriptor>
      <TrackSchedule>
        <!--opt, object, recording schedule-->
        <ScheduleBlockList>
          <!--opt, array, recording schedule list, subType:object-->
          <ScheduleBlock>
            <!--opt, object, recording schedule module-->
            <ScheduleBlockGUID>
              <!--opt, string, schedule GUID-->{ABC12345-CDEF-4520-8BB8-7135789C8790}
            </ScheduleBlockGUID>
            <ScheduleBlockType>
              <!--req, string, schedule type-->/ISAPI/recording/schedule/default
            </ScheduleBlockType>
            <ScheduleBlock>
          </ScheduleBlockList>
        </TrackSchedule>
        <CustomExtensionList>
          <!--opt, array, custom extension list, subType:object-->
          <CustomExtension>
```

```

<CustomExtension>
  <!--opt, object, custom extension-->
  <CustomExtensionName>
    <!--opt, string, custom extension name-->www.xxx.com/RaCM/trackExt/ver10
  </CustomExtensionName>
  <enableSchedule>
    <!--opt, bool, whether to enable recording schedule configuration-->true
  </enableSchedule>
  <PreRecordTimeSeconds>
    <!--opt, int, pre-record, unit:s-->1
  </PreRecordTimeSeconds>
  <PostRecordTimeSeconds>
    <!--opt, int, post-record, unit:s-->1
  </PostRecordTimeSeconds>
</CustomExtension>
</CustomExtensionList>
<durationEnabled>
  <!--opt, bool, whether to enable video expiry time, desc:this node is not returned when it is not supported; you can configure video expiry time via the node Duration when it is supported-->true
</durationEnabled>
</Track>
</TrackList>

```

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL, range:[0,1024]-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status description, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code-->OK
  </subStatusCode>
  <description>
    <!--ro, opt, string, custom error information description, range:[0,1024], desc:detailed information of custom error returned by device applications, used for fast debugging-->badXmlFormat
  </description>
</ResponseStatus>

```

14.3.2.4 Delete recording schedules for a specified channel

Request URL

DELETE /ISAPI/ContentMgmt/record/tracks/<trackStreamID>

Query Parameter

Parameter Name	Parameter Type	Description
trackStreamID	string	Channel number corresponding to the stream type, for example, 101 indicates main stream of channel 1.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL, range:[0,1024]-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code-->OK
  </subStatusCode>
  <description>
    <!--ro, opt, string, custom error information description, range:[0,1024], desc:the detailed information of custom error returned by device applications, which is used for fast debugging-->badXmlFormat
  </description>
</ResponseStatus>
```

14.3.2.5 Get the configuration capability of the recording schedule

Request URL

GET /ISAPI/ContentMgmt/record/tracks/<trackStreamID>/capabilities

Query Parameter

Parameter Name	Parameter Type	Description
trackStreamID	string	Channel number corresponding to the stream type, for example, 101 indicates main stream of channel 1.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<Track xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, configuration capability of the recording schedule, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, opt, int, channel corresponding to the stream type, desc:the values of <id> and <Channel> are the same. For example, 201 refers to the main stream of channel 1, 202 refers to the sub-stream of channel 2, and so on-->201
  </id>
  <Channel>
    <!--ro, req, int, channel No.-->1
  </Channel>
  <Enable>
    <!--ro, req, bool, whether to enable, desc:this node is retained, and returned by some devices, but has no practical meaning-->true
  </Enable>
  <Description>
    <!--ro, req, string, recording description-->trackType=standard,sourceTag=AXIS210a,contentType=video,codecType=MPEG4-SP,resolution=640x480,frameRate=20fps,bitrate=6000 kbps
  </Description>
  <TrackGUID>
    <!--ro, req, string, GUID, desc:generated by the client-->{A01AAAAA-BBBB-CCCC-DDDD-033595353625}
  </TrackGUID>
  <Size>
    <!--ro, opt, int, recording size-->1
  </Size>
  <Duration min="0" max="750">
    <!--ro, opt, string, video expiry time, attr:min{req, int},max{req, int}, desc:e.g., P10DT15H indicates the video will be expired in 10 days and 15 hours-->P10DT15H
  </Duration>
  <DefaultRecordingMode
opt="CMR,MOTION,ALARM,EDR,ALARMANDMOTION,AllEvent,POS,PECCANCY,SMART,temperatureIntervalMeasurement,methaneConcentrationException,thermalVehicleDetection,fishingShipDetection,consultation,panicAlarm,zoneAlarm,parallelParking,parallelParkingContinuousRecord,linedetection,toiletTarry,getUp,retention,failDown">
    <!--ro, req, enum, default recording type, subType:string, attr:opt{req, string}, desc:"CMR" (capture by schedule), "MOTION" (capture motion detection pictures), "ALARM" (capture alarm pictures), "EDR" (capture alarm pictures or motion detection pictures), "ALARMANDMOTION" (capture alarm pictures and motion detection pictures), "AllEvent" (all events), "POS" (POS recording), "PECCANCY" (forensic marking recording), "SMART" (smart recording), "temperatureIntervalMeasurement" (temperature range detection), "methaneConcentrationException" (dangerous gas detection: methane concentration exception by default), "thermalVehicleDetection" (thermal imaging vehicle detection), "fishingShipDetection" (fishing ship detection), "consultation", "panicAlarm" (panic alarm), "zoneAlarm" (zone alarm), "parallelParking" (vehicle entering or exiting during parallel parking), "parallelParkingContinuousRecord" (from vehicl entering to vehicle exiting for parallel parking), "Linedetection" (Line crossing detection), "toiletTarry" (in-toilet overtime detection), "getUp" (get-off-bed detection), "retention" (overstay detection), "failDown" (getting up or falling down detection)-->CMR
  </DefaultRecordingMode>
```

```

<LoopEnable>
  <!--ro, opt, bool, whether to support recurrent overwriting-->true
</LoopEnable>
<SrcDescriptor>
  <!--ro, opt, object, video source description-->
  <SrcGUID>
    <!--ro, req, string, GUID generated by the client-->{E800A543-9D53-4520-8BB8-9509062C692D}
  </SrcGUID>
  <SrcChannel>
    <!--ro, req, int, source channel-->1
  </SrcChannel>
  <StreamHint>
    <!--ro, req, string, stream description-->video,mp4,640x480,20 fps,6000 kbps
  </StreamHint>
  <SrcDriver>
    <!--ro, req, string, stream executable driver name-->RTP/RTSP
  </SrcDriver>
  <SrcType>
    <!--ro, opt, string, source type-->mp4 video
  </SrcType>
  <SrcUrl>
    opt="rtsp://localhost/PSIA/Streaming/channels/101,rtsp://localhost/PSIA/Streaming/channels/102,rtsp://localhost/PSIA/Streaming/channels/103,rtsp://localhost/PSIA/Streaming/channels/107"
    <!--ro, req, string, source URL, attr:opt{req, string}-->rtsp://10.3.2.26/mpeg4/media.amp
  </SrcUrl>
  <SrcUrlMethods>
    <!--ro, req, string, methods supported by the source, desc:"DESCRIBE" (subscribe), "SETUP", "PLAY", "TEARDOWN" (stop)-->DESCRIBE
  </SrcUrlMethods>
  <SrcLogin>
    <!--ro, req, string, Login source password, desc:user name for source channel RTSP authentication returned by device; encryption required for sensitive information-->admin
  </SrcLogin>
</SrcDescriptor>
<TrackSchedule>
  <!--ro, opt, object, recording schedule-->
  <ScheduleBlockList>
    <!--ro, opt, array, recording schedule list, subType:object-->
    <ScheduleBlock>
      <!--ro, opt, object, recording schedule module-->
      <ScheduleBlockGUID>
        <!--ro, opt, string, schedule GUID-->{ABC12345-CDEF-4520-8BB8-7135789C8790}
      </ScheduleBlockGUID>
      <ScheduleBlockType>
        <!--ro, req, string, schedule type-->/ISAPI/recording/schedule/default
      </ScheduleBlockType>
      <ScheduleAction>
        <!--ro, opt, array, schedule, subType:object, desc:N/A-->
        <id>
          <!--ro, req, int, ID-->1
        </id>
        <ScheduleActionStartTime>
          <!--ro, opt, object, scheduled start time-->
          <DayOfWeek>
            <!--ro, req, enum, day of a week, subType:string, desc:"Monday", "Tuesday", "Wednesday", "Thursday", "Friday", "Saturday", "Sunday"-->Monday
          </DayOfWeek>
          <TimeOfDay>
            <!--ro, opt, time, time-->08:00:00
          </TimeOfDay>
          </ScheduleActionStartTime>
          <ScheduleActionEndTime>
            <!--ro, opt, object, scheduled end time-->
            <DayOfWeek>
              <!--ro, req, enum, day of a week, subType:string, desc:"Monday", "Tuesday", "Wednesday", "Thursday", "Friday", "Saturday", "Sunday"-->Monday
            </DayOfWeek>
            <TimeOfDay>
              <!--ro, opt, time, time-->08:00:00
            </TimeOfDay>
            </ScheduleActionEndTime>
          <ScheduleDSTEnable>
            <!--ro, req, bool, whether to enable Daylight Saving Time (DST)-->true
          </ScheduleDSTEnable>
          <Description>
            <!--ro, req, string, description-->PreMorning (Midnight to 8am,local time)
          </Description>
          <Actions>
            <!--ro, opt, object, trigger action, desc:alarm or motion detection that triggers a recording-->
            <Record>
              <!--ro, opt, bool, record, desc:this node is retained, and returned by some devices, but has no practical meaning-->true
            </Record>
            <Log>
              <!--ro, opt, bool, Log, desc:this node is retained, and returned by some devices, but has no practical meaning-->true
            </Log>
            <SaveImg>
              <!--ro, opt, bool, save image, desc:this node is retained, and returned by some devices, but has no practical meaning-->true
            </SaveImg>
            <ActionRecordingMode>
              <!--ro, req, enum, recording schedule type, subType:string, desc:"CMR" (capture by schedule), "MOTION" (capture motion detection pictures), "ALARM" (capture alarm pictures), "EDR" (capture alarm pictures or motion detection pictures), "ALARMANDMOTION" (capture alarm pictures and motion detection pictures), "Command" (recording by commands), "SMART" (smart recording), "AlLEvent" (all events), "temperatureIntervalMeasurement" (temperature range detection), "thermalVehicleDetection" (thermal imaging vehicle detection), "fishingShipDetection" (fishing ship detection), "methaneConcentrationException" (dangerous gas detection: methane concentration exception by default), "consultation", "panicAlarm" (panic alarm), "zoneAlarm" (zone alarm), "LineDetection" (Line crossing detection), "toiletTarry" (in-toilet overtime detection), "getUp" (get-off-bed detection), "retention" (overstay detection), "failDown" (getting up or falling down detection)-->CMR
            </ActionRecordingMode>
          </Actions>
        </ScheduleAction>
      </ScheduleBlock>
    </ScheduleBlockList>
  </TrackSchedule>

```

```

</ActionRecordingMode>
<PreRecordTimeSeconds min="0" max="10" def="5">
  <!--ro, opt, int, pre-record duration, unit:s, attr:min{req, int},max{req, int},def{req, int}, desc:from 0 to 10 seconds; default: 5 seconds-->
>5
</PreRecordTimeSeconds>
<PostRecordTimeSeconds min="30" max="600" def="30">
  <!--ro, opt, int, post-record duration, unit:s, attr:min{req, int},max{req, int},def{req, int}, desc:from 30 to 600 seconds; default: 30
seconds-->30
</PostRecordTimeSeconds>
</Actions>
</ScheduleAction>
</ScheduleBlock>
</ScheduleBlockList>
</TrackSchedule>
<CustomExtensionList>
  <!--ro, opt, array, custom extension list, subType:object-->
  <CustomExtension>
    <!--ro, opt, object, custom extension-->
    <CustomExtensionName>
      <!--ro, opt, string, custom extension name-->www.xxx.com/RaCM/trackExt/ver10
    </CustomExtensionName>
    <enableSchedule>
      <!--ro, opt, bool, whether to enable recording schedule configuration-->true
    </enableSchedule>
    <SaveAudio>
      <!--ro, opt, bool, whether to enable audio recording-->true
    </SaveAudio>
    <PreRecordTimeSeconds>
      <!--ro, opt, int, pre-record, unit:s-->1
    </PreRecordTimeSeconds>
    <PostRecordTimeSeconds>
      <!--ro, opt, int, post-record, unit:s-->1
    </PostRecordTimeSeconds>
    <HolidaySchedule>
      <!--ro, opt, object, holiday schedule-->
    <ScheduleBlock>
      <!--ro, opt, object, schedule module-->
      <ScheduleBlockGUID>
        <!--ro, req, string, schedule module GUID-->{00000000-0000-0000-0000-000000000000}
      </ScheduleBlockGUID>
      <ScheduleBlockType>
        <!--ro, opt, string, schedule module type-->www.xxx.com/racm/schedule/ver10
      </ScheduleBlockType>
    </ScheduleBlock>
  </HolidaySchedule>
</CustomExtension>
</CustomExtensionList>
<IntelligentRecord>
  <!--ro, opt, enum, whether to enable VCA recording, subType:string, desc:0-no, 1-yes.-->0
</IntelligentRecord>
<delayTime opt="0,3,4,5,10,30,60,120,300">
  <!--ro, opt, int, capture delay time, unit:s, attr:opt{req, string}-->1
</delayTime>
<durationEnabled opt="true,false">
  <!--ro, opt, bool, whether to enable video expiry date, attr:opt{req, string},
desc:1. front-end device: this node is not returned when this function is not supported; the video expiry date will be set by the node <Duration> when this
function is supported and <Duration> is not 0
2. back-end device: the video expiry date will be set by the node <Duration> when this node is not returned; this node is "false" when <Duration> is 0-->
>true
</durationEnabled>
<redundancyRec opt="true,false">
  <!--ro, opt, bool, whether it is redundant recording, attr:opt{req, string}-->false
</redundancyRec>
<passbackRecord opt="true,false">
  <!--ro, opt, bool, whether to copy back recording, attr:opt{req, string}-->false
</passbackRecord>
<lockDuration min="0" max="65535">
  <!--ro, opt, int, recording locking duration, unit:h, attr:min{req, int},max{req, int}, desc:0-unlocked or this node does not exist, 0xffff-Locked
permanently; if the total recording is longer than the Locked part, it will not be Locked-->0
</lockDuration>
<recordBackup opt="true,false">
  <!--ro, opt, bool, whether to enable video archiving, attr:opt{req, string}-->false
</recordBackup>
<SVCLLevel opt="0,1,2,3">
  <!--ro, opt, enum, SVC frame extracting type, subType:int, attr:opt{req, string}, desc:0-not extracted, 1-half extracted, 2-three quarters extracted-->0
</SVCLLevel>
<recordManage opt="true,false">
  <!--ro, opt, bool, whether to enable video scheduling, attr:opt{req, string}, desc:enabled-scheduled recording; disabled-no scheduled recording but the
recording schedule still in use for, e.g., motion detection and copy-back-->false
</recordManage>
<extraSaveAudio opt="true,false">
  <!--ro, opt, bool, whether to enable separate audio storage, attr:opt{req, string}-->false
</extraSaveAudio>
</Track>

```

14.3.2.6 Get the recording schedule parameters of a specified channel

Request URL

GET /ISAPI/ContentMgmt/record/tracks/<trackStreamID>

Query Parameter

Parameter Name	Parameter Type	Description
trackStreamID	string	Channel number corresponding to the stream type, for example, 101 indicates main stream of channel 1.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<Track xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, parameters of a recording schedule, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, opt, int, channel corresponding to the stream type, desc:the values of <id> and <Channel> are the same. For example, 201 refers to the main stream of channel 2, 202 refers to the sub-stream of channel 2, and so on. If the field SrcUrl of video source description is valid, the channel stream type should be subject to that of SrcUrl-->201
  </id>
  <Channel>
    <!--ro, req, int, channel No.-->1
  </Channel>
  <Enable>
    <!--ro, req, bool, whether to enable, desc:this node is retained, and returned by some devices, but has no practical meaning-->true
  </Enable>
  <Description>
    <!--ro, req, string, recording description-->trackType=standard,sourceTag=AXIS210a,contentType=video,codecType=MPEG4-SP,resolution=640x480,frameRate=20 fps,bitrate=6000 kbps
  </Description>
  <TrackGUID>
    <!--ro, req, string, GUID, desc:generated by the client-->{A01AAAAA-BBBB-CCCC-DDDD-033595353625}
  </TrackGUID>
  <Size>
    <!--ro, opt, int, video size-->1
  </Size>
  <Duration min="0" max="750">
    <!--ro, opt, string, video expiry time, attr:min{req, int},max{req, int}, desc:e.g., P10DT15H indicates the video will be expired in 10 days and 15 hours-->P10DT15H
  </Duration>
  <DefaultRecordingMode>
    <!--ro, req, enum, default recording type, subType:string, desc:"CMR" (capture by schedule), "MOTION" (capture motion detection pictures), "ALARM" (capture alarm pictures), "EDR" (capture alarm pictures or motion detection pictures), "ALARMANDMOTION" (capture alarm pictures and motion detection pictures), "AlLEvent" (all events), "POS" (POS recording), "PECCANCY" (forensic marking recording), "SMART" (smart recording), "temperatureIntervalMeasurement" (temperature range detection), "methaneConcentrationException" (dangerous gas detection: methane concentration exception by default), "thermalVehicleDetection" (thermal imaging vehicle detection), "fishingShipDetection" (fishing ship detection), "consultation", "panicAlarm" (panic alarm), "zoneAlarm" (zone alarm), "parallelParking" (vehicle entering or exiting during parallel parking, "parallelParkingContinuousRecord" (from vehicl entering to vehicle exiting for parallel parking), "Linedetection" (Line crossing detection), "toiletTarry" (in-toilet overtime detection), "getUp" (get-off-bed detection), "retention" (overstay detection), "failDown" (getting up or falling down detection)-->CMR
  </DefaultRecordingMode>
  <LoopEnable>
    <!--ro, opt, bool, whether to support recurrent overwriting-->true
  </LoopEnable>
  <SrcDescriptor>
    <!--ro, opt, object, video source description-->
    <SrcGUID>
      <!--ro, req, string, GUID generated by the client-->{E800A543-9D53-4520-8BB8-9509062C692D}
    </SrcGUID>
    <SrcChannel>
      <!--ro, req, int, source channel-->1
    </SrcChannel>
    <StreamHint>
      <!--ro, req, string, stream description-->video,mp4,640x480,20 fps,6000 kbps
    </StreamHint>
    <SrcDriver>
      <!--ro, req, string, stream executable driver name-->RTP/RTSP
    </SrcDriver>
    <SrcType>
      <!--ro, opt, string, source type-->mp4 video
    </SrcType>
    <SrcUrl>
      <!--ro, req, string, source URL, desc:the format of source URL is: rtsp://localhost/ISAPI/Streaming/channels/<trackStreamID>. The <trackStreamID> refers to the channel stream ID = channel number * 100 + stream type (1 indicates main stream, 2 indicates sub stream). For example, 201 indicates the main stream of channel 2-->rtsp://localhost/ISAPI/Streaming/channels/101
    </SrcUrl>
    <SrcUrlMethods>
      <!--ro, req, enum, methods supported by the source, subType:string, desc:"DESCRIBE" (subscribe), "SETUP", "PLAY", "TEARDOWN" (stop)-->DESCRIBE
    </SrcUrlMethods>
    <SrcLogin>
      <!--ro, req, string, Login source password, desc:user name for source channel RTSP authentication returned by device; encryption required for sensitive information-->admin
    </SrcLogin>
  </SrcDescriptor>
  <TrackSchedule>
    <!--ro, opt, object, recording schedule-->
```



```

<ScheduleBlockList>
  <!--ro, opt, array, recording schedule List, subType:object-->
  <ScheduleBlock>
    <!--ro, opt, object, recording schedule module-->
    <ScheduleBlockGUID>
      <!--ro, opt, string, schedule GUID-->{ABC12345-CDEF-4520-8BB8-7135789C8790}
    </ScheduleBlockGUID>
    <ScheduleBlockType>
      <!--ro, req, string, schedule type-->/ISAPI/recording/schedule/default
    </ScheduleBlockType>
    <ScheduleAction>
      <!--ro, opt, array, schedule, subType:object, desc:N/A-->
      <id>
        <!--ro, req, int, ID-->1
      </id>
      <ScheduleActionStartTime>
        <!--ro, opt, object, scheduled start time-->
        <DayOfWeek>
          <!--ro, req, enum, day of a week, subType:string, desc:"Monday", "Tuesday", "Wednesday", "Thursday", "Friday", "Saturday", "Sunday"-->Monday
        </DayOfWeek>
        <TimeOfDay>
          <!--ro, opt, time, time-->08:00:00
        </TimeOfDay>
      </ScheduleActionStartTime>
      <ScheduleActionEndTime>
        <!--ro, opt, object, scheduled end time-->
        <DayOfWeek>
          <!--ro, req, enum, day of a week, subType:string, desc:"Monday", "Tuesday", "Wednesday", "Thursday", "Friday", "Saturday", "Sunday"-->Monday
        </DayOfWeek>
        <TimeOfDay>
          <!--ro, opt, time, time-->08:00:00
        </TimeOfDay>
      </ScheduleActionEndTime>
      <ScheduleDSTenable>
        <!--ro, req, bool, whether to enable DayLight Saving Time (DST)-->true
      </ScheduleDSTenable>
      <Description>
        <!--ro, req, string, description-->PreMorning (Midnight to 8am,local time)
      </Description>
      <Actions>
        <!--ro, opt, object, trigger action, desc:alarm or motion detection that triggers a recording-->
        <Record>
          <!--ro, opt, bool, record, desc:this node is retained, and returned by some devices, but has no practical meaning-->true
        </Record>
        <Log>
          <!--ro, opt, bool, log, desc:this node is retained, and returned by some devices, but has no practical meaning-->true
        </Log>
        <SaveImg>
          <!--ro, opt, bool, save image, desc:this node is retained, and returned by some devices, but has no practical meaning-->true
        </SaveImg>
        <ActionRecordingMode>
          <!--ro, req, enum, recording schedule type, subType:string, desc:"CMR" (capture by schedule), "MOTION" (capture motion detection pictures),
          "ALARM" (capture alarm pictures), "EDR" (capture alarm pictures or motion detection pictures), "ALARMANDMOTION" (capture alarm pictures and motion detection
          pictures), "COMMAND" (recording by commands), "SMART" (smart recording), "thermalVehicleDetection" (thermal imaging vehicle detection),
          "fishingShipDetection" (fishing ship detection), "methaneConcentrationException" (dangerous gas detection: methane concentration exception by default),
          "ALLEvent" (all events), "consultation", "panicAlarm" (panic alarm), "zoneAlarm" (zone alarm), "temperatureIntervalMeasurement" (temperature range
          detection), "linedetection" (line crossing detection), "toiletTarry" (in-toilet overtime detection), "getUp" (get-off-bed detection), "retention" (overstay
          detection), "failDown" (getting up or falling down detection)-->CMR
        </ActionRecordingMode>
        <PreRecordTimeSeconds>
          <!--ro, opt, int, pre-record duration, unit:s, desc:from 0 to 10 seconds; default: 5 seconds-->5
        </PreRecordTimeSeconds>
        <PostRecordTimeSeconds>
          <!--ro, opt, int, post-record duration, unit:s, desc:from 0 to 20 seconds; default: 5 seconds-->5
        </PostRecordTimeSeconds>
      </Actions>
    </ScheduleAction>
  </ScheduleBlock>
</ScheduleBlockList>
</TrackSchedule>
<CustomExtensionList>
  <!--ro, opt, array, custom extension List, subType:object-->
  <CustomExtension>
    <!--ro, opt, object, custom extension-->
    <CustomExtensionName>
      <!--ro, opt, string, custom extension name-->www.xxx.com/RaCM/trackExt/ver10
    </CustomExtensionName>
    <enableSchedule>
      <!--ro, opt, bool, whether to enable recording schedule configuration-->true
    </enableSchedule>
    <SaveAudio>
      <!--ro, opt, bool, whether to enable audio recording-->true
    </SaveAudio>
    <PreRecordTimeSeconds>
      <!--ro, opt, int, pre-record, unit:s-->1
    </PreRecordTimeSeconds>
    <PostRecordTimeSeconds>
      <!--ro, opt, int, post-record, unit:s-->1
    </PostRecordTimeSeconds>
    <HolidaySchedule>
      <!--ro, opt, object, holiday schedule-->
      <ScheduleBlock>
        <!--ro, opt, object, schedule module-->

```

```

<ScheduleBlockGUID>
  <!--ro, req, string, schedule module GUID-->{00000000-0000-0000-0000-000000000000}
</ScheduleBlockGUID>
<ScheduleBlockType>
  <!--ro, opt, string, schedule module type-->www.xxx.com/racm/schedule/ver10
</ScheduleBlockType>
</ScheduleBlock>
</HolidaySchedule>
</CustomExtension>
</CustomExtensionList>
<IntelligentRecord>
  <!--ro, opt, bool, whether to enable VCA recording-->>false
</IntelligentRecord>
<delayTime>
  <!--ro, opt, int, capture delay time, unit:s-->1
</delayTime>
<durationEnabled>
  <!--ro, opt, bool, whether to enable video expiry time, desc:this node is not returned when it is not supported; you can configure video expiry time via
the node Duration when it is supported-->>true
</durationEnabled>
<redundancyRec>
  <!--ro, opt, bool, whether it is redundant recording-->>false
</redundancyRec>
<passbackRecord>
  <!--ro, opt, bool, whether to copy back recording-->>false
</passbackRecord>
<lockDuration>
  <!--ro, opt, int, recording locking duration, unit:h, desc:0-unlocked or this node does not exist, 0xffff-locked permanently; if the total recording is
longer than the locked part, it will not be locked-->0
</lockDuration>
<recordBackup>
  <!--ro, opt, bool, whether to enable video archiving-->>false
</recordBackup>
<SVCLLevel>
  <!--ro, opt, enum, SVC frame extracting type, subType:int, desc:0-not extracted, 1-half extracted, 2-three quarters extracted-->0
</SVCLLevel>
<recordManage>
  <!--ro, opt, bool, whether to enable video scheduling, desc:true (enabled scheduled recording), false (no scheduled recording but the recording schedule
is still in use, e.g., motion detection and copy-back)-->>false
</recordManage>
<extraSaveAudio>
  <!--ro, opt, bool, whether to enable separate audio storage-->>false
</extraSaveAudio>
</Track>

```

14.3.2.7 Set the recording schedule for a specified channel

Request URL

PUT /ISAPI/ContentMgmt/record/tracks/<trackStreamID>

Query Parameter

Parameter Name	Parameter Type	Description
trackStreamID	string	Channel number corresponding to the stream type, for example, 101 indicates main stream of channel 1.

Request Message

```

<?xml version="1.0" encoding="UTF-8"?>
<Track xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, get the parameters of a recording schedule, attr:version{req, string, protocolVersion}-->
  <id>
    <!--opt, int, channel corresponding to the stream type, desc:the values of <id> and <Channel> are the same. For example, 201 refers to the main stream
of channel 2, 202 refers to the sub-stream of channel 2, and so on. If the field SrcUrl of video source description is valid, the channel stream type should
be subject to that of SrcUrl-->201
  </id>
  <Channel>
    <!--req, int, channel No.-->1
  </Channel>
  <Enable>
    <!--req, bool, whether to enable, desc:this node is retained, and returned by some devices, but has no practical meaning-->>true
  </Enable>
  <Description>
    <!--req, string, recording description-->trackType=standard,sourceTag=AXIS210a,contentType=video,codecType=MPEG4-SP,resolution=640x480,frameRate=20
fps,bitrate=6000 kbps
  </Description>
  <TrackGUID>
    <!--req, string, GUID, desc:generated by the client-->{A01AAAAA-BBBB-CCCC-DDDD-033595353625}
  </TrackGUID>
  <Duration min="0" max="750">
    <!--opt, string, video expiry time, attr:min{req, int},max{req, int}, desc:e.g., P10DT15H indicates the video will be expired in 10 days and 15 hours--
>P10DT15H
  </Duration>

```

```

<DefaultRecordingMode>
  <!--req, enum, default record type, subType:string, desc:"CMR" (capture by schedule), "MOTION" (capture motion detection pictures), "ALARM" (capture
alarm pictures), "EDR" (capture alarm pictures or motion detection pictures), "ALARMANDMOTION" (capture alarm pictures and motion detection pictures),
"ALLEvent" (all events), "POS" (POS recording), "PECCANCY" (forensic marking recording), "SMART" (smart recording), "temperatureIntervalMeasurement"
(temperature range detection), "methaneConcentrationException" (dangerous gas detection: methane concentration exception by default),
"thermalVehicleDetection" (thermal imaging vehicle detection), "fishingShipDetection" (fishing ship detection), "consultation", "panicAlarm" (panic alarm),
"zoneAlarm" (zone alarm), "parallelParking" (vehicle entering or exiting during parallel parking, "parallelParkingContinuousRecord" (from vehicle entering to
vehicle exiting for parallel parking), "Linedetection" (Line crossing detection), "toiletTarry" (in-toilet overtime detection), "getUp" (get-off-bed
detection), "retention" (overstay detection), "failDown" (getting up or falling down detection)-->CMR
</DefaultRecordingMode>
<LoopEnable>
  <!--opt, bool, whether to support recurrently overwriting-->true
</LoopEnable>
<SrcDescriptor>
  <!--opt, object, video source description-->
  <SrcGUID>
    <!--req, string, GUID generated by the client-->{E800A543-9D53-4520-8BB8-9509062C692D}
  </SrcGUID>
  <SrcChannel>
    <!--req, int, source channel-->1
  </SrcChannel>
  <StreamHint>
    <!--req, string, stream description-->video,mp4,640x480,20 fps,6000 kbps
  </StreamHint>
  <SrcDriver>
    <!--req, string, stream executable driver name-->RTP/RTSP
  </SrcDriver>
  <SrcType>
    <!--opt, string, source type-->mp4 video
  </SrcType>
  <SrcUrl>
    <!--req, string, source URL, desc:the format of source URL is: rtsp://localhost/ISAPI/Streaming/channels/<trackStreamID>. The <trackStreamID> refers
to the channel stream ID = channel number * 100 + stream type (1 indicates main stream, 2 indicates sub stream). For example, 201 indicates the main stream
of channel 2-->rtsp://localhost/ISAPI/Streaming/channels/101
  </SrcUrl>
  <SrcLogin>
    <!--req, string, login source password, desc:user name for source channel RTSP authentication; encryption required for sensitive information--
>admin:admin
  </SrcLogin>
</SrcDescriptor>
<TrackSchedule>
  <!--opt, object, recording schedule-->
  <ScheduleBlockList>
    <!--opt, array, recording schedule list, subType:object-->
    <ScheduleBlock>
      <!--opt, object, recording schedule module-->
      <ScheduleBlockGUID>
        <!--opt, string, schedule GUID-->{ABC12345-CDEF-4520-8BB8-7135789C8790}
      </ScheduleBlockGUID>
      <ScheduleBlockType>
        <!--req, string, schedule type-->/ISAPI/recording/schedule/default
      </ScheduleBlockType>
    </ScheduleBlock>
  </ScheduleBlockList>
</TrackSchedule>
<CustomExtensionList>
  <!--opt, array, custom extension list, subType:object-->
  <CustomExtension>
    <!--opt, object, custom extension-->
    <CustomExtensionName>
      <!--opt, string, custom extension name-->www.xxx.com/RaCM/trackExt/ver10
    </CustomExtensionName>
    <enableSchedule>
      <!--opt, bool, whether to enable recording schedule configuration-->true
    </enableSchedule>
    <PreRecordTimeSeconds>
      <!--opt, int, pre-record, unit:s-->1
    </PreRecordTimeSeconds>
    <PostRecordTimeSeconds>
      <!--opt, int, post-record, unit:s-->1
    </PostRecordTimeSeconds>
  </CustomExtension>
</CustomExtensionList>
<durationEnabled>
  <!--opt, bool, whether to enable video expiry time, desc:this node is not returned when it is not supported; you can configure video expiry time via the
node duration when it is supported-->true
</durationEnabled>
</Track>

```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL, range:[0,1024]-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status description, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code-->OK
  </subStatusCode>
  <description>
    <!--ro, opt, string, custom error information description, range:[0,1024], desc:detailed information of custom error returned by device applications, used for fast debugging-->badXmlFormat
  </description>
</ResponseStatus>
```

14.3.3 Video Search

14.3.3.1 Refresh the video index manually before playback

Request URL

PUT /ISAPI/ContentMgmt/record/control/manualRefresh/channels/<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	channel No.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL, range:[0,1024]-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code description-->OK
  </subStatusCode>
  <description>
    <!--ro, opt, string, custom error message description, range:[0,1024], desc:the custom error message description returned by the application is used to quickly identify and evaluate issues-->badXmlFormat
  </description>
</ResponseStatus>
```

14.3.3.2 Get the capability of searching for video and picture files

Request URL

GET /ISAPI/ContentMgmt/search/capabilities

Query Parameter

None

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>
<CMSearchDescription xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, search conditions, attr:version{opt, string, protocolVersion}-->
  <timeSpanList>
    <!--ro, opt, array, list of time periods, subType:object-->
    <timeSpan>
      <!--ro, opt, object, time period-->
      <startTime>
        <!--ro, req, datetime, start time-->1970-01-01T00:00:00+08:00
      </startTime>
      <endTime>
        <!--ro, req, datetime, end time-->1970-01-01T00:00:00+08:00
      </endTime>
    </timeSpan>
  </timeSpanList>
</CMSearchDescription>
```

14.3.3.3 Search for video and picture files

Request URL

POST /ISAPI/ContentMgmt/search?timeType= <timeType>

Query Parameter

Parameter Name	Parameter Type	Description
timeType	enum	1. If "isSupportTimeTypeSTD" is true in GET /ISAPI/System/capabilities, it indicates that the device supports parsing the optional parameter timeType=STD in the URL.2. If the parameter timeType=STD is included in the URL, time-related parameters (e.g., "datetime") is processed in ISO8601 time format.3. If the parameter timeType=STD is not included in the URL, time-related parameters is processed according to the original time format set by the device.

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>
<CMSearchDescription xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, search conditions, attr:version{opt, string, protocolVersion}-->
  <searchID>
    <!--req, string, search ID, desc:it is used to confirm the upper-level platform or system. If the platform or the system is the same one during two searches, the search history will be saved in the memory to speed up next search-->test
  </searchID>
  <trackIDList>
    <!--opt, array, channel list, subType:object-->
    <trackID>
      <!--opt, int, channel stream ID, desc:"XX01" (main stream videos of XX channel), "XX03" (search for XX channel pictures), 1 by default-->101
    </trackID>
  </trackIDList>
  <timeSpanList>
    <!--opt, array, list of time periods, subType:object-->
    <timeSpan>
      <!--opt, object, time period-->
      <startTime>
        <!--req, datetime, start time, desc:ISO8601 time (TZ format, UTC)-->1970-01-01T00:00:00Z
      </startTime>
      <endTime>
        <!--req, datetime, end time, desc:ISO8601 time (TZ format, UTC)-->1970-01-01T01:00:00Z
      </endTime>
      <laneNumber>
        <!--opt, int, lane No.-->1
      </laneNumber>
      <carType>
        <!--opt, enum, vehicle type, subType:string, desc:"coach", "truck", "car", "minibus", "smalltruck" (small-sized truck), "bigcar" (large-sized vehicle), "smallcar" (small-sized vehicle), "human", "tumbrel" (two wheeler), "trike" (tricycle), "suv", "midcar" (middle-sized bus), "all", "unknown"-->coach
      </carType>
      <illegalType>
        <!--opt, enum, violation type, subType:string, desc:"all", "normal", "LowSpeed" (driving in low speed), "highSpeed" (driving in high speed), "reverse" (wrong-way driving), "redlight" (red light running), "driveLine" (driving on the lane line), "direction" (driving against direction guidance), "intersectionCongest" (overstay at intersection), "nonDriveway" (motor vehicle on non-motor vehicle lane), "changeLane" (illegal lane change), "wrongLine" (occupy dedicated lane), "badSign" (prohibition violation), "intersectionStop" (stop vehicle at intersection), "greenLightStop" (stop vehicle when green light), "overYellow" (over yellow line), "illegalParking" (illegal parking), "unTurn" (illegal U-turn), "emergencyLane" (occupy emergency lane), "banRight" (no right turn), "banLeft" (no left turn), "failSafeBelt" (seatbelt unbuckled), "pedRedLight" (pedestrian red light running), "failYieldPed" (not yield to pedestrian), "overStop" (over stop line), "bigCarOccupy" (lane occupation by large-sized vehicle), "leftNotYieldStraight" (left turn not yield to straight), "rightNotYieldLeft" (right turn not yield to left turn), "uTurnNotYieldGoingStraight", "LeftSideDrivingAfterLeftTurn", "gasser", "threeWheel", "Passenger",
```


1000000, 11: RU - RUSSIA, 12: UA - UKRAINE, 109: CN - CHINA, 112: US - USA, 221: AU - AUSTRALIA, 000: ALL-->0

```
</country>
<subType>
  <!--opt, enum, sub types, subType:string, desc:only supported by vehicleDetection and HVTVehicleDetection. "all", "motorVehicle", "nonMotorVehicle",
  "pedestrian"-->all
</subType>
<capTypeDescriptor>
  <!--opt, enum, types of captured pictures, subType:string, desc:"event", "evidence". Events include parkEvent, crosslane, vehicleexist, lanechange,
  wrongdirection, congestion, turnaround, edfManual. Evidences include parkEvent, crosslane, vehicleexist, lanechange, wrongdirection, and anyType-->anyType
</capTypeDescriptor>
<nation>
  <!--opt, enum, area, subType:string, desc:EU: Europe Region; ER: Middle East; AP: Asia Pacific; AfricaAndAmerica: Africa and America-->EU
</nation>
<vehicleType>
  <!--opt, enum, vehicle type, subType:string, desc:"unknown", "bus", "truck", "vehicle", "van", "buggy", "SUMMPV": SUV/MPV, "mediumBus"-->bus
</vehicleType>
<absoulteParkingNum>
  <!--opt, string, parking space No., desc:the parking space No. is the same as the number on the actual ground surface, which can be captured by the
  camera-->test
</absoulteParkingNum>
<SearchProperty>
</metadataList>
<cardNumber>
  <!--opt, string, card No., range:[0,32], desc:if this node is empty or does not exist, it indicates that the card No. is not restricted-->test
</cardNumber>
<drawFrame>
  <!--opt, bool, whether to enable frame extraction, desc:the value of this node is false by default-->>false
</drawFrame>
<AlarmInNoList>
  <!--opt, array, triggered alarm input channel List, subType:object-->
  <alarmInNo>
    <!--req, int, triggered alarm input channel No.-->0
  </alarmInNo>
</AlarmInNoList>
<ruleID>
  <!--opt, string, rule ID, desc:if this node is not configured, the search result will not be restricted by any rule-->test
</ruleID>
<roomIndex>
  <!--opt, int, interrogation room No., desc:it starts from 1-->0
</roomIndex>
<StreamIDParam>
  <!--opt, object, stream ID parameters-->
  <streamID>
    <!--req, string, stream ID, range:[0,72]-->test
  </streamID>
  <channel>
    <!--opt, int, channel No., range:[1,256]-->1
  </channel>
  <cmdType>
    <!--opt, int, trigger type, range:[0,255], desc:connect NVR with cloud storage to use it-->0
  </cmdType>
  <backupVolumeNum>
    <!--opt, int, archive No., range:[0,255], desc:applicable to CVR-->0
  </backupVolumeNum>
  <archiveLabel>
    <!--opt, string, archive No.-->test
  </archiveLabel>
</StreamIDParam>
<PosAlarm>
  <!--opt, object, pos video-->
  <caseSensitive>
    <!--req, bool, whether it is case-sensitive-->>true
  </caseSensitive>
  <combineMode>
    <!--req, enum, keyword combination, subType:string, desc:"or", "and"-->or
  </combineMode>
  <keywordList>
    <!--opt, array, keyword list, subType:object, desc:supports up to three key words-->
    <keyword>
      <!--req, string, keyword, range:[0,128]-->test
    </keyword>
  </keywordList>
</PosAlarm>
<TrialParam>
  <!--opt, object, search conditions of trial information-->
  <caseNo>
    <!--opt, string, case No., range:[0,56]-->test
  </caseNo>
  <caseName>
    <!--opt, string, case name, range:[0,56]-->test
  </caseName>
  <litigant1>
    <!--opt, string, party 1, range:[0,32]-->test
  </litigant1>
  <litigant2>
    <!--opt, string, party 2, range:[0,32]-->test
  </litigant2>
  <chiefJudge>
    <!--opt, string, jury, range:[0,32]-->test
  </chiefJudge>
  <caseType>
    <!--opt, enum, case type, subType:int, desc:0 (all), 1 (penal case), 2 (civil case)-->0
  </caseType>
</TrialParam>
```



```

<ConferenceParam>
  <!--opt, object, video conference parameters-->
  <conferenceID>
    <!--opt, string, conference ID, range:[1,64]-->test
  </conferenceID>
</ConferenceParam>
<ATMPParam>
  <!--opt, object, ATM search-->
  <transactionType>
    <!--opt, enum, transaction type, subType:int, desc:0 (all), 1(search), 2(withdrawal), 3 (deposit), 4(change password), 5(transfer), 6(search with no card), 7(deposit with no card), 8 (cash swallowed), 9(card swallowed) 10(undefined)-->0
  </transactionType>
  <transationAmount>
    <!--opt, int, amount, step:1, desc:unit: yuan-->0
  </transationAmount>
</ATMPParam>
<LabelSearch>
  <!--opt, object, search by tag type List of video file, desc:if the node is not returned, it means search for all videos. Related URI: /ISAPI/ContentMgmt/record/control/remark?format=json&security=<security>&iv=<iv>-->
  <LabelSearchType>
    <!--opt, enum, type of searching by video file tag, subType:string, desc:"recordLabelTypeList", "allLabel", "noLabel"-->recordLabelTypeList
  </LabelSearchType>
  <LabelTypeList>
    <!--opt, object, by tag type List of video file, dep:and,{$.CMSearchDescription.recordLabelSearch.recordLabelSearchType,eq,recordLabelTypeList}-->
    <LabelTypes>
      <!--opt, object, tag type of video file-->
      <LabelType>
        <!--opt, enum, tag type of video file, subType:string, desc:"importance" (important), "unimportance" (not important)-->importance
      </LabelType>
    </LabelTypes>
  </LabelTypeList>
</LabelSearch>
<dockStationAudioFile>
  <!--opt, object, dock station audio file-->
  <analysisState>
    <!--ro, opt, enum, analysis status, subType:string, desc:"complete" (completed), "running", "notStarted" (not started)-->complete
  </analysisState>
  <keyWordList>
    <!--opt, array, dock station audio file Label, subType:object, range:[0,100]-->
    <keyWord>
      <!--opt, string, Label, range:[0,256]-->test
    </keyWord>
  </keyWordList>
</dockStationAudioFile>
<objectsThrownDetectionSearch>
  <!--opt, object, object thrown from building search condition-->
  <alarmLevel>
    <!--opt, int, alarm priority, range:[1,6], desc:1 (Low), 2 (medium), 3 (high), 4 (Low and medium), 5 (Low and high), 6 (medium and high). If this node is empty, alarms of all levels will be displayed-->3
  </alarmLevel>
  <lowFloorID>
    <!--opt, int, Low floor, range:[-100,100]-->0
  </lowFloorID>
  <highFloorID>
    <!--opt, int, high floor, range:[-100,100]-->0
  </highFloorID>
</objectsThrownDetectionSearch>
<alarmResultSearch>
  <!--opt, object, face picture comparison search condition-->
  <faceContrastType>
    <!--req, enum, face picture comparison type, subType:string, desc:"all", "faceContrast" (face picture comparison succeeded), "whiteFaceContrast" (allowList face picture comparison), "faceContrastFailure" (face picture comparison failed)-->faceContrast
  </faceContrastType>
</alarmResultSearch>
<radarID>
  <!--opt, int, radar channel No.-->1
</radarID>
<synthesisType>
  <!--opt, enum, subType:string-->all
</synthesisType>
</CMSearchDescription>

```

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>
<CMSearchResult xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, search results, attr:version{opt, string, protocolVersion}-->
  <searchID>
    <!--ro, req, string, search ID, desc:it is used to confirm the upper-level platform or system. If the platform or the system is the same one during two searches, the search history will be saved in the memory to speed up next search-->test
  </searchID>
  <responseStatus>
    <!--ro, req, enum, search status, subType:string, desc:true (succeeded), false (failed)-->true
  </responseStatus>
  <responseStatusStrg>
    <!--ro, req, enum, searching status description, subType:string, desc:"OK", "NO MATCHES", "MORE"-->OK
  </responseStatusStrg>
  <numOfMatches>
    <!--ro, req, int, number of returned records-->500
  </numOfMatches>
  <modelSet>

```



```

<matchList>
  <!--ro, opt, array, result list, subType:object-->
  <searchMatchItem>
    <!--ro, opt, object, results-->
    <sourceID>
      <!--ro, req, string, source ID, desc:source ID-->test
    </sourceID>
    <trackID>
      <!--ro, opt, int, channel stream ID, desc:"XX01" (main stream videos of XX channel), "XX03" (search for XX channel pictures), 1 by default-->101
    </trackID>
    <timeSpan>
      <!--ro, opt, object, time range-->
      <startTime>
        <!--ro, req, datetime, video start time, desc:ISO8601 time (TZ format, UTC)-->1970-01-01T00:10:00Z
      </startTime>
      <endTime>
        <!--ro, req, datetime, video end time, desc:ISO8601 time (TZ format, UTC)-->1970-01-01T00:20:00Z
      </endTime>
    </timeSpan>
    <mediaSegmentDescriptor>
      <!--ro, opt, object, data description-->
      <contentType>
        <!--ro, req, string, file type, desc:corresponding to conditions-->test
      </contentType>
      <codecType>
        <!--ro, req, string, video encoding type-->test
      </codecType>
      <rateType>
        <!--ro, opt, string, video bit rate-->test
      </rateType>
      <playbackURI>
        <!--ro, opt, string, video URL,
desc:"name=" is followed by the video file name, and "size=" is followed by the size of the video file. The "starttime" and "endtime" are UTC time, but as
the time returned by front-end devices is UTC time, while the time returned by DVR/NVR devices is the devices' local time, there are different mechanisms to
deal with the time:
1. For DVR/NVR devices that return the local time:
  1) When the request URL does not include "timeType=STD" (/ISAPI/ContentMgmt/search), then the returned playbackURI will not include "timeType=STD". The
"starttime" and "endtime" will refer to the devices' local time.
  2) When the request URL includes "timeType=STD" (/ISAPI/ContentMgmt/search&timeType=STD), and the devices support parsing "timeType"
("isSupportTimeTypeSTD" is true in GET /ISAPI/System/capabilities), then the returned playbackURI will include "timeType=STD". The "starttime" and "endtime"
will refer to the UTC time in ISO 8601 format.
2. For IPC devices that return UTC time, whether or not the request URL includes "timeType=STD", the devices do not need to parse "timeType". The returned
playbackURI will not include "timeType=STD", and the "starttime" and "endtime" will refer to the UTC time in ISO 8601 format.
3. To play back the video files, synchronize the playbackURI to the video playback API: /ISAPI/Streaming/tracks/<trackStreamID>?starttime=
<startTime>&endtime=<endTime>&name=<fileName>&size=<fileSize>&timeType=<timeType>.-->http://10.65.130.168/Streaming/tracks/201/?
starttime=20190213T091134Z&endtime=20190213T092116Z&name=01010000093000100&size=732335288;timeType=STD
        </playbackURI>
      <lockStatus>
        <!--ro, opt, enum, whether video file is locked, subType:string, desc:"Lock", "unlock"-->lock
      </lockStatus>
      <remainLockTime>
        <!--ro, opt, int, remaining lock time, unit:s, desc:only returned when "lockStatus" is "Lock". If 0 is returned, it indicates that it is locked
permanently-->1
      </remainLockTime>
      <name>
        <!--ro, opt, string, file name-->test
      </name>
      <size>
        <!--ro, opt, int, file size-->0
      </size>
      <mediaID>
        <!--ro, opt, int, file ID, desc:unique identifier of file-->0
      </mediaID>
      <remark>
        <!--ro, opt, string, file remarks-->test
      </remark>
      <GPSInfo>
        <!--ro, opt, string, file GPS, desc:required, if no GPS information, a blank is returned-->test
      </GPSInfo>
      <recorderCode>
        <!--ro, opt, string, video recorder No.-->test
      </recorderCode>
      <uploadState>
        <!--ro, opt, enum, upload status, subType:string, desc:"uploaded", "nonUploaded", "uploadFailed", "uploading"-->uploaded
      </uploadState>
      <uploadTime>
        <!--ro, opt, datetime, video uploading time, desc:ISO8601 time (TD format, local time and time difference)-->1970-01-01T00:00+08:00
      </uploadTime>
      <policeCode>
        <!--ro, opt, string, police No., desc:sensitive information is encrypted-->test
      </policeCode>
      <policeName>
        <!--ro, opt, string, police name, desc:sensitive information is encrypted-->test
      </policeName>
      <shootingTime>
        <!--ro, opt, datetime, time, desc:ISO8601 time (TD format, local time and time difference)-->1970-01-01T00:00+08:00
      </shootingTime>
      <fileTime>
        <!--ro, opt, int, the file is too long, unit:min-->1
      </fileTime>
      <remarks>
        <!--ro, opt, string, file remarks-->test
      </remarks>
      <cloudStorageType>

```

```

    <!--ro, opt, enum, storage server type, subType:string, desc:0 (cloud storage), 1 (CVR), 2 (pstor)-->0
</cloudStorageType>
<fileUrl>
    <!--ro, opt, string, file URL-->test
</fileUrl>
<thumbnailUrl>
    <!--ro, opt, string, thumbnail URL of picture or video-->test
</thumbnailUrl>
<encryption>
    <!--ro, opt, object, encryption-->
    <enabled>
        <!--ro, opt, bool, whether to encrypt the file-->true
    </enabled>
    <encryptionKey>
        <!--ro, opt, string, encryption key, desc:sensitive information is encrypted-->test
    </encryptionKey>
    <encryptionLevel>
        <!--ro, opt, enum, encryption Level, subType:int, desc:1 (AES128), 2 (AES256)-->1
    </encryptionLevel>
</encryption>
<videoTargetTypeList>
    <!--ro, opt, object, List of target types, desc:this node is only applicable for HEOP protocol of intercom products. Several target types are
included in the time range. Every type is for a stream. Playback is according to video of corresponding time-->
    <videoTargetType>
        <!--ro, opt, enum, List of target types, subType:string, desc:this node is only applicable for HEOP protocol of intercom products. Several
target types are included in the time range. Every type is for a stream. Playback is according to video of corresponding time. "Local", "peer"-->local
    </videoTargetType>
</videoTargetTypeList>
<TargetRegionList size="8">
    <!--ro, opt, array, search for the target region List of the picture, subType:object, attr:size{req, int}, desc:related URL.
/ISAPI/ContentMgmt/capabilities targetRegionEventPicSearch-->
    <TargetRegion>
        <!--ro, opt, object, target area-->
        <regionID>
            <!--ro, req, string, detection area ID-->1
        </regionID>
        <RegionCoordinatesList>
            <!--ro, req, array, List of point coordinates, subType:object, range:[3,10], desc:rectangle-->
            <RegionCoordinates>
                <!--ro, opt, object, point coordinates, desc:the origin is the lower-left corner of the screen-->
                <positionX>
                    <!--ro, req, float, X-coordinate, range:[0,1]-->1
                </positionX>
                <positionY>
                    <!--ro, req, float, Y-coordinate, range:[0,1]-->1
                </positionY>
            </RegionCoordinates>
        </RegionCoordinatesList>
    </TargetRegion>
</TargetRegionList>
<objectsThrownDetectionResult>
    <!--ro, opt, object, object thrown from building search result-->
    <alarmLevel>
        <!--ro, opt, int, alarm Level, desc:it is categorized into three Levels according to the target track and the actual event credibility. The
higher the Level, the greater the credibility of the alarm being triggered by an actual object thrown from building event.-->0
    </alarmLevel>
    <floorID>
        <!--ro, opt, int, floor No., range:[-100,100]-->0
    </floorID>
</objectsThrownDetectionResult>
<synthesisType>
    <!--ro, opt, enum, subType:string-->auto
</synthesisType>
<bodyCameraShortSN>
    <!--ro, opt, string, range:[0,9]-->P20151543
</bodyCameraShortSN>
<shipsDetection>
    <!--ro, opt, object-->
    <shipName>
        <!--ro, opt, string, range:[1,64]-->浙嘉兴资03181
    </shipName>
    <shipsSpeed>
        <!--ro, opt, float, range:[0.0,300.0], unit:km/h-->23.4
    </shipsSpeed>
    <shipsLength>
        <!--ro, opt, float, range:[0.000,500.000], unit:m-->50.000
    </shipsLength>
    <shipLocation>
        <!--ro, opt, object-->
        <longitudeType>
            <!--ro, opt, enum, subType:string-->E
        </longitudeType>
        <latitudeType>
            <!--ro, opt, enum, subType:string-->S
        </latitudeType>
    </shipLocation>
    <degree>
        <!--ro, opt, int, range:[0,180]-->0
    </degree>
    <minute>
        <!--ro, opt, int, range:[0,60]-->0
    </minute>

```

```

<sec>
  <!--ro, opt, float, range:[0,60.000000]-->0.000
</sec>
</longitude>
<latitude>
  <!--ro, opt, object-->
  <degree>
    <!--ro, opt, int, range:[0,180]-->0
  </degree>
  <minute>
    <!--ro, opt, int, range:[0,60]-->0
  </minute>
  <sec>
    <!--ro, opt, float, range:[0,60.000000]-->0.000
  </sec>
</latitude>
</shipLocation>
<abnormalType>
  <!--ro, opt, enum, subType:int-->shipCourseDeviation
</abnormalType>
<shipChannelID>
  <!--ro, opt, int, range:[1,4]-->4
</shipChannelID>
</shipsDetection>
</mediaSegmentDescriptor>
<metadataMatches>
  <!--ro, opt, object, metadata match information-->
  <metadataDescriptor>
    <!--ro, req, string, metadata description, desc:eg: recordType.meta..com/MOTION. The supported video file type by a specific device can be
    returned by opt in RacmCap-->recordSearchType of /ISAPI/ContentMgmt/capabilities-->test
  </metadataDescriptor>
</metadataMatches>
<face>
  <!--ro, opt, object, face search result-->
  <name>
    <!--ro, opt, string, name-->test
  </name>
  <gender>
    <!--ro, opt, enum, gender, subType:string, desc:"maLe", "femaLe", "unknown"-->male
  </gender>
  <certificateType>
    <!--ro, opt, enum, certificate type, subType:string, desc:"officerID" (officer ID), "ID" (identify card), "passport" (passport), "other" (the
    other certificate)-->officerID
  </certificateType>
  <certificateNumber>
    <!--ro, opt, string, certificate No.-->test
  </certificateNumber>
  <currTemperature>
    <!--ro, opt, float, face temperature, range:[-20.0,150.0], unit:℃-->36.5
  </currTemperature>
  <mask>
    <!--ro, opt, enum, whether the person wears a mask, subType:string, desc:"unknown", "no", "yes"-->unknown
  </mask>
  <phoneNumber>
    <!--ro, opt, string, phone number, range:[1,64], desc:it is valid when event type is face picture comparison-->test
  </phoneNumber>
  <FDID>
    <!--ro, opt, string, face picture Library ID, range:[1,64], desc:it is valid when event type is face picture comparison-->test
  </FDID>
  <FDLibName>
    <!--ro, opt, string, face picture Library name, range:[1,64], desc:it is valid when event type is face picture comparison-->test
  </FDLibName>
  <FDPicURL>
    <!--ro, opt, string, face picture Library picture URL, desc:it is valid when event type is face picture comparison-->test
  </FDPicURL>
  <similarity>
    <!--ro, opt, float, comparison similarity, range:[0,1], step:0.001, desc:it is valid when event type is face picture comparison-->test
  </similarity>
</face>
<AlarmInNoList>
  <!--ro, opt, array, triggered alarm input channel list, subType:object-->
  <alarmInNo>
    <!--ro, req, int, triggered alarm input channel No.-->0
  </alarmInNo>
</AlarmInNoList>
<ruleID>
  <!--ro, opt, string, rule ID, desc:if this node is not returned, the search result is not restricted by any rule-->test
</ruleID>
<roomIndex>
  <!--ro, opt, int, interrogation room No., desc:it starts from 1-->0
</roomIndex>
<StreamIDParam>
  <!--ro, opt, object, stream ID parameters-->
  <streamID>
    <!--ro, req, string, stream ID, range:[0,72]-->test
  </streamID>
  <cmdType>
    <!--ro, opt, int, trigger type, range:[0,255], desc:connect NVR with cloud storage to use it-->0
  </cmdType>
  <backupVolumeNum>
    <!--ro, opt, int, archive No., range:[0,255], desc:applicable to CVR-->0
  </backupVolumeNum>
  <archiveLabel>
    <!--ro, opt, string, archive No.-->test

```

```

    </archiveLabel>
  </StreamIDParam>
  <PosAlarm>
    <!--ro, opt, object, pos video-->
    <caseSensitive>
      <!--ro, req, bool, whether it is case-sensitive-->true
    </caseSensitive>
    <combineMode>
      <!--ro, req, enum, keyword combination, subType:string, desc:"or", "and"-->or
    </combineMode>
    <KeywordList>
      <!--ro, opt, array, keyword list, subType:object, desc:supports a maximum of three words-->
      <keyword>
        <!--ro, req, string, keyword, range:[0,128]-->test
      </keyword>
    </KeywordList>
  </PosAlarm>
  <TrialParam>
    <!--ro, opt, object, search conditions of trial information-->
    <caseNo>
      <!--ro, opt, string, case No., range:[0,56]-->test
    </caseNo>
    <caseName>
      <!--ro, opt, string, case name, range:[0,56]-->test
    </caseName>
    <litigant1>
      <!--ro, opt, string, party 1, range:[0,32]-->test
    </litigant1>
    <litigant2>
      <!--ro, opt, string, party 2, range:[0,32]-->test
    </litigant2>
    <chiefJudge>
      <!--ro, opt, string, jury, range:[0,32]-->test
    </chiefJudge>
    <caseType>
      <!--ro, opt, enum, case type, subType:int, desc:0 (all), 1 (penal case), 2 (civil case)-->0
    </caseType>
  </TrialParam>
  <plateNo>
    <!--ro, opt, string, license plate number, range:[1,64], desc:noPlate (vehicle without license plate), unknown (no license plate recognized),
    XXXXXXXX (license plate number. For motor vehicles, it is a 16-byte string; for non-motor vehicles, it is a 48-byte string)-->蓝浙AX2P12
  </plateNo>
  <ConferenceParam>
    <!--ro, opt, object, video conference parameters-->
    <conferenceName>
      <!--ro, opt, string, conference name, range:[1,64], desc:from the "conferenceName" of POST /ISAPI/VCS/conferences-->test
    </conferenceName>
  </ConferenceParam>
  <ATMPParam>
    <!--ro, opt, object, ATM search-->
    <transactionType>
      <!--ro, opt, enum, transaction type, subType:int, desc:0 (all), 1(search), 2(withdrawal), 3 (deposit), 4 (change password), 5(transfer), 6 (search
      with no card), 7 (deposit with no card), 8 (cash swallowed), 9 (card swallowed) 10 (undefined)-->0
    </transactionType>
    <transactionAmount>
      <!--ro, opt, int, amount, step:1, desc:unit: yuan-->0
    </transactionAmount>
  </ATMPParam>
  <labelTypeList>
    <!--ro, opt, object, tag type list of video file, desc:URL for configuring video tags: /ISAPI/ContentMgmt/record/control/remark?
    format=json&security=<security>&iv=<iv>-->
    <labelTypes>
      <!--ro, opt, object, tag type of video file-->
      <labelType>
        <!--ro, opt, enum, tag type of video file, subType:string, desc:"importance", "unimportance"-->importance
      </labelType>
    </labelTypes>
  </labelTypeList>
  <isInFalseAlarmMaterialLib>
    <!--ro, opt, bool, whether imported to false alarm library, desc:not imported if this node is not returned or false is returned-->true
  </isInFalseAlarmMaterialLib>
  <vegetationSpectrumDetection>
    <!--ro, opt, object-->
    <vegetationIndex>
      <!--ro, opt, enum, subType:string-->NDVI
    </vegetationIndex>
    <vegetationIndexInitData>
      <!--ro, opt, enum, subType:string-->NDVI
    </vegetationIndexInitData>
    <reflectivityType>
      <!--ro, opt, enum, subType:string-->blue
    </reflectivityType>
    <isVisibleImage>
      <!--ro, opt, bool-->true
    </isVisibleImage>
  </vegetationSpectrumDetection>
</searchMatchItem>
<dockStationAudioFile>
  <!--ro, opt, object, dock station audio file-->
  <analysisState>
    <!--ro, opt, enum, analysis status, subType:string, desc:"complete" (completed), "running", "notStarted" (not started)-->complete
  </analysisState>
  <keywordList>

```

```

<!--ro, opt, array, dock station audio file Label, subType:object, range:[0,100]-->
<keyword>
<!--ro, opt, string, Label, range:[0,256]-->test
</keyword>
</keywordList>
</dockStationAudioFile>
<pictureType>
<!--ro, opt, enum, subType:string-->licensePlatePicture
</pictureType>
</matchList>
<totalMatches>
<!--ro, opt, int, total number of matched results-->12
</totalMatches>
</CMSearchResult>

```

14.4 PTZ

14.4.1 Preset Management

14.4.1.1 Delete all patrols by channel.

Request URL

DELETE /ISAPI/PTZCtrl/channels/<channelID>/patrols

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version(ro), req, string, protocolVersion-->
  <requestURL>
    <!--ro, opt, string, request URL, range:[0,1024]-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, read-only, describe the error reason in detail, desc:sub status code description-->OK
  </subStatusCode>
  <description>
    <!--ro, opt, string, range:[0,1024]-->badXmlFormat
  </description>
  <MErrCode>
    <!--ro, opt, string-->0x00000000
  </MErrCode>
  <MErrDevSelfEx>
    <!--ro, opt, string-->0x00000000
  </MErrDevSelfEx>
</ResponseStatus>

```

14.4.1.2 Set parameters of all patrols for a specified channel

Request URL

PUT /ISAPI/PTZCtrl/channels/<channelID>/patrols

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```

<?xml version="1.0" encoding="UTF-8"?>

<PTZPatrolList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, array, List of patrol parameters, subType:object, attr:version{req, string, protocolVersion}-->
  <PTZPatrol>
    <!--opt, object, patrol parameters-->
    <enabled>
      <!--req, bool, whether to enable-->true
    </enabled>
    <id>
      <!--req, string, ID-->test
    </id>
    <patrolName>
      <!--req, string, patrol name-->test
    </patrolName>
    <resumeType>
      <!--opt, enum, type, subType:string, desc:"relative", "absolute"-->relative
    </resumeType>
    <PatrolSequenceList>
      <!--req, array, List of patrol results, subType:object-->
      <PatrolSequence>
        <!--req, object, patrol result-->
        <presetID>
          <!--req, string, preset ID-->1
        </presetID>
        <seqSpeed>
          <!--req, string, patrol speed-->1
        </seqSpeed>
        <delay>
          <!--req, string, delay-->1
        </delay>
      </PatrolSequence>
    </PatrolSequenceList>
  </PTZPatrol>
</PTZPatrolList>

```

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>

```

14.4.1.3 Get the parameters of all patrols of a specific channel

Request URL

GET /ISAPI/PTZCtrl/channels/<channelID>/patrols

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<PTZPatrolList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, array, subType:object, attr:version{req, string, protocolVersion}-->
  <PTZPatrol>
    <!--ro, opt, object, patrol parameters-->
    <enabled>
      <!--ro, req, bool-->true
    </enabled>
    <id>
      <!--ro, req, string, ID-->test
    </id>
    <patrolName>
      <!--ro, req, string, patrol name-->test
    </patrolName>
    <resumeType>
      <!--ro, opt, enum, type, subType:string, desc:"relative", "absolute"-->relative
    </resumeType>
    <PatrolSequenceList>
      <!--ro, req, array, subType:object-->
      <PatrolSequence>
        <!--ro, req, object, list-->
        <presetID>
          <!--ro, req, string, preset ID-->1
        </presetID>
        <seqSpeed>
          <!--ro, req, string, patrol speed-->1
        </seqSpeed>
        <delay>
          <!--ro, req, int, delay, unit:ms-->1
        </delay>
      </PatrolSequence>
    </PatrolSequenceList>
  </PTZPatrol>
</PTZPatrolList>

```

14.4.1.4 Get patrol parameters of a specified channel

Request URL

GET /ISAPI/PTZCtrl/channels/<channelID>/patrols/<patrolID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--
patrolID	string	--

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<PTZPatrol xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, patrol parameters, attr:version{req, string, protocolVersion}-->
  <enabled>
    <!--ro, req, bool, whether to enable-->true
  </enabled>
  <id>
    <!--ro, req, string, ID-->test
  </id>
  <patrolName>
    <!--ro, req, string, patrol name-->test
  </patrolName>
  <resumeType>
    <!--ro, opt, enum, type, subType:string, desc:"relative", "absolute"-->relative
  </resumeType>
  <PatrolSequenceList>
    <!--ro, req, array, patrol result list, subType:object-->
    <PatrolSequence>
      <!--ro, req, object, patrol result-->
      <presetID>
        <!--ro, req, string, preset ID-->1
      </presetID>
      <seqSpeed>
        <!--ro, req, string, patrol speed-->1
      </seqSpeed>
      <delay>
        <!--ro, req, int, delay, unit:ms-->1
      </delay>
    </PatrolSequence>
  </PatrolSequenceList>
</PTZPatrol>

```

14.4.1.5 Delete a patrol by channel

Request URL

DELETE /ISAPI/PTZCtrl/channels/<channelID>/patrols/<patrolID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--
patrolID	string	--

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, opt, string, request URL, range:[0,1024]-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code description-->OK
  </subStatusCode>
  <description>
    <!--ro, opt, string, range:[0,1024]-->badXmlFormat
  </description>
  <MErrCode>
    <!--ro, opt, string-->0x00000000
  </MErrCode>
  <MErrDevSelfEx>
    <!--ro, opt, string-->0x00000000
  </MErrDevSelfEx>
</ResponseStatus>

```


14.4.1.6 Set path parameters of a single patrol for a specified channel

Request URL

PUT /ISAPI/PTZCtrl/channels/<channelID>/patrols/<patrolID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--
patrolID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<PTZPatrol xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, patrol parameters, attr:version{req, string, protocolVersion}-->
  <enabled>
    <!--req, bool, whether to enable-->true
  </enabled>
  <id>
    <!--req, string, ID-->test
  </id>
  <patrolName>
    <!--req, string, patrol name-->test
  </patrolName>
  <resumeType>
    <!--opt, enum, type, subType:string, desc:"relative", "absolute"-->relative
  </resumeType>
  <PatrolSequenceList>
    <!--req, array, patrol result list, subType:object-->
    <PatrolSequence>
      <!--req, object, patrol result-->
      <presetID>
        <!--req, string, preset ID-->1
      </presetID>
      <seqSpeed>
        <!--req, string, patrol speed-->1
      </seqSpeed>
      <delay>
        <!--req, int, delay, unit:ms-->1
      </delay>
    </PatrolSequence>
  </PatrolSequenceList>
</PTZPatrol>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.4.1.7 Add a patrol by channel

Request URL

POST /ISAPI/PTZCtrl/channels/<channelID>/patrols?delayUnitType=<delayUnitType>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--
delayUnitType	string	If the ?delayUnitType=ms is not contained in the configuration URI, the unit of the delay field will follow the device's default behavior (milliseconds for back-end, front-end, and on-board vehicle, seconds for front-end and thermal device).

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<PTZPatrol xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, patrol parameters, attr:version{req, string, protocolVersion}-->
  <enabled>
    <!--req, bool, whether to enable-->true
  </enabled>
  <id>
    <!--req, string, ID-->test
  </id>
  <patrolName>
    <!--req, string, patrol name-->test
  </patrolName>
  <resumeType>
    <!--opt, enum, type, subType:string, desc:"relative", "absolute"-->relative
  </resumeType>
  <PatrolSequenceList>
    <!--req, array, subType:object-->
    <PatrolSequence>
      <!--req, object, list-->
      <presetID>
        <!--req, string, preset ID-->1
      </presetID>
      <seqSpeed>
        <!--req, string, patrol speed-->1
      </seqSpeed>
      <delay>
        <!--req, int, unit: millisecond, unit:ms-->1
      </delay>
    </PatrolSequence>
  </PatrolSequenceList>
</PTZPatrol>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, opt, string, request URL, range:[0,1024]-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
  <description>
    <!--ro, opt, string, range:[0,1024]-->badXmlFormat
  </description>
  <MErrCode>
    <!--ro, opt, string-->0x00000000
  </MErrCode>
  <MErrDevSelfEx>
    <!--ro, opt, string-->0x00000000
  </MErrDevSelfEx>
</ResponseStatus>
```

14.4.1.8 Set all presets parameters

Request URL

PUT /ISAPI/PTZCtrl/channels/<channelID>/presets

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<PTZPresetList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, array, presets list, subType:object, attr:version{req, string, protocolVersion}-->
  <PTZPreset>
    <!--opt, object, PTZ preset-->
    <enabled>
      <!--req, bool, whether to enable-->true
    </enabled>
    <id>
      <!--req, string, ID-->test
    </id>
    <presetName>
      <!--req, string, preset name-->test
    </presetName>
    <AbsoluteHigh>
      <!--opt, object, absolute height-->
      <elevation>
        <!--opt, int, altitude, range:[-900,2700]-->1
      </elevation>
      <azimuth>
        <!--opt, int, panning angle, range:[0,3600]-->1
      </azimuth>
      <absoluteZoom>
        <!--opt, int, absolute zoom, range:[0,1000]-->1
      </absoluteZoom>
    </AbsoluteHigh>
  </PTZPreset>
</PTZPresetList>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.4.1.9 Delete all presets parameters

Request URL

DELETE /ISAPI/PTZCtrl/channels/<channelID>/presets

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, opt, string, request URL, range:[0,1024]-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
  <description>
    <!--ro, opt, string, range:[0,1024]-->badXmlFormat
  </description>
  <MErrCode>
    <!--ro, opt, string-->0x00000000
  </MErrCode>
  <MErrDevSelfEx>
    <!--ro, opt, string-->0x00000000
  </MErrDevSelfEx>
</ResponseStatus>
```

14.4.1.10 Get all presets' parameters

Request URL

GET /ISAPI/PTZCtrl/channels/<channelID>/presets

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<PTZPresetList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, array, subType:object, attr:version{req, string, protocolVersion}-->
  <PTZPreset>
    <!--ro, opt, object-->
    <enabled>
      <!--ro, req, bool-->true
    </enabled>
    <id>
      <!--ro, req, string-->test
    </id>
    <presetName>
      <!--ro, req, string-->test
    </presetName>
    <AbsoluteHigh>
      <!--ro, opt, object-->
      <elevation>
        <!--ro, opt, int, range:[-900,2700]-->1
      </elevation>
      <azimuth>
        <!--ro, opt, int, range:[0,3600]-->1
      </azimuth>
      <absoluteZoom>
        <!--ro, opt, int, range:[0,1000]-->1
      </absoluteZoom>
      <focus>
        <!--ro, opt, int, range:[1,100000]-->1
      </focus>
    </AbsoluteHigh>
  </PTZPreset>
</PTZPresetList>
```

14.4.1.11 Get the single PTZ control parameters

Request URL

GET /ISAPI/PTZCtrl/channels/<channelID>/presets/<presetID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--
presetID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<PTZPreset xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, attr:version{req, string, protocolVersion}-->
  <enabled>
    <!--ro, req, bool, whether to enable-->true
  </enabled>
  <id>
    <!--ro, req, string, listening host ID-->test
  </id>
  <presetName>
    <!--ro, req, string, preset name-->test
  </presetName>
  <AbsoluteHigh>
    <!--ro, opt, object, absolute height-->
    <elevation>
      <!--ro, opt, int, altitude, range:[-900,2700], desc:altitude-->1
    </elevation>
    <azimuth>
      <!--ro, opt, int, panning angle, range:[0,3600], desc:panning angle-->1
    </azimuth>
    <absoluteZoom>
      <!--ro, opt, int, range:[0,1000]-->1
    </absoluteZoom>
  </AbsoluteHigh>
</PTZPreset>
```

14.4.1.12 Set parameters of a preset

Request URL

PUT /ISAPI/PTZCtrl/channels/<channelID>/presets/<presetID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--
presetID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<PTZPreset xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, preset parameters, attr:version{req, string, protocolVersion}-->
  <enabled>
    <!--req, bool, whether to enable-->true
  </enabled>
  <id>
    <!--req, string, ID-->test
  </id>
  <presetName>
    <!--req, string, preset name-->test
  </presetName>
  <AbsoluteHigh>
    <!--opt, object, absolute height-->
    <elevation>
      <!--opt, int, altitude, range: [-900, 2700]-->1
    </elevation>
    <azimuth>
      <!--opt, int, range: [0, 3600]-->1
    </azimuth>
    <absoluteZoom>
      <!--opt, int, range: [0, 1000]-->1
    </absoluteZoom>
  </AbsoluteHigh>
</PTZPreset>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (Succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code-->OK
  </subStatusCode>
</ResponseStatus>
```

14.4.1.13 Delete a preset

Request URL

DELETE /ISAPI/PTZCtrl/channels/<channelID>/presets/<presetID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel ID
presetID	string	Preset ID

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string}-->
  <requestURL>
    <!--ro, opt, string, request URL, range:[0,1024]-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
  <description>
    <!--ro, opt, string, range:[0,1024]-->badXmlFormat
  </description>
  <MErrCode>
    <!--ro, opt, string-->0x00000000
  </MErrCode>
  <MErrDevSelfEx>
    <!--ro, opt, string-->0x00000000
  </MErrDevSelfEx>
</ResponseStatus>
```

14.4.1.14 Call a preset

Request URL

PUT /ISAPI/PTZCtrl/channels/<channelID>/presets/<presetID>/goto

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--
presetID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code-->OK
  </subStatusCode>
</ResponseStatus>
```

14.4.2 PTZ Control

14.4.2.1 Set the PTZ absolute positioning data of a specific channel

Request URL

PUT /ISAPI/PTZCtrl/channels/<channelID>/absolute

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<PTZData xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, PTZ absolute positioning data, attr:version{req, string, protocolVersion}-->
  <AbsoluteHigh>
    <!--opt, object, absolute height-->
    <elevation>
      <!--opt, int, altitude, range: [-900,2700]-->1
    </elevation>
    <azimuth>
      <!--opt, int, panning angle, range: [0,3600]-->1
    </azimuth>
    <absoluteZoom>
      <!--opt, int, absolute zoom, range: [0,1000]-->1
    </absoluteZoom>
  </AbsoluteHigh>
</PTZData>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.4.2.2 Control PTZ to pan and tilt

Request URL

PUT /ISAPI/PTZCtrl/channels/<channelID>/continuous?type=<type>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.
type	enum	Module type. 1. Determine whether the device supports the optional parameter "type" by checking if /ISAPI/PTZCtrl/channels//capabilities returns continuousPanTiltType; 2. PTZLaser (laser PTZ), which indicates the control of the laser PTZ linked with the specified channel's PTZ camera

Request Message


```
<?xml version="1.0" encoding="UTF-8"?>

<PTZData xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, panning, tilting, and zooming positive direction, attr:version{req, string, protocolVersion}-->
  <pan>
    <!--opt, int, panning positive direction, range:[-100,100], desc:panning positive direction-->60
  </pan>
  <tilt>
    <!--opt, int, tilting positive direction, range:[-100,100], desc:tilting positive direction-->60
  </tilt>
  <zoom>
    <!--opt, int, zoom value, range:[-100,100], desc:the value represents the zoom speed. Positive value represents zooming in, and the larger the value, the faster the speed. Negative value represents zooming out, and the smaller the value, the faster the speed. Value 0 represents stopping rotating-->60
  </zoom>
  <rotate>
    <!--opt, int, Lens rotation value, range:[-100,100], desc:the value represents the rotation speed. Positive value represents clockwise rotation, and the speed rises with the larger value. Negative value represents counterclockwise rotation, and the speed rises with the smaller value. Value 0 represents stopping rotating-->60
  </rotate>
</PTZData>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string}-->
  <requestURL>
    <!--ro, opt, string, request URL, range:[0,1024]-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
  <description>
    <!--ro, opt, string, custom error message description, range:[0,1024], desc:detailed information of custom error returned by device applications, used for fast debugging-->badXMLFormat
  </description>
  <MErrCode>
    <!--ro, opt, string, error codes categorized by functional modules, desc:all general error codes are in the range of this field-->0x00000000
  </MErrCode>
  <MErrDevSelfEx>
    <!--ro, opt, string, error codes categorized by functional modules, desc:N/A-->0x00000000
  </MErrDevSelfEx>
</ResponseStatus>
```

14.4.2.3 Get the PTZ status of a specific channel of the device

Request URL

GET /ISAPI/PTZCtrl/channels/<channelID>/status

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<PTZStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, attr:version{req, string, protocolVersion}-->
  <AbsoluteHigh>
    <!--ro, opt, object, absolute height-->
    <elevation>
      <!--ro, opt, int, altitude, range: [-900,2700], desc:altitude-->1
    </elevation>
    <azimuth>
      <!--ro, opt, int, panning angle, range: [0,3600], desc:panning angle-->1
    </azimuth>
    <absoluteZoom>
      <!--ro, opt, int, zooming parameter, range: [0,1000], desc:zooming parameter-->1
    </absoluteZoom>
  </AbsoluteHigh>
</PTZStatus>
```

14.4.3 PTZ Home Position

14.4.3.1 Set the initial position of the PTZ of a specific channel

Request URL

PUT /ISAPI/PTZCtrl/channels/<channelID>/homeposition

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.4.3.2 Delete the initial position

Request URL

DELETE /ISAPI/PTZCtrl/channels/<channelID>/homeposition

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, opt, string, request URL, range:[0,1024]-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code description-->OK
  </subStatusCode>
  <description>
    <!--ro, opt, string, range:[0,1024]-->badXmlFormat
  </description>
  <MErrCode>
    <!--ro, opt, string-->0x00000000
  </MErrCode>
  <MErrDevSelfEx>
    <!--ro, opt, string-->0x00000000
  </MErrDevSelfEx>
</ResponseStatus>
```

14.4.4 PTZ Maintenance

14.4.4.1 Get the PTZ capability supported by the device

Request URL

GET /ISAPI/PTZCtrl/capabilities

Query Parameter

None

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<PTZCtrlCap xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, PTZ control capability, attr:version{req, string, protocolVersion}-->
  <maxPTZChannelNum min="1" max="10">
    <!--ro, opt, int, number of PTZ channels, attr:min{req, int},max{req, int}-->1
  </maxPTZChannelNum>
  <isSupportPTZWithPreview opt="true,false">
    <!--ro, opt, bool, whether to support live view, attr:opt{req, string}-->true
  </isSupportPTZWithPreview>
  <isSupportZoomLinkage opt="true,false">
    <!--ro, opt, bool, attr:opt{req, string}-->true
  </isSupportZoomLinkage>
  <isSupportManualWiper opt="true,false">
    <!--ro, opt, bool, whether to support wiper control interface manually, attr:opt{req, string}-->true
  </isSupportManualWiper>
  <isSupportTiltSync opt="true,false">
    <!--ro, opt, bool, whether to support tilt sync control of sound and bullet camera, attr:opt{req, string}-->true
  </isSupportTiltSync>
  <isSupportPTZProtocolList>
    <!--ro, opt, bool, whether to support getting PTZ protocol supported by device, desc:/ISAPI/PTZCtrl/PTZProtocolList?format=json-->true
  </isSupportPTZProtocolList>
  <isSupportRailwayRobot>
    <!--ro, opt, bool-->true
  </isSupportRailwayRobot>
  <isSupportPTZViewPreset>
    <!--ro, opt, bool-->true
  </isSupportPTZViewPreset>
  <isSupportPresetsProFocus>
    <!--ro, opt, bool-->true
  </isSupportPresetsProFocus>
  <isSupportGetCurrentPresetInfo>
    <!--ro, opt, bool-->true
  </isSupportGetCurrentPresetInfo>
</PTZCtrlCap>
```

14.4.4.2 Set control parameter of all PTZ.

Request URL

PUT /ISAPI/PTZCtrl/channels

Query Parameter

None

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<PTZChannelList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, array, PTZ channels' configuration list, subType:object, attr:version(req, string, protocolVersion)-->
  <PTZChannel>
    <!--req, object, PTZ channel configuration-->
    <id>
      <!--req, int-->1
    </id>
    <enabled>
      <!--req, bool-->true
    </enabled>
    <serialNumber>
      <!--req, int-->1
    </serialNumber>
    <videoInputID>
      <!--req, int-->1
    </videoInputID>
    <panMaxSpeed>
      <!--opt, int-->1
    </panMaxSpeed>
    <tiltMaxSpeed>
      <!--opt, int-->1
    </tiltMaxSpeed>
    <presetSpeed>
      <!--opt, int, range:[1,8]-->1
    </presetSpeed>
    <autoPatrolSpeed>
      <!--opt, int, range:[0,100]-->1
    </autoPatrolSpeed>
    <keyBoardControlSpeed>
      <!--opt, int, range:[0,100]-->1
    </keyBoardControlSpeed>
    <controlProtocol>
      <!--opt, enum, control protocol type, subType:string, desc:control protocol type-->pelco-d
    </controlProtocol>
    <controlAddress>
      <!--req, object-->
      <enabled>
        <!--req, bool-->true
      </enabled>
      <Address>
        <!--opt, string-->1
      </Address>
    </controlAddress>
    <defaultPresetID>
      <!--opt, string-->test
    </defaultPresetID>
    <PTZRs485Para>
      <!--req, object-->
      <baudRate>
        <!--req, int-->9600
      </baudRate>
      <dataBits>
        <!--req, int, data bit-->1
      </dataBits>
      <parityType>
        <!--req, enum, parity type, subType:string, desc:parity type-->space
      </parityType>
      <stopBits>
        <!--req, enum, stop bit, subType:string, desc:1, 1.5, 2-->1
      </stopBits>
      <flowCtrl>
        <!--req, enum, flow control type, subType:string, desc:flow control type-->hardware
      </flowCtrl>
    </PTZRs485Para>
    <manualControlSpeed>
      <!--opt, enum, manual control speed type, subType:string, desc:"pedestrian", "nonMotorVehicle" (non-motor vehicles), "motorVehicle" (vehicle), "selfadaptive" (self-adaptive), "compatible"-->pedestrian
    </manualControlSpeed>
    <PTQueryFrequency>
      <!--opt, enum, subType:int-->30
    </PTQueryFrequency>
  </PTZChannel>
</PTZChannelList>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.4.4.3 Add control parameter of single PTZ

Request URL

POST /ISAPI/PTZCtrl/channels

Query Parameter

None

Request Message

dzambrano@vinsoft.com.mx
VISION E INGENIO SOFTWARE SA DE CV (VIINSOFT)

```

<?xml version="1.0" encoding="UTF-8"?>

<PTZChannel xmlns="http://www.isapi.org/ver20/XMLSchema">
  <!--req, object, PTZ channel configuration-->
  <id>
    <!--req, int, ID-->1
  </id>
  <enabled>
    <!--req, bool, whether to enable-->true
  </enabled>
  <serialNumber>
    <!--req, int, serial port No.-->1
  </serialNumber>
  <videoInputID>
    <!--req, int-->1
  </videoInputID>
  <panMaxSpeed>
    <!--opt, int, ro,degrees/sec-->1
  </panMaxSpeed>
  <tiltMaxSpeed>
    <!--opt, int, ro,degrees/sec-->1
  </tiltMaxSpeed>
  <presetSpeed>
    <!--opt, int, 1..8, range:[1,8]-->1
  </presetSpeed>
  <autoPatrolSpeed>
    <!--opt, int, 0..100, range:[0,100]-->1
  </autoPatrolSpeed>
  <keyBoardControlSpeed>
    <!--opt, int, 0..100, range:[0,100]-->1
  </keyBoardControlSpeed>
  <controlProtocol>
    <!--opt, enum, control protocol type, subType:string, desc:control protocol type-->pelco-d
  </controlProtocol>
  <controlAddress>
    <!--req, object-->
    <enabled>
      <!--req, bool, whether to enable-->true
    </enabled>
    <Address>
      <!--opt, string, address-->1
    </Address>
  </controlAddress>
  <defaultPresetID>
    <!--opt, string, id-->test
  </defaultPresetID>
  <PTZRs485Para>
    <!--req, object-->
    <baudRate>
      <!--req, int, baud rate-->9600
    </baudRate>
    <dataBits>
      <!--req, int, data bit-->1
    </dataBits>
    <parityType>
      <!--req, enum, parity type, subType:string, desc:"none" (no parity bit), "even" (even parity), "odd" (odd parity), "mark" (total number of parity bits
is 1), "space" (total number of parity bits is 0)-->space
    </parityType>
    <stopBits>
      <!--req, enum, stop bit, subType:string, desc:"1", "1.5", "2"-->1
    </stopBits>
    <flowCtrl>
      <!--req, enum, "none,software,hardware", subType:string, desc:"none", "software", "hardware"-->hardware
    </flowCtrl>
  </PTZRs485Para>
  <manualControlSpeed>
    <!--opt, enum, manual control speed type, subType:string, desc:"pedestrian", "nonMotorVehicle" (non-motor vehicles), "motorVehicle" (vehicle),
"selfadaptive" (self-adaptive), "compatible"-->pedestrian
  </manualControlSpeed>
  <PTQueryFrequency>
    <!--opt, enum, subType:int-->30
  </PTQueryFrequency>
</PTZChannel>

```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.4.4.4 Delete control parameters of all PTZ

Request URL

DELETE /ISAPI/PTZCtrl/channels

Query Parameter

None

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.4.4.5 Set a specified PTZ channel's parameters

Request URL

PUT /ISAPI/PTZCtrl/channels/<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<PTZChannel xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, PTZ channel's parameters, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, int, ID-->1
  </id>
  <enabled>
    <!--req, bool, whether to enable-->true
  </enabled>
  <serialNumber>
```

```

    <!--req, int, serial port No., desc:this field should be supported by both GET and PUT methods. If the value is 0, it indicates that no serial port is
Linked-->1
</serialNumber>
<videoInputID>
    <!--req, int, video input ID-->1
</videoInputID>
<panMaxSpeed>
    <!--opt, int, the maximum panning speed, unit: degrees/sec-->1
</panMaxSpeed>
<tiltMaxSpeed>
    <!--opt, int, the maximum titling speed, unit: degrees/sec-->1
</tiltMaxSpeed>
<presetSpeed>
    <!--opt, int, preset speed-->1
</presetSpeed>
<autoPatrolSpeed>
    <!--opt, int, automatic patrol speed-->1
</autoPatrolSpeed>
<keyBoardControlSpeed>
    <!--opt, int, keypad control speed, range:[0,100]-->1
</keyBoardControlSpeed>
<controlProtocol>
    <!--opt, enum, control protocol, subType:string, desc:"pelco-d", "modbus-RTU", "modbus-ASCII"-->pelco-d
</controlProtocol>
<controlAddress>
    <!--req, object, control address-->
    <enabled>
        <!--req, bool, whether to enable-->true
    </enabled>
    <Address>
        <!--opt, string, address, range:[1,255]-->test
    </Address>
</controlAddress>
<defaultPresetID>
    <!--opt, string, preset ID-->test
</defaultPresetID>
<PTZRs485Para>
    <!--opt, object-->
    <baudRate>
        <!--req, int, baud rate-->9600
    </baudRate>
    <dataBits>
        <!--req, int, data bit-->1
    </dataBits>
    <parityType>
        <!--req, enum, parity type, subType:string, desc:"none" (no parity bit), "even" (even parity), "odd" (odd parity), "mark" (total number of parity bits
is 1), "space" (total number of parity bits is 0)-->space
    </parityType>
    <stopBits>
        <!--req, enum, stop bit, subType:string, desc:"1", "1.5", "2"-->1
    </stopBits>
    <flowCtrl>
        <!--req, enum, flow control type, subType:string, desc:"none", "software", "hardware"-->hardware
    </flowCtrl>
</PTZRs485Para>
<manualControlSpeed>
    <!--opt, enum, manual control speed type, subType:string, desc:"pedestrian", "nonMotorVehicle" (non-motor vehicles), "motorVehicle" (vehicle),
"selfadaptive" (self-adaptive), "compatible"-->pedestrian
</manualControlSpeed>
<panSupport>
    <!--opt, bool, whether it supports panning-->true
</panSupport>
<tiltSupport>
    <!--opt, bool, whether it supports tilting-->true
</tiltSupport>
<zoomSupport>
    <!--opt, bool, whether it supports zooming-->true
</zoomSupport>
<PTPositiveDirection>
    <!--opt, object, panning and tilting positive direction, desc:panning and tilting positive direction-->
    <pan>
        <!--opt, enum, panning positive direction, subType:string, desc:"left", "right"-->left
    </pan>
    <tile>
        <!--opt, enum, tilting positive direction, subType:string, desc:"up", "down"-->up
    </tile>
</PTPositiveDirection>
<PTQueryFrequency>
    <!--opt, enum, subType:int-->30
</PTQueryFrequency>
</PTZChannel>

```

Response Message


```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.4.4.6 Get parameters of a specified PTZ channel

Request URL

GET /ISAPI/PTZCtrl/channels/<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<PTZChannel xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, int-->1
  </id>
  <enabled>
    <!--ro, req, bool, ro-->>true
  </enabled>
  <serialNumber>
    <!--ro, req, int-->1
  </serialNumber>
  <videoInputID>
    <!--ro, req, int-->1
  </videoInputID>
  <panMaxSpeed>
    <!--ro, opt, int, the maximum speed for panning-->1
  </panMaxSpeed>
  <tiltMaxSpeed>
    <!--ro, opt, int, the maximum speed for tilting-->1
  </tiltMaxSpeed>
  <presetSpeed>
    <!--ro, opt, int, preset speed-->1
  </presetSpeed>
  <autoPatrolSpeed>
    <!--ro, opt, int, automatic patrol speed-->1
  </autoPatrolSpeed>
  <keyBoardControlSpeed>
    <!--ro, opt, int, keyboard control speed, range:[0,100]-->1
  </keyBoardControlSpeed>
  <controlProtocol>
    <!--ro, opt, enum, "pelco-d,modbus-RTU,modbus-ASCII", subType:string, desc:"pelco-d,modbus-RTU,modbus-ASCII"-->pelco-d
  </controlProtocol>
  <controlAddress>
    <!--ro, opt, object-->
    <enabled>
      <!--ro, req, bool, ro-->true
    </enabled>
    <Address>
      <!--ro, opt, string, 1-255, range:[1,255]-->test
    </Address>
  </controlAddress>
  <defaultPresetID>
    <!--ro, opt, string, default preset ID-->test
  </defaultPresetID>
  <PTZRs485Para>
```

```

<!--ro, opt, object-->
<baudRate>
  <!--ro, req, int, baud rate-->9600
</baudRate>
<dataBits>
  <!--ro, req, int, data bit-->1
</dataBits>
<parityType>
  <!--ro, req, enum, "none,even,odd,mark,space", subType:string, desc:"none,even,odd,mark,space"-->space
</parityType>
<stopBits>
  <!--ro, req, enum, stop bit, subType:string, desc:stop bit-->1
</stopBits>
<flowCtrl>
  <!--ro, req, enum, flow control mode, subType:string, desc:flow control mode-->hardware
</flowCtrl>
</PTZRs485Para>
<manualControlSpeed>
  <!--ro, opt, enum, manual control speed, subType:string, desc:manual control speed-->pedestrian
</manualControlSpeed>
<panSupport>
  <!--ro, opt, bool, whether it supports panning-->true
</panSupport>
<tiltSupport>
  <!--ro, opt, bool, whether it supports tilting-->true
</tiltSupport>
<zoomSupport>
  <!--ro, opt, bool, whether it supports zooming-->true
</zoomSupport>
<PTPositiveDirection>
  <!--ro, opt, object, panning and tilting positive direction, desc:panning and tilting positive direction-->
  <pan>
    <!--ro, opt, enum, panning positive direction (horizontal), subType:string, desc:"Left", "right"-->left
  </pan>
  <tile>
    <!--ro, opt, enum, tilting positive direction (vertical), subType:string, desc:"up", "down"-->up
  </tile>
</PTPositiveDirection>
<PTQueryFrequency>
  <!--ro, opt, enum, subType:int-->30
</PTQueryFrequency>
<tiltNegationEnabled>
  <!--ro, opt, bool-->>false
</tiltNegationEnabled>
<presetAccuracy>
  <!--ro, opt, float, range:[0.00,0.50]-->0.01
</presetAccuracy>
<autoFocusCompletionWaitEnabled>
  <!--ro, opt, bool-->>false
</autoFocusCompletionWaitEnabled>
</PTZChannel>

```

14.4.4.7 Get the PTZ self-checking and control capability

Request URL

GET /ISAPI/PTZCtrl/channels/<channelID>/initializationCtrl/capabilities?format=json

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```

{
  "InitializationCtrlCap": {
    /*ro, req, object, PTZ self-checking and control capability*/
    "status": {
      /*ro, opt, object, status*/
      "@opt": ["initialized", "noInitialization", "close", "success", "building", "false"]
      /*ro, req, array, status value, subType:string, desc:initialized-initialized already, noInitialization-not initialized yet*/
    },
    "initializationPercent": {
      /*ro, opt, object*/
      "@min": 0,
      /*ro, req, int*/
      "@max": 100
      /*ro, req, int*/
    }
  }
}

```

14.4.4.8 Get PTZ self-checking and control status

Request URL

GET /ISAPI/PTZCtrl/channels/<channelID>/initializationCtrl/status?format=json

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```

{
  "InitializationCtrl": {
    /*ro, opt, object, PTZ self-checking and control status*/
    "status": "initialized",
    /*ro, req, enum, status, subType:string, desc:"initialized" (initialized already), "noInitialization" (not initialized yet)*/
    "initializationPercent": 0
    /*ro, opt, int, range:[0,100], unit:%*/
  }
}

```

14.4.4.9 Set the parameters for PTZ self-checking and control of a specific channel

Request URL

PUT /ISAPI/PTZCtrl/channels/<channelID>/initializationCtrl?format=json

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```
{
  "requestURL": "test",
  /*ro, opt, string, URI*/
  "statusCode": "test",
  /*ro, opt, string, status code, desc:1 (succeeded). It is required when an error occurred*/
  "statusString": "test",
  /*ro, opt, string, status description, desc:"ok" (succeeded). It is required when an error occurred*/
  "subStatusCode": "test",
  /*ro, opt, string, sub status code, desc:"ok" (succeeded). It is required when an error occurred*/
  "errorCode": 1,
  /*ro, req, int, error code, desc:when the value of statusCode is not 1, it corresponds to subStatusCode*/
  "errorMsg": "ok"
  /*ro, req, string, error information, desc:this node is required when the value of statusCode is not 1*/
}
```

14.5 Abnormal Event Detection

14.5.1 Fast Moving Detection

14.5.1.1 Get the arming schedule of fast moving detection for all channels

Request URL

GET /ISAPI/Event/schedules/rapidMoves

Query Parameter

None

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<RapidMoveScheduleList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, attr:version{req, string, protocolVersion}-->
  <Schedule>
    <!--ro, opt, object-->
    <id>
      <!--ro, req, string-->test
    </id>
    <eventType>
      <!--ro, opt, enum, subType:string-->rapidMove
    </eventType>
    <videoInputChannelID>
      <!--ro, opt, string-->test
    </videoInputChannelID>
    <TimeBlockList size="8">
      <!--ro, req, object, attr:size{req, int}-->
      <TimeBlock>
        <!--ro, opt, object-->
        <dayOfWeek>
          <!--ro, opt, enum, subType:int-->1
        </dayOfWeek>
        <TimeRange>
          <!--ro, req, object-->
          <beginTime>
            <!--ro, req, time-->00:00:00
          </beginTime>
          <endTime>
            <!--ro, req, time-->00:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </TimeBlockList>
    <HolidayBlockList>
      <!--ro, opt, object-->
      <TimeBlock>
        <!--ro, opt, object-->
        <TimeRange>
          <!--ro, req, object-->
          <beginTime>
            <!--ro, req, time-->00:00:00
          </beginTime>
          <endTime>
            <!--ro, req, time-->00:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </HolidayBlockList>
  </Schedule>
</RapidMoveScheduleList>

```

14.5.1.2 Set the arming schedule of fast moving detection for all channels

Request URL

PUT /ISAPI/Event/schedules/rapidMoves

Query Parameter

None

Request Message

```

<?xml version="1.0" encoding="UTF-8"?>

<RapidMoveScheduleList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, attr:version{req, string, protocolVersion}-->
  <Schedule>
    <!--opt, object-->
    <id>
      <!--req, string-->test
    </id>
    <eventType>
      <!--opt, enum, subType:string-->rapidMove
    </eventType>
    <videoInputChannelID>
      <!--opt, string-->test
    </videoInputChannelID>
    <TimeBlockList size="8">
      <!--req, object, attr:size{req, int}-->
      <TimeBlock>
        <!--opt, object-->
        <dayOfWeek>
          <!--opt, enum, subType:int-->1
        </dayOfWeek>
        <TimeRange>
          <!--req, object-->
          <beginTime>
            <!--req, time-->00:00:00
          </beginTime>
          <endTime>
            <!--req, time-->00:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </TimeBlockList>
    <HolidayBlockList>
      <!--opt, object-->
      <TimeBlock>
        <!--opt, object-->
        <TimeRange>
          <!--req, object-->
          <beginTime>
            <!--req, time-->00:00:00
          </beginTime>
          <endTime>
            <!--req, time-->00:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </HolidayBlockList>
  </Schedule>
</RapidMoveScheduleList>

```

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>

```

14.5.1.3 Set the arming schedule of fast moving detection for a specified channel

Request URL

PUT /ISAPI/Event/schedules/rapidMoves/rapidMove-<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<Schedule xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string-->test
  </id>
  <eventType>
    <!--opt, string-->rapidMove
  </eventType>
  <videoInputChannelID>
    <!--opt, string-->test
  </videoInputChannelID>
  <TimeBlockList size="8">
    <!--req, object, attr:size{req, int}-->
    <TimeBlock>
      <!--opt, object-->
      <dayOfWeek>
        <!--opt, enum, subType:int-->1
      </dayOfWeek>
      <TimeRange>
        <!--req, object-->
        <beginTime>
          <!--req, time-->00:00:00
        </beginTime>
        <endTime>
          <!--req, time-->00:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </TimeBlockList>
  <HolidayBlockList>
    <!--opt, object-->
    <TimeBlock>
      <!--opt, object-->
      <TimeRange>
        <!--req, object-->
        <beginTime>
          <!--req, time-->00:00:00
        </beginTime>
        <endTime>
          <!--req, time-->00:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </HolidayBlockList>
</Schedule>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.5.1.4 Get the arming schedule of fast moving detection for a specified channel

Request URL

GET /ISAPI/Event/schedules/rapidMoves/rapidMove-<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<Schedule xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string-->test
  </id>
  <eventType>
    <!--ro, opt, enum, subType:string-->rapidMove
  </eventType>
  <videoInputChannelID>
    <!--ro, opt, string-->test
  </videoInputChannelID>
  <TimeBlockList size="8">
    <!--ro, req, object, attr:size{req, int}-->
    <TimeBlock>
      <!--ro, opt, object-->
      <dayOfWeek>
        <!--ro, opt, enum, subType:int-->1
      </dayOfWeek>
      <TimeRange>
        <!--ro, req, object-->
        <beginTime>
          <!--ro, req, time-->00:00:00
        </beginTime>
        <endTime>
          <!--ro, req, time-->00:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </TimeBlockList>
  <HolidayBlockList>
    <!--ro, opt, object-->
    <TimeBlock>
      <!--ro, opt, object-->
      <TimeRange>
        <!--ro, req, object-->
        <beginTime>
          <!--ro, req, time-->00:00:00
        </beginTime>
        <endTime>
          <!--ro, req, time-->00:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </HolidayBlockList>
</Schedule>
```

14.5.1.5 Set the linkage parameters of fast moving detection

Request URL

PUT /ISAPI/Event/triggers/rapidMove<<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message


```

<?xml version="1.0" encoding="UTF-8"?>

<EventTrigger xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string-->test
  </id>
  <eventType>
    <!--req, enum, subType:string-->rapidMove
  </eventType>
  <eventDescription>
    <!--opt, string-->test
  </eventDescription>
  <inputIOPortID>
    <!--opt, string-->1
  </inputIOPortID>
  <dynInputIOPortID>
    <!--opt, string-->1
  </dynInputIOPortID>
  <videoInputChannelID>
    <!--opt, string-->1
  </videoInputChannelID>
  <dynVideoInputChannelID>
    <!--opt, string-->1
  </dynVideoInputChannelID>
  <intervalBetweenEvents>
    <!--opt, int, unit:s-->1
  </intervalBetweenEvents>
  <WLSensorID>
    <!--opt, string-->1
  </WLSensorID>
  <EventTriggerNotificationList>
    <!--opt, array, subType:object-->
    <EventTriggerNotification>
      <!--opt, object-->
      <id>
        <!--req, string-->test
      </id>
      <notificationMethod>
        <!--req, enum, subType:string-->email
      </notificationMethod>
      <notificationRecurrence>
        <!--opt, enum, subType:string-->beginning
      </notificationRecurrence>
      <notificationInterval>
        <!--opt, int, unit:ms-->1
      </notificationInterval>
      <videoInputID>
        <!--opt, string-->1
      </videoInputID>
      <dynVideoInputID>
        <!--opt, string-->1
      </dynVideoInputID>
      <ptzAction>
        <!--opt, object-->
        <ptzChannelID>
          <!--req, string-->1
        </ptzChannelID>
        <actionName>
          <!--req, enum, subType:string-->preset
        </actionName>
        <actionNum>
          <!--opt, int-->1
        </actionNum>
      </ptzAction>
      <WhiteLightAction>
        <!--opt, object-->
        <WhiteLightDurationTime>
          <!--opt, int, range:[1,60], unit:s-->1
        </WhiteLightDurationTime>
      </WhiteLightAction>
    </EventTriggerNotification>
  </EventTriggerNotificationList>
</EventTrigger>

```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.5.1.6 Get the linkage parameters of fast moving detection

Request URL

GET /ISAPI/Event/triggers/rapidMove-<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<EventTrigger xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string-->test
  </id>
  <eventType>
    <!--ro, req, enum, subType:string-->rapidMove
  </eventType>
  <eventDescription>
    <!--ro, opt, string-->test
  </eventDescription>
  <inputIOPortID>
    <!--ro, opt, string-->1
  </inputIOPortID>
  <dynInputIOPortID>
    <!--ro, opt, string-->1
  </dynInputIOPortID>
  <videoInputChannelID>
    <!--ro, opt, string-->1
  </videoInputChannelID>
  <dynVideoInputChannelID>
    <!--ro, opt, string-->1
  </dynVideoInputChannelID>
  <intervalBetweenEvents>
    <!--ro, opt, int, unit:s-->1
  </intervalBetweenEvents>
  <wLSensorID>
    <!--ro, opt, string-->1
  </wLSensorID>
  <EventTriggerNotificationList>
    <!--ro, opt, array, subType:object-->
    <EventTriggerNotification>
      <!--ro, opt, object-->
      <id>
        <!--ro, req, string-->test
      </id>
      <notificationMethod>
        <!--ro, req, enum, subType:string-->email
      </notificationMethod>
      <notificationRecurrence>
        <!--ro, opt, enum, subType:string-->beginning
      </notificationRecurrence>
      <notificationInterval>
        <!--ro, opt, int, unit:ms-->1
      </notificationInterval>
      <videoInputID>
        <!--ro, opt, string-->1
      </videoInputID>
      <dynVideoInputID>
        <!--ro, opt, string-->1
      </dynVideoInputID>
      <ptzAction>
        <!--ro, opt, object-->
        <ptzChannelID>
          <!--ro, req, string-->1
        </ptzChannelID>
        <actionName>
          <!--ro, req, enum, subType:string-->preset
        </actionName>
        <actionNum>
          <!--ro, opt, int-->1
        </actionNum>
      </ptzAction>
      <whiteLightAction>
        <!--ro, opt, object-->
        <whiteLightDurationTime>
          <!--ro, opt, int, range:[1,60], unit:s-->1
        </whiteLightDurationTime>
      </whiteLightAction>
    </EventTriggerNotification>
  </EventTriggerNotificationList>
</EventTrigger>
```

14.5.1.7 Fast moving

Event Type: rapidMove

```
<?xml version="1.0" encoding="UTF-8"?>

<EventNotificationAlert xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, transmitted parameters, attr:version{req, string, protocolVersion}-->
  <ipAddress>
    <!--ro, req, string, IPv4 address of the device that triggers the alarm-->172.6.64.7
  </ipAddress>
  <ipv6Address>
    <!--ro, opt, string, IPv6 address of the device that triggers the alarm-->1080:0:0:0:8:800:200C:417A
```

```

</ipv6Address>
<portNo>
  <!--ro, opt, int, communication port No. of the device that triggers the alarm-->80
</portNo>
<protocol>
  <!--ro, opt, enum, transmission communication protocol type, subType:string, desc:transmission communication protocol type: "HTTP", "HTTPS", "EHome".
  The value should be "HTTP" when ISAPI protocol is transmitted via EZ protocol. The value should be "EHome" when ISAPI protocol is transmitted via ISUP--
  >HTTP
</protocol>
<macAddress>
  <!--ro, opt, string, MAC address-->01:17:24:45:D9:F4
</macAddress>
<dynChannelID>
  <!--ro, opt, string, digital channel No.-->test
</dynChannelID>
<channelID>
  <!--ro, opt, string, channel No. of the device that triggers the alarm, desc:video channel No. that triggers the alarm-->test
</channelID>
<relatedChannelList>
  <!--ro, opt, string, List of alarm related channels, which are of the same camera with channelID, desc:this parameter is used for Live view or playback
  on the platform; multiple channel No.s are separated by commas-->1,2,3
</relatedChannelList>
<dateTime>
  <!--ro, req, datetime, alarm trigger time-->2004-05-03T17:30:08+08:00
</dateTime>
<activePostCount>
  <!--ro, opt, int, times that the same alarm has been uploaded, desc:event triggering frequency-->1
</activePostCount>
<eventType>
  <!--ro, req, enum, event type, subType:string, desc:"rapidMove" (fast moving detection)-->rapidMove
</eventType>
<eventState>
  <!--ro, req, enum, event status, subType:string, desc:for durative event: active (valid), inactive (invalid)-->active
</eventState>
<eventDescription>
  <!--ro, req, string, event description-->test
</eventDescription>
<deviceID>
  <!--ro, opt, string, device ID, desc:it should be returned for ISUP alarms, e.g., test0123 (Ehome2.0, Ehome4.0, and ISUP5.0)-->12345
</deviceID>
<DetectionRegionList>
  <!--ro, opt, array, detection area List, subType:object-->
  <DetectionRegionEntry>
    <!--ro, opt, object, detection area-->
    <regionID>
      <!--ro, req, string, area ID-->test
    </regionID>
    <sensitivityLevel>
      <!--ro, opt, int, sensitivity, range:[0,100]-->0
    </sensitivityLevel>
    <RegionCoordinatesList>
      <!--ro, opt, array, target area, subType:object, range:[0,4], desc:rectangle-->
      <RegionCoordinates>
        <!--ro, opt, object, target area, desc:the origin is the upper-left corner of the screen-->
        <positionX>
          <!--ro, req, int, X-coordinate, range:[0,1000]-->0
        </positionX>
        <positionY>
          <!--ro, req, int, Y-coordinate, range:[0,1000]-->0
        </positionY>
      </RegionCoordinates>
    </RegionCoordinatesList>
  </DetectionRegionEntry>
</DetectionRegionList>
<channelName>
  <!--ro, opt, string, channel name-->test
</channelName>
<Extensions>
  <!--ro, opt, object, extended information-->
  <serialNumber>
    <!--ro, opt, string, serial No.-->test
  </serialNumber>
  <eventPush>
    <!--ro, opt, string, event notification-->test
  </eventPush>
</Extensions>
<DetectionPictureTransType>
  <!--ro, opt, enum, picture transmission mode, subType:string, desc:"url", "binary", "base64"-->url
</DetectionPictureTransType>
<DetectionPicturesNumber>
  <!--ro, opt, int, number of pictures contained in the alarm received in arming mode, desc:this field will not be returned when there is no picture
  contained in the alarm-->1
</DetectionPicturesNumber>
<bkgUrl>
  <!--ro, opt, string, background picture URL, desc:background picture URL-->test
</bkgUrl>
<URLCertificationType>
  <!--ro, opt, enum, picture URL authentication method, subType:string, desc:authentication mode of picture URL: "no"-no authentication, "digest"-digest
  authentication (it is used for local picture URL returned by NVR or DVR)-->no
</URLCertificationType>
<pId>
  <!--ro, opt, string, picture ID, desc:the field value is the picture Content-ID when the value of DetectionPictureTransType is "binary"-->test
</pId>
<targetAttr>

```

```

<!--ro, opt, object, transmitted parameters-->{ /*可选,透传字段,推荐使用以下三个字段*/ "deviceId": "1", /*可选,设备ID, string类型, 最大长度为64*/
"deviceChannel": 1, /*可选, 设备通道号, integer32类型*/ "deviceName": "shebei", /*可选, 设备名称, string类型, 最大长度为128*/ }
</targetAttrs>
<TaskInfo>
<!--ro, opt, object, task information submitted by data center products-->
<taskID>
<!--ro, req, string, task ID, range:[0,64]-->test
</taskID>
<algorithmType>
<!--ro, opt, enum, algorithm type, subType:int, desc:1-"highQualityVehicle" (high-quality vehicle),2-"highPerformanceVehicle" (high-performance
vehicle),3-"personStructModel" (person structural modeling),4-"vehicleAndPersonStructModel" (person and vehicle structural modeling),5-"videoFaceDetect"
(video face detection),6-"videoFaceDetectModel" (video face detection and modeling),7-"smart" (face detection (output frame without recognizing
properties)+human body detection (output properties and frame)+behavior detection)-->1
</algorithmType>
<taskName>
<!--ro, opt, string, task name-->test
</taskName>
<algorithmID>
<!--ro, opt, string, algorithm package ID-->test
</algorithmID>
<monitorPointID>
<!--ro, opt, string, camera No.-->test
</monitorPointID>
<monitorPointName>
<!--ro, opt, string, camera name-->test
</monitorPointName>
<streamType>
<!--ro, opt, enum, stream type, subType:string, desc:"realtime" (real-time stream), "historyvideo" (history stream), "localvideo" (local stream)--
>realtime
</streamType>
<ruleID>
<!--ro, opt, string, rule ID, desc:it is used to distinguish different tasks with the same name, and the ruleID in the event uploading message
indicates that the event is related to this task-->test
</ruleID>
<ruleCustomName>
<!--ro, req, string, user-defined event name, range:[0,128], desc:it is defined by the caller, and it is included in the message when the alarm is
uploaded. Up to 128 characters are allowed-->test
</ruleCustomName>
<algorithmInfo>
<!--ro, opt, object, algorithm version information, desc:this field is required for secondary analysis-->
<algorithmId>
<!--ro, opt, string, algorithm package ID-->test
</algorithmId>
<algoVendorId>
<!--ro, opt, string, manufacturer ID-->test
</algoVendorId>
<algoVersionId>
<!--ro, opt, string, algorithm version No.-->test
</algoVersionId>
<algoChipType>
<!--ro, opt, string, chip type-->test
</algoChipType>
<algoModelVersion>
<!--ro, opt, string, model version-->test
</algoModelVersion>
</algorithmInfo>
</TaskInfo>
<timeStamp>
<!--ro, opt, datetime, timestamp of the frame, which triggers the alarm-->1970-01-01T00:00:00+08:00
</timeStamp>
<isDataRetransmission>
<!--ro, opt, bool, whether it is a resending data (if the real-time detection data upload fails due to the network condition, the data will be uploaded
again after the device recovers.)-->true
</isDataRetransmission>
<ruleID>
<!--ro, opt, int, rule No., range:[0,7], desc:rule No.-->0
</ruleID>
<ruleName>
<!--ro, opt, string, rule name, range:[0,32], desc:rule name-->test
</ruleName>
</EventNotificationAlert>

```

14.5.2 Loitering Detection

14.5.2.1 Set arming schedules of loitering detection of all channels

Request URL

PUT /ISAPI/Event/schedules/loiterings

Query Parameter

None

Request Message

```

<?xml version="1.0" encoding="UTF-8"?>

<LoiteringScheduleList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, array, arming schedule list, subType:object, attr:version{req, string, protocolVersion}-->
  <Schedule>
    <!--opt, object, arming schedule-->
    <id>
      <!--req, string, ID, desc:ID-->loitering-1
    </id>
    <eventType>
      <!--opt, string, event type-->loitering
    </eventType>
    <videoInputChannelID>
      <!--opt, string, video input channel ID-->1
    </videoInputChannelID>
    <TimeBlockList size="8">
      <!--req, array, arming schedule list, subType:object, attr:size{opt, int}-->
      <TimeBlock>
        <!--opt, object-->
        <dayOfWeek>
          <!--opt, enum, day of the week, subType:int, desc:1: Monday; 2: Tuesday; 3: Wednesday; 4: Thursday; 5: Friday; 6: Saturday; 7: Sunday;-->1
        </dayOfWeek>
        <TimeRange>
          <!--req, object, time period-->
          <beginTime>
            <!--req, time, start time-->10:00:00
          </beginTime>
          <endTime>
            <!--req, time, end time-->10:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </TimeBlockList>
    <HolidayBlockList>
      <!--opt, array, holiday arming schedule, subType:object-->
      <TimeBlock>
        <!--opt, object, arming time-->
        <TimeRange>
          <!--req, object, time period-->
          <beginTime>
            <!--req, time, start time-->10:00:00
          </beginTime>
          <endTime>
            <!--req, time, end time-->10:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </HolidayBlockList>
  </Schedule>
</LoiteringScheduleList>

```

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code-->OK
  </subStatusCode>
</ResponseStatus>

```

14.5.2.2 Get arming schedules of the loitering detection of all channels

Request URL

GET /ISAPI/Event/schedules/loiterings

Query Parameter

None

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<LoiteringScheduleList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, array, arming schedule list, subType:object, attr:version{req, string, protocolVersion}-->
  <Schedule>
    <!--ro, opt, object, arming schedule information-->
    <id>
      <!--ro, req, string, ID-->loitering-1
    </id>
    <eventType>
      <!--ro, opt, string, event type-->loitering
    </eventType>
    <videoInputChannelID>
      <!--ro, opt, string, video input channel ID-->1
    </videoInputChannelID>
    <TimeBlockList size="8">
      <!--ro, req, array, arming schedule list, subType:object, attr:size{opt, int}-->
      <TimeBlock>
        <!--ro, opt, object, arming schedules-->
        <dayOfWeek>
          <!--ro, opt, enum, day of a week, subType:int, desc:1: Monday), 2: Tuesday, 3: Wednesday, 4: Thursday, 5: Friday, 6: Saturday, 7: Sunday-->1
        </dayOfWeek>
        <TimeRange>
          <!--ro, req, object, time period-->
          <beginTime>
            <!--ro, req, time, start time-->10:00:00
          </beginTime>
          <endTime>
            <!--ro, req, time, end time-->10:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </TimeBlockList>
    <HolidayBlockList>
      <!--ro, opt, array, subType:object-->
      <TimeBlock>
        <!--ro, opt, object, arming schedules-->
        <TimeRange>
          <!--ro, req, object, time period-->
          <beginTime>
            <!--ro, req, time, start time-->10:00:00
          </beginTime>
          <endTime>
            <!--ro, req, time, end time-->10:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </HolidayBlockList>
  </Schedule>
</LoiteringScheduleList>
```

14.5.2.3 Get the arming schedule of loitering detection for all channels

Request URL

GET /ISAPI/Event/schedules/loiterings/loitering

Query Parameter

None

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<LoiteringScheduleList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, attr:version{req, string, protocolVersion}-->
  <Schedule>
    <!--ro, opt, object-->
    <id>
      <!--ro, req, string-->test
    </id>
    <eventType>
      <!--ro, opt, string-->loitering
    </eventType>
    <videoInputChannelID>
      <!--ro, opt, string-->test
    </videoInputChannelID>
    <TimeBlockList size="8">
      <!--ro, req, object, attr:size{req, int}-->
      <TimeBlock>
        <!--ro, opt, object-->
        <dayOfWeek>
          <!--ro, opt, enum, subType:int-->1
        </dayOfWeek>
        <TimeRange>
          <!--ro, req, object-->
          <beginTime>
            <!--ro, req, time-->00:00:00
          </beginTime>
          <endTime>
            <!--ro, req, time-->00:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </TimeBlockList>
    <HolidayBlockList>
      <!--ro, opt, object-->
      <TimeBlock>
        <!--ro, opt, object-->
        <TimeRange>
          <!--ro, req, object-->
          <beginTime>
            <!--ro, req, time-->00:00:00
          </beginTime>
          <endTime>
            <!--ro, req, time-->00:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </HolidayBlockList>
  </Schedule>
</LoiteringScheduleList>

```

14.5.2.4 Set the arming schedule of loitering detection for all channels

Request URL

PUT /ISAPI/Event/schedules/loiterings/loitering

Query Parameter

None

Request Message


```

<?xml version="1.0" encoding="UTF-8"?>

<LoiteringScheduleList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, attr:version{req, string, protocolVersion}-->
  <Schedule>
    <!--opt, object-->
    <id>
      <!--req, string-->test
    </id>
    <eventType>
      <!--opt, string-->loitering
    </eventType>
    <videoInputChannelID>
      <!--opt, string-->test
    </videoInputChannelID>
    <TimeBlockList size="8">
      <!--req, object, attr:size{req, int}-->
      <TimeBlock>
        <!--opt, object-->
        <dayOfWeek>
          <!--opt, enum, subType:int-->1
        </dayOfWeek>
        <TimeRange>
          <!--req, object-->
          <beginTime>
            <!--req, time-->00:00:00
          </beginTime>
          <endTime>
            <!--req, time-->00:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </TimeBlockList>
    <HolidayBlockList>
      <!--opt, object-->
      <TimeBlock>
        <!--opt, object-->
        <TimeRange>
          <!--req, object-->
          <beginTime>
            <!--req, time-->00:00:00
          </beginTime>
          <endTime>
            <!--req, time-->00:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </HolidayBlockList>
  </Schedule>
</LoiteringScheduleList>

```

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>

```

14.5.2.5 Set arming schedule of loitering detection of a channel

Request URL

PUT /ISAPI/Event/schedules/loiterings/loitering-<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<Schedule xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string, ID, desc:ID-->test
  </id>
  <eventType>
    <!--opt, enum, event type, subType:string-->loitering
  </eventType>
  <videoInputChannelID>
    <!--opt, string, video input channel ID-->test
  </videoInputChannelID>
  <TimeBlockList size="8">
    <!--req, object, arming schedule List, attr:size{req, int}-->
    <TimeBlock>
      <!--opt, object-->
      <dayOfWeek>
        <!--opt, enum, day of the week, subType:int, desc:1(Monday); 2(Tuesday); 3(Wednesday); 4(Thursday); 5(Friday); 6(Saturday); 7(Sunday)-->1
      </dayOfWeek>
      <TimeRange>
        <!--req, object-->
        <beginTime>
          <!--req, time, start time-->00:00:00
        </beginTime>
        <endTime>
          <!--req, time, end time-->00:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </TimeBlockList>
  <HolidayBlockList>
    <!--opt, object, holiday arming schedule-->
    <TimeBlock>
      <!--opt, object, arming time-->
      <TimeRange>
        <!--req, object, time period-->
        <beginTime>
          <!--req, time, start time-->00:00:00
        </beginTime>
        <endTime>
          <!--req, time, end time-->00:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </HolidayBlockList>
</Schedule>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status description, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code-->OK
  </subStatusCode>
</ResponseStatus>
```

14.5.2.6 Get the arming schedule of loitering detection for a specified channel

Request URL

GET /ISAPI/Event/schedules/loiterings/loitering-<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<Schedule xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string-->test
  </id>
  <eventType>
    <!--ro, opt, enum, subType:string-->loitering
  </eventType>
  <videoInputChannelID>
    <!--ro, opt, string-->test
  </videoInputChannelID>
  <TimeBlockList size="8">
    <!--ro, req, object, attr:size{req, int}-->
    <TimeBlock>
      <!--ro, opt, object-->
      <dayOfWeek>
        <!--ro, opt, enum, subType:int-->1
      </dayOfWeek>
      <TimeRange>
        <!--ro, req, object-->
        <beginTime>
          <!--ro, req, time-->00:00:00
        </beginTime>
        <endTime>
          <!--ro, req, time-->00:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </TimeBlockList>
  <HolidayBlockList>
    <!--ro, opt, object-->
    <TimeBlock>
      <!--ro, opt, object-->
      <TimeRange>
        <!--ro, req, object-->
        <beginTime>
          <!--ro, req, time-->00:00:00
        </beginTime>
        <endTime>
          <!--ro, req, time-->00:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </HolidayBlockList>
</Schedule>
```

14.5.2.7 Get the linkage parameters of loitering detection

Request URL

GET /ISAPI/Event/triggers/loitering-<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<EventTrigger xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string-->test
  </id>
  <eventType>
    <!--ro, req, enum, subType:string-->loitering
  </eventType>
  <eventDescription>
    <!--ro, opt, string-->test
  </eventDescription>
  <inputIOPortID>
    <!--ro, opt, string-->1
  </inputIOPortID>
  <dynInputIOPortID>
    <!--ro, opt, string-->1
  </dynInputIOPortID>
  <videoInputChannelID>
    <!--ro, opt, string-->1
  </videoInputChannelID>
  <dynVideoInputChannelID>
    <!--ro, opt, string-->1
  </dynVideoInputChannelID>
  <intervalBetweenEvents>
    <!--ro, opt, int, unit:s-->1
  </intervalBetweenEvents>
  <WLSensorID>
    <!--ro, opt, string-->1
  </WLSensorID>
  <EventTriggerNotificationList>
    <!--ro, opt, array, subType:object-->
    <EventTriggerNotification>
      <!--ro, opt, object-->
      <id>
        <!--ro, req, string-->test
      </id>
      <notificationMethod>
        <!--ro, req, enum, subType:string-->email
      </notificationMethod>
      <notificationRecurrence>
        <!--ro, opt, enum, subType:string-->beginning
      </notificationRecurrence>
      <notificationInterval>
        <!--ro, opt, int, unit:ms-->1
      </notificationInterval>
      <videoInputID>
        <!--ro, opt, string-->1
      </videoInputID>
      <dynVideoInputID>
        <!--ro, opt, string-->1
      </dynVideoInputID>
      <ptzAction>
        <!--ro, opt, object-->
        <ptzChannelID>
          <!--ro, req, string-->1
        </ptzChannelID>
        <actionName>
          <!--ro, req, enum, subType:string-->preset
        </actionName>
        <actionNum>
          <!--ro, opt, int-->1
        </actionNum>
      </ptzAction>
      <WhiteLightAction>
        <!--ro, opt, object-->
        <WhiteLightDurationTime>
          <!--ro, opt, int, range:[1,60], unit:s-->1
        </WhiteLightDurationTime>
      </WhiteLightAction>
    </EventTriggerNotification>
  </EventTriggerNotificationList>
</EventTrigger>

```

14.5.2.8 Set the linkage parameters of loitering detection

Request URL

PUT /ISAPI/Event/triggers/loitering-<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<EventTrigger xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string-->test
  </id>
  <eventType>
    <!--req, enum, subType:string-->loitering
  </eventType>
  <eventDescription>
    <!--opt, string-->test
  </eventDescription>
  <inputIOPortID>
    <!--opt, string-->1
  </inputIOPortID>
  <dynInputIOPortID>
    <!--opt, string-->1
  </dynInputIOPortID>
  <videoInputChannelID>
    <!--opt, string-->1
  </videoInputChannelID>
  <dynVideoInputChannelID>
    <!--opt, string-->1
  </dynVideoInputChannelID>
  <intervalBetweenEvents>
    <!--opt, int, unit:s-->1
  </intervalBetweenEvents>
  <wLSensorID>
    <!--opt, string-->1
  </wLSensorID>
  <EventTriggerNotificationList>
    <!--opt, array, subType:object-->
    <EventTriggerNotification>
      <!--opt, object-->
      <id>
        <!--req, string-->test
      </id>
      <notificationMethod>
        <!--req, enum, subType:string-->email
      </notificationMethod>
      <notificationRecurrence>
        <!--opt, enum, subType:string-->beginning
      </notificationRecurrence>
      <notificationInterval>
        <!--opt, int, unit:ms-->1
      </notificationInterval>
      <videoInputID>
        <!--opt, string-->1
      </videoInputID>
      <dynVideoInputID>
        <!--opt, string-->1
      </dynVideoInputID>
      <ptzAction>
        <!--opt, object-->
        <ptzChannelID>
          <!--req, string-->1
        </ptzChannelID>
        <actionName>
          <!--req, enum, subType:string-->preset
        </actionName>
        <actionNum>
          <!--opt, int-->1
        </actionNum>
        <ptzAction>
        <WhiteLightAction>
          <!--opt, object-->
          <WhiteLightDurationTime>
            <!--opt, int, range:[1,60], unit:s-->1
          </WhiteLightDurationTime>
          <WhiteLightAction>
        </WhiteLightAction>
      </EventTriggerNotification>
    </EventTriggerNotificationList>
  </EventTrigger>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.5.2.9 Set loitering detection parameters of all channels

Request URL

PUT /ISAPI/Smart/loitering

Query Parameter

None

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<LoiteringList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, array, subType:object, attr:version{req, string, protocolVersion}-->
  <Loitering>
    <!--opt, object, Loitering detection parameters configuration of a channel-->
    <id>
      <!--req, string, channel No.-->test
    </id>
    <enabled>
      <!--req, bool-->true
    </enabled>
    <normalizedScreenSize>
      <!--opt, object, normalized size-->
      <normalizedScreenWidth>
        <!--req, int, normalized width-->1
      </normalizedScreenWidth>
      <normalizedScreenHeight>
        <!--req, int, normalized height-->1
      </normalizedScreenHeight>
    </normalizedScreenSize>
    <LoiteringRegionList>
      <!--opt, array, information list of Loitering detection areas, subType:object-->
      <LoiteringRegion>
        <!--opt, object, Loitering detection area-->
        <id>
          <!--req, string-->1
        </id>
        <sensitivityLevel>
          <!--opt, int, sensitivity, range:[0,100], desc:sensitivity-->1
        </sensitivityLevel>
        <timeThreshold>
          <!--opt, int, time threshold-->1
        </timeThreshold>
        <RegionCoordinatesList>
          <!--opt, array, area coordinate list, subType:object, range:[0,4], desc:rectangle-->
          <RegionCoordinates>
            <!--opt, object, area coordinates, desc:the origin is the Lower-Left corner of the screen-->
            <positionX>
              <!--req, int, x-coordinate, range:[0,1000]-->1
            </positionX>
            <positionY>
              <!--req, int, y-coordinate, range:[0,1000]-->1
            </positionY>
          </RegionCoordinates>
        </RegionCoordinatesList>
      </LoiteringRegion>
    </LoiteringRegionList>
    <mutexAbility opt="PDC">
      <!--opt, string, attr:opt{req, string}-->PDC
    </mutexAbility>
    <isSupportMultiScene>
      <!--opt, bool, whether supports multiple scene detection-->true
    </isSupportMultiScene>
  </Loitering>
</LoiteringList>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6
    (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format",
    "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code description-->OK
  </subStatusCode>
</ResponseStatus>
```

14.5.2.10 Get loitering detection parameters of all channels

Request URL

GET /ISAPI/Smart/loitering

Query Parameter

None

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<LoiteringList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, array, subType:object, attr:version{req, string, protocolVersion}-->
  <Loitering>
    <!--ro, opt, object, Loitering detection parameters configuration of a channel-->
    <id>
      <!--ro, req, string, channel No.-->test
    </id>
    <enabled>
      <!--ro, req, bool, whether to enable the function-->true
    </enabled>
    <normalizedScreenSize>
      <!--ro, opt, object, normalized size-->
      <normalizedScreenWidth>
        <!--ro, req, int, normalized width-->1
      </normalizedScreenWidth>
      <normalizedScreenHeight>
        <!--ro, req, int, normalized height-->1
      </normalizedScreenHeight>
    </normalizedScreenSize>
    <LoiteringRegionList>
      <!--ro, opt, array, information List of Loitering detection areas, subType:object-->
      <LoiteringRegion>
        <!--ro, opt, object, Loitering detection area-->
        <id>
          <!--ro, req, string-->1
        </id>
        <sensitivityLevel>
          <!--ro, opt, int, sensitivity, range:[0,100], desc:sensitivity-->1
        </sensitivityLevel>
        <timeThreshold>
          <!--ro, opt, int, time threshold-->1
        </timeThreshold>
        <RegionCoordinatesList>
          <!--ro, opt, array, area coordinate List, subType:object, range:[0,4], desc:rectangle-->
          <RegionCoordinates>
            <!--ro, opt, object, area coordinates, desc:the origin is the Lower-Left corner of the screen-->
            <positionX>
              <!--ro, req, int, X-coordinate, range:[0,1000]-->1
            </positionX>
            <positionY>
              <!--ro, req, int, Y-coordinate, range:[0,1000]-->1
            </positionY>
          </RegionCoordinates>
        </RegionCoordinatesList>
      </LoiteringRegion>
    </LoiteringRegionList>
    <mutexAbility opt="PDC">
      <!--ro, opt, string, attr:opt{req, string}-->PDC
    </mutexAbility>
    <isSupportMultiScene>
      <!--ro, opt, bool, whether supports multiple scene detection-->true
    </isSupportMultiScene>
  </Loitering>
</LoiteringList>

```

14.5.2.11 Get loitering detection parameters of a channel

Request URL

GET /ISAPI/Smart/loitering/<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message


```

<?xml version="1.0" encoding="UTF-8"?>

<Loitering xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, Loitering detection parameters configuration of a channel, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string, channel No.-->1
  </id>
  <enabled>
    <!--ro, req, bool, whether to enable the function-->true
  </enabled>
  <normalizedScreenSize>
    <!--ro, opt, object, normalized size-->
    <normalizedScreenWidth>
      <!--ro, req, int, normalized width-->1
    </normalizedScreenWidth>
    <normalizedScreenHeight>
      <!--ro, req, int, normalized height-->1
    </normalizedScreenHeight>
  </normalizedScreenSize>
  <LoiteringRegionList>
    <!--ro, opt, array, information List of Loitering detection areas, subType:object-->
    <LoiteringRegion>
      <!--ro, opt, object, Loitering detection area-->
      <id>
        <!--ro, req, string, area ID-->1
      </id>
      <sensitivityLevel>
        <!--ro, opt, int, sensitivity, range:[0,100], desc:sensitivity-->1
      </sensitivityLevel>
      <timeThreshold>
        <!--ro, opt, int, time threshold-->1
      </timeThreshold>
      <RegionCoordinatesList>
        <!--ro, opt, array, area coordinate List, subType:object, range:[0,4], desc:rectangle-->
        <RegionCoordinates>
          <!--ro, opt, object, area coordinates, desc:the origin is the Lower-Left corner of the screen-->
          <positionX>
            <!--ro, req, int, x-coordinate, range:[0,1000]-->1
          </positionX>
          <positionY>
            <!--ro, req, int, y-coordinate, range:[0,1000]-->1
          </positionY>
        </RegionCoordinates>
      </RegionCoordinatesList>
    </LoiteringRegion>
  </LoiteringRegionList>
  <mutexAbility opt="PDC">
    <!--ro, opt, string, ro,"PDC", attr:opt{req, string}-->PDC
  </mutexAbility>
  <isSupportMultiScene>
    <!--ro, opt, bool-->true
  </isSupportMultiScene>
</Loitering>

```

14.5.2.12 Batch get parameters of multiple areas

Request URL

GET /ISAPI/Smart/loitering/<channelID>/regions

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<LoiteringRegionList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, array, information list of Loitering detection areas, subType:object, attr:version{req, string, protocolVersion}-->
  <LoiteringRegion>
    <!--ro, opt, object, Loitering detection area-->
    <id>
      <!--ro, req, string, detection area ID-->1
    </id>
    <sensitivityLevel>
      <!--ro, opt, int, sensitivity, range:[0,100], desc:sensitivity-->1
    </sensitivityLevel>
    <timeThreshold>
      <!--ro, opt, int, time threshold-->1
    </timeThreshold>
    <RegionCoordinatesList>
      <!--ro, opt, array, area coordinates list, subType:object, range:[0,4], desc:rectangle-->
      <RegionCoordinates>
        <!--ro, opt, object, area coordinates, desc:the origin is the Lower-Left corner of the screen-->
        <positionX>
          <!--ro, req, int, X-coordinate, range:[0,1000]-->1
        </positionX>
        <positionY>
          <!--ro, req, int, Y-coordinate, range:[0,1000]-->1
        </positionY>
      </RegionCoordinates>
    </RegionCoordinatesList>
  </LoiteringRegion>
</LoiteringRegionList>
```

14.5.2.13 Batch set parameters of multiple areas

Request URL

PUT /ISAPI/Smart/loitering/<channelID>/regions

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<LoiteringRegionList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, array, information list of loitering detection areas, subType:object, attr:version{req, string, protocolVersion}-->
  <LoiteringRegion>
    <!--opt, object, Loitering detection area-->
    <id>
      <!--req, string, area ID-->1
    </id>
    <sensitivityLevel>
      <!--opt, int, sensitivity, range:[0,100], desc:sensitivity-->1
    </sensitivityLevel>
    <timeThreshold>
      <!--opt, int, time threshold-->1
    </timeThreshold>
    <RegionCoordinatesList>
      <!--opt, array, area coordinates list, subType:object, range:[0,4], desc:rectangle-->
      <RegionCoordinates>
        <!--opt, object, area coordinates, desc:the origin is the Lower-Left corner of the screen-->
        <positionX>
          <!--req, int, X-coordinate, range:[0,1000]-->1
        </positionX>
        <positionY>
          <!--req, int, Y-coordinate, range:[0,1000]-->1
        </positionY>
      </RegionCoordinates>
    </RegionCoordinatesList>
  </LoiteringRegion>
</LoiteringRegionList>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:detailed description of the error code-->OK
  </subStatusCode>
</ResponseStatus>
```

14.5.2.14 Set parameters of a single area

Request URL

PUT /ISAPI/Smart/loitering/<channelID>/regions/<regionID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--
regionID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<LoiteringRegion xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, loitering detection area, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string, area ID-->1
  </id>
  <sensitivityLevel>
    <!--opt, int, sensitivity, range:[0,100], desc:sensitivity-->1
  </sensitivityLevel>
  <timeThreshold>
    <!--opt, int, time threshold-->1
  </timeThreshold>
  <RegionCoordinatesList>
    <!--opt, array, area coordinates List, subType:object, range:[0,4], desc:rectangle-->
    <RegionCoordinates>
      <!--opt, object, area coordinates, desc:the origin is the lower-left corner of the screen-->
      <positionX>
        <!--req, int, X-coordinate, range:[0,1000]-->1
      </positionX>
      <positionY>
        <!--req, int, Y-coordinate, range:[0,1000]-->1
      </positionY>
    </RegionCoordinates>
  </RegionCoordinatesList>
</LoiteringRegion>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:detailed description of the error code-->OK
  </subStatusCode>
</ResponseStatus>
```

14.5.2.15 Get loitering detection parameters of a single area

Request URL

GET /ISAPI/Smart/loitering/<channelID>/regions/<regionID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.
regionID	string	Region No.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<LoiteringRegion xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, loitering detection area, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string, area ID-->1
  </id>
  <sensitivityLevel>
    <!--ro, opt, int, sensitivity, range:[0,100], desc:sensitivity-->1
  </sensitivityLevel>
  <timeThreshold>
    <!--ro, opt, int, time threshold-->1
  </timeThreshold>
  <RegionCoordinatesList>
    <!--ro, opt, array, List of area coordinates, subType:object, range:[0,4], desc:rectangle-->
    <RegionCoordinates>
      <!--ro, opt, object, area coordinates, desc:the origin is the lower-left corner of the screen-->
      <positionX>
        <!--ro, req, int, X-coordinate, range:[0,1000]-->1
      </positionX>
      <positionY>
        <!--ro, req, int, Y-coordinate, range:[0,1000]-->1
      </positionY>
    </RegionCoordinates>
  </RegionCoordinatesList>
</LoiteringRegion>
```

14.5.2.16 Loitering detection

EventType:loitering

```
<?xml version="1.0" encoding="UTF-8"?>

<EventNotificationAlert xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, event alarm, attr:version{opt, string, protocolVersion}-->
  <ipAddress>
    <!--ro, req, string, IPv4 address of the device that triggers the alarm-->172.6.64.7
  </ipAddress>
  <ipv6Address>
    <!--ro, opt, string, IPv6 address of the device that triggers the alarm-->1080:0:0:0:8:800:200C:417A
  </ipv6Address>
```

```

<portNo>
  <!--ro, opt, int, communication port No. of the device that triggers the alarm-->80
</portNo>
<protocol>
  <!--ro, opt, enum, transmission communication protocol type, subType:string, desc:when ISAPI protocol is transmitted via HCNetsDK, the channel No. is
the video channel No. of private protocol. When ISAPI protocol is transmitted via EZ protocol, the channel No. is the video channel No. of EZ protocol. When
ISAPI protocol is transmitted via ISUP, the channel No. is the video channel No. of ISUP-->HTTP
</protocol>
<macAddress>
  <!--ro, opt, string, MAC address-->01:17:24:45:D9:F4
</macAddress>
<dynChannelID>
  <!--ro, opt, string, digital channel No.-->test
</dynChannelID>
<channelID>
  <!--ro, opt, int, channel No. of the device that triggers the alarm, desc:video channel No. that triggers the alarm-->1
</channelID>
<relatedChannelList>
  <!--ro, opt, string, List of alarm related channels, which are of the same camera with channelID, desc:this parameter is used for Live view or playback
on the platform; multiple channel No.s are separated by commas-->1,2,3
</relatedChannelList>
<dateTime>
  <!--ro, req, datetime, alarm trigger time-->2004-05-03T17:30:08+08:00
</dateTime>
<activePostCount>
  <!--ro, opt, int, times that the same alarm has been uploaded, desc:event triggering frequency-->1
</activePostCount>
<eventType>
  <!--ro, req, enum, event type, subType:string, desc:"loitering" (loitering detection)-->loitering
</eventType>
<eventState>
  <!--ro, req, enum, event status, subType:string, desc:for durative event: "active" (valid), "inactive" (invalid)-->active
</eventState>
<eventDescription>
  <!--ro, req, string, event description-->test
</eventDescription>
<deviceID>
  <!--ro, opt, string, device ID, desc:it should be returned for ISUP alarms, e.g., test0123 (Ehome2.0, Ehome4.0, and ISUP5.0)-->12345
</deviceID>
<DetectionRegionList>
  <!--ro, opt, array, detection area List, subType:object-->
  <DetectionRegionEntry>
    <!--ro, opt, object, detection area-->
    <regionID>
      <!--ro, req, string, detection area ID-->test
    </regionID>
    <sensitivityLevel>
      <!--ro, opt, int, sensitivity, range:[0,100]-->1
    </sensitivityLevel>
    <RegionCoordinatesList>
      <!--ro, opt, array, target area, subType:object, range:[0,4], desc:rectangle-->
      <RegionCoordinates>
        <!--ro, opt, object, area point coordinates, desc:the origin is the upper-left corner of the screen-->
        <positionX>
          <!--ro, req, int, X-coordinate, range:[0,1000]-->50
        </positionX>
        <positionY>
          <!--ro, req, int, Y-coordinate, range:[0,1000]-->50
        </positionY>
      </RegionCoordinates>
    </RegionCoordinatesList>
    <detectionTarget>
      <!--ro, opt, enum, target type, subType:string, desc:"human"-->human
    </detectionTarget>
  </DetectionRegionEntry>
</DetectionRegionList>
<channelName>
  <!--ro, opt, string, channel name, range:[1,64]-->test
</channelName>
<Extensions>
  <!--ro, opt, object, extended information-->
  <serialNumber>
    <!--ro, opt, string, serial No.-->test
  </serialNumber>
  <eventPush>
    <!--ro, opt, string, event notification-->test
  </eventPush>
  <Extensions>
  <detectionPictureTransType>
    <!--ro, opt, enum, picture transmission mode, subType:string, desc:"url", "binary", "base64"-->url
  </detectionPictureTransType>
  <detectionPicturesNumber>
    <!--ro, opt, int, number of pictures contained in the alarm received in arming mode, desc:this field will not be returned when there is no picture
contained in the alarm-->1
  </detectionPicturesNumber>
  <bkgUrl>
    <!--ro, opt, string, background picture URL, desc:background picture URL-->test
  </bkgUrl>
  <URLCertificationType>
    <!--ro, opt, enum, picture URL authentication method, subType:string, desc:authentication mode of picture URL: "no"-no authentication, "digest"-digest
authentication (it is used for local picture URL returned by NVR or DVR)-->no
  </URLCertificationType>
  <pId>

```

```

<!--ro, opt, string, picture ID, desc:the field value is the picture Content-ID when the value of detectionPictureTransType is "binary"-->test
</pId>
<targetAttrs>
  <!--ro, opt, object, transmitted parameters-->{ /*可选,透传字段,推荐使用以下三个字段*/ "deviceId": "1", /*可选,设备ID, string类型, 最大长度为64*/
"deviceChannel": 1, /*可选, 设备通道号, integer32类型*/ "deviceName": "shebei", /*可选, 设备名称, string类型, 最大长度为128*/ }
</targetAttrs>
<TaskInfo>
  <!--ro, opt, object, task information submitted by data center products-->
  <taskID>
    <!--ro, req, string, task ID, range:[0,64]-->test
  </taskID>
  <algorithmType>
    <!--ro, opt, enum, algorithm type, subType:int, desc:1-"highQualityVehicle" (high-quality vehicle),2-"highPerformanceVehicle" (high-performance
vehicle),3-"personStructModel" (person structural modeling),4-"vehicleAndPersonStructModel" (person and vehicle structural modeling),5-"videoFaceDetect"
(video face detection),6-"videoFaceDetectModel" (video face detection and modeling),7-"smart" (face detection (output frame without recognizing
properties)+human body detection (output properties and frame)+behavior detection)-->1
  </algorithmType>
  <taskName>
    <!--ro, opt, string, task name-->test
  </taskName>
  <algorithmID>
    <!--ro, opt, string, algorithm package ID-->test
  </algorithmID>
  <monitorPointID>
    <!--ro, opt, string, camera No.-->test
  </monitorPointID>
  <monitorPointName>
    <!--ro, opt, string, camera name-->test
  </monitorPointName>
  <streamType>
    <!--ro, opt, enum, stream type, subType:string, desc:"realtime" (real-time stream), "historyvideo" (history stream), "localvideo" (Local stream)--
>realtime
  </streamType>
  <ruleID>
    <!--ro, opt, string, rule ID, desc:it is used to distinguish different tasks with the same name, and the ruleID in the event uploading message
indicates that the event is related to this task-->test
  </ruleID>
  <ruleCustomName>
    <!--ro, req, string, user-defined event name, range:[0,128], desc:it is defined by the caller, and it is included in the message when the alarm is
uploaded. Up to 128 characters are allowed-->test
  </ruleCustomName>
  <algorithmInfo>
    <!--ro, opt, object, algorithm version information, desc:this field is required for secondary analysis-->
    <algorithmId>
      <!--ro, opt, string, algorithm package ID-->test
    </algorithmId>
    <algoVendorId>
      <!--ro, opt, string, manufacturer ID-->test
    </algoVendorId>
    <algoVersionId>
      <!--ro, opt, string, algorithm version No.-->test
    </algoVersionId>
    <algoChipType>
      <!--ro, opt, string, chip type-->test
    </algoChipType>
    <algoModelVersion>
      <!--ro, opt, string, model version-->test
    </algoModelVersion>
  </algorithmInfo>
</TaskInfo>
<timeStamp>
  <!--ro, opt, string, timestamp of the frame, which triggers the alarm-->test
</timeStamp>
<isDataRetransmission>
  <!--ro, opt, bool, whether it is a resending data (if the real-time detection data upload fails due to the network condition, the data will be uploaded
again after the device recovers.)-->true
</isDataRetransmission>
<ruleID>
  <!--ro, opt, int, rule No., range:[0,7], desc:rule No.-->0
</ruleID>
<ruleName>
  <!--ro, opt, string, rule name, range:[0,32], desc:rule name-->test
</ruleName>
</EventNotificationAlert>

```

14.5.3 Object Removal Detection

14.5.3.1 Get the arming schedule of object removal detection for all channels

Request URL

GET /ISAPI/Event/schedules/attendedBaggages

Query Parameter

None

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<AttendBaggageScheduleList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, array, subType:object, attr:version{req, string, protocolVersion}-->
  <Schedule>
    <!--ro, opt, object-->
    <id>
      <!--ro, req, string-->attendedBaggage-1
    </id>
    <eventType>
      <!--ro, opt, string-->attendedBaggage
    </eventType>
    <videoInputChannelID>
      <!--ro, opt, string-->1
    </videoInputChannelID>
    <TimeBlockList size="8">
      <!--ro, req, array, subType:object, attr:size{opt, int}-->
      <TimeBlock>
        <!--ro, opt, object-->
        <dayOfWeek>
          <!--ro, opt, enum, subType:int-->1
        </dayOfWeek>
        <TimeRange>
          <!--ro, req, object-->
          <beginTime>
            <!--ro, req, time-->10:00:00
          </beginTime>
          <endTime>
            <!--ro, req, time-->10:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </TimeBlockList>
    <HolidayBlockList>
      <!--ro, opt, array, subType:object-->
      <TimeBlock>
        <!--ro, opt, object-->
        <TimeRange>
          <!--ro, req, object-->
          <beginTime>
            <!--ro, req, time-->10:00:00
          </beginTime>
          <endTime>
            <!--ro, req, time-->10:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </HolidayBlockList>
  </Schedule>
</AttendBaggageScheduleList>
```

14.5.3.2 Set the arming schedule of object removal detection for all channels

Request URL

PUT /ISAPI/Event/schedules/attendedBaggages

Query Parameter

None

Request Message

```

<?xml version="1.0" encoding="UTF-8"?>

<AttendBaggageScheduleList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, array, subType:object, attr:version{req, string, protocolVersion}-->
  <Schedule>
    <!--opt, object-->
    <id>
      <!--req, string-->attendedBaggage-1
    </id>
    <eventType>
      <!--opt, string-->attendedBaggage
    </eventType>
    <videoInputChannelID>
      <!--opt, string-->1
    </videoInputChannelID>
    <TimeBlockList size="8">
      <!--req, array, subType:object, attr:size{opt, int}-->
      <TimeBlock>
        <!--opt, object-->
        <dayOfWeek>
          <!--opt, enum, subType:int-->1
        </dayOfWeek>
        <TimeRange>
          <!--req, object-->
          <beginTime>
            <!--req, time-->10:00:00
          </beginTime>
          <endTime>
            <!--req, time-->10:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </TimeBlockList>
    <HolidayBlockList>
      <!--opt, array, subType:object-->
      <TimeBlock>
        <!--opt, object-->
        <TimeRange>
          <!--req, object-->
          <beginTime>
            <!--req, time-->10:00:00
          </beginTime>
          <endTime>
            <!--req, time-->10:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </HolidayBlockList>
  </Schedule>
</AttendBaggageScheduleList>

```

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>

```

14.5.3.3 Get the arming schedule of object removal detection for all channels

Request URL

GET /ISAPI/Event/schedules/attendedBaggages/attendedBaggage

Query Parameter

None

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<AttendBaggageScheduleList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, array, subType:object, attr:version{req, string, protocolVersion}-->
  <Schedule version="2.0">
    <!--ro, opt, object, attr:version{req, string}-->
    <id>
      <!--ro, req, string-->attendedBaggage-1
    </id>
    <eventType>
      <!--ro, opt, string-->attendedBaggage
    </eventType>
    <videoInputChannelID>
      <!--ro, opt, string-->test
    </videoInputChannelID>
    <TimeBlockList size="8">
      <!--ro, req, array, subType:object, attr:size{req, int}-->
      <TimeBlock>
        <!--ro, opt, object-->
        <dayOfWeek>
          <!--ro, opt, enum, subType:int-->1
        </dayOfWeek>
        <TimeRange>
          <!--ro, req, object-->
          <beginTime>
            <!--ro, req, time-->00:00:00
          </beginTime>
          <endTime>
            <!--ro, req, time-->00:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </TimeBlockList>
    <HolidayBlockList>
      <!--ro, opt, array, subType:object-->
      <TimeBlock>
        <!--ro, opt, object-->
        <TimeRange>
          <!--ro, req, object-->
          <beginTime>
            <!--ro, req, time-->00:00:00
          </beginTime>
          <endTime>
            <!--ro, req, time-->00:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </HolidayBlockList>
  </Schedule>
</AttendBaggageScheduleList>
```

14.5.3.4 Set the arming schedule of object removal detection for all channels

Request URL

PUT /ISAPI/Event/schedules/attendedBaggages/attendedBaggage

Query Parameter

None

Request Message

```

<?xml version="1.0" encoding="UTF-8"?>

<AttendBaggageScheduleList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, array, subType:object, attr:version{req, string, protocolVersion}-->
  <Schedule version="2.0">
    <!--opt, object, attr:version{req, string}-->
    <id>
      <!--req, string-->attendedBaggage-1
    </id>
    <eventType>
      <!--opt, string-->attendedBaggage
    </eventType>
    <videoInputChannelID>
      <!--opt, string-->test
    </videoInputChannelID>
    <TimeBlockList size="8">
      <!--req, array, subType:object, attr:size{req, int}-->
      <TimeBlock>
        <!--opt, object-->
        <dayOfWeek>
          <!--opt, enum, subType:int-->1
        </dayOfWeek>
        <TimeRange>
          <!--req, object-->
          <beginTime>
            <!--req, time-->00:00:00
          </beginTime>
          <endTime>
            <!--req, time-->00:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </TimeBlockList>
    <HolidayBlockList>
      <!--opt, array, subType:object-->
      <TimeBlock>
        <!--opt, object-->
        <TimeRange>
          <!--req, object-->
          <beginTime>
            <!--req, time-->00:00:00
          </beginTime>
          <endTime>
            <!--req, time-->00:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </HolidayBlockList>
  </Schedule>
</AttendBaggageScheduleList>

```

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>

```

14.5.3.5 Set the arming schedule of object removal detection for a specified channel

Request URL

PUT /ISAPI/Event/schedules/attendedBaggages/attendedBaggage-<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<Schedule xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string-->attendedBaggage-1
  </id>
  <eventType>
    <!--opt, enum, subType:string-->attendedBaggage
  </eventType>
  <videoInputChannelID>
    <!--opt, string-->test
  </videoInputChannelID>
  <TimeBlockList size="8">
    <!--req, array, subType:object, attr:size{req, int}-->
    <TimeBlock>
      <!--opt, object-->
      <dayOfWeek>
        <!--opt, enum, subType:int-->1
      </dayOfWeek>
      <TimeRange>
        <!--req, object-->
        <beginTime>
          <!--req, time-->00:00:00
        </beginTime>
        <endTime>
          <!--req, time-->00:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </TimeBlockList>
  <HolidayBlockList>
    <!--opt, array, subType:object-->
    <TimeBlock>
      <!--opt, object-->
      <TimeRange>
        <!--req, object-->
        <beginTime>
          <!--req, time-->00:00:00
        </beginTime>
        <endTime>
          <!--req, time-->00:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </HolidayBlockList>
</Schedule>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.5.3.6 Get the arming schedule of object removal detection for a specified channel

Request URL

GET /ISAPI/Event/schedules/attendedBaggages/attendedBaggage-<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<Schedule xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string-->attendedBaggage-1
  </id>
  <eventType>
    <!--ro, opt, enum, subType:string-->attendedBaggage
  </eventType>
  <videoInputChannelID>
    <!--ro, opt, string-->test
  </videoInputChannelID>
  <TimeBlockList size="8">
    <!--ro, req, array, subType:object, attr:size{req, int}-->
    <TimeBlock>
      <!--ro, opt, object-->
      <dayOfWeek>
        <!--ro, opt, enum, subType:int-->1
      </dayOfWeek>
      <TimeRange>
        <!--ro, req, object-->
        <beginTime>
          <!--ro, req, time-->00:00:00
        </beginTime>
        <endTime>
          <!--ro, req, time-->00:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </TimeBlockList>
  <HolidayBlockList>
    <!--ro, opt, array, subType:object-->
    <TimeBlock>
      <!--ro, opt, object-->
      <TimeRange>
        <!--ro, req, object-->
        <beginTime>
          <!--ro, req, time-->00:00:00
        </beginTime>
        <endTime>
          <!--ro, req, time-->00:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </HolidayBlockList>
</Schedule>
```

14.5.3.7 Get the linkage parameters of object removal detection

Request URL

GET /ISAPI/Event/triggers/attendedBaggage-<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<EventTrigger xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string-->attendedBaggage-1
  </id>
  <eventType>
    <!--ro, req, enum, subType:string-->attendedBaggage
  </eventType>
  <eventDescription>
    <!--ro, opt, string-->test
  </eventDescription>
  <inputIOPortID>
    <!--ro, opt, string-->1
  </inputIOPortID>
  <dynInputIOPortID>
    <!--ro, opt, string-->1
  </dynInputIOPortID>
  <videoInputChannelID>
    <!--ro, opt, string-->1
  </videoInputChannelID>
  <dynVideoInputChannelID>
    <!--ro, opt, string-->1
  </dynVideoInputChannelID>
  <intervalBetweenEvents>
    <!--ro, opt, int, unit:s-->1
  </intervalBetweenEvents>
  <WLSensorID>
    <!--ro, opt, string-->1
  </WLSensorID>
  <EventTriggerNotificationList>
    <!--ro, opt, array, subType:object-->
    <EventTriggerNotification>
      <!--ro, opt, object-->
      <id>
        <!--ro, req, string-->test
      </id>
      <notificationMethod>
        <!--ro, req, enum, subType:string-->email
      </notificationMethod>
      <notificationRecurrence>
        <!--ro, opt, enum, subType:string-->beginning
      </notificationRecurrence>
      <notificationInterval>
        <!--ro, opt, int, unit:ms-->1
      </notificationInterval>
      <videoInputID>
        <!--ro, opt, string-->1
      </videoInputID>
      <dynVideoInputID>
        <!--ro, opt, string-->1
      </dynVideoInputID>
      <ptzAction>
        <!--ro, opt, object-->
        <ptzChannelID>
          <!--ro, req, string-->1
        </ptzChannelID>
        <actionName>
          <!--ro, req, enum, subType:string-->preset
        </actionName>
        <actionNum>
          <!--ro, opt, int-->1
        </actionNum>
      </ptzAction>
      <WhiteLightAction>
        <!--ro, opt, object-->
        <WhiteLightDurationTime>
          <!--ro, opt, int, range:[1,60], unit:s-->1
        </WhiteLightDurationTime>
      </WhiteLightAction>
    </EventTriggerNotification>
  </EventTriggerNotificationList>
</EventTrigger>
```

14.5.3.8 Set the linkage parameters of object removal detection

Request URL

PUT /ISAPI/Event/triggers/attendedBaggage-<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<EventTrigger xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string-->attendedBaggage-1
  </id>
  <eventType>
    <!--req, enum, subType:string-->attendedBaggage
  </eventType>
  <eventDescription>
    <!--opt, string-->test
  </eventDescription>
  <inputIOPortID>
    <!--opt, string-->1
  </inputIOPortID>
  <dynInputIOPortID>
    <!--opt, string-->1
  </dynInputIOPortID>
  <videoInputChannelID>
    <!--opt, string-->1
  </videoInputChannelID>
  <dynVideoInputChannelID>
    <!--opt, string-->1
  </dynVideoInputChannelID>
  <intervalBetweenEvents>
    <!--opt, int, unit:s-->1
  </intervalBetweenEvents>
  <wLSensorID>
    <!--opt, string-->1
  </wLSensorID>
  <EventTriggerNotificationList>
    <!--opt, array, subType:object-->
    <EventTriggerNotification>
      <!--opt, object-->
      <id>
        <!--req, string-->test
      </id>
      <notificationMethod>
        <!--req, enum, subType:string-->email
      </notificationMethod>
      <notificationRecurrence>
        <!--opt, enum, subType:string-->beginning
      </notificationRecurrence>
      <notificationInterval>
        <!--opt, int, unit:ms-->1
      </notificationInterval>
      <videoInputID>
        <!--opt, string-->1
      </videoInputID>
      <dynVideoInputID>
        <!--opt, string-->1
      </dynVideoInputID>
      <ptzAction>
        <!--opt, object-->
        <ptzChannelID>
          <!--req, string-->1
        </ptzChannelID>
        <actionName>
          <!--req, enum, subType:string-->preset
        </actionName>
        <actionNum>
          <!--opt, int-->1
        </actionNum>
      </ptzAction>
      <WhiteLightAction>
        <!--opt, object-->
        <WhiteLightDurationTime>
          <!--opt, int, range:[1,60], unit:s-->1
        </WhiteLightDurationTime>
      </WhiteLightAction>
    </EventTriggerNotification>
  </EventTriggerNotificationList>
</EventTrigger>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.5.3.9 Object removal

EventType:attendedBaggage

```
<?xml version="1.0" encoding="UTF-8"?>

<EventNotificationAlert xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, object removal alarm, attr:version{opt, string, protocolVersion}-->
  <ipAddress>
    <!--ro, req, string, IPv4 address of the device that triggers the alarm-->172.6.64.7
  </ipAddress>
  <ipv6Address>
    <!--ro, opt, string, IPv6 address of the device that triggers the alarm-->1080:0:0:0:8:800:200C:417A
  </ipv6Address>
  <portNo>
    <!--ro, opt, int, communication port No. of the device that triggers the alarm-->80
  </portNo>
  <protocol>
    <!--ro, opt, enum, transmission communication protocol type, subType:string, desc:when ISAPI protocol is transmitted via HCNetsDK, the channel No. is the video channel No. of private protocol. When ISAPI protocol is transmitted via EZ protocol, the channel No. is the video channel No. of EZ protocol. When ISAPI protocol is transmitted via ISUP, the channel No. is the video channel No. of ISUP-->HTTP
  </protocol>
  <macAddress>
    <!--ro, opt, string, MAC address-->01:17:24:45:D9:F4
  </macAddress>
  <dynChannelID>
    <!--ro, opt, string, digital channel No.-->test
  </dynChannelID>
  <channelID>
    <!--ro, opt, int, channel No. of the device that triggers the alarm, desc:video channel No. that triggers the alarm-->1
  </channelID>
  <relatedChannelList>
    <!--ro, opt, string, List of alarm related channels, which are of the same camera with channelID, desc:this parameter is used for Live view or playback on the platform; multiple channel No.s are separated by commas-->1,2,3
  </relatedChannelList>
  <dateTime>
    <!--ro, req, datetime, alarm trigger time-->2004-05-03T17:30:08+08:00
  </dateTime>
  <activePostCount>
    <!--ro, opt, int, event triggering frequency, desc:event triggering frequency-->1
  </activePostCount>
  <eventType>
    <!--ro, req, enum, event type, subType:string, desc:"attendedBaggage" (object removal)-->attendedBaggage
  </eventType>
  <eventState>
    <!--ro, req, enum, event status, subType:string, desc:for durative event: "active" (valid), "inactive" (invalid)-->active
  </eventState>
  <eventDescription>
    <!--ro, req, string, event description-->test
  </eventDescription>
  <deviceID>
    <!--ro, opt, string, device ID, desc:it should be returned for ISUP alarms, e.g., test0123 (Ehome2.0, Ehome4.0, and ISUP5.0)-->12345
  </deviceID>
  <DetectionRegionList>
    <!--ro, opt, array, detection area list, subType:object-->
    <DetectionRegionEntry>
      <!--ro, opt, object, detection area-->
      <regionID>
        <!--ro, req, string, area ID-->test
      </regionID>
      <sensitivityLevel>
        <!--ro, opt, int, sensitivity, range:[0,100]-->1
      </sensitivityLevel>
      <RegionCoordinatesList>
        <!--ro, opt, array, target area, subType:object, range:[0,4], desc:rectangle-->
        <RegionCoordinates>
          <!--ro, opt, object, area point coordinates, desc:the origin is the upper-left corner of the screen-->
          <positionX>
            <!--ro, req, int, X-coordinate, range:[0,1000]-->50
          </positionX>
```

```

<positionY>
  <!--ro, req, int, Y-coordinate, range:[0,1000]-->50
</positionY>
</RegionCoordinates>
</RegionCoordinatesList>
<detectedTarget>
  <!--ro, opt, enum, target type, subType:string, desc:"others"-->others
</detectedTarget>
</DetectionRegionEntry>
</DetectionRegionList>
<channelName>
  <!--ro, opt, string, channel name, range:[1,64]-->test
</channelName>
<Extensions>
  <!--ro, opt, object, extended information-->
  <serialNumber>
    <!--ro, opt, string, serial No.-->test
  </serialNumber>
  <eventPush>
    <!--ro, opt, string, event notification contents-->test
  </eventPush>
</Extensions>
<detectedPictureTransType>
  <!--ro, opt, enum, picture transmission mode, subType:string, desc:"url", "binary", "base64"-->url
</detectedPictureTransType>
<detectedPicturesNumber>
  <!--ro, opt, int, number of pictures contained in the alarm received in arming mode, desc:this field will not be returned when there is no picture
  contained in the alarm-->1
</detectedPicturesNumber>
<bgkUrl>
  <!--ro, opt, string, background picture URL, desc:background picture URL-->test
</bgkUrl>
<URLCertificationType>
  <!--ro, opt, enum, picture URL authentication method, subType:string, desc:authentication mode of picture URL: "no"-no authentication, "digest"-digest
  authentication (it is used for local picture URL returned by NVR or DVR)-->no
</URLCertificationType>
<pId>
  <!--ro, opt, string, picture ID, desc:the field value is the picture Content-ID when the value of detectedPictureTransType is "binary"-->test
</pId>
<targetAttrs>
  <!--ro, opt, object, transmitted parameters-->{ /*可选,透传字段,推荐使用以下三个字段*/ "deviceId": "1", /*可选,设备ID, string类型, 最大长度为64*/
  "deviceChannel": 1, /*可选,设备通道号, integer32类型*/ "deviceName": "shebei", /*可选,设备名称, string类型, 最大长度为128*/ }
</targetAttrs>
<TaskInfo>
  <!--ro, opt, object, task information submitted by data center products-->
  <taskID>
    <!--ro, req, string, task ID, range:[0,64]-->test
  </taskID>
  <algorithmType>
    <!--ro, opt, enum, algorithm type, subType:int, desc:1-"highQualityVehicle" (high-quality vehicle),2-"highPerformanceVehicle" (high-performance
    vehicle),3-"personStructModel" (person structural modeling),4-"vehicleAndPersonStructModel" (person and vehicle structural modeling),5-"videoFaceDetect"
    (video face detection),6-"videoFaceDetectModel" (video face detection and modeling),7-"smart" (face detection (output frame without recognizing
    properties)+human body detection (output properties and frame)+behavior detection)-->1
  </algorithmType>
  <taskName>
    <!--ro, opt, string, task name-->test
  </taskName>
  <algorithmID>
    <!--ro, opt, string, algorithm package ID-->test
  </algorithmID>
  <monitorPointID>
    <!--ro, opt, string, camera No.-->test
  </monitorPointID>
  <monitorPointName>
    <!--ro, opt, string, camera name-->test
  </monitorPointName>
  <streamType>
    <!--ro, opt, enum, stream type, subType:string, desc:"realtime" (real-time stream), "historyvideo" (history stream), "localvideo" (local stream)--
  >realtime
  </streamType>
  <ruleID>
    <!--ro, opt, string, rule ID, desc:it is used to distinguish different tasks with the same name, and the ruleID in the event uploading message
    indicates that the event is related to this task-->test
  </ruleID>
  <ruleCustomName>
    <!--ro, req, string, user-defined event name, range:[0,128], desc:it is defined by the caller, and it is included in the message when the alarm is
    uploaded. Up to 128 characters are allowed-->test
  </ruleCustomName>
  <algorithmInfo>
    <!--ro, opt, object, algorithm version information, desc:this field is required for secondary analysis-->
    <algorithmId>
      <!--ro, opt, string, algorithm package ID-->test
    </algorithmId>
    <algoVendorId>
      <!--ro, opt, string, manufacturer ID-->test
    </algoVendorId>
    <algoVersionId>
      <!--ro, opt, string, algorithm version No.-->test
    </algoVersionId>
    <algoChipType>
      <!--ro, opt, string, chip type-->test
    </algoChipType>
    <algoModelVersion>
      <!--ro, opt, string, model version-->test
    </algoModelVersion>
  </algorithmInfo>

```



```

<!--ro, opt, string, model version-->test
</algoModelVersion>
</algorithmInfo>
</TaskInfo>
<timeStamp>
  <!--ro, opt, string, timestamp of the frame, which triggers the alarm, desc:ISO 8601 format, e.g., 2019-12-30T15:00:00.23+08:00-->test
</timeStamp>
<isDataRetransmission>
  <!--ro, opt, bool, whether it is a resending data (if the real-time detection data upload fails due to the network condition, the data will be uploaded
again after the device recovers.)-->true
</isDataRetransmission>
<ruleID>
  <!--ro, opt, int, rule No., range:[0,7], desc:rule No.-->0
</ruleID>
<ruleName>
  <!--ro, opt, string, rule name, range:[0,32], desc:rule name-->test
</ruleName>
</EventNotificationAlert>

```

14.5.4 People Gathering Detection

14.5.4.1 Get the arming time parameters of people gathering for all channels

Request URL

GET /ISAPI/Event/schedules/groups

Query Parameter

None

Request Message

None

Response Message

VISION E INGENIO SOFTWARE SA DE CV (VIINSOFT)

dzambrano@vinsoft.com.mx

```

<?xml version="1.0" encoding="UTF-8"?>

<GroupScheduleList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, people gathering arming time configuration list, attr:version{req, string, protocolVersion}-->
  <Schedule>
    <!--ro, opt, object, people gathering arming time configuration-->
    <id>
      <!--ro, req, string, index, desc:the format is event type-channel No.-->test
    </id>
    <eventType>
      <!--ro, opt, enum, event type, subType:string, desc:;group:group-->group
    </eventType>
    <videoInputChannelID>
      <!--ro, opt, string, video input channel ID-->test
    </videoInputChannelID>
    <TimeBlockList size="8">
      <!--ro, req, object, arming time list, attr:size{req, int}-->
      <TimeBlock>
        <!--ro, opt, object, arming time-->
        <dayOfWeek>
          <!--ro, opt, enum, days of the week, subType:int, desc:1 (Monday), 2 (Tuesday), 3 (Wednesday), 4 (Thursday), 5 (Friday), 6 (Saturday), 7 (Sunday)-->1
        </dayOfWeek>
        <TimeRange>
          <!--ro, req, object, time range-->
          <beginTime>
            <!--ro, req, time, start time-->00:00:00
          </beginTime>
          <endTime>
            <!--ro, req, time, end time-->00:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </TimeBlockList>
    <HolidayBlockList>
      <!--ro, opt, object, holiday arming time-->
      <TimeBlock>
        <!--ro, opt, object, arming time-->
        <TimeRange>
          <!--ro, req, object, time range-->
          <beginTime>
            <!--ro, req, time, start Time-->00:00:00
          </beginTime>
          <endTime>
            <!--ro, req, time, end time-->00:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </HolidayBlockList>
  </Schedule>
</GroupScheduleList>

```

14.5.4.2 Set the arming time parameters of people gathering for all channels

Request URL

PUT /ISAPI/Event/schedules/groups

Query Parameter

None

Request Message

```

<?xml version="1.0" encoding="UTF-8"?>

<GroupScheduleList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, people gathering arming time configuration List, attr:version{req, string, protocolVersion}-->
  <Schedule>
    <!--opt, object, people gathering arming time configuration-->
    <id>
      <!--req, string, index, desc:the format is event type-channel No.-->test
    </id>
    <eventType>
      <!--opt, enum, event type, subType:string, desc::group:group-->group
    </eventType>
    <videoInputChannelID>
      <!--opt, string, video input channel ID-->test
    </videoInputChannelID>
    <TimeBlockList size="8">
      <!--req, object, arming time List, attr:size{req, int}-->
      <TimeBlock>
        <!--opt, object, arming time-->
        <dayOfWeek>
          <!--opt, enum, days of the week, subType:int, desc:1 (Monday), 2 (Tuesday), 3 (Wednesday), 4 (Thursday), 5 (Friday), 6 (Saturday), 7 (Sunday)-->1
        </dayOfWeek>
        <TimeRange>
          <!--req, object, time range-->
          <beginTime>
            <!--req, time, start Time-->00:00:00
          </beginTime>
          <endTime>
            <!--req, time, end time-->00:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </TimeBlockList>
    <HolidayBlockList>
      <!--opt, object, holiday arming time-->
      <TimeBlock>
        <!--opt, object, arming time-->
        <TimeRange>
          <!--req, object, time range-->
          <beginTime>
            <!--req, time, start Time-->00:00:00
          </beginTime>
          <endTime>
            <!--req, time, end time-->00:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </HolidayBlockList>
  </Schedule>
</GroupScheduleList>

```

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>

```

14.5.4.3 Get the arming schedule parameters of people gathering for a specified channel

Request URL

GET /ISAPI/Event/schedules/groups/group-<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<Schedule xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, arming time, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string, index, desc:the format is event type-channel No.-->test
  </id>
  <eventType>
    <!--ro, opt, enum, event type, subType:string, desc::group:group-->group
  </eventType>
  <videoInputChannelID>
    <!--ro, opt, string, video input channel ID-->test
  </videoInputChannelID>
  <TimeBlockList size="8">
    <!--ro, req, object, arming time List, attr:size{req, int}-->
    <TimeBlock>
      <!--ro, opt, object, arming time-->
      <dayOfWeek>
        <!--ro, opt, enum, days of the week, subType:int, desc:1 (Monday), 2 (Tuesday), 3 (Wednesday), 4 (Thursday), 5 (Friday), 6 (Saturday), 7 (Sunday)--
      </dayOfWeek>
      <TimeRange>
        <!--ro, req, object, time range-->
        <beginTime>
          <!--ro, req, time, Start Time-->00:00:00
        </beginTime>
        <endTime>
          <!--ro, req, time, end time-->00:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </TimeBlockList>
  <HolidayBlockList>
    <!--ro, opt, object, holiday arming time-->
    <TimeBlock>
      <!--ro, opt, object, arming time-->
      <TimeRange>
        <!--ro, req, object, time range-->
        <beginTime>
          <!--ro, req, time, start time-->00:00:00
        </beginTime>
        <endTime>
          <!--ro, req, time, end time-->00:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </HolidayBlockList>
</Schedule>
```

14.5.4.4 Set the arming time parameters of people gathering for all channels

Request URL

PUT /ISAPI/Event/schedules/groups/group-<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```

<?xml version="1.0" encoding="UTF-8"?>

<Schedule xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, people gathering arming time configuration, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string, index, desc:the format is event type-channel No.-->test
  </id>
  <eventType>
    <!--opt, enum, event type, subType:string, desc::group:group-->group
  </eventType>
  <videoInputChannelID>
    <!--opt, string, video input channel ID-->test
  </videoInputChannelID>
  <TimeBlockList size="8">
    <!--req, object, arming time List, attr:size{req, int}-->
    <TimeBlock>
      <!--opt, object, arming time-->
      <dayOfWeek>
        <!--opt, enum, days of the week, subType:int, desc:1 (Monday), 2 (Tuesday), 3 (Wednesday), 4 (Thursday), 5 (Friday), 6 (Saturday), 7 (Sunday)-->1
      </dayOfWeek>
      <TimeRange>
        <!--req, object, time range-->
        <beginTime>
          <!--req, time, start time-->00:00:00
        </beginTime>
        <endTime>
          <!--req, time, end time-->00:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </TimeBlockList>
  <HolidayBlockList>
    <!--opt, object, holiday arming time-->
    <TimeBlock>
      <!--opt, object, arming time-->
      <TimeRange>
        <!--req, object, time range-->
        <beginTime>
          <!--req, time, start time-->00:00:00
        </beginTime>
        <endTime>
          <!--req, time, end time-->00:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </HolidayBlockList>
</Schedule>

```

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>

```

14.5.4.5 Set the linkage parameters of people gathering

Request URL

PUT /ISAPI/Event/triggers/group-<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```

<?xml version="1.0" encoding="UTF-8"?>

<EventTrigger xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, people gathering linkage configuration, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string, index, desc:the format is event type-channel No.-->test
  </id>
  <eventType>
    <!--req, enum, event type, subType:string, desc::group:group-->group
  </eventType>
  <eventDescription>
    <!--opt, string, event description-->test
  </eventDescription>
  <inputIOPortID>
    <!--opt, string, I/O input port ID-->1
  </inputIOPortID>
  <dynInputIOPortID>
    <!--opt, string, dynamic I/O input port ID-->1
  </dynInputIOPortID>
  <videoInputChannelID>
    <!--opt, string, video input channel ID, desc:if <eventType> is
"VMD,videoLoss,tamperdetection,regionEntrance,regionExiting,Loitering,group,rapidMove,parking,unattendedBaggage,attendedBaggage"-->1
  </videoInputChannelID>
  <dynVideoInputChannelID>
    <!--opt, string, dynamic video input channel ID-->1
  </dynVideoInputChannelID>
  <intervalBetweenEvents>
    <!--opt, int, event capture interval, unit:s-->1
  </intervalBetweenEvents>
  <WLSensorID>
    <!--opt, string, wireless ID-->1
  </WLSensorID>
  <EventTriggerNotificationList>
    <!--opt, array, linkage action list, subType:object-->
    <EventTriggerNotification>
      <!--opt, object, linkage action-->
      <id>
        <!--req, string, index-->test
      </id>
      <notificationMethod>
        <!--req, enum, linkage action, subType:string, desc:"email", "IM" (instant messaging), "IO" (I/O output), "sysLog" (system log), "HTTP" (uploading
via HTTP), "FTP" (uploading via FTP), "beep" (buzzer), "ptz" (PTZ), "record" (recording), "monitorAlarm" (alarm on monitor), "center" (uploading to the
center), "LightAudioAlarm" (light and audio alarm), "focus" (focus), "trace" (tracking), "whiteLight" (white light), "audio" (audio)-->email
      </notificationMethod>
      <notificationRecurrence>
        <!--opt, enum, linkage cycle, subType:string, desc:"beginning", "beginningandend", "recurring"-->beginning
      </notificationRecurrence>
      <notificationInterval>
        <!--opt, int, linkage time interval, unit:ms-->1
      </notificationInterval>
      <videoInputID>
        <!--opt, string, video channel ID-->1
      </videoInputID>
      <dynVideoInputID>
        <!--opt, string, dynamic video input channel ID-->1
      </dynVideoInputID>
      <ptzAction>
        <!--opt, object, PTZ linkage-->
        <ptzChannelID>
          <!--req, string, PTZ linked channel No.-->1
        </ptzChannelID>
        <actionName>
          <!--req, enum, PTZ linkage action, subType:string, desc:"preset", "pattern", "patrol"-->preset
        </actionName>
        <actionNum>
          <!--opt, int, linked No., desc:depend on the content of <actionName>, it can be preset No., patrol No., and pattern No.-->1
        </actionNum>
      </ptzAction>
      <whiteLightAction>
        <!--opt, object, linkage parameters of the white light, desc:it is valid when the value of notificationMethod is "whiteLight"-->
        <whiteLightDurationTime>
          <!--opt, int, light flashing duration, range:[1,60], unit:s-->1
        </whiteLightDurationTime>
      </whiteLightAction>
    </EventTriggerNotification>
  </EventTriggerNotificationList>
</EventTrigger>

```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.5.4.6 Get linkage parameters of people gathering

Request URL

GET /ISAPI/Event/triggers/group-<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<EventTrigger xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, people gathering linkage configuration, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string, index, desc:the format is event type-channel No.-->test
  </id>
  <eventType>
    <!--ro, req, enum, event type, subType:string, desc:group:group-->group
  </eventType>
  <eventDescription>
    <!--ro, opt, string, event description-->test
  </eventDescription>
  <inputIOPortID>
    <!--ro, opt, string, I/O input port ID-->1
  </inputIOPortID>
  <dynInputIOPortID>
    <!--ro, opt, string, dynamic I/O input port ID-->1
  </dynInputIOPortID>
  <videoInputChannelID>
    <!--ro, opt, string, video input channel ID, desc:if <eventType> is
    "VM, videoLoss, tamperdetection, regionEntrance, regionExiting, Loitering, group, rapidMove, parking, unattendedBaggage, attendedBaggage"-->1
  </videoInputChannelID>
  <dynVideoInputChannelID>
    <!--ro, opt, string, dynamic video input channel ID-->1
  </dynVideoInputChannelID>
  <intervalBetweenEvents>
    <!--ro, opt, int, event capture interval, unit:s-->1
  </intervalBetweenEvents>
  <WLSensorID>
    <!--ro, opt, string, wireless ID-->1
  </WLSensorID>
  <EventTriggerNotificationList>
    <!--ro, opt, array, linkage action list, subType:object-->
    <EventTriggerNotification>
      <!--ro, opt, object, linkage action-->
      <id>
        <!--ro, req, string, index-->test
      </id>
      <notificationMethod>
        <!--ro, req, enum, linkage action, subType:string, desc:"email", "IM" (instant messaging), "IO" (I/O output), "sysLog" (system log), "HTTP"
        (uploading via HTTP), "FTP" (uploading via FTP), "beep" (buzzer), "ptz" (PTZ), "record" (recording), "monitorAlarm" (alarm on monitor), "center" (uploading
        to the center), "LightAudioAlarm" (Light and audio alarm), "focus" (focus), "trace" (tracking), "whiteLight" (white light), "audio" (audio)-->email
      </notificationMethod>
      <notificationRecurrence>
        <!--ro, opt, enum, linkage cycle, subType:string, desc:"beginning", "beginningandend", "recurring"-->beginning
      </notificationRecurrence>
      <notificationInterval>
        <!--ro, opt, int, linkage time interval, unit:ms-->1
      </notificationInterval>
      <videoInputID>
        <!--ro, opt, string, video channel ID-->1
      </videoInputID>
      <dynVideoInputID>
        <!--ro, opt, string, dynamic video input channel ID-->1
      </dynVideoInputID>
      <ptzAction>
        <!--ro, opt, object, PTZ linkage-->
        <ptzChannelID>
          <!--ro, req, string, PTZ linked channel No.-->1
        </ptzChannelID>
        <actionName>
          <!--ro, req, enum, PTZ linkage action, subType:string, desc:"preset", "pattern", "patrol"-->preset
        </actionName>
        <actionNum>
          <!--ro, opt, int, linked No., desc:depend on the content of <actionName>, it can be preset No., patrol No., and pattern No.-->1
        </actionNum>
      </ptzAction>
      <whiteLightAction>
        <!--ro, opt, object, linkage parameters of the white light, desc:it is valid when the value of notificationMethod is "whiteLight"-->
        <whiteLightDurationTime>
          <!--ro, opt, int, light flashing duration, range:[1,60], unit:s-->1
        </whiteLightDurationTime>
      </whiteLightAction>
    </EventTriggerNotification>
  </EventTriggerNotificationList>
</EventTrigger>

```

14.5.4.7 Get parameters of people gathering for a specified channel

Request URL

PUT /ISAPI/Smart/group/<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<Group xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, parameters configuration of people gathering for a channel, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string, channel No.-->1
  </id>
  <enabled>
    <!--req, bool, whether to enable-->true
  </enabled>
  <normalizedScreenSize>
    <!--opt, object, normalized size-->
    <normalizedScreenWidth>
      <!--req, int, normalized width-->1
    </normalizedScreenWidth>
    <normalizedScreenHeight>
      <!--req, int, normalized height-->1
    </normalizedScreenHeight>
  </normalizedScreenSize>
  <GroupRegionList>
    <!--opt, array, people gathering area list, subType:object-->
    <GroupRegion>
      <!--opt, object, people gathering area-->
      <id>
        <!--req, string, area ID-->1
      </id>
      <objectOccupation>
        <!--opt, int, percentage-->1
      </objectOccupation>
      <RegionCoordinatesList>
        <!--opt, array, area coordinate list, subType:object, range:[0,4], desc:rectangle-->
        <RegionCoordinates>
          <!--opt, object, area coordinates, desc:the origin is the lower-left corner of the screen-->
          <positionX>
            <!--req, int, x-coordinate, range:[0,1000]-->1
          </positionX>
          <positionY>
            <!--req, int, y-coordinate, range:[0,1000]-->1
          </positionY>
        </RegionCoordinates>
      </RegionCoordinatesList>
    </GroupRegion>
  </GroupRegionList>
  <mutexAbility opt="PDC">
    <!--opt, string, mutual exclusion ability, attr:opt{req, string}-->PDC
  </mutexAbility>
  <isSupportMultiScene>
    <!--opt, bool, whether supports multiple scene detection-->true
  </isSupportMultiScene>
</Group>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.5.4.8 Get parameters of people gathering for a specified channel

Request URL

GET /ISAPI/Smart/group/<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

VISION E INGENIO SOFTWARE SA DE CV (VIINSOFT)
dzambrano@viinsoft.com.mx

```

<?xml version="1.0" encoding="UTF-8"?>

<Group xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, parameters configuration of people gathering for a channel, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string, channel No.-->1
  </id>
  <enabled>
    <!--ro, req, bool, whether to enable-->true
  </enabled>
  <normalizedScreenSize>
    <!--ro, opt, object, normalized size-->
    <normalizedScreenWidth>
      <!--ro, req, int, normalized width-->1
    </normalizedScreenWidth>
    <normalizedScreenHeight>
      <!--ro, req, int, normalized height-->1
    </normalizedScreenHeight>
  </normalizedScreenSize>
  <GroupRegionList>
    <!--ro, opt, array, people gathering area List, subType:object-->
    <GroupRegion>
      <!--ro, opt, object, people gathering area-->
      <id>
        <!--ro, req, string, area ID-->1
      </id>
      <objectOccupation>
        <!--ro, opt, int, percentage-->1
      </objectOccupation>
      <RegionCoordinatesList>
        <!--ro, opt, array, area coordinate List, subType:object, range:[0,4], desc:rectangle-->
        <RegionCoordinates>
          <!--ro, opt, object, area coordinates, desc:the origin is the Lower-Left corner of the screen-->
          <positionX>
            <!--ro, req, int, x-coordinate, range:[0,1000]-->1
          </positionX>
          <positionY>
            <!--ro, req, int, y-coordinate, range:[0,1000]-->1
          </positionY>
        </RegionCoordinates>
      </RegionCoordinatesList>
    </GroupRegion>
  </headCount>
  <!--ro, opt, int-->5
</headCount>
<duration>
  <!--ro, opt, int-->10
</duration>
<GroupRegionList>
<mutexAbility opt="PDC">
  <!--ro, opt, string, mutual exclusion ability, attr:opt{req, string}-->PDC
</mutexAbility>
<isSupportMultiScene>
  <!--ro, opt, bool, whether supports multiple scene detection-->true
</isSupportMultiScene>
<shieldedRegionList>
  <!--ro, opt, array, subType:object-->
  <GroupRegion>
    <!--ro, opt, object-->
    <id>
      <!--ro, req, string-->1
    </id>
    <RegionCoordinatesList>
      <!--ro, opt, array, subType:object, range:[0,4]-->
      <RegionCoordinates>
        <!--ro, opt, object-->
        <positionX>
          <!--ro, req, int, range:[0,1000]-->1
        </positionX>
        <positionY>
          <!--ro, req, int, range:[0,1000]-->1
        </positionY>
      </RegionCoordinates>
    </RegionCoordinatesList>
  </GroupRegion>
</shieldedRegionList>
<sensitivityLevel>
  <!--ro, opt, int, range:[0,100]-->1
</sensitivityLevel>
</Group>

```

14.5.4.9 Get the capability of people gathering

Request URL

GET /ISAPI/Smart/group/<channelID>/capabilities

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

VISION E INGENIO SOFTWARE SA DE CV (VIINSOFT)
dzambrano@vinsoft.com.mx

```

<?xml version="1.0" encoding="UTF-8"?>

<Group xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, get the capability of people gathering, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string, channel No.-->1
  </id>
  <enabled opt="true,false">
    <!--ro, req, bool, whether to enable, attr:opt{req, string}-->true
  </enabled>
  <normalizedScreenSize>
    <!--ro, req, object, normalized size-->
    <normalizedScreenWidth>
      <!--ro, req, int, normalized width-->1
    </normalizedScreenWidth>
    <normalizedScreenHeight>
      <!--ro, req, int, normalized height-->1
    </normalizedScreenHeight>
  </normalizedScreenSize>
  <GroupRegionList size="4">
    <!--ro, opt, object, people gathering area List, attr:size{req, int}-->
    <GroupRegion>
      <!--ro, opt, object, people gathering area-->
      <id>
        <!--ro, req, string, area ID-->1
      </id>
      <objectOccupation min="1" max="100">
        <!--ro, req, int, percentage, range:[1,100], attr:min{req, int},max{req, int}-->1
      </objectOccupation>
      <RegionCoordinatesList>
        <!--ro, opt, array, area coordinate List, subType:object, range:[0,4], desc:rectangle-->
        <RegionCoordinates>
          <!--ro, opt, object, area coordinates, desc:the origin is the Lower-Left corner of the screen-->
          <positionX>
            <!--ro, req, int, x-coordinate, range:[0,1000]-->1
          </positionX>
          <positionY>
            <!--ro, req, int, y-coordinate, range:[0,1000]-->1
          </positionY>
        </RegionCoordinates>
      </RegionCoordinatesList>
    </GroupRegion>
    <headCount min="2" max="20">
      <!--ro, opt, int, attr:min{req, int},max{req, int}-->5
    </headCount>
    <duration min="1" max="60">
      <!--ro, opt, int, attr:min{req, int},max{req, int}-->10
    </duration>
    <GroupRegionList>
    <mutexAbility opt="PDC">
      <!--ro, opt, string, mutual exclusion ability, attr:opt{req, string}-->PDC
    </mutexAbility>
    <isSupportMultiScene>
      <!--ro, opt, bool, whether supports multiple scene detection-->true
    </isSupportMultiScene>
    <isSupportOverlapParams>
      <!--ro, opt, bool, whether supports the parameters for overLaying intelligent information of people gathering, desc:GET/PUT
      /ISAPI/Smart/group/channels/<channelID>/GroupOverLapParams?format=json-->true
    </isSupportOverlapParams>
    <shieldedRegionList size="4">
      <!--ro, opt, array, subType:object, attr:size{req, int}-->
      <GroupRegion>
        <!--ro, opt, object-->
        <id>
          <!--ro, req, string-->1
        </id>
        <RegionCoordinatesList>
          <!--ro, opt, array, subType:object, range:[0,4]-->
          <RegionCoordinates>
            <!--ro, opt, object-->
            <positionX>
              <!--ro, req, int, range:[0,1000]-->1
            </positionX>
            <positionY>
              <!--ro, req, int, range:[0,1000]-->1
            </positionY>
          </RegionCoordinates>
        </RegionCoordinatesList>
      </GroupRegion>
    </shieldedRegionList>
    <sensitivityLevel min="0" max="100">
      <!--ro, opt, int, range:[0,100], attr:min{req, int},max{req, int}-->1
    </sensitivityLevel>
  </Group>

```

14.5.4.10 Set parameters of people gathering for all areas

Request URL

PUT /ISAPI/Smart/group/<channelID>/regions

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<GroupRegionList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, array, batch configure the parameters of people gathering area, subType:object, attr:version{req, string, protocolVersion}-->
  <GroupRegion>
    <!--opt, object, configure the parameter of people gathering area-->
    <id>
      <!--req, string, area ID-->1
    </id>
    <objectOccupation>
      <!--opt, int, percentage-->1
    </objectOccupation>
    <RegionCoordinatesList>
      <!--opt, array, area coordinate List, subType:object, range:[0,4], desc:rectangle-->
      <RegionCoordinates>
        <!--opt, object, area coordinates, desc:the origin is the lower-left corner of the screen-->
        <positionX>
          <!--req, int, x-coordinate, range:[0,1000]-->1
        </positionX>
        <positionY>
          <!--req, int, y-coordinate, range:[0,1000]-->1
        </positionY>
      </RegionCoordinates>
    </RegionCoordinatesList>
  </GroupRegion>
</GroupRegionList>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.5.4.11 Get the parameters of people gathering in all areas

Request URL

GET /ISAPI/Smart/group/<channelID>/regions

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<GroupRegionList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, array, batch set the parameters of people gathering area, subType:object, attr:version{req, string, protocolVersion}-->
  <GroupRegion>
    <!--ro, opt, object, set a specified parameter of people gathering area-->
    <id>
      <!--ro, req, string, area ID-->1
    </id>
    <objectOccupation>
      <!--ro, opt, int, percentage-->1
    </objectOccupation>
    <RegionCoordinatesList>
      <!--ro, opt, array, area coordinate list, subType:object, range:[0,4], desc:rectangle-->
      <RegionCoordinates>
        <!--ro, opt, object, area coordinates, desc:the origin is the Lower-Left corner of the screen-->
        <positionX>
          <!--ro, req, int, x-coordinate, range:[0,1000]-->1
        </positionX>
        <positionY>
          <!--ro, req, int, y-coordinate, range:[0,1000]-->1
        </positionY>
      </RegionCoordinates>
    </RegionCoordinatesList>
  </GroupRegion>
</GroupRegionList>
```

14.5.4.12 Set parameters of people gathering for a specified area

Request URL

PUT /ISAPI/Smart/group/<channelID>/regions/<regionID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--
regionID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<GroupRegion xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, configure the parameter of people gathering area, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string, area ID-->1
  </id>
  <objectOccupation>
    <!--opt, int, percentage-->1
  </objectOccupation>
  <RegionCoordinatesList>
    <!--opt, array, area coordinate list, subType:object, range:[0,4], desc:rectangle-->
    <RegionCoordinates>
      <!--opt, object, area coordinates, desc:the origin is the Lower-Left corner of the screen-->
      <positionX>
        <!--req, int, x-coordinate, range:[0,1000]-->1
      </positionX>
      <positionY>
        <!--req, int, y-coordinate, range:[0,1000]-->1
      </positionY>
    </RegionCoordinates>
  </RegionCoordinatesList>
</GroupRegion>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.5.4.13 Get parameters of a specified area for people gathering

Request URL

GET /ISAPI/Smart/group/<channelID>/regions/<regionID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.
regionID	string	Region No.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<GroupRegion xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, a specified parameter of people gathering area, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string, area ID-->1
  </id>
  <objectOccupation>
    <!--ro, opt, int, percentage-->1
  </objectOccupation>
  <RegionCoordinatesList>
    <!--ro, opt, array, area coordinate list, subType:object, range:[0,4], desc:rectangle-->
    <RegionCoordinates>
      <!--ro, opt, object, area coordinates, desc:the origin is the lower-left corner of the screen-->
      <positionX>
        <!--ro, req, int, x-coordinate, range:[0,1000]-->1
      </positionX>
      <positionY>
        <!--ro, req, int, y-coordinate, range:[0,1000]-->1
      </positionY>
    </RegionCoordinates>
  </RegionCoordinatesList>
</GroupRegion>
```

14.5.4.14 People gathering

EventType:group

```
<?xml version="1.0" encoding="UTF-8"?>

<EventNotificationAlert xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, event alarm, attr:version{opt, string, protocolVersion}-->
  <ipAddress>
    <!--ro, req, string, IPv4 address of the device that triggers the alarm-->172.6.64.7
  </ipAddress>
  <ipv6Address>
    <!--ro, opt, string, IPv6 address of the device that triggers the alarm-->1000:0:0:0:8:800:200C:417A
  </ipv6Address>
  <portNo>
    <!--ro, opt, int, communication port No. of the device that triggers the alarm-->80
  </portNo>
```



```

<protocol>
  <!--ro, opt, enum, transmission communication protocol type, subType:string, desc:when ISAPI protocol is transmitted via HCNetsDK, the channel No. is
the video channel No. of private protocol. When ISAPI protocol is transmitted via EZ protocol, the channel No. is the video channel No. of EZ protocol. When
ISAPI protocol is transmitted via ISUP, the channel No. is the video channel No. of ISUP-->HTTP
</protocol>
<macAddress>
  <!--ro, opt, string, MAC address-->01:17:24:45:D9:F4
</macAddress>
<dynChannelID>
  <!--ro, opt, string, digital channel No.-->test
</dynChannelID>
<channelID>
  <!--ro, opt, string, channel No. of the device that triggers the alarm, desc:video channel No. that triggers the alarm-->test
</channelID>
<relatedChannelList>
  <!--ro, opt, string, List of alarm related channels, which are of the same camera with channelID, desc:this parameter is used for Live view or playback
on the platform; multiple channel No.s are separated by commas-->1,2,3
</relatedChannelList>
<dateTime>
  <!--ro, req, datetime, alarm trigger time-->2004-05-03T17:30:08+08:00
</dateTime>
<activePostCount>
  <!--ro, opt, int, times that the same alarm has been uploaded, desc:event triggering frequency-->1
</activePostCount>
<eventType>
  <!--ro, req, enum, event type, subType:string, desc:"group" (people gathering)-->group
</eventType>
<eventState>
  <!--ro, req, enum, event status, subType:string, desc:for durative event: "active" (valid), "inactive" (invalid)-->active
</eventState>
<eventDescription>
  <!--ro, req, string, event description-->test
</eventDescription>
<deviceId>
  <!--ro, opt, string, device ID, desc:it should be returned for ISUP alarms, e.g., test0123 (Ehome2.0, Ehome4.0, and ISUP5.0)-->12345
</deviceId>
<DetectionRegionList>
  <!--ro, opt, array, detection area list, subType:object-->
  <DetectionRegionEntry>
    <!--ro, opt, object, detection area-->
    <regionID>
      <!--ro, req, string, area ID-->test
    </regionID>
    <sensitivityLevel>
      <!--ro, opt, int, sensitivity, range:[0,100]-->1
    </sensitivityLevel>
    <RegionCoordinatesList>
      <!--ro, opt, array, target area, subType:object, range:[0,4], desc:rectangle-->
      <RegionCoordinates>
        <!--ro, opt, object, area point coordinates, desc:the origin is the upper-left corner of the screen-->
        <positionX>
          <!--ro, req, int, X-coordinate, range:[0,1000]-->50
        </positionX>
        <positionY>
          <!--ro, req, int, Y-coordinate, range:[0,1000]-->50
        </positionY>
      </RegionCoordinates>
    </RegionCoordinatesList>
    <objectOccupation>
      <!--ro, opt, int, percentage, range:[1,100]-->1
    </objectOccupation>
  </DetectionRegionEntry>
</DetectionRegionList>
<channelName>
  <!--ro, opt, string, channel name, range:[1,64]-->test
</channelName>
<Extensions>
  <!--ro, opt, object, extended information-->
  <serialNumber>
    <!--ro, opt, string, serial No.-->test
  </serialNumber>
  <eventPush>
    <!--ro, opt, string, event notification-->test
  </eventPush>
  </Extensions>
  <detectionPictureTransType>
    <!--ro, opt, enum, picture transmission mode, subType:string, desc:"url", "binary", "base64"-->url
  </detectionPictureTransType>
  <detectionPicturesNumber>
    <!--ro, opt, int, number of pictures contained in the alarm received in arming mode, desc:this field will not be returned when there is no picture
contained in the alarm-->1
  </detectionPicturesNumber>
  <bkgUrl>
    <!--ro, opt, string, background picture URL, desc:background picture URL-->test
  </bkgUrl>
  <URLCertificationType>
    <!--ro, opt, enum, picture URL authentication method, subType:string, desc:authentication mode of picture URL: "no"-no authentication, "digest"-digest
authentication (it is used for local picture URL returned by NVR or DVR)-->no
  </URLCertificationType>
  <pId>
    <!--ro, opt, string, picture ID, desc:the field value is the picture Content-ID when the value of detectionPictureTransType is "binary"-->test
  </pId>
  <targetAttrs>

```

```

<!--ro, opt, object, transmitted parameters-->{ /*可选, 透传字段, 推荐使用以下三个字段*/ "deviceId": "1", /*可选, 设备ID, string类型, 最大长度为64*/
"deviceChannel": 1, /*可选, 设备通道号, integer32类型*/ "deviceName": "shebei", /*可选, 设备名称, string类型, 最大长度为128*/ }
</targetAttrs>
<TaskInfo>
  <!--ro, opt, object, task information submitted by data center products-->
  <taskID>
    <!--ro, req, string, task ID, range:[0,64]-->test
  </taskID>
  <algorithmType>
    <!--ro, opt, enum, algorithm type, subType:int, desc:1-"highQualityVehicle" (high-quality vehicle),2-"highPerformanceVehicle" (high-performance
vehicle),3-"personStructModel" (person structural modeling),4-"vehicleAndPersonStructModel" (person and vehicle structural modeling),5-"videoFaceDetect"
(video face detection),6-"videoFaceDetectModel" (video face detection and modeling),7-"smart" (face detection (output frame without recognizing
properties)+human body detection (output properties and frame)+behavior detection)-->1
  </algorithmType>
  <taskName>
    <!--ro, opt, string, task name-->test
  </taskName>
  <algorithmID>
    <!--ro, opt, string, algorithm package ID-->test
  </algorithmID>
  <monitorPointID>
    <!--ro, opt, string, camera No.-->test
  </monitorPointID>
  <monitorPointName>
    <!--ro, opt, string, camera name-->test
  </monitorPointName>
  <streamType>
    <!--ro, opt, enum, stream type, subType:string, desc:"realtime" (real-time stream), "historyvideo" (history stream), "localvideo" (local stream)--
>realtime
  </streamType>
  <ruleID>
    <!--ro, opt, string, rule ID, desc:it is used to distinguish different tasks with the same name, and the ruleID in the event uploading message
indicates that the event is related to this task-->test
  </ruleID>
  <ruleCustomName>
    <!--ro, req, string, user-defined event name, range:[0,128], desc:it is defined by the caller, and it is included in the message when the alarm is
uploaded. Up to 128 characters are allowed-->test
  </ruleCustomName>
  <algorithmInfo>
    <!--ro, opt, object, algorithm version information, desc:this field is required for secondary analysis-->
    <algorithmId>
      <!--ro, opt, string, algorithm package ID-->test
    </algorithmId>
    <algoVendorId>
      <!--ro, opt, string, manufacturer ID-->test
    </algoVendorId>
    <algoVersionId>
      <!--ro, opt, string, algorithm version No.-->test
    </algoVersionId>
    <algoChipType>
      <!--ro, opt, string, chip type-->test
    </algoChipType>
    <algoModelVersion>
      <!--ro, opt, string, model version-->test
    </algoModelVersion>
  </algorithmInfo>
</TaskInfo>
<timeStamp>
  <!--ro, opt, string, timestamp of the frame, which triggers the alarm-->test
</timeStamp>
<isDataRetransmission>
  <!--ro, opt, bool, whether it is a resending data (if the real-time detection data upload fails due to the network condition, the data will be uploaded
again after the device recovers.)-->true
</isDataRetransmission>
<ruleID>
  <!--ro, opt, int, rule No., range:[0,7], desc:rule No.-->0
</ruleID>
<ruleName>
  <!--ro, opt, string, rule name, range:[0,32], desc:rule name-->test
</ruleName>
</EventNotificationAlert>

```

Parameter Name	Parameter Value	Parameter Type(Content-Type)	Content-ID	File Name	Description
group	[Message content]	application/xml	--	--	--
.value	[Binary picture data]	image/jpeg	随机值	pic.jpeg	--
video	[Video data]	video/mp4	随机值	video.mp4	--

Note: The protocol is transmitted in form format. See Chapter 4.5.1.4 for form framework description, as shown in the instance below.

```
--<frontier>
Content-Disposition: form-data; name=Parameter Name;filename=File Name
Content-Type: Parameter Type
Content-Length: ****
Content-ID: Content ID
Parameter Value
```

- Parameter Name: the name property of Content-Disposition in the header of form unit; it refers to the form unit name.
- Parameter Type (Content-Type): the Content-Type property in the header of form unit.
- File Name (filename): the filename property of Content-Disposition of form unit Headers. It exists only when the transmitted data of form unit is file, and it refers to the file name of form unit body.
- Parameter Value: the body content of form unit.

14.5.5 Unattended Baggage Detection

14.5.5.1 Set the arming schedule of unattended baggage detection for all channels

Request URL

PUT /ISAPI/Event/schedules/unattendedBaggages

Query Parameter

None

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<UnattendBaggageScheduleList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, array, subType:object, attr:version{req, string, protocolVersion}-->
  <Schedule>
    <!--opt, object-->
    <id>
      <!--req, string-->unattendedBaggage-1
    </id>
    <eventType>
      <!--opt, enum, subType:string-->unattendedBaggage
    </eventType>
    <videoInputChannelID>
      <!--opt, string-->test
    </videoInputChannelID>
    <TimeBlockList size="8">
      <!--req, array, subType:object, range:[0,56], attr:size{req, int, range:[0,8]}-->
      <TimeBlock>
        <!--opt, object-->
        <dayOfWeek>
          <!--opt, enum, subType:int-->1
        </dayOfWeek>
        <TimeRange>
          <!--req, object-->
          <beginTime>
            <!--req, time-->00:00:00
          </beginTime>
          <endTime>
            <!--req, time-->00:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </TimeBlockList>
    <HolidayBlockList>
      <!--opt, array, subType:object, range:[0,8]-->
      <TimeBlock>
        <!--opt, object-->
        <TimeRange>
          <!--req, object-->
          <beginTime>
            <!--req, time-->00:00:00
          </beginTime>
          <endTime>
            <!--req, time-->00:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </HolidayBlockList>
  </Schedule>
</UnattendBaggageScheduleList>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.5.5.2 Get the arming schedule of unattended baggage detection for all channels

Request URL

GET /ISAPI/Event/schedules/unattendedBaggages

Query Parameter

None

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<UnattendBaggageScheduleList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, array, subType:object, attr:version{req, string, protocolVersion}-->
  <Schedule>
    <!--ro, opt, object-->
    <id>
      <!--ro, req, string-->unattendedBaggage-1
    </id>
    <eventType>
      <!--ro, opt, enum, subType:string-->unattendedBaggage
    </eventType>
    <videoInputChannelID>
      <!--ro, opt, string-->test
    </videoInputChannelID>
    <TimeBlockList size="8">
      <!--ro, req, array, subType:object, range:[0,56], attr:size{req, int, range:[0,8]}-->
      <TimeBlock>
        <!--ro, opt, object-->
        <dayOfWeek>
          <!--ro, opt, enum, subType:int-->1
        </dayOfWeek>
        <TimeRange>
          <!--ro, req, object-->
          <beginTime>
            <!--ro, req, time-->00:00:00
          </beginTime>
          <endTime>
            <!--ro, req, time-->00:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </TimeBlockList>
    <HolidayBlockList>
      <!--ro, opt, array, subType:object, range:[0,8]-->
      <TimeBlock>
        <!--ro, opt, object-->
        <TimeRange>
          <!--ro, req, object-->
          <beginTime>
            <!--ro, req, time-->00:00:00
          </beginTime>
          <endTime>
            <!--ro, req, time-->00:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </HolidayBlockList>
  </Schedule>
</UnattendBaggageScheduleList>

```

14.5.5.3 Get the arming schedule of unattended baggage detection for a specified channel

Request URL

GET /ISAPI/Event/schedules/unattendedBaggages/unattendedBaggage-<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<Schedule xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string-->unattendedBaggage-1
  </id>
  <eventType>
    <!--ro, opt, enum, subType:string-->unattendedBaggage
  </eventType>
  <videoInputChannelID>
    <!--ro, opt, string-->test
  </videoInputChannelID>
  <TimeBlockList size="8">
    <!--ro, req, array, subType:object, range:[0,56], attr:size{req, int, range:[0,8]}-->
    <TimeBlock>
      <!--ro, opt, object-->
      <dayOfWeek>
        <!--ro, opt, enum, subType:int-->1
      </dayOfWeek>
      <TimeRange>
        <!--ro, req, object-->
        <beginTime>
          <!--ro, req, time-->00:00:00
        </beginTime>
        <endTime>
          <!--ro, req, time-->00:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </TimeBlockList>
  <HolidayBlockList>
    <!--ro, opt, array, subType:object, range:[0,8]-->
    <TimeBlock>
      <!--ro, opt, object-->
      <TimeRange>
        <!--ro, req, object-->
        <beginTime>
          <!--ro, req, time-->00:00:00
        </beginTime>
        <endTime>
          <!--ro, req, time-->00:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </HolidayBlockList>
</Schedule>

```

14.5.5.4 Set the arming schedule of unattended baggage detection for a specified channel

Request URL

PUT /ISAPI/Event/schedules/unattendedBaggages/unattendedBaggage-<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<Schedule xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string-->test
  </id>
  <eventType>
    <!--opt, enum, subType:string-->unattendedBaggage
  </eventType>
  <videoInputChannelID>
    <!--opt, string-->test
  </videoInputChannelID>
  <TimeBlockList size="8">
    <!--req, array, subType:object, range:[0,56], attr:size{req, int, range:[0,8]}-->
    <TimeBlock>
      <!--opt, object-->
      <dayOfWeek>
        <!--opt, enum, subType:int-->1
      </dayOfWeek>
      <TimeRange>
        <!--req, object-->
        <beginTime>
          <!--req, time-->00:00:00
        </beginTime>
        <endTime>
          <!--req, time-->00:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </TimeBlockList>
  <HolidayBlockList>
    <!--opt, array, subType:object, range:[0,8]-->
    <TimeBlock>
      <!--opt, object-->
      <TimeRange>
        <!--req, object-->
        <beginTime>
          <!--req, time-->00:00:00
        </beginTime>
        <endTime>
          <!--req, time-->00:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </HolidayBlockList>
</Schedule>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.5.5.5 Get the linkage parameters of unattended baggage detection

Request URL

GET /ISAPI/Event/triggers/unattendedBaggage-<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<EventTrigger xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string-->unattendedBaggage-1
  </id>
  <eventType>
    <!--ro, req, enum, subType:string-->unattendedBaggage
  </eventType>
  <eventDescription>
    <!--ro, opt, string-->test
  </eventDescription>
  <inputIOPortID>
    <!--ro, opt, string-->1
  </inputIOPortID>
  <dynInputIOPortID>
    <!--ro, opt, string-->1
  </dynInputIOPortID>
  <videoInputChannelID>
    <!--ro, opt, string-->1
  </videoInputChannelID>
  <dynVideoInputChannelID>
    <!--ro, opt, string-->1
  </dynVideoInputChannelID>
  <intervalBetweenEvents>
    <!--ro, opt, int, unit:s-->1
  </intervalBetweenEvents>
  <wLSensorID>
    <!--ro, opt, string-->1
  </wLSensorID>
  <EventTriggerNotificationList>
    <!--ro, opt, array, subType:object-->
    <EventTriggerNotification>
      <!--ro, opt, object-->
      <id>
        <!--ro, req, string-->test
      </id>
      <notificationMethod>
        <!--ro, req, enum, subType:string-->email
      </notificationMethod>
      <notificationRecurrence>
        <!--ro, opt, enum, subType:string-->beginning
      </notificationRecurrence>
      <notificationInterval>
        <!--ro, opt, int, unit:ms-->1
      </notificationInterval>
      <videoInputID>
        <!--ro, opt, string-->1
      </videoInputID>
      <dynVideoInputID>
        <!--ro, opt, string-->1
      </dynVideoInputID>
      <ptzAction>
        <!--ro, opt, object-->
        <ptzChannelID>
          <!--ro, req, string-->1
        </ptzChannelID>
        <actionName>
          <!--ro, req, enum, subType:string-->preset
        </actionName>
        <actionNum>
          <!--ro, opt, int-->1
        </actionNum>
      </ptzAction>
      <whiteLightAction>
        <!--ro, opt, object-->
        <whiteLightDurationTime>
          <!--ro, opt, int, range:[1,60], unit:s-->1
        </whiteLightDurationTime>
      </whiteLightAction>
    </EventTriggerNotification>
  </EventTriggerNotificationList>
</EventTrigger>
```

14.5.5.6 Set the linkage parameters of unattended baggage detection

Request URL

PUT /ISAPI/Event/triggers/unattendedBaggage-<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<EventTrigger xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string-->unattendedBaggage-1
  </id>
  <eventType>
    <!--req, enum, subType:string-->unattendedBaggage
  </eventType>
  <eventDescription>
    <!--opt, string-->test
  </eventDescription>
  <inputIOPortID>
    <!--opt, string-->1
  </inputIOPortID>
  <dynInputIOPortID>
    <!--opt, string-->1
  </dynInputIOPortID>
  <videoInputChannelID>
    <!--opt, string-->1
  </videoInputChannelID>
  <dynVideoInputChannelID>
    <!--opt, string-->1
  </dynVideoInputChannelID>
  <intervalBetweenEvents>
    <!--opt, int, unit:s-->1
  </intervalBetweenEvents>
  <wLSensorID>
    <!--opt, string-->1
  </wLSensorID>
  <EventTriggerNotificationList>
    <!--opt, array, subType:object-->
    <EventTriggerNotification>
      <!--opt, object-->
      <id>
        <!--req, string-->test
      </id>
      <notificationMethod>
        <!--req, enum, subType:string-->email
      </notificationMethod>
      <notificationRecurrence>
        <!--opt, enum, subType:string-->beginning
      </notificationRecurrence>
      <notificationInterval>
        <!--opt, int, unit:ms-->1
      </notificationInterval>
      <videoInputID>
        <!--opt, string-->1
      </videoInputID>
      <dynVideoInputID>
        <!--opt, string-->1
      </dynVideoInputID>
      <ptzAction>
        <!--opt, object-->
        <ptzChannelID>
          <!--req, string-->1
        </ptzChannelID>
        <actionName>
          <!--req, enum, subType:string-->preset
        </actionName>
        <actionNum>
          <!--opt, int-->1
        </actionNum>
      </ptzAction>
      <whiteLightAction>
        <!--opt, object-->
        <whiteLightDurationTime>
          <!--opt, int, range:[1,60], unit:s-->1
        </whiteLightDurationTime>
      </whiteLightAction>
    </EventTriggerNotification>
  </EventTriggerNotificationList>
</EventTrigger>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.5.5.7 Unattended baggage detection

EventType:unattendedBaggage

```
<?xml version="1.0" encoding="UTF-8"?>

<EventNotificationAlert xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, unattended baggage alarm, attr:version{opt, string, protocolVersion}-->
  <ipAddress>
    <!--ro, req, string, IPv4 address of the device that triggers the alarm-->172.6.64.7
  </ipAddress>
  <ipv6Address>
    <!--ro, opt, string, IPv6 address of the device that triggers the alarm-->1080:0:0:0:8:800:200C:417A
  </ipv6Address>
  <portNo>
    <!--ro, opt, int, communication port No. of the device that triggers the alarm-->80
  </portNo>
  <protocol>
    <!--ro, opt, enum, transmission communication protocol type, subType:string, desc:when ISAPI protocol is transmitted via HCNetsDK, the channel No. is the video channel No. of private protocol. When ISAPI protocol is transmitted via EZ protocol, the channel No. is the video channel No. of EZ protocol. When ISAPI protocol is transmitted via ISUP, the channel No. is the video channel No. of ISUP-->HTTP
  </protocol>
  <macAddress>
    <!--ro, opt, string, MAC address-->01:17:24:45:D9:F4
  </macAddress>
  <dynChannelID>
    <!--ro, opt, string, digital channel No.-->test
  </dynChannelID>
  <channelID>
    <!--ro, opt, int, channel No. of the device that triggers the alarm, desc:video channel No. that triggers the alarm-->1
  </channelID>
  <relatedChannelList>
    <!--ro, opt, string, List of alarm related channels, which are of the same camera with channelID, desc:this parameter is used for Live view or playback on the platform; multiple channel No.s are separated by commas-->1,2,3
  </relatedChannelList>
  <dateTime>
    <!--ro, req, datetime, alarm trigger time-->2004-05-03T17:30:08+08:00
  </dateTime>
  <activePostCount>
    <!--ro, opt, int, event triggering frequency, desc:event triggering frequency-->1
  </activePostCount>
  <eventType>
    <!--ro, req, enum, event type, subType:string, desc:"unattendedBaggage" (unattended baggage)-->unattendedBaggage
  </eventType>
  <eventState>
    <!--ro, req, enum, event status, subType:string, desc:for durative event: "active" (valid), "inactive" (invalid)-->active
  </eventState>
  <eventDescription>
    <!--ro, req, string, event description-->test
  </eventDescription>
  <deviceID>
    <!--ro, opt, string, device ID, desc:it should be returned for ISUP alarms, e.g., test0123 (Ehome2.0, Ehome4.0, and ISUP5.0)-->12345
  </deviceID>
  <DetectionRegionList>
    <!--ro, opt, array, detection area list, subType:object-->
    <DetectionRegionEntry>
      <!--ro, opt, object, detection area-->
      <regionID>
        <!--ro, req, string, area ID-->test
      </regionID>
      <sensitivityLevel>
        <!--ro, opt, int, sensitivity, range:[0,100]-->1
      </sensitivityLevel>
      <RegionCoordinatesList>
        <!--ro, opt, array, target area, subType:object, range:[0,4], desc:rectangle-->
        <RegionCoordinates>
          <!--ro, opt, object, area point coordinates, desc:the origin is the upper-left corner of the screen-->
          <positionX>
            <!--ro, req, int, X-coordinate, range:[0,1000]-->50
          </positionX>
```

```

<positionY>
  <!--ro, req, int, Y-coordinate, range:[0,1000]-->50
</positionY>
</RegionCoordinates>
</RegionCoordinatesList>
<detectedTarget>
  <!--ro, opt, enum, target type, subType:string, desc:"others"-->others
</detectedTarget>
</DetectionRegionEntry>
</DetectionRegionList>
<channelName>
  <!--ro, opt, string, channel name, range:[1,64]-->test
</channelName>
<Extensions>
  <!--ro, opt, object, extended information-->
  <serialNumber>
    <!--ro, opt, string, serial No.-->test
  </serialNumber>
  <eventPush>
    <!--ro, opt, string, event notification contents-->test
  </eventPush>
</Extensions>
<detectedPictureTransType>
  <!--ro, opt, enum, picture transmission mode, subType:string, desc:"url", "binary", "base64"-->url
</detectedPictureTransType>
<detectedPicturesNumber>
  <!--ro, opt, int, number of pictures contained in the alarm received in arming mode, desc:this field will not be returned when there is no picture
  contained in the alarm-->1
</detectedPicturesNumber>
<bgkUrl>
  <!--ro, opt, string, background picture URL, desc:background picture URL-->test
</bgkUrl>
<URLCertificationType>
  <!--ro, opt, enum, picture URL authentication method, subType:string, desc:authentication mode of picture URL: "no"-no authentication, "digest"-digest
  authentication (it is used for local picture URL returned by NVR or DVR)-->no
</URLCertificationType>
<pId>
  <!--ro, opt, string, picture ID, desc:the field value is the picture Content-ID when the value of detectedPictureTransType is "binary"-->test
</pId>
<targetAttrs>
  <!--ro, opt, object, transmitted parameters-->{ /*可选,透传字段,推荐使用以下三个字段*/ "deviceId": "1", /*可选,设备ID, string类型, 最大长度为64*/
  "deviceChannel": 1, /*可选,设备通道号, integer32类型*/ "deviceName": "shebei", /*可选,设备名称, string类型, 最大长度为128*/ }
</targetAttrs>
<TaskInfo>
  <!--ro, opt, object, task information submitted by data center products-->
  <taskId>
    <!--ro, req, string, task ID, range:[0,64]-->test
  </taskId>
  <algorithmType>
    <!--ro, opt, enum, algorithm type, subType:int, desc:1-"highQualityVehicle" (high-quality vehicle),2-"highPerformanceVehicle" (high-performance
    vehicle),3-"personStructModel" (person structural modeling),4-"vehicleAndPersonStructModel" (person and vehicle structural modeling),5-"videoFaceDetect"
    (video face detection),6-"videoFaceDetectModel" (video face detection and modeling),7-"smart" (face detection (output frame without recognizing
    properties)+human body detection (output properties and frame)+behavior detection)-->1
  </algorithmType>
  <taskName>
    <!--ro, opt, string, task name-->test
  </taskName>
  <algorithmID>
    <!--ro, opt, string, algorithm package ID-->test
  </algorithmID>
  <monitorPointID>
    <!--ro, opt, string, camera No.-->test
  </monitorPointID>
  <monitorPointName>
    <!--ro, opt, string, camera name-->test
  </monitorPointName>
  <streamType>
    <!--ro, opt, enum, stream type, subType:string, desc:"realtime" (real-time stream), "historyvideo" (history stream), "localvideo" (local stream)--
  >realtime
  </streamType>
  <ruleID>
    <!--ro, opt, string, rule ID, desc:it is used to distinguish different tasks with the same name, and the ruleID in the event uploading message
    indicates that the event is related to this task-->test
  </ruleID>
  <ruleCustomName>
    <!--ro, req, string, user-defined event name, range:[0,128], desc:it is defined by the caller, and it is included in the message when the alarm is
    uploaded. Up to 128 characters are allowed-->test
  </ruleCustomName>
  <algorithmInfo>
    <!--ro, opt, object, algorithm version information, desc:this field is required for secondary analysis-->
    <algorithmId>
      <!--ro, opt, string, algorithm package ID-->test
    </algorithmId>
    <algoVendorId>
      <!--ro, opt, string, manufacturer ID-->test
    </algoVendorId>
    <algoVersionId>
      <!--ro, opt, string, algorithm version No.-->test
    </algoVersionId>
    <algoChipType>
      <!--ro, opt, string, chip type-->test
    </algoChipType>
    <algoModelVersion>
      <!--ro, opt, string, model version-->test
    </algoModelVersion>
  </algorithmInfo>

```

```

<!--ro, opt, string, model version-->test
</algoModelVersion>
</algorithmInfo>
</TaskInfo>
<timeStamp>
  <!--ro, opt, string, timestamp of the frame, which triggers the alarm, desc:ISO 8601 format, e.g., 2019-12-30T15:00:00.23+08:00-->test
</timeStamp>
<isDataRetransmission>
  <!--ro, opt, bool, whether it is a resending data (if the real-time detection data upload fails due to the network condition, the data will be uploaded
again after the device recovers.)-->true
</isDataRetransmission>
<ruleID>
  <!--ro, opt, int, rule No., range:[0,7], desc:rule No.-->0
</ruleID>
<ruleName>
  <!--ro, opt, string, rule name, range:[0,32], desc:rule name-->test
</ruleName>
</EventNotificationAlert>

```

14.6 Face Capture

14.6.1 Face Capture Settings

14.6.1.1 Get the arming schedule of face capture

Request URL

GET /ISAPI/Event/schedules/faceSnap

Query Parameter

None

Request Message

None

Response Message

dzambrano@vinsoft.com.mx (VINISOFT)

VISION E INGENIO SOFTWARE SA DE CV

<?xml version="1.0" encoding="UTF-8"?>

```
<FaceSnapScheduleList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, array, arming schedule of face capture for all channels, subType:object, attr:version{req, string, protocolVersion}-->
  <Schedule>
    <!--ro, opt, object, arming schedule of face capture for a specified channel-->
    <id>
      <!--ro, req, string, channel No.-->test
    </id>
    <eventType>
      <!--ro, req, enum, event type, subType:string, desc:"ADAS", "ADASAlarm", "AID", "ANPR", "AccessControllerEvent", "CDsStatus", "DBD", "GPSUpload",
      "HFP", "IO", "IOTD", "LES", "LFPD", "PALMismatch", "PIR", "PeopleCounting", "PeopleNumChange", "Standup", "TMA", "TMPAM", "VMD", "abnormalAcceleration",
      "abnormalDriving", "advReachHeight", "alarmResult", "attendance", "attendedBaggage", "audioAbnormal", "audioException", "behaviorResult",
      "blindSpotDetection", "cardMatch", "changedStatus", "collision", "containerDetection", "crowdSituationAnalysis", "databaseException", "defocus",
      "diskUnformat", "diskerror", "diskfull", "driverConditionMonitor", "emergencyAlarm", "faceCapture", "faceSnapModeling", "facedetection", "failDown",
      "faultAlarm", "fieldDetection", "fireDetection", "fireEscapeDetection", "flowOverrun", "framesPeopleCounting", "getUp", "group", "hdBadBlock", "hdImpact",
      "heatmap", "highHDTemperature", "highTempAlarm", "hotSpare", "illAccess", "ipcTransferAbnorma", "ipconflict", "keyPersonGetUp", "LeavePosition",
      "linedetection", "ListSyncException", "Loitering", "LowHDTemperature", "mixedTargetDetection", "modelError", "nicbroken", "nodeOffline",
      "nonPoliceIntrusion", "overSpeed", "overtimeTarry", "parking", "peopleNumChange", "peopleNumCounting", "personAbnormalAlarm", "personDensityDetection",
      "personQueueCounting", "personQueueDetection", "personQueueRealTime", "personQueueTime", "playCellphone", "pocException", "poe", "policeAbsent",
      "radarAlarm", "radarFieldDetection", "radarLineDetection", "radarPerimeterRule", "radarTargetDetection", "radarVideoDetection", "raidException",
      "rapidMove", "reachHeight", "recordCycleAbnormal", "recordException", "regionEntrance", "regionExiting", "retention", "rollover", "running",
      "safetyHelmetDetection", "scenechangedetection", "sensorAlarm", "severeHDFailure", "shelterAlarm", "shipsDetection", "sitQuietly", "smokeAndFireDetection",
      "smokeDetection", "softIO", "spacingChange", "sysStorFull", "takingElevatorDetection", "targetCapture", "temperature", "thermometry", "thirdPartyException",
      "toiletTarry", "tollCodeInfo", "tossing", "unattendedBaggage", "vehicleMatchResult", "vehicleRcogResult", "versionAbnormal", "videoException", "videoLoss",
      "violationAlarm", "violentMotion", "yardTarry", "faceSnap"-->ADAS
    </eventType>
    <videoInputChannelID>
      <!--ro, opt, string, video input channel No.-->test
    </videoInputChannelID>
    <TimeBlockList size="8">
      <!--ro, req, array, arming time list, subType:object, attr:size{req, int}-->
      <TimeBlock>
        <!--ro, opt, object, arming time-->
        <dayOfWeek>
          <!--ro, opt, enum, day of a week, subType:int, desc:1 (Monday), 2 (Tuesday), 3 (Wednesday), 4 (Thursday), 5 (Friday), 6 (Saturday), 7 (Sunday)-->1
        </dayOfWeek>
        <dayOfWeek>
        </dayOfWeek>
        <TimeRange>
          <!--ro, req, object, time range-->
          <beginTime>
            <!--ro, req, time, start time-->00:00:00+08:00
          </beginTime>
          <endTime>
            <!--ro, req, time, end time-->00:00:00+08:00
          </endTime>
        </TimeRange>
        <ScheduleProperity>
          <!--ro, opt, object, arming advanced configurations-->
          <vehicleDetectSceneID>
            <!--ro, opt, int, vehicle detection scene ID-->1
          </vehicleDetectSceneID>
          <sceneID>
            <!--ro, opt, int, scene ID-->1
          </sceneID>
          <SceneList>
            <!--ro, opt, array, switching rules of multiple scenes, subType:object, desc:mutually exclusive with "sceneID"-->
            <Scene>
              <!--ro, opt, object, multiple scene List-->
              <sceneID>
                <!--ro, req, string, scene ID-->1
              </sceneID>
              <durationTime>
                <!--ro, req, int, stayed time of a single scene-->1
              </durationTime>
            </Scene>
          </SceneList>
        </ScheduleProperity>
      </TimeBlock>
    </TimeBlockList>
    <HolidayBlockList>
      <!--ro, opt, array, holiday arming time, subType:object-->
      <TimeBlock>
        <!--ro, opt, object, arming schedules-->
        <TimeRange>
          <!--ro, req, object, time range-->
          <beginTime>
            <!--ro, req, time, start time-->00:00:00+08:00
          </beginTime>
          <endTime>
            <!--ro, req, time, end time-->00:00:00+08:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </HolidayBlockList>
  </Schedule>
</FaceSnapScheduleList>
```

14.6.1.2 Set the arming schedule of face capture

Request URL

PUT /ISAPI/Event/schedules/faceSnap

Query Parameter

None

Request Message

dzambrano@vinsoft.com.mx

VISION E INGENIO SOFTWARE SA DE CV (VIINSOFT)

<?xml version="1.0" encoding="UTF-8"?>

```
<FaceSnapScheduleList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--wo, req, array, arming schedule of face capture for all channels, subType:object, attr:version{req, string, protocolVersion}-->
  <Schedule>
    <!--opt, object, arming schedule of face capture for a specified channel-->
    <id>
      <!--wo, req, string, channel No.-->test
    </id>
    <eventType>
      <!--wo, req, enum, event type, subType:string, desc:"ADAS", "ADASAlarm", "AID", "ANPR", "AccessControllerEvent", "CDsStatus", "DBD", "GPSUpload",
      "HFP", "IO", "IOTD", "LES", "LFPD", "PALMismatch", "PIR", "PeopleCounting", "PeopleNumChange", "Standup", "TMA", "TMPAM", "VMD", "abnormalAcceleration",
      "abnormalDriving", "advReachHeight", "alarmResult", "attendance", "attendedBaggage", "audioAbnormal", "audioException", "behaviorResult",
      "blindSpotDetection", "cardMatch", "changedStatus", "collision", "containerDetection", "crowdSituationAnalysis", "databaseException", "defocus",
      "diskUnformat", "diskerror", "diskfull", "driverConditionMonitor", "emergencyAlarm", "faceCapture", "faceSnapModeling", "facedetection", "failDown",
      "faultAlarm", "fielddetection", "fireDetection", "fireEscapeDetection", "flowOverrun", "framesPeopleCounting", "getUp", "group", "hdBadBlock", "hdImpact",
      "heatmap", "highHDTemperature", "highTempAlarm", "hotSpare", "illAccess", "ipcTransferAbnorma", "ipconflict", "keyPersonGetUp", "LeavePosition",
      "linedetection", "ListSyncException", "Loitering", "LowHDTemperature", "mixedTargetDetection", "modelError", "nicbroken", "nodeOffline",
      "nonPoliceIntrusion", "overSpeed", "overtimeTarry", "parking", "peopleNumChange", "peopleNumCounting", "personAbnormalAlarm", "personDensityDetection",
      "personQueueCounting", "personQueueDetection", "personQueueRealTime", "personQueueTime", "playCellphone", "pocException", "poe", "policeAbsent",
      "radarAlarm", "radarFieldDetection", "radarLineDetection", "radarPerimeterRule", "radarTargetDetection", "radarVideoDetection", "raidException",
      "rapidMove", "reachHeight", "recordCycleAbnormal", "recordException", "regionEntrance", "regionExiting", "retention", "rollover", "running",
      "safetyHelmetDetection", "scenechangedetection", "sensorAlarm", "severeHDFailure", "shelterAlarm", "shipsDetection", "sitQuietly", "smokeAndFireDetection",
      "smokeDetection", "softIO", "spacingChange", "sysStorFull", "takingElevatorDetection", "targetCapture", "temperature", "thermometry", "thirdPartyException",
      "toiletTarry", "tollCodeInfo", "tossing", "unattendedBaggage", "vehicleMatchResult", "vehicleRcogResult", "versionAbnormal", "videoException", "videoLoss",
      "violationAlarm", "violentMotion", "yardTarry", "faceSnap"-->faceSnap
    </eventType>
    <videoInputChannelID>
      <!--wo, opt, string, video input channel No.-->test
    </videoInputChannelID>
    <TimeBlockList size="8">
      <!--wo, req, array, arming time list, subType:object, attr:size{req, int}-->
      <TimeBlock>
        <!--wo, opt, object, arming slots-->
        <dayOfWeek>
          <!--opt, enum, days of the week, subType:int, desc:days of the week-->1
        </dayOfWeek>
        <TimeRange>
          <!--wo, req, object, time range-->
          <beginTime>
            <!--wo, req, time, start time-->00:00:00+08:00
          </beginTime>
          <endTime>
            <!--wo, req, time, end time-->00:00:00+08:00
          </endTime>
        </TimeRange>
        <ScheduleProperity>
          <!--wo, opt, object, arming advanced configurations-->
          <vehicleDetectSceneID>
            <!--wo, opt, int, vehicle detection scene-->1
          </vehicleDetectSceneID>
          <sceneID>
            <!--wo, opt, int, scene ID-->1
          </sceneID>
          <SceneList>
            <!--wo, opt, array, switching rules of multiple scenes, subType:object, desc:mutually exclusive with "sceneID"-->
            <Scene>
              <!--wo, opt, object, multiple scene List-->
              <sceneID>
                <!--wo, req, string, scene ID-->1
              </sceneID>
              <durationTime>
                <!--wo, req, int, stayed time of a single scene-->1
              </durationTime>
            </Scene>
          </SceneList>
        </ScheduleProperity>
      </TimeBlock>
    </TimeBlockList>
    <HolidayBlockList>
      <!--wo, opt, array, holiday arming time list, subType:object-->
      <TimeBlock>
        <!--wo, opt, object, arming time-->
        <TimeRange>
          <!--wo, req, object, time range-->
          <beginTime>
            <!--wo, req, time, start time-->00:00:00+08:00
          </beginTime>
          <endTime>
            <!--wo, req, time, end time-->00:00:00+08:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </HolidayBlockList>
  </Schedule>
</FaceSnapScheduleList>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.6.1.3 Get the arming schedule of face capture for a specified channel

Request URL

GET /ISAPI/Event/schedules/faceSnap/faceSnap-<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Device channel No.

Request Message

None

Response Message

<?xml version="1.0" encoding="UTF-8"?>

<Schedule xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">

<!--ro, opt, object, arming schedule of face capture for a specified channel, attr:version{req, string, protocolVersion}-->

<id>

<!--ro, req, string, channel No.-->test

</id>

<eventType>

<!--ro, req, enum, event type, subType:string, desc:"ADAS", "ADASAlarm", "AID", "ANPR", "AccessControllerEvent", "CDsStatus", "DBD", "GPSUpload", "HFP", "IO", "IOTD", "LES", "LFPD", "PALMismatch", "PIR", "PeopleCounting", "PeopleNumChange", "Standup", "TMA", "TMPAM", "VMD", "abnormalAcceleration", "abnormalDriving", "advReachHeight", "alarmResult", "attendance", "attendedBaggage", "audioAbnormal", "audioException", "behaviorResult", "blindSpotDetection", "cardMatch", "changedStatus", "collision", "containerDetection", "crowdSituationAnalysis", "databaseException", "defocus", "diskUnformat", "diskerror", "diskfull", "driverConditionMonitor", "emergencyAlarm", "faceCapture", "faceSnapModeling", "facedetection", "failDown", "faultAlarm", "fieldddetection", "fireDetection", "fireEscapeDetection", "flowOverrun", "framesPeopleCounting", "getUp", "group", "hdBadBlock", "hdImpact", "heatmap", "highHDTemperature", "highTempAlarm", "hotSpare", "ilLaccess", "ipcTransferAbnormal", "ipconflict", "keyPersonGetUp", "LeavePosition", "linedetection", "listSyncException", "loitering", "lowHDTemperature", "mixedTargetDetection", "modelError", "nicbroken", "nodeOffline", "nonPoliceIntrusion", "overSpeed", "overtimeTarry", "parking", "peopleNumChange", "peopleNumCounting", "personAbnormalAlarm", "personDensityDetection", "personQueueCounting", "personQueueDetection", "personQueueRealTime", "personQueueTime", "playCellphone", "pocException", "poe", "policeAbsent", "radarAlarm", "radarFieldDetection", "radarLineDetection", "radarPerimeterRule", "radarTargetDetection", "radarVideoDetection", "raidException", "rapidMove", "reachHeight", "recordCycleAbnormal", "recordException", "regionEntrance", "regionExiting", "retention", "rollover", "running", "safetyHelmetDetection", "scenechangedetection", "sensorAlarm", "severeHDFailure", "shelterAlarm", "shipsDetection", "sitQuietly", "smokeAndFireDetection", "smokeDetection", "softIO", "spacingChange", "sysStorFull", "takingElevatorDetection", "targetCapture", "temperature", "thermometry", "thirdPartyException", "toiletTarry", "tollCodeInfo", "tossing", "unattendedBaggage", "vehicleMatchResult", "vehicleRecogResult", "versionAbnormal", "videoException", "videoLoss", "violationAlarm", "violentMotion", "yardTarry", "faceSnap"-->faceSnap

</eventType>

<videoInputChannelID>

<!--ro, opt, string, video input channel No.-->test

</videoInputChannelID>

<TimeBlockList size="8">

<!--ro, req, array, subType:object, attr:size{req, int}-->

<TimeBlock>

<!--ro, opt, object-->

<dayOfWeek>

<!--ro, opt, enum, subType:int-->1

</dayOfWeek>

<TimeRange>

<!--ro, req, object-->

<beginTime>

<!--ro, req, time-->00:00:00+08:00

</beginTime>

<endTime>

<!--ro, req, time-->00:00:00+08:00

</endTime>

<TimeRange>

<ScheduleProperty>

<!--ro, opt, object-->

<vehicleDetectSceneID>

<!--ro, opt, int-->1

</vehicleDetectSceneID>

<sceneID>

<!--ro, opt, int-->1

</sceneID>

<SceneList>

<!--ro, opt, array, subType:object-->

<Scene>

<!--ro, opt, object-->

<sceneID>

<!--ro, req, string-->1

</sceneID>

<durationTime>

<!--ro, req, int-->1

</durationTime>

</Scene>

</SceneList>

</ScheduleProperty>

</TimeBlock>

</TimeBlockList>

<HolidayBlockList>

<!--ro, opt, array, subType:object-->

<TimeBlock>

<!--ro, opt, object-->

<TimeRange>

<!--ro, req, object-->

<beginTime>

<!--ro, req, time-->00:00:00+08:00

</beginTime>

<endTime>

<!--ro, req, time-->00:00:00+08:00

</endTime>

</TimeRange>

</TimeBlock>

</HolidayBlockList>

<backToSceneTime>

<!--ro, opt, int, range:[5,100], step:1, unit:s-->15

</backToSceneTime>

</Schedule>

14.6.1.4 Set the arming schedule of face capture for a specified channel

Request URL

PUT /ISAPI/Event/schedules/faceSnap/faceSnap-<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

VISION E INGENIO SOFTWARE SA DE CV (VIINSOFT)
dzambrano@viinsoft.com.mx

```

<?xml version="1.0" encoding="UTF-8"?>

<Schedule xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--wo, opt, object, arming schedule of face capture for a specified channel, attr:version{req, string, protocolVersion}-->
  <id>
    <!--wo, req, string, channel No.-->test
  </id>
  <eventType>
    <!--wo, req, enum, event type, subType:string, desc:"ADAS", "ADASAlarm", AID, ANPR, AccessControllerEvent, CdsStatus, DBD, GPSUpload, HFP, IO, IOTD,
    LES, LFPD, PALMismatch, PIR, PeopleCounting, PeopleNumChange, Standup, TMA, TMPAM, VMD, abnormalAcceleration, abnormalDriving, advReachHeight, alarmResult,
    attendance, attendedBaggage, audioAbnormal, audioexception, behaviorResult, blindSpotDetection, cardMatch, changedStatus, collision, containerDetection,
    crowdSituationAnalysis, databaseException, defocus, diskUnformat, diskerror, diskfull, driverConditionMonitor, emergencyAlarm, faceCapture,
    faceSnapModeling, facedetection, failDown, faultAlarm, fielddetection, fireDetection, fireEscapeDetection, flowOverrun, framesPeopleCounting, getUp, group,
    hdBadBlock, hdImpact, heatmap, highHDTemperature, highTempAlarm, hotSpare, illAccess, ipcTransferAbnormal, ipconflict, keyPersonGetUp, leavePosition,
    linedetection, ListSyncException, Loitering, LowHDTemperature, mixedTargetDetection, modelError, nicbroken, nodeOffline, nonPoliceIntrusion, overSpeed,
    overtimeTarry, parking, peopleNumChange, peopleNumCounting, personAbnormalAlarm:, personDensityDetection, personQueueCounting, personQueueDetection,
    personQueueRealTime, personQueueTime, playCellphone, pocException, poe, policeAbsent, radarAlarm, radarFieldDetection, radarLineDetection,
    radarPerimeterRule, radarTargetDetection, radarVideoDetection, raidException, rapidMove, reachHeight, recordCycleAbnormal, recordException, regionEntrance,
    regionExiting, retention, rollover, running, safetyHelmetDetection, scenechangedetection, sensorAlarm, severeHDFailure, shelterAlarm, shipsDetection,
    sitQuietly, smokeAndFireDetection, smokeDetection, softIO, spacingChange, sysStarFull, takingElevatorDetection, targetCapture, temperature, thermometry,
    thirdPartyException, toiletTarry, tollCodeInfo, tossing, unattendedBaggage, vehicleMatchResult, vehicleRcogResult, versionAbnormal, videoException,
    videoloss, violationAlarm, violentMotion, yardTarry, faceSnap-->faceSnap
  </eventType>
  <videoInputChannelID>
    <!--wo, opt, string, video input channel No.-->test
  </videoInputChannelID>
  <TimeBlockList size="8">
    <!--wo, req, array, arming time List, subType:object, attr:size{req, int}-->
    <TimeBlock>
      <!--wo, opt, object, arming time-->
      <dayOfWeek>
        <!--wo, opt, enum, days of the week, subType:int, desc:1 (Monday), 2 (Tuesday), 3 (Wednesday), 4 (Thursday), 5 (Friday), 6 (Saturday), 7 (Sunday)-->
        </dayOfWeek>
      <TimeRange>
        <!--wo, req, object, time range-->
        <beginTime>
          <!--wo, req, time, start time-->00:00:00+08:00
        </beginTime>
        <endTime>
          <!--wo, req, time, end time-->00:00:00+08:00
        </endTime>
      </TimeRange>
      <ScheduleProperty>
        <!--wo, opt, object, arming advanced configurations-->
        <vehicleDetectSceneID>
          <!--wo, opt, int, vehicle detection scene-->1
        </vehicleDetectSceneID>
        <sceneID>
          <!--wo, opt, int, scene ID-->1
        </sceneID>
        <SceneList>
          <!--wo, opt, array, switching rules of multiple scenes, subType:object, desc:mutually exclusive with "sceneID"-->
          <Scene>
            <!--wo, opt, object, multiple scene list-->
            <sceneID>
              <!--wo, req, string, scene ID-->1
            </sceneID>
            <durationTime>
              <!--req, int, stayed time of a single scene-->1
            </durationTime>
          </Scene>
        </SceneList>
      </ScheduleProperty>
    </TimeBlock>
  </TimeBlockList>
  <HolidayBlockList>
    <!--opt, array, holiday arming time List, subType:object-->
    <TimeBlock>
      <!--opt, object, arming time-->
      <TimeRange>
        <!--req, object, time range-->
        <beginTime>
          <!--req, time, start time-->00:00:00+08:00
        </beginTime>
        <endTime>
          <!--req, time, end time-->00:00:00+08:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </HolidayBlockList>
</Schedule>

```

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6
    (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format",
    "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>

```

14.6.1.5 Set the arming schedule of face modeling for all channels

Request URL

PUT /ISAPI/Event/schedules/faceSnapModeling

Query Parameter

None

Request Message

dzambrano@vinsoft.com.mx (VINISOFT)

VISION E INGENIO SOFTWARE SA DE CV

```

<?xml version="1.0" encoding="UTF-8"?>

<FaceSnapModelingScheduleList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, array, subType:object, attr:version{req, string, protocolVersion}-->
  <Schedule>
    <!--req, object-->
    <id>
      <!--req, string-->faceSnapModeling-1
    </id>
    <eventType>
      <!--opt, enum, subType:string-->faceSnapModeling
    </eventType>
    <inputIOPortID>
      <!--opt, string-->test
    </inputIOPortID>
    <outputIOPortID>
      <!--opt, string-->test
    </outputIOPortID>
    <videoInputChannelID>
      <!--opt, string-->1
    </videoInputChannelID>
    <TimeBlockList size="8">
      <!--req, array, subType:object, attr:size{opt, int}-->
      <TimeBlock>
        <!--opt, object-->
        <dayOfWeek>
          <!--opt, enum, subType:int-->1
        </dayOfWeek>
        <TimeRange>
          <!--req, object-->
          <beginTime>
            <!--req, time-->10:00:00
          </beginTime>
          <endTime>
            <!--req, time-->10:00:00
          </endTime>
        </TimeRange>
        <ScheduleProperty>
          <!--opt, object-->
          <vehicleDetectSceneID>
            <!--opt, int-->0
          </vehicleDetectSceneID>
          <sceneID>
            <!--opt, int-->0
          </sceneID>
        </ScheduleProperty>
      </TimeBlock>
    </TimeBlockList>
    <HolidayBlockList>
      <!--opt, array, subType:object-->
      <TimeBlock>
        <!--opt, object-->
        <TimeRange>
          <!--req, object-->
          <beginTime>
            <!--req, time-->10:00:00
          </beginTime>
          <endTime>
            <!--req, time-->10:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </HolidayBlockList>
  </Schedule>
</FaceSnapModelingScheduleList>

```

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>

```

14.6.1.6 Get the arming schedule of face modeling for all channels

Request URL

GET /ISAPI/Event/schedules/faceSnapModeling

Query Parameter

None

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<FaceSnapModelingScheduleList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, array, subType:object, attr:version{req, string, protocolVersion}-->
  <Schedule>
    <!--ro, req, object-->
    <id>
      <!--ro, req, string-->faceSnapModeling-1
    </id>
    <eventType>
      <!--ro, opt, enum, subType:string-->faceSnapModeling
    </eventType>
    <inputIOPortID>
      <!--ro, opt, string-->test
    </inputIOPortID>
    <outputIOPortID>
      <!--ro, opt, string-->test
    </outputIOPortID>
    <videoInputChannelID>
      <!--ro, opt, string-->1
    </videoInputChannelID>
    <TimeBlockList size="8">
      <!--ro, req, array, subType:object, attr:size{opt, int}-->
      <TimeBlock>
        <!--ro, opt, object-->
        <dayOfWeek>
          <!--ro, opt, enum, subType:int-->1
        </dayOfWeek>
        <TimeRange>
          <!--ro, req, object-->
          <beginTime>
            <!--ro, req, time-->10:00:00
          </beginTime>
          <endTime>
            <!--ro, req, time-->10:00:00
          </endTime>
        </TimeRange>
        <ScheduleProperty>
          <!--ro, opt, object-->
          <vehicleDetectSceneID>
            <!--ro, opt, int-->0
          </vehicleDetectSceneID>
          <sceneID>
            <!--ro, opt, int-->0
          </sceneID>
        </ScheduleProperty>
      </TimeBlock>
    </TimeBlockList>
    <HolidayBlockList>
      <!--ro, opt, array, subType:object-->
      <TimeBlock>
        <!--ro, opt, object-->
        <TimeRange>
          <!--ro, req, object-->
          <beginTime>
            <!--ro, req, time-->10:00:00
          </beginTime>
          <endTime>
            <!--ro, req, time-->10:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </HolidayBlockList>
  </Schedule>
</FaceSnapModelingScheduleList>
```

14.6.1.7 Set the arming schedule of face modeling for a specified channel

Request URL

PUT /ISAPI/Event/schedules/faceSnapModeling/faceSnapModeling-<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<Schedule xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string-->faceSnapModeling-1
  </id>
  <eventType>
    <!--opt, enum, subType:string-->faceSnapModeling
  </eventType>
  <inputIOPortID>
    <!--ro, opt, string-->test
  </inputIOPortID>
  <outputIOPortID>
    <!--ro, opt, string-->test
  </outputIOPortID>
  <videoInputChannelID>
    <!--opt, string-->1
  </videoInputChannelID>
  <TimeBlockList size="8">
    <!--req, array, subType:object, attr:size{opt, int}-->
    <TimeBlock>
      <!--opt, object-->
      <dayOfWeek>
        <!--opt, enum, subType:int-->1
      </dayOfWeek>
      <TimeRange>
        <!--req, object-->
        <beginTime>
          <!--req, time-->10:00:00
        </beginTime>
        <endTime>
          <!--req, time-->10:00:00
        </endTime>
      </TimeRange>
      <ScheduleProperty>
        <!--opt, object-->
        <vehicleDetectSceneID>
          <!--opt, int-->0
        </vehicleDetectSceneID>
        <sceneID>
          <!--opt, int-->0
        </sceneID>
      </ScheduleProperty>
    </TimeBlock>
  </TimeBlockList>
  <HolidayBlockList>
    <!--opt, array, subType:object-->
    <TimeBlock>
      <!--opt, object-->
      <TimeRange>
        <!--req, object-->
        <beginTime>
          <!--req, time-->10:00:00
        </beginTime>
        <endTime>
          <!--req, time-->10:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </HolidayBlockList>
</Schedule>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.6.1.8 Get the arming schedule of face modeling for a specified channel

Request URL

GET /ISAPI/Event/schedules/faceSnapModeling/faceSnapModeling-<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message


```
<?xml version="1.0" encoding="UTF-8"?>

<Schedule xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string-->faceSnapModeling-1
  </id>
  <eventType>
    <!--ro, opt, enum, subType:string-->faceSnapModeling
  </eventType>
  <inputIOPortID>
    <!--ro, opt, string-->test
  </inputIOPortID>
  <outputIOPortID>
    <!--ro, opt, string-->test
  </outputIOPortID>
  <videoInputChannelID>
    <!--ro, opt, string-->1
  </videoInputChannelID>
  <TimeBlockList size="8">
    <!--ro, req, array, subType:object, attr:size{opt, int}-->
    <TimeBlock>
      <!--ro, opt, object-->
      <dayOfWeek>
        <!--ro, opt, enum, subType:int-->1
      </dayOfWeek>
      <TimeRange>
        <!--ro, req, object-->
        <beginTime>
          <!--ro, req, time-->10:00:00
        </beginTime>
        <endTime>
          <!--ro, req, time-->10:00:00
        </endTime>
      </TimeRange>
      <ScheduleProperty>
        <!--ro, opt, object-->
        <vehicleDetectSceneID>
          <!--ro, opt, int-->0
        </vehicleDetectSceneID>
        <sceneID>
          <!--ro, opt, int-->0
        </sceneID>
      </ScheduleProperty>
    </TimeBlock>
  </TimeBlockList>
  <HolidayBlockList>
    <!--ro, opt, array, subType:object-->
    <TimeBlock>
      <!--ro, opt, object-->
      <TimeRange>
        <!--ro, req, object-->
        <beginTime>
          <!--ro, req, time-->10:00:00
        </beginTime>
        <endTime>
          <!--ro, req, time-->10:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </HolidayBlockList>
</Schedule>
```

14.6.1.9 Delete the linkage of face capture

Request URL

DELETE /ISAPI/Event/triggers/faceSnap-<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Device channel No.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, opt, string, request URL, range:[0,1024]-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
  <description>
    <!--ro, opt, string, range:[0,1024]-->badXmlFormat
  </description>
  <MErrCode>
    <!--ro, opt, string-->0x00000000
  </MErrCode>
  <MErrDevSelfEx>
    <!--ro, opt, string-->0x00000000
  </MErrDevSelfEx>
  <MErrDevSelfEx>
    <!--ro, opt, string-->0x00000000
  </MErrDevSelfEx>
</ResponseStatus>
```

14.6.1.10 Set the linkage parameters of face capture

Request URL

PUT /ISAPI/Event/triggers/faceSnap-<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<EventTrigger xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--wo, req, object, Configure Linkage actions:, attr:version{req, string, protocolVersion}-->
  <id>
    <!--wo, req, string, channel No.-->test
  </id>
  <eventType>
    <!--wo, req, enum, event type, subType:string, desc:"ADAS", "ADASAlarm", "AID", "ANPR", "AccessControllerEvent", "CDsStatus", "DBD", "GPSUpload", "HFP", "IO", "IOTD", "LES", "LFPD", "PALMismatch", "PIR", "PeopleCounting", "PeopleNumChange", "Standup", "TMA", "TMPAM", "VMD", "abnormalAcceleration", "abnormalDriving", "advReachHeight", "AlarmResult", "attendance", "attendedBaggage", "audioAbnormal", "audioException", "behaviorResult", "blindSpotDetection", "cardMatch", "changedStatus", "collision", "containerDetection", "crowdSituationAnalysis", "databaseException", "defocus", "diskUnformat", "diskError", "diskFull", "driverConditionMonitor", "emergencyAlarm", "faceCapture", "faceSnapModeling", "facedetection", "failDown", "faultAlarm", "fieldDetection", "fireDetection", "fireEscapeDetection", "flowOverrun", "framesPeopleCounting", "getUp", "group", "hdBadBlock", "hdImpact", "heatmap", "highHDTemperature", "highTempAlarm", "hotSpare", "ilLaccess", "ipcTransferAbnormal", "ipConflict", "keyPersonGetUp", "LeavePosition", "linedetection", "listSyncException", "Loitering", "LowHDTemperature", "mixedTargetDetection", "modelError", "nicbroken", "nodeOffline", "nonPoliceIntrusion", "overSpeed", "overtimeTarry", "parking", "peopleNumChange", "peopleNumCounting", "personAbnormalAlarm", "personDensityDetection", "personQueueCounting", "personQueueDetection", "personQueueRealTime", "personQueueTime", "pLayCellphone", "pocException", "poe", "policeAbsent", "radarAlarm", "radarFieldDetection", "radarLineDetection", "radarPerimeterRule", "radarTargetDetection", "radarVideoDetection", "raidException", "rapidMove", "reachHeight", "recordCycleAbnormal", "recordException", "regionEntrance", "regionExiting", "retention", "rollover", "running", "safetyHelmetDetection", "scenechangedetection", "sensorAlarm", "severeHDFailure", "shelterAlarm", "shipsDetection", "sitQuietly", "smokeAndFireDetection", "smokeDetection", "softIO", "spacingChange", "sysStorFull", "takingElevatorDetection", "targetCapture", "temperature", "thermometry", "thirdPartyException", "toiletTarry", "tollCodeInfo", "tossing", "unattendedBaggage", "vehicleMatchResult", "vehicleRcogResult", "versionAbnormal", "videoException", "videoLoss", "violationAlarm", "violentMotion", "yardTarry", "faceSnap"-->faceSnap
  </eventType>
  <eventDescription>
    <!--wo, opt, string, event description-->test
  </eventDescription>
  <inputIOPortID>
    <!--wo, opt, string, I/O input port ID-->1
  </inputIOPortID>
  <dynInputIOPortID>
    <!--wo, opt, string, dynamic I/O input port ID-->1
  </dynInputIOPortID>
  <videoInputChannelID>
    <!--wo, opt, string, video input channel ID, desc:only valid when event types are VMD, videoLoss, shelterAlarm, regionEntrance, regionExiting, Loitering, group, rapidMove, parking, unattendedBaggage, attendedBaggage, thermal, zoneTriggeredAlarm, criticalALerts, businessCounselingLinkage-->test
  </videoInputChannelID>
  <dynVideoInputChannelID>
    <!--wo, opt, string, dynamic video input channel ID-->1
  </dynVideoInputChannelID>
  <intervalBetweenEvents>
    <!--wo, opt, int, event capture interval, step:1, unit:s-->1
  </intervalBetweenEvents>
```

```

</intervalBetweenEvents>
<WLSensorID>
  <!--wo, opt, string, wireless ID-->test
</WLSensorID>
<EventTriggerNotificationList>
  <!--wo, opt, array, configuration List of event Linkage, subType:object-->
  <EventTriggerNotification>
    <!--wo, opt, object, List-->
    <id>
      <!--wo, req, string, Linkage configuration ID-->test
    </id>
    <notificationMethod>
      <!--wo, req, enum, Linkage action, subType:string, desc:"FTP" (uploading via FTP), "HTTP" (uploading via HTTP), "IM" (instant messaging), "IO" (I/O
output), "LightAudioAlarm" (light and audio alarm), "audio" (audio), "beep" (buzzer), "center" (uploading to the center), "cloud" (cloud storage), "email",
"focus" (focus), "monitorAlarm" (alarm on monitor), "ptz" (PTZ), "record" (recording), "sysLog" (system Log), "trace" (tracking), "whiteLight" (white
Light)-->FTP
    </notificationMethod>
    <notificationRecurrence>
      <!--wo, opt, enum, Linkage cycle, subType:string, desc:"beginning", "beginningandend", "recurring"-->beginning
    </notificationRecurrence>
    <notificationInterval>
      <!--wo, opt, int, Linkage time interval, step:1, unit:ms-->1
    </notificationInterval>
    <videoInputID>
      <!--wo, opt, string, video input ID-->test
    </videoInputID>
    <dynVideoInputID>
      <!--wo, opt, string, dynamic video input ID-->test
    </dynVideoInputID>
    <ptzAction>
      <!--wo, opt, object, PTZ Linkage action-->
      <ptzChannelID>
        <!--wo, req, string, PTZ Linked channel No.-->test
      </ptzChannelID>
      <actionName>
        <!--wo, req, enum, PTZ Linkage action, subType:string, desc:"preset", "pattern", "patrol"-->preset
      </actionName>
      <actionNum>
        <!--wo, opt, int, Linkage value-->1
      </actionNum>
    </ptzAction>
    <whiteLightAction>
      <!--wo, opt, object, white Light Linkage-->
      <whiteLightDurationTime>
        <!--wo, req, int, Light flashing duration, range:[1,60], step:1, unit:s-->1
      </whiteLightDurationTime>
    </whiteLightAction>
  </EventTriggerNotification>
</EventTriggerNotificationList>
</EventTrigger>

```

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6
(Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format",
"Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>

```

14.6.1.11 Get the linkage parameters of face capture

Request URL

GET /ISAPI/Event/triggers/faceSnap-<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Device channel No.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<EventTrigger xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, Linkage configuration, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string, channel No.-->test
  </id>
  <eventType>
    <!--ro, req, enum, event type, subType:string, desc:"ADAS", "ADASAlarm", "AID", "ANPR", "AccessControllerEvent", "CDsStatus", "DBD", "GPSUpload", "HFP",
    "IO", "IOTD", "LES", "LFPD", "PALMismatch", "PIR", "PeopleCounting", "PeopleNumChange", "Standup", "TMA", "TMPAM", "VMD", "abnormalAcceleration",
    "abnormalDriving", "advReachHeight", "alarmResult", "attendance", "attendedBaggage", "audioAbnormal", "audioException", "behaviorResult",
    "blindSpotDetection", "cardMatch", "changedStatus", "collision", "containerDetection", "crowdSituationAnalysis", "databaseException", "defocus",
    "diskUnformat", "diskerror", "diskfull", "driverConditionMonitor", "emergencyAlarm", "faceCapture", "faceSnapModeling", "facedetection", "failDown",
    "faultAlarm", "fieldDetection", "fireDetection", "fireEscapeDetection", "flowOverrun", "framesPeopleCounting", "getUp", "group", "hdBadBlock", "hdImpact",
    "heatmap", "highHDTemperature", "highTempAlarm", "hotSpare", "ilLaccess", "ipcTransferAbnormal", "ipconflict", "keyPersonGetUp", "LeavePosition",
    "linedetection", "listSyncException", "Loitering", "LowHDTemperature", "mixedTargetDetection", "modelError", "nicbroken", "nodeOffline",
    "nonPoliceIntrusion", "overSpeed", "overtimeTarry", "parking", "peopleNumChange", "peopleNumCounting", "personAbnormalAlarm", "personDensityDetection",
    "personQueueCounting", "personQueueDetection", "personQueueRealTime", "personQueueTime", "pLayCellphone", "pocException", "poe", "policeAbsent",
    "radarAlarm", "radarFieldDetection", "radarLineDetection", "radarPerimeterRule", "radarTargetDetection", "radarVideoDetection", "raidException",
    "rapidMove", "reachHeight", "recordCycleAbnormal", "recordException", "regionEntrance", "regionExiting", "retention", "rollover", "running",
    "safetyHelmetDetection", "scenechangedetection", "sensorAlarm", "severeHDFailure", "shelteralarm", "shipsDetection", "sitQuietly", "smokeAndFireDetection",
    "smokeDetection", "softIO", "spacingChange", "sysStorFull", "takingElevatorDetection", "targetCapture", "temperature", "thermometry", "thirdPartyException",
    "toiletTarry", "tollCodeInfo", "tossing", "unattendedBaggage", "vehicleMatchResult", "vehicleRcogResult", "versionAbnormal", "videoException", "videoLoss",
    "violationAlarm", "violentMotion", "yardTarry", "faceSnap"-->faceSnap
  </eventType>
  <eventDescription>
    <!--ro, opt, string, event description-->test
  </eventDescription>
  <inputIOPortID>
    <!--ro, opt, string, I/O input port ID-->1
  </inputIOPortID>
  <dynInputIOPortID>
    <!--ro, opt, string, dynamic I/O input port ID-->1
  </dynInputIOPortID>
  <videoInputChannelID>
    <!--ro, opt, string, video input channel ID, desc:only valid when event types are VMD, videoLoss, shelteralarm, regionEntrance, regionExiting,
    Loitering, group, rapidMove, parking, unattendedBaggage, attendedBaggage, thermal, zoneTriggeredAlarm, criticalAlerts, businessCounselingLinkage-->test
  </videoInputChannelID>
  <dynVideoInputChannelID>
    <!--ro, opt, string, dynamic video input channel ID-->1
  </dynVideoInputChannelID>
  <intervalBetweenEvents>
    <!--ro, opt, int, event capture interval, step:1, unit:s-->1
  </intervalBetweenEvents>
  <wLSensorID>
    <!--ro, opt, string, wireless ID-->test
  </wLSensorID>
  <EventTriggerNotificationList>
    <!--ro, opt, array, subType:object-->
    <EventTriggerNotification>
      <!--ro, opt, object-->
      <id>
        <!--ro, req, string-->test
      </id>
      <notificationMethod>
        <!--ro, req, enum, subType:string-->FTP
      </notificationMethod>
      <notificationRecurrence>
        <!--ro, opt, enum, subType:string-->beginning
      </notificationRecurrence>
      <notificationInterval>
        <!--ro, opt, int, step:1, unit:ms-->1
      </notificationInterval>
      <videoInputID>
        <!--ro, opt, string-->test
      </videoInputID>
      <dynVideoInputID>
        <!--ro, opt, string-->test
      </dynVideoInputID>
      <ptzAction>
        <!--ro, opt, object-->
        <ptzChannelID>
          <!--ro, req, string-->test
        </ptzChannelID>
        <actionName>
          <!--ro, req, enum, subType:string-->preset
        </actionName>
        <actionNum>
          <!--ro, opt, int-->1
        </actionNum>
      </ptzAction>
      <whiteLightAction>
        <!--ro, opt, object-->
        <whiteLightDurationTime>
          <!--ro, req, int, range:[1,60], step:1, unit:s-->1
        </whiteLightDurationTime>
      </whiteLightAction>
    </EventTriggerNotification>
  </EventTriggerNotificationList>
</EventTrigger>
```

```

</WhiteLightAction>
<childDevID>
  <!--ro, opt, string-->1
</childDevID>
</EventTriggerNotification>
</EventTriggerNotificationList>
</EventTrigger>

```

14.6.1.12 Set the face capture rule parameters of a device

Request URL

PUT /ISAPI/Intelligent/channels/<channelID>/faceRule

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```

<?xml version="1.0" encoding="UTF-8"?>
<FaceRule xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, face capture rule capability, attr:version{opt, string, protocolVersion}-->
  <enabled>
    <!--req, enum, whether to enable the function, subType:string, desc:"true", "false"-->true
  </enabled>
  <FaceDetectionRegion>
    <!--opt, object, detection area-->
    <RegionCoordinatesList>
      <!--opt, array, list of region coordinates, subType:object, range:[3,10]-->
      <RegionCoordinates>
        <!--req, object, area point coordinates, desc:the origin is the lower-left corner of the screen-->
        <positionX>
          <!--req, int, X-coordinate, range:[0,1000]-->50
        </positionX>
        <positionY>
          <!--req, int, Y-coordinate, range:[0,1000]-->50
        </positionY>
      </RegionCoordinates>
    </RegionCoordinatesList>
  </FaceDetectionRegion>
  <InterPupileRegion>
    <!--opt, object, rectangle frame of minimum pupil distance, desc:the origin is the lower-left corner of the screen-->
    <positionX>
      <!--req, int, X-coordinate, range:[0,1000]-->50
    </positionX>
    <positionY>
      <!--req, int, Y-coordinate, range:[0,1000]-->50
    </positionY>
    <width>
      <!--req, int, pupil distance, range:[0,1000]-->50
    </width>
    <height>
      <!--req, int, height, range:[0,1000]-->50
    </height>
  </InterPupileRegion>
  <MaxInterPupilRegion>
    <!--opt, object, the maximum pupil distance, desc:the origin is the lower-left corner of the screen-->
    <positionX>
      <!--req, int, X-coordinate, range:[0,1000]-->50
    </positionX>
    <positionY>
      <!--req, int, Y-coordinate, range:[0,1000]-->50
    </positionY>
    <width>
      <!--req, int, pupil distance, range:[0,1000]-->50
    </width>
    <height>
      <!--req, int, height, range:[0,1000]-->50
    </height>
  </MaxInterPupilRegion>
  <SizeFilter>
    <!--opt, object, size filter-->
    <enabled>
      <!--req, bool, whether to enable size filter-->true
    </enabled>
    <ratio>
      <!--opt, float, ratio of head-shoulder size filter to minimum pupil distance, range:[4.0,6.0]-->5.0
    </ratio>
  </SizeFilter>
  <MaxTargetSize>
    <!--opt, object, the origin is the lower-left corner of the screen, desc:the origin is the lower-left corner of the screen-->
    <positionX>
      <!--req, int, X-coordinate, range:[0,1000], desc:X-coordinate-->0
    </positionX>

```

```

</positionY>
<!--req, int, Y-coordinate, range:[0,1000]-->0
</positionY>
<width>
<!--req, int, width, range:[0,1000]-->0
</width>
<height>
<!--req, int, height, range:[0,1000]-->0
</height>
</MaxTargetSize>
<MinTargetSize>
<!--opt, object, the origin is the Lower-Left corner of the screen, desc:the origin is the Lower-Left corner of the screen-->
<positionX>
<!--req, int, X-coordinate, range:[0,1000]-->0
</positionX>
<positionY>
<!--req, int, Y-coordinate, range:[0,1000]-->0
</positionY>
<width>
<!--req, int, width, range:[0,1000]-->0
</width>
<height>
<!--req, int, height, range:[0,1000]-->0
</height>
</MinTargetSize>
</SizeFilter>
<detectonType>
<!--opt, string, face type for detection, desc:"abnormalFace" (abnormal face),"normalFace" (normal face),"multiFace" (multiple faces),"sunglassesFace"
(face, on which wearing sunglasses), "callFace" (face of a person who is making a phone call). Multiple values are separated by commas--
>abnormalFace,normalFace
</detectonType>
<autoROIEnable>
<!--opt, bool, whether to enable face automatic ROI, desc:the value of this node is false by default-->>false
</autoROIEnable>
</FaceRule>

```

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6
    (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format",
    "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>

```

14.6.1.13 Get the capability of configuring parameters of face capture rules.

Request URL

GET /ISAPI/Intelligent/channels/<channelID>/faceRule/capabilities

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<FaceRule xmlns="http://www.isapi.org/ver20/XMLSchema" version="1.0">
  <!--ro, req, object, capability of configuring parameters of face capture rules, attr:version{opt, string, protocolVersion}-->
  <enabled opt="true,false">
    <!--ro, req, enum, whether to enable, subType:string, attr:opt{opt, string}, desc:whether to enable-->>true
  </enabled>
  <FaceDetectionRegion>

```

```

<!--ro, opt, object, detection area-->
<RegionCoordinatesList>
  <!--ro, opt, array, coordinate List of the area, subType:object, range:[3,10]-->
  <RegionCoordinates>
    <!--ro, req, object, coordinates of the area, desc:The origin is the Lower-Left corner of the screen.-->
    <positionX>
      <!--ro, req, int, X-coordinate, range:[0,1000]-->50
    </positionX>
    <positionY>
      <!--ro, req, int, Y-coordinate, range:[0,1000]-->50
    </positionY>
  </RegionCoordinates>
</RegionCoordinatesList>
</FaceDetectionRegion>
<InterPupileRegion>
  <!--ro, opt, object, the rectangle frame on the minimum pupillary distance, desc:The origin is the Lower-Left corner of the screen.-->
  <positionX>
    <!--ro, req, int, X-coordinate, range:[0,1000]-->50
  </positionX>
  <positionY>
    <!--ro, req, int, Y-coordinate, range:[0,1000]-->50
  </positionY>
  <width min="0" max="1000">
    <!--ro, req, int, pupillary distance, range:[0,1000], attr:min{opt, string},max{opt, string}-->50
  </width>
  <height>
    <!--ro, req, int, height, range:[0,1000]-->50
  </height>
</InterPupileRegion>
<MaxInterPupilRegion>
  <!--ro, opt, object, the maximum pupillary distance, desc:The origin is the Lower-Left corner of the screen.-->
  <positionX>
    <!--ro, req, int, X-coordinate, range:[0,1000]-->50
  </positionX>
  <positionY>
    <!--ro, req, int, Y-coordinate, range:[0,1000]-->50
  </positionY>
  <width min="50" max="50">
    <!--ro, req, int, pupillary distance, range:[0,1000], attr:min{opt, string},max{opt, string}-->50
  </width>
  <height>
    <!--ro, req, int, height, range:[0,1000]-->50
  </height>
</MaxInterPupilRegion>
<SizeFilter>
  <!--ro, opt, object, size filter-->
  <enabled opt="true,false" def="false">
    <!--ro, req, bool, whether to enable size filter, attr:opt{opt, string},def{opt, string}-->true
  </enabled>
  <ratio min="4.0" max="6.0" def="5.0">
    <!--ro, opt, float, ratio of the size filter of the head and shoulders to the minimum pupillary distance, range:[4.0,6.0], attr:min{opt, string},max{opt, string},def{opt, string}-->5.0
  </ratio>
  <MaxTargetSize>
    <!--ro, opt, object, target frame on the largest face, desc:The origin is the Lower-Left corner of the screen.-->
    <positionX min="0" max="1000">
      <!--ro, req, int, X-coordinate, attr:min{req, int},max{req, int}-->0
    </positionX>
    <positionY min="0" max="1000">
      <!--ro, req, int, Y-coordinate, attr:min{req, int},max{req, int}-->0
    </positionY>
    <width min="0" max="1000">
      <!--ro, req, int, width, attr:min{req, int},max{req, int}-->0
    </width>
    <height min="0" max="1000">
      <!--ro, req, int, height, attr:min{req, int},max{req, int}-->0
    </height>
  </MaxTargetSize>
  <MinTargetSize>
    <!--ro, opt, object, target frame on the smallest face, desc:The origin is the Lower-Left corner of the screen.-->
    <positionX min="0" max="1000">
      <!--ro, req, int, X-coordinate, attr:min{req, int},max{req, int}-->0
    </positionX>
    <positionY min="0" max="1000">
      <!--ro, req, int, Y-coordinate, attr:min{req, int},max{req, int}-->0
    </positionY>
    <width min="0" max="1000">
      <!--ro, req, int, width, attr:min{req, int},max{req, int}-->0
    </width>
    <height min="0" max="1000">
      <!--ro, req, int, height, attr:min{req, int},max{req, int}-->0
    </height>
  </MinTargetSize>
</SizeFilter>
<isSupportTrigger>
  <!--ro, opt, bool, whether it supports trigger mode, desc:Related URI: /ISAPI/Intelligent/channels/<ID>/faceRule/trigger?format=json-->true
</isSupportTrigger>
<detectioType opt="abnormalFace,normalFace,multiFace,sunglassesFace,callFace" def="normalFace,multiFace,sunglassesFace,callFace">
  <!--ro, opt, string, face type for detection, attr:opt{req, string},def{req, string}, desc:abnormalFace (abnormal face), normalFace (normal face), multiFace (multiple faces), sunglassesFace (face with sunglasses), callFace (face of a person who is making a phone call, which is used to detect faces in ATM mode). Multiple types are separated by commas.-->test
</detectioType>
<default opt="true">

```

```

    <!--ro, opt, bool, whether it supports getting the default parameters, attr:opt{req, string}, desc:If the value of this node is true, it indicates that
    the query parameter default can be added to the URI GET /ISAPI/Intelligent/channels/<ID>/faceRule for getting the default parameters, i.e., GET
    /ISAPI/Intelligent/channels/<ID>/faceRule?default=true.-->true
  </default>
  <autoROIEnable opt="true,false">
    <!--ro, opt, bool, whether to enable automatic face ROI, attr:opt{req, string}, desc:By default it is false.-->>false
  </autoROIEnable>
  <MEF>
    <!--ro, opt, object, mobile electric fence, desc:Related URI: /ISAPI/Intelligent/channels/<ID>/faceRule/MEF?format=json-->
    <enabled opt="true,false">
      <!--ro, req, bool, whether to enable uploading the electric fence data Linked with the event, attr:opt{req, string}-->true
    </enabled>
  </MEF>
  <isSupportFaceSnapPosOverlayParams>
    <!--ro, opt, bool-->true
  </isSupportFaceSnapPosOverlayParams>
  <backToSceneTime min="5" max="100">
    <!--ro, opt, int, range:[5,100], step:1, unit:s, attr:min{req, int},max{req, int}-->15
  </backToSceneTime>
  <minInterPupileDistance min="13" max="666">
    <!--ro, opt, int, range:[13,666], step:1, unit:px, attr:min{req, int},max{req, int}-->13
  </minInterPupileDistance>
  <isSupportSearchFaceSnapAlarm>
    <!--ro, opt, bool-->true
  </isSupportSearchFaceSnapAlarm>
  <isSupportFaceApproachParams>
    <!--ro, opt, bool-->true
  </isSupportFaceApproachParams>
  <isSupportChannelPrivacyMaskList>
    <!--ro, opt, bool-->true
  </isSupportChannelPrivacyMaskList>
</FaceRule>

```

14.6.1.14 Get the trigger mode parameters capability of face capture

Request URL

GET /ISAPI/Intelligent/channels/<channelID>/faceRule/trigger/capabilities?format=json

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```

{
  "TriggerCap": {
    /*ro, req, object*/
    "type": {
      /*ro, opt, object*/
      "@opt": ["IO", "video"]
      /*ro, opt, array, subType:string*/
    },
    "IOSignalType": {
      /*ro, opt, object*/
      "@opt": ["levelSignal", "pulseSignal"]
      /*ro, opt, array, subType:string*/
    },
    "doorStatus": {
      /*ro, opt, object*/
      "@opt": ["open", "close", "N_A"]
      /*ro, opt, array, subType:string*/
    }
  }
}

```

14.6.1.15 Set the trigger mode parameters of face capture

Request URL

PUT /ISAPI/Intelligent/channels/<channelID>/faceRule/trigger?format=json

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
{
  "Trigger": {
    /*req, object*/
    "type": "video",
    /*req, enum, subType:string*/
    "IOSignalType": "levelSignal"
    /*req, enum, subType:string*/
  }
}
```

Response Message

```
{
  "statusCode": 1,
  /*ro, opt, int*/
  "statusString": "ok",
  /*ro, opt, string, range:[1,64]*/
  "subStatusCode": "ok",
  /*ro, opt, string, range:[1,64]*/
  "errorCode": 1,
  /*ro, opt, int*/
  "errorMsg": "ok"
  /*ro, opt, string*/
}
```

14.6.1.16 Get the trigger mode parameters of face capture

Request URL

GET /ISAPI/Intelligent/channels/<channelID>/faceRule/trigger?format=json

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```
{
  "Trigger": {
    /*ro, req, object*/
    "type": "video"
    /*ro, req, enum, subType:string*/
    "IOSignalType": "levelSignal",
    /*ro, req, enum, subType:string*/
    "doorStatus": "open"
    /*ro, req, enum, subType:string*/
  }
}
```

14.6.1.17 Get the face capture rule parameters of a device

Request URL

GET /ISAPI/Intelligent/channels/<channelID>/faceRule?default=<default>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.
default	string	Get default parameters via FaceRule.default in /ISAPI/Intelligent/channels//faceRule/capabilities.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<FaceRule xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, face capture rule capability, attr:version{opt, string, protocolVersion}-->
  <enabled>
    <!--ro, req, enum, whether to enable, subType:string, desc:"true", "false"-->true
  </enabled>
  <FaceDetectionRegion>
    <!--ro, opt, object, detection area-->
    <RegionCoordinatesList>
      <!--ro, opt, array, List of region coordinates, subType:object, range:[3,10]-->
      <RegionCoordinates>
        <!--ro, req, object, area point coordinates, desc:the origin is the Lower-Left corner of the screen-->
        <positionX>
          <!--ro, req, int, X-coordinate, range:[0,1000]-->50
        </positionX>
        <positionY>
          <!--ro, req, int, Y-coordinate, range:[0,1000]-->50
        </positionY>
      </RegionCoordinates>
    </RegionCoordinatesList>
  </FaceDetectionRegion>
  <InterPupileRegion>
    <!--ro, opt, object, rectangle frame of minimum pupil distance, desc:the origin is the Lower-Left corner of the screen-->
    <positionX>
      <!--ro, req, int, X-coordinate, range:[0,1000]-->50
    </positionX>
    <positionY>
      <!--ro, req, int, Y-coordinate, range:[0,1000]-->50
    </positionY>
    <width>
      <!--ro, req, int, pupillary distance, range:[0,1000]-->50
    </width>
    <height>
      <!--ro, req, int, height, range:[0,1000]-->50
    </height>
  </InterPupileRegion>
  <MaxInterPupilRegion>
    <!--ro, opt, object, the maximum pupillary distance, desc:The origin is the Lower-Left corner of the screen.-->
    <positionX>
      <!--ro, req, int, X-coordinate, range:[0,1000]-->50
    </positionX>
    <positionY>
      <!--ro, req, int, Y-coordinate, range:[0,1000]-->50
    </positionY>
    <width>
      <!--ro, req, int, pupillary distance, range:[0,1000]-->50
    </width>
    <height>
      <!--ro, req, int, height, range:[0,1000]-->50
    </height>
  </MaxInterPupilRegion>
  <SizeFilter>
    <!--ro, opt, object, size filter-->
    <enabled>
      <!--ro, req, bool, whether to enable size filter-->true
    </enabled>
    <ratio>
      <!--ro, opt, float, ratio of head-shoulder size filter to minimum pupil distance, range:[4.0,6.0]-->5.0
    </ratio>
  <MaxTargetSize>
    <!--ro, opt, object, target frame on the largest face, desc:The origin is the Lower-Left corner of the screen.-->
    <positionX>
      <!--ro, req, int, X-coordinate, range:[0,1000], desc:Value range: [0,1000]-->0
    </positionX>
    <positionY>
      <!--ro, req, int, Y-coordinate, range:[0,1000]-->0
    </positionY>
    <width>
      <!--ro, req, int, width, range:[0,1000]-->0
    </width>
    <height>
      <!--ro, req, int, height, range:[0,1000]-->0
    </height>
  </MaxTargetSize>

```

```

</neight>
</MaxTargetSize>
<MinTargetSize>
  <!--ro, opt, object, target frame on the smallest face, desc:The origin is the lower-left corner of the screen.-->
  <positionX>
    <!--ro, req, int, X-coordinate, range:[0,1000]-->0
  </positionX>
  <positionY>
    <!--ro, req, int, Y-coordinate, range:[0,1000]-->0
  </positionY>
  <width>
    <!--ro, req, int, width, range:[0,1000]-->0
  </width>
  <height>
    <!--ro, req, int, height, range:[0,1000]-->0
  </height>
</MinTargetSize>
</SizeFilter>
<detecType>
  <!--ro, opt, string, face type for detection, desc:abnormalFace (abnormal face), normalFace (normal face), multiFace (multiple faces), sunglassesFace
(face with sunglasses), callFace (face of a person who is making a phone call, which is used to detect faces in ATM mode). This node supports to be set to
multiple values and they should be separated by commas.-->abnormalFace,normalFace
</detecType>
<autoROIEnable>
  <!--ro, opt, bool, whether to enable automatic face ROI, desc:By default it is false.-->>false
</autoROIEnable>
<minInterPupileDistance>
  <!--ro, opt, int, range:[13,666], step:1, unit:px-->58
</minInterPupileDistance>
</FaceRule>

```

14.6.1.18 Get the capability of configuring advanced parameters of face capture

Request URL

GET /ISAPI/Intelligent/channels/<channelID>/faceSnap/advancedParam/capabilities?format=json

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```

{
  "AdvancedParamCap": {
    /*ro, req, object*/
    "snapMode": {
      /*ro, opt, object*/
      "@opt": ["fast", "best"],
      /*ro, opt, array, subType:string*/
    },
    "quickSnapThreshold": {
      /*ro, opt, object*/
      "@min": 0,
      /*ro, opt, int*/
      "@max": 100,
      /*ro, opt, int*/
      "@def": 70
      /*ro, opt, int*/
    },
    "quickSnapMaxtime": {
      /*ro, opt, object*/
      "@min": 0,
      /*ro, opt, int*/
      "@max": 300,
      /*ro, opt, int*/
      "@def": 5
      /*ro, opt, int*/
    },
    "quickSnapCount": {
      /*ro, opt, object*/
      "@min": 1,
      /*ro, opt, int*/
      "@max": 100,
      /*ro, opt, int*/
      "@def": 1
      /*ro, opt, int*/
    },
    "snapTime": {
      /*ro, opt, object*/
      "@min": 1,

```

```

        /*ro, opt, int*/
        "@max": 3,
        /*ro, opt, int*/
        "@def": 1
        /*ro, opt, int*/
    },
    "snapThreshold": {
        /*ro, opt, object*/
        "@min": 0,
        /*ro, opt, int*/
        "@max": 100,
        /*ro, opt, int*/
        "@def": 20
        /*ro, opt, int*/
    },
    "faceExposurEnable": {
        /*ro, opt, object*/
        "@opt": [true, false],
        /*ro, opt, array, subType:bool*/
        "@def": false
        /*ro, opt, bool*/
    },
    "referenceBright": {
        /*ro, opt, object*/
        "@min": 0,
        /*ro, opt, int*/
        "@max": 100,
        /*ro, opt, int*/
        "@def": 50
        /*ro, opt, int*/
    },
    "minContinueTime": {
        /*ro, opt, object*/
        "@min": 0,
        /*ro, opt, int*/
        "@max": 60,
        /*ro, opt, int*/
        "@def": 5
        /*ro, opt, int*/
    },
    "faceFilterTime": {
        /*ro, opt, object*/
        "@min": 0,
        /*ro, opt, int*/
        "@max": 100000,
        /*ro, opt, int*/
        "@def": 0
        /*ro, opt, int*/
    },
    "faceAttributEnable": {
        /*ro, opt, object*/
        "@opt": [true, false]
        /*ro, opt, array, subType:bool*/
    },
    "facesnapFilterEnable": {
        /*ro, opt, object*/
        "@opt": [true, false],
        /*ro, opt, array, subType:bool*/
        "@def": false
        /*ro, opt, bool*/
    },
    "swingAngleLeft": {
        /*ro, opt, object*/
        "@min": 0,
        /*ro, opt, int*/
        "@max": 70
        /*ro, opt, int*/
    },
    "swingAngleRight": {
        /*ro, opt, object*/
        "@min": 0,
        /*ro, opt, int*/
        "@max": 70
        /*ro, opt, int*/
    },
    "tiltAngleUp": {
        /*ro, opt, object*/
        "@min": 0,
        /*ro, opt, int*/
        "@max": 50
        /*ro, opt, int*/
    },
    "tiltAngleDown": {
        /*ro, opt, object*/
        "@min": 0,
        /*ro, opt, int*/
        "@max": 50
        /*ro, opt, int*/
    },
    "quickContinueSnapEnable": {
        /*ro, opt, object, dep:and,{$.AdvancedParamCap.snapMode,eq,fast}*/
        "@opt": [true, false],
        /*ro, opt, array, subType:bool*/
        "@def": false
    }

```

```

    },
    /*no, opt, bool*/
  },
}

```

14.6.1.19 Set the advanced parameters of face capture

Request URL

PUT /ISAPI/Intelligent/channels/<channelID>/faceSnap/advancedParam?format=json

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```

{
  "AdvancedParam": {
    /*wo, req, object*/
    "tarGenerateRate": 3,
    /*wo, opt, int, range:[1,5]*/
    "sensitivity": 3,
    /*wo, opt, int, range:[1,5]*/
    "snapMode": "fast",
    /*wo, req, enum, subType:string*/
    "quickSnapThreshold": 70,
    /*wo, opt, int, range:[0,100], unit:s*/
    "quickSnapMaxtime": 5,
    /*wo, opt, int, range:[0,300], step:1, unit:s*/
    "quickSnapCount": 1,
    /*wo, opt, int, range:[1,100]*/
    "snapTime": 1,
    /*wo, opt, int, range:[1,3]*/
    "snapThreshold": 20,
    /*wo, opt, int, range:[0,100]*/
    "snapInterval": 1,
    /*wo, opt, int*/
    "faceExposureEnable": true,
    /*wo, opt, bool*/
    "referenceBright": 50,
    /*wo, opt, int, range:[0,100]*/
    "minContinueTime": 5,
    /*wo, opt, int, range:[0,60], step:1, unit:min*/
    "faceFilterTime": 0,
    /*wo, opt, int, range:[0,100000], step:1, unit:ms*/
    "faceAttributeEnable": true,
    /*wo, opt, bool*/
    "faceSnapFilterEnable": false,
    /*wo, opt, bool*/
    "swingAngleLeft": 10,
    /*wo, opt, int, range:[0,70], step:1, unit:°*/
    "swingAngleRight": 1,
    /*wo, opt, int, range:[0,70], step:1, unit:°*/
    "tiltAngleUp": 10,
    /*wo, opt, int, range:[0,50], step:1, unit:°*/
    "tiltAngleDown": 10,
    /*wo, opt, int, range:[0,50], step:1, unit:°*/
    "instantLightMidEnable": true,
    /*wo, opt, bool*/
    "fixedLightMidEnable": true,
    /*wo, opt, bool*/
    "severeEnable": true,
    /*wo, opt, bool*/
    "OSDEnable": true,
    /*wo, opt, bool*/
    "RemoveDuplicate": {
      /*wo, opt, object, dep:and,{$.AdvancedParam.snapMode,eq,best}*/
      "enabled": true,
      /*wo, opt, bool*/
      "threshold": 88,
      /*wo, opt, int*/
      "faceScore": 20,
      /*wo, opt, int*/
      "updateTime": 60,
      /*wo, opt, int*/
    },
    "quickContinueSnapEnable": false
  },
  /*wo, opt, bool, dep:and,{$.AdvancedParam.snapMode,eq,fast}*/
}

```

Response Message

```
{
  "statusCode": 1,
  /*ro, opt, int*/
  "statusString": "ok",
  /*ro, opt, string, range:[1,64]*/
  "subStatusCode": "ok",
  /*ro, opt, string, range:[1,64]*/
  "errorCode": 1,
  /*ro, opt, int*/
  "errorMsg": "ok"
  /*ro, opt, string*/
}
```

14.6.1.20 Get the capability of configuring parameters for capturing face pictures and overlaying information on the captured face pictures.

Request URL

GET /ISAPI/Intelligent/channels/<channelID>/faceSnap/overlapPic/capabilities?format=json

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```
{
  "OverlapPicCap": {
    /*ro, opt, object, capability of configuring parameters for overlaying information on the picture*/
    "AddIntelInfo": {
      /*ro, opt, object, overlay the VCA information*/
      "streamWithIntelInfo": {
        /*ro, opt, object, overlay the VCA information on the stream*/
        "@opt": [true, false]
        /*ro, req, array, value range, subType:bool*/
      },
      "alarmWithTargetInfo": {
        /*ro, opt, object, overlay the target frame on the alarm picture*/
        "@opt": [true, false]
        /*ro, req, array, value range, subType:bool*/
      }
    },
    "TargetPicParam": {
      /*ro, opt, object, target picture parameters*/
      "targetPicMode": {
        /*ro, opt, object, target picture mode*/
        "@opt": ["custom", "head", "headShoulders", "human", "features", "IDCard", "faceCloseup"]
        /*ro, req, array, value range, subType:string, desc:"custom", "head" (head shot), "headShoulders" (head and shoulders picture), "human" (full-body shot)*/
      },
      "CustomImgSizeCap": {
        /*ro, opt, object, picture size in custom mode*/
        "targetPicWidth": {
          /*ro, req, object, width*/
          "@min": 0.0,
          /*ro, req, float, the minimum value*/
          "@max": 100.0,
          /*ro, req, float, the maximum value*/
          "@def": 3.0
          /*ro, req, float, the default value*/
        },
        "headHeight": {
          /*ro, req, object, head height*/
          "@min": 0.0,
          /*ro, req, float, the minimum value*/
          "@max": 100.0,
          /*ro, req, float, the maximum value*/
          "@def": 2.0
          /*ro, req, float, the default value*/
        },
        "bodyHeight": {
          /*ro, req, object, body height*/
          "@min": 1.0,
          /*ro, req, float, the minimum value*/
          "@max": 100.0,
          /*ro, req, float, the maximum value*/
          "@def": 1.0
        }
      }
    }
  }
}
```

```

        /*ro, req, float, the default value*/
    },
},
"HeadImgSizeCap": {
    /*ro, opt, object, picture size in head shot mode*/
    "targetPicWidth": {
        /*ro, req, object, width*/
        "@min": 1.0,
        /*ro, req, float, the minimum value*/
        "@max": 100.0,
        /*ro, req, float, the maximum value*/
        "@def": 1.5
        /*ro, req, float, the default value*/
    },
    "headHeight": {
        /*ro, req, object, head height*/
        "@min": 1.0,
        /*ro, req, float, the minimum value*/
        "@max": 100.0,
        /*ro, req, float, the maximum value*/
        "@def": 1.5
        /*ro, req, float, the default value*/
    },
    "bodyHeight": {
        /*ro, req, object, body height*/
        "@min": 1.0,
        /*ro, req, float, the minimum value*/
        "@max": 100.0,
        /*ro, req, float, the maximum value*/
        "@def": 0.5
        /*ro, req, float, the default value*/
    }
},
"HeadShouldersImgSizeCap": {
    /*ro, opt, object, picture size in head and shoulders picture mode*/
    "targetPicWidth": {
        /*ro, req, object, width*/
        "@min": 1.0,
        /*ro, req, float, the minimum value*/
        "@max": 100.0,
        /*ro, req, float, the maximum value*/
        "@def": 3.0
        /*ro, req, float, the default value*/
    },
    "headHeight": {
        /*ro, req, object, head height*/
        "@min": 1,
        /*ro, req, int, the minimum value*/
        "@max": 100,
        /*ro, req, int, the maximum value*/
        "@def": 2
        /*ro, req, int, the default value*/
    },
    "bodyHeight": {
        /*ro, req, object, body height*/
        "@min": 1.0,
        /*ro, req, float, the minimum value*/
        "@max": 100.0,
        /*ro, req, float, the maximum value*/
        "@def": 3.5
        /*ro, req, float, the default value*/
    }
},
"HumanImgSizeCap": {
    /*ro, opt, object, picture size in full-body shot mode*/
    "targetPicWidth": {
        /*ro, req, object, width*/
        "@min": 1.0,
        /*ro, req, float, the minimum value*/
        "@max": 100.0,
        /*ro, req, float, the maximum value*/
        "@def": 3.0
        /*ro, req, float, the default value*/
    },
    "headHeight": {
        /*ro, req, object, head height*/
        "@min": 1.0,
        /*ro, req, float, the minimum value*/
        "@max": 100.0,
        /*ro, req, float, the maximum value*/
        "@def": 2.0
        /*ro, req, float, the default value*/
    },
    "bodyHeight": {
        /*ro, req, object, body height*/
        "@min": 1.100,
        /*ro, req, float, the minimum value*/
        "@max": 100.0,
        /*ro, req, float, the maximum value*/
        "@def": 7.0
        /*ro, req, float, the default value*/
    }
},
},

```

```

"TargetPicHeight": {
/*ro, opt, object, target picture with fixed pixels*/
  "enable": {
/*ro, req, object, whether to enable*/
    "@opt": [true, false]
/*ro, req, array, value range, subType:bool*/
  },
  "height": {
/*ro, req, object, height*/
    "@min": 1,
/*ro, req, int, the minimum value*/
    "@max": 100,
/*ro, req, int, the maximum value*/
    "@def": 1
/*ro, req, int, the default value*/
  }
},
"FaceBeautification": {
/*ro, opt, object, face beautification*/
  "enable": {
/*ro, req, object, whether to enable*/
    "@opt": [true, false]
/*ro, req, array, value range, subType:bool*/
  },
  "level": {
/*ro, req, object, beautification level*/
    "@min": 0,
/*ro, req, int, the minimum value*/
    "@max": 100,
/*ro, req, int, the maximum value*/
    "@def": 100
/*ro, req, int, the default value*/
  }
},
},
"AlarmPicParam": {
/*ro, opt, object, alarm picture parameters*/
  "backgroundPicUpload": {
/*ro, opt, object, whether to upload the background picture*/
    "@opt": [true, false]
/*ro, req, array, value range, subType:bool*/
  },
  "picQuality": {
/*ro, opt, object, picture quality*/
    "@opt": ["best", "better", "general"]
/*ro, req, array, value range, subType:string, desc:"best", "better", "general"*/
  },
  "PicSize": {
/*ro, opt, object, picture size*/
    "width": {
/*ro, req, object, width*/
      "@opt": [1280, 1280, 1920, 2560],
/*ro, req, array, value range, subType:int*/
    },
    "height": {
/*ro, req, object, height*/
      "@opt": [720, 960, 1080, 1440],
/*ro, req, array, value range, subType:int*/
    }
  },
  "facePictureUpload": {
/*ro, opt, object, whether to upload the close-up face picture (head and shoulders picture), desc:If this field does not exist, the close-up
face picture will be uploaded by default.*/
    "@opt": [true, false]
/*ro, req, array, value range, subType:bool*/
  }
},
"AlarmOsdParam": {
/*ro, opt, object, parameters of overlaying OSD on the alarm picture*/
  "@size": 1,
/*ro, opt, int, the maximum number of overlaid items*/
  "osdIndex": {
/*ro, opt, object, overlaid items*/
    "@opt": ["cameraNo", "positionInfo", "snapTimeOsd", "facingPupil", "GPS"]
/*ro, req, array, value range, subType:string, desc:"cameraNo" (channel No.), "positionInfo" (position information), "snapTimeOsd" (capture
time), "facingPupil" (pupillary distance)*/
  },
  "enabled": {
/*ro, opt, object, whether to enable overlaying the item*/
    "@opt": [true, false]
/*ro, req, array, value range, subType:bool*/
  }
},
},
}
}

```

14.6.1.21 Get the parameters of capturing face pictures and overlaying information on the captured face pictures.

Request URL

GET /ISAPI/Intelligent/channels/<channelID>/faceSnap/overlapPic?format=json

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```
{
  "OverlapPic": {
    /*ro, opt, object, parameters of overlaying information on the picture*/
    "AddIntelInfo": {
      /*ro, opt, object, overlay the VCA information*/
      "streamWithIntelInfo": true,
      /*ro, opt, bool, overlay the VCA information on the stream*/
      "alarmWithTargetInfo": false
      /*ro, opt, bool, overlay the target frame on the alarm picture*/
    },
    "TargetPicParam": {
      /*ro, opt, object, target picture parameters*/
      "targetPicMode": "custom",
      /*ro, opt, enum, target picture mode, subType:string, desc:"custom", "head" (head shot), "headShoulders" (head and shoulders picture), "human"
(full-body shot)*/
      "targetPicWidth": 3.0,
      /*ro, opt, float, width*/
      "headHeight": 2.0,
      /*ro, opt, float, head height*/
      "bodyHeight": 7.0,
      /*ro, opt, float, body height*/
      "TargetPicHeight": {
        /*ro, opt, object, target picture with fixed pixels*/
        "enable": true,
        /*ro, req, bool, whether to enable*/
        "height": 100
        /*ro, req, int, height*/
      },
      "FaceBeautification": {
        /*ro, opt, object, face beautification*/
        "enable": true,
        /*ro, req, bool, whether to enable*/
        "level": 100
        /*ro, req, int, beautification level*/
      },
      "faceSharpeningLevel": 50,
      /*ro, opt, int, range:[0,100]*/
      "faceEnhancement": true,
      /*ro, opt, bool, whether to enable face enhancement*/
      "faceEnhancementLevel": 50,
      /*ro, opt, int, range:[0,100]*/
      "faceCloseupRatio": {
        /*ro, opt, object*/
        "upRatio": 20,
        /*ro, opt, int*/
        "downRatio": 20,
        /*ro, opt, int*/
        "leftRatio": 20,
        /*ro, opt, int*/
        "rightRatio": 20
        /*ro, opt, int*/
      },
      "humanEyeLighteningEnabled": false,
      /*ro, opt, bool*/
      "colorReproduction": true
      /*ro, opt, bool*/
    },
    "AlarmPicParam": {
      /*ro, opt, object, alarm picture parameters*/
      "backgroundPicUpload": true,
      /*ro, opt, bool, whether to upload the background picture*/
      "picQuality": "general",
      /*ro, opt, enum, picture quality, subType:string, desc:"best", "better", "general"*/
      "PicSize": {
        /*ro, req, object, picture size*/
        "width": 1920,
        /*ro, req, int, width*/
        "height": 1080
        /*ro, req, int, height*/
      },
      "facePictureUpload": true
      /*ro, opt, bool, whether to upload the close-up face picture (head and shoulders picture), desc:If this field does not exist, the close-up face
picture will be uploaded by default.*/
    },
    "AlarmOsdParam": [
```

```

/*ro, opt, array, parameters of overlaying OSD on the alarm picture, subType:object*/
{
    "osdIndex": "cameraNo",
    /*ro, opt, enum, overlaid items, subType:string, desc:"cameraNo" (channel No.), "positionInfo" (position information), "snapTimeOsd"
(capture time), "facingPupil" (pupillary distance)*/
    "osdValue": "test",
    /*ro, opt, string, overlaid content, desc:If the value of this field is empty, it indicates that the content needs to be overlaid by DSP.*/
    "enabled": true
    /*ro, opt, bool, whether to enable overlaying the item*/
}
],
"faceNoiseReduction": true,
/*ro, opt, bool*/
"faceMosaic": false,
/*ro, opt, bool*/
"backgroundCompress": {
/*ro, opt, object*/
    "enabled": true,
    /*ro, req, bool*/
    "backgroundCompressLevel": "middle"
    /*ro, opt, enum, subType:string*/
}
}
}
}

```

14.6.1.22 Set the overlay and capture parameters for face capture

Request URL

PUT /ISAPI/Intelligent/channels/<channelID>/faceSnap/overlapPic?format=json

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

```

{
    "OverlapPic": {
/*opt, object, picture overlay*/
        "AddIntelInfo": {
/*opt, object, overlay intelligent information*/
            "streamWithIntelInfo": true,
            /*opt, bool, overlay intelligent information with the stream*/
            "alarmWithTargetInfo": false
            /*opt, bool, overlay the alarm picture with target information*/
        },
        "TargetPicParam": {
/*opt, object, target picture parameters*/
            "targetPicMode": "custom",
            /*ro, opt, enum, target picture mode, subType:string, desc:"custom", "head" (head shot), "headShoulders" (half-body shot), "human" (full-body
shot)*/
            "targetPicWidth": 3.0,
            /*opt, float, target picture width*/
            "headHeight": 2.0,
            /*opt, float, head height*/
            "bodyHeight": 7.0,
            /*opt, float, body height*/
            "TargetPicHeight": {
/*opt, object, target picture fixed pixels*/
                "enable": true,
                /*req, bool, whether to enable*/
                "height": 100
                /*req, int, height*/
            },
            "FaceBeautification": {
/*opt, object, face picture beauty mode*/
                "enable": true,
                /*req, bool, whether to enable*/
                "level": 100
                /*req, int, beauty level*/
            },
            "faceSharpeningLevel": 50,
            /*opt, int, range:[0,100]*/
            "faceEnhancement": true,
            /*opt, bool, whether to enable face enhancement*/
            "faceEnhancementLevel": 50,
            /*opt, int, range:[0,100]*/
            "faceCloseupRatio": {
/*ro, opt, object*/
                "upRatio": 20,
                /*ro, opt, int*/
                "downRatio": 20,
                /*ro, opt, int*/
                "leftRatio": 20,
                /*ro, opt, int*/
            }
        }
    }
}

```

```

        /*ro, opt, int*/
        "rightRatio": 20
        /*ro, opt, int*/
    },
    "humanEyeLighteningEnabled": false,
    /*opt, bool*/
    "colorReproduction": true
    /*opt, bool*/
},
"AlarmPicParam": {
/*opt, object, alarm picture parameters*/
    "backgroundPicUpload": true,
    /*opt, bool, whether to upload the background picture*/
    "picQuality": "general",
    /*opt, enum, picture quality, subType:string, desc:"best", "better", "general"*/
    "PicSize": {
        /*req, object, picture size*/
        "width": 1920,
        /*req, int, width*/
        "height": 1080
        /*req, int, height*/
    },
    "facePictureUpload": true
    /*opt, bool*/
},
"AlarmOsdParam": [
/*opt, array, text overlay parameters on captured pictures, subType:object*/
{
    "osdIndex": "cameraNo",
    /*opt, enum, overlaid item, subType:string, desc:"cameraNo" (channel number), positionInfo (position information), "snapTimeOsd" (capture
time)*/
    "osdValue": "test",
    /*opt, string, overlay text, desc:when this field does not exists, it indicates DSP overlay*/
    "enabled": true
    /*opt, bool, whether to enable text overlay*/
}
],
"faceNoiseReduction": true,
/*opt, bool*/
"faceMosaic": false,
/*opt, bool*/
"backgroundCompress": {
/*opt, object*/
    "enabled": true,
    /*req, bool*/
    "backgroundCompressLevel": "middle"
    /*opt, enum, subType:string*/
}
}
}
}

```

Response Message

```

{
    "statusCode": 1,
    /*ro, opt, int, status code, desc:1 (succeeded). It is required when an error occurred*/
    "statusString": "OK",
    /*ro, opt, string, status description, range:[1,64], desc:"ok" (succeeded). It is required when an error occurred*/
    "subStatusCode": "ok",
    /*ro, opt, string, sub status code, range:[1,64], desc:"ok" (succeeded). It is required when an error occurred*/
    "errorCode": 1,
    /*ro, opt, int, error code, desc:it is required when the value of statusCode is not 1, and it corresponds to subStatusCode*/
    "errorMsg": "ok",
    /*ro, opt, string, error information, desc:this field is required when the value of statusCode is not 1*/
    "MErrCode": "0x00000000",
    /*ro, opt, string*/
    "MErrDevSelfEx": "0x00000000"
    /*ro, opt, string*/
}

```

14.6.1.23 Get the capability of configuring shielded area of face capture

Request URL

GET /ISAPI/Intelligent/channels/<channelID>/faceSnap/shieldRegion/capabilities?format=json

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```
{
  "ShieldRegionCap": {
    /*ro, opt, object*/
    "@size": 8,
    /*ro, req, int*/
    "enable": {
      /*ro, req, object*/
      "@opt": [true, false]
      /*ro, req, array, subType:bool*/
    },
    "PointF": {
      /*ro, opt, object*/
      "@minSize": 0,
      /*ro, req, int*/
      "@maxSize": 4,
      /*ro, req, int*/
      "x": {
        /*ro, req, object*/
        "@min": 0.000,
        /*ro, req, float, range:[0.000,1.000]*/
        "@max": 1.000,
        /*ro, req, float, range:[0.000,1.000]*/
        "@def": 0.001
        /*ro, req, float, range:[0.000,1.000]*/
      },
      "y": {
        /*ro, req, object*/
        "@min": 0.000,
        /*ro, req, float, range:[0.000,1.000]*/
        "@max": 1.000,
        /*ro, req, float, range:[0.000,1.000]*/
        "@def": 0.001
        /*ro, req, float, range:[0.000,1.000]*/
      }
    }
  }
}
```

14.6.1.24 Get the shielded area parameters of face capture

Request URL

GET /ISAPI/Intelligent/channels/<channelID>/faceSnap/shieldRegion?format=json

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```
{
  "ShieldRegion": [
    /*ro, opt, array, subType:object*/
    {
      "ruleID": 1,
      /*ro, req, int*/
      "enable": true,
      /*ro, req, bool*/
      "PointF": [
        /*ro, opt, array, subType:object, range:[3,10]*/
        {
          "x": 0.120,
          /*ro, req, float, range:[0.000,1.000]*/
          "y": 0.120
          /*ro, req, float, range:[0.000,1.000]*/
        }
      ]
    }
  ]
}
```

14.6.1.25 Set the shielded area parameters of face capture

Request URL

PUT /ISAPI/Intelligent/channels/<channelID>/faceSnap/shieldRegion?format=json

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
{
  "ShieldRegion": [
    /*opt, array, subType:object*/
    {
      "ruleID": 1,
      /*req, int*/
      "enable": true,
      /*req, bool*/
      "PointF": [
        /*opt, array, subType:object, range:[3,10]*/
        {
          "x": 0.120,
          /*req, float, range:[0.000,1.000]*/
          "y": 0.120
          /*req, float, range:[0.000,1.000]*/
        }
      ]
    }
  ]
}
```

Response Message

```
{
  "statusCode": 1,
  /*ro, opt, int*/
  "statusString": "ok",
  /*ro, opt, string, range:[1,64]*/
  "subStatusCode": "ok",
  /*ro, opt, string, range:[1,64]*/
  "errorCode": 1,
  /*ro, opt, int*/
  "errorMsg": "ok",
  /*ro, opt, string*/
}
```

14.6.1.26 Get the VCA resource parameters of face capture and recognition channel

Request URL

GET /ISAPI/Intelligent/channels/<channelID>/intelliResource

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>
<IntelliResource xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{req, string, protocolVersion}-->
  <BehaviorInfo>
    <!--ro, opt, object-->
    <IntelliImage>
      <!--ro, opt, object-->
      <isUpload>
        <!--ro, req, enum, subType:string-->true
      </isUpload>
      <imgQuality>
        <!--ro, opt, enum, subType:string-->best
      </imgQuality>
      <imgResolutionWidth>
        <!--ro, req, int-->1
      </imgResolutionWidth>
    </IntelliImage>
  </BehaviorInfo>
</IntelliResource>
```

```
<imgResolutionHeight>
  <!--ro, req, int-->1
</imgResolutionHeight>
<isImgTargetOverlap>
  <!--ro, req, bool-->true
</isImgTargetOverlap>
<isImgRuleOverlap>
  <!--ro, req, bool-->true
</isImgRuleOverlap>
<isImgSizeOverlap>
  <!--ro, opt, bool-->bool
</isImgSizeOverlap>
</IntelliImage>
<VideoOverlapInfo>
  <!--ro, opt, object-->
  <isOverlapIntelli>
    <!--ro, req, bool-->true
  </isOverlapIntelli>
  <isOverlapTarget>
    <!--ro, req, bool-->true
  </isOverlapTarget>
  <isOverlapRule>
    <!--ro, req, bool-->true
  </isOverlapRule>
</VideoOverlapInfo>
<IntelliAnalysisEnable>
  <!--ro, req, bool-->true
</IntelliAnalysisEnable>
<sceneType>
  <!--ro, opt, enum, subType:string-->perimeterProtection
</sceneType>
<DisplayTrajectory>
  <!--ro, opt, object-->
  <enabled>
    <!--ro, req, bool-->true
  </enabled>
  <durationLimit>
    <!--ro, opt, enum, subType:string-->5s
  </durationLimit>
</DisplayTrajectory>
<targetMarkingColorEnabled>
  <!--ro, req, bool-->true
</targetMarkingColorEnabled>
<picRecordEnable>
  <!--ro, opt, bool-->true
</picRecordEnable>
<autoTrack>
  <!--ro, opt, bool-->false
</autoTrack>
<NotificationPTZRecheck>
  <!--ro, opt, bool-->false
</NotificationPTZRecheck>
</BehaviorInfo>
<FaceCaptureInfo>
  <!--ro, opt, object-->
  <imgQuality>
    <!--ro, opt, enum, subType:string-->best
  </imgQuality>
  <isImgTargetOverlap>
    <!--ro, req, bool-->true
  </isImgTargetOverlap>
  <VideoOverlapInfo>
    <!--ro, opt, object-->
    <isOverlapIntelli>
      <!--ro, req, bool-->true
    </isOverlapIntelli>
    <isOverlapTarget>
      <!--ro, opt, bool-->true
    </isOverlapTarget>
    <isOverlapRule>
      <!--ro, opt, bool-->true
    </isOverlapRule>
  </VideoOverlapInfo>
  <backgroundUpload>
    <!--ro, opt, bool-->true
  </backgroundUpload>
  <imgResolutionWidth>
    <!--ro, req, int-->1
  </imgResolutionWidth>
  <imgResolutionHeight>
    <!--ro, req, int-->1
  </imgResolutionHeight>
  <TargetImgInfo>
    <!--ro, opt, object-->
    <targetImgType>
      <!--ro, opt, enum, subType:string-->custom
    </targetImgType>
    <TargetImgSize>
      <!--ro, opt, object-->
      <widthRatio>
        <!--ro, req, float-->0.000
      </widthRatio>
      <upperPartHeightRatio>
        <!--ro, req, float-->0.000
      </upperPartHeightRatio>
    </TargetImgSize>
  </TargetImgInfo>
</FaceCaptureInfo>
```

```

        <!--ro, req, float-->0.000
    </upperPartHeightRatio>
    <underPartHeightRatio>
        <!--ro, req, float-->0.000
    </underPartHeightRatio>
    <TargetImgSize>
    <fixedPixelEnable>
        <!--ro, opt, bool-->>true
    </fixedPixelEnable>
    <heightPixel>
        <!--ro, opt, int-->1
    </heightPixel>
    <FaceBeautification>
        <!--ro, opt, object-->
    <enabled>
        <!--ro, opt, bool-->true
    </enabled>
    <level>
        <!--ro, opt, int, range:[0,100]-->1
    </level>
    </FaceBeautification>
    <faceEnhancement>
        <!--ro, opt, bool-->true
    </faceEnhancement>
    <TargetImgInfo>
    <backgroundIntervalUpload>
        <!--ro, opt, int, range:[0,65534], unit:s-->1
    </backgroundIntervalUpload>
    <picRecordEnable>
        <!--ro, opt, bool-->true
    </picRecordEnable>
    <FaceCaptureInfo>
    <AlgVersionInfo>
        <!--ro, opt, object-->
    <AlgItem>
        <!--ro, opt, object-->
    <id>
        <!--ro, opt, string-->test
    </id>
    <algName>
        <!--ro, opt, string-->test
    </algName>
    </AlgItem>
    </AlgVersionInfo>
    <JudiciaryInfo>
        <!--ro, opt, object-->
    <IntelliImage>
        <!--ro, req, object-->
    <isUpload>
        <!--ro, req, enum, subType:string-->true
    </isUpload>
    <imgQuality>
        <!--ro, opt, enum, subType:string-->best
    </imgQuality>
    <imgResolutionWidth>
        <!--ro, req, int-->1
    </imgResolutionWidth>
    <imgResolutionHeight>
        <!--ro, req, int-->1
    </imgResolutionHeight>
    </IntelliImage>
    <VideoOverlapInfo>
        <!--ro, opt, object-->
    <isOverlapIntelli>
        <!--ro, req, bool-->true
    </isOverlapIntelli>
    </VideoOverlapInfo>
    </JudiciaryInfo>
    <QRCodeUrl>
        <!--ro, opt, object-->
    <vcaVideoQRCodeUrl>
        <!--ro, opt, string, range:[0,256]-->http://127.0.0.1
    </vcaVideoQRCodeUrl>
    </QRCodeUrl>
    </IntelliResource>

```

14.6.1.27 Set the intelligent resource parameters of face capture channel

Request URL

PUT /ISAPI/Intelligent/channels/<channelID>/intelliResource

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<IntelliResource xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, attr:version{req, string, protocolVersion}-->
  <BehaviorInfo>
    <!--opt, object-->
    <IntelliImage>
      <!--opt, object-->
      <isUpload>
        <!--req, enum, subType:string-->true
      </isUpload>
      <imgQuality>
        <!--opt, enum, subType:string-->best
      </imgQuality>
      <imgResolutionWidth>
        <!--opt, int-->1
      </imgResolutionWidth>
      <imgResolutionHeight>
        <!--opt, int-->1
      </imgResolutionHeight>
      <isImgTargetOverlap>
        <!--req, bool-->true
      </isImgTargetOverlap>
      <isImgRuleOverlap>
        <!--req, bool-->true
      </isImgRuleOverlap>
      <isImgSizeOverlap>
        <!--opt, bool-->bool
      </isImgSizeOverlap>
    </IntelliImage>
    <VideoOverlapInfo>
      <!--opt, object-->
      <isOverlapIntelli>
        <!--req, bool-->true
      </isOverlapIntelli>
      <isOverlapTarget>
        <!--req, bool-->true
      </isOverlapTarget>
      <isOverlapRule>
        <!--req, bool-->true
      </isOverlapRule>
    </VideoOverlapInfo>
    <IntelliAnalysisEnable>
      <!--req, bool-->true
    </IntelliAnalysisEnable>
    <DisplayTrajectory>
      <!--opt, object-->
      <enabled>
        <!--req, bool-->true
      </enabled>
      <durationLimit>
        <!--opt, enum, subType:string-->5s
      </durationLimit>
    </DisplayTrajectory>
    <targetMarkingColorEnabled>
      <!--req, bool-->true
    </targetMarkingColorEnabled>
    <picRecordEnable>
      <!--opt, bool-->true
    </picRecordEnable>
  </BehaviorInfo>
  <FaceCaptureInfo>
    <!--opt, object-->
    <imgQuality>
      <!--opt, enum, subType:string-->best
    </imgQuality>
    <isImgTargetOverlap>
      <!--req, bool-->true
    </isImgTargetOverlap>
    <VideoOverlapInfo>
      <!--opt, object-->
      <isOverlapIntelli>
        <!--req, bool-->true
      </isOverlapIntelli>
      <isOverlapTarget>
        <!--opt, bool-->true
      </isOverlapTarget>
      <isOverlapRule>
        <!--opt, bool-->true
      </isOverlapRule>
    </VideoOverlapInfo>
    <backgroundUpload>
      <!--opt, bool-->true
    </backgroundUpload>
    <imgResolutionWidth>
      <!--req, int-->1
    </imgResolutionWidth>
    <imgResolutionHeight>
      <!--req, int-->1
    </imgResolutionHeight>
  </FaceCaptureInfo>
</IntelliResource>
```



```

<TargetImgInfo>
  <!--opt, object-->
  <targetImgType>
    <!--opt, enum, subType:string-->custom
  </targetImgType>
  <TargetImgSize>
    <!--opt, object-->
    <widthRatio>
      <!--req, float-->0.000
    </widthRatio>
    <upperPartHeightRatio>
      <!--req, float-->0.000
    </upperPartHeightRatio>
    <underPartHeightRatio>
      <!--req, float-->0.000
    </underPartHeightRatio>
  </TargetImgSize>
  <fixedPixelEnable>
    <!--opt, bool-->true
  </fixedPixelEnable>
  <heightPixel>
    <!--opt, int-->1
  </heightPixel>
  <FaceBeautification>
    <!--opt, object-->
    <enabled>
      <!--opt, bool-->true
    </enabled>
    <level>
      <!--opt, int, range:[0,100]-->1
    </level>
  </FaceBeautification>
  <faceEnhancement>
    <!--opt, bool-->true
  </faceEnhancement>
</TargetImgInfo>
<backgroundIntervalUpload>
  <!--opt, int, range:[0,65534], unit:s-->1
</backgroundIntervalUpload>
<picRecordEnable>
  <!--opt, bool-->true
</picRecordEnable>
</FaceCaptureInfo>
<AlgVersionInfo>
  <!--opt, object-->
  <AlgItem>
    <!--opt, object-->
    <id>
      <!--opt, string, index-->test
    </id>
    <algName>
      <!--opt, string-->test
    </algName>
  </AlgItem>
</AlgVersionInfo>
<JudiciaryInfo>
  <!--opt, object-->
  <IntelliImage>
    <!--req, object-->
    <isUpload>
      <!--req, enum, subType:string-->true
    </isUpload>
    <imgQuality>
      <!--opt, enum, subType:string-->best
    </imgQuality>
    <imgResolutionWidth>
      <!--req, int-->1
    </imgResolutionWidth>
    <imgResolutionHeight>
      <!--req, int-->1
    </imgResolutionHeight>
  </IntelliImage>
  <VideoOverlapInfo>
    <!--opt, object-->
    <isOverlapIntelli>
      <!--req, bool-->true
    </isOverlapIntelli>
  </VideoOverlapInfo>
</JudiciaryInfo>
<QRCodeUrl>
  <!--opt, object-->
  <vcaVideoQRCodeUrl>
    <!--opt, string, range:[0,256]-->http://127.0.0.1
  </vcaVideoQRCodeUrl>
</QRCodeUrl>
</IntelliResource>

```

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status description, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code-->OK
  </subStatusCode>
</ResponseStatus>

```

14.6.1.28 Get the configuration capability of intelligent

resources by channel **Request URL**

GET /ISAPI/Intelligent/channels/<channelID>/intelliResource/capabilities

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>
<IntelliResourceCap xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{req, string, protocolVersion}-->
</IntelliResourceCap>

```

14.6.1.29 Set the VCA type parameters

Request URL

PUT /ISAPI/Intelligent/channels/<channelID>/intelliType

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```

<?xml version="1.0" encoding="UTF-8"?>

<IntelliType xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, attr:version{req, string, protocolVersion}-->
  <type>
    <!--req, enum, subType:string-->behavior
  </type>
</IntelliType>

```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.6.1.30 Get the VCA type parameters

Request URL

GET /ISAPI/Intelligent/channels/<channelID>/intelliType

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<IntelliType xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, attr:version{req, string, protocolVersion}-->
  <type>
    <!--ro, req, enum, subType:string-->behavior
  </type>
</IntelliType>
```

14.6.1.31 Get the face modeling configuration capability

Request URL

GET /ISAPI/Intelligent/channels/<channelID>/modeling/capabilities?format=json

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```

{
  "ModelingCap": {
    /*ro, opt, object*/
    "FaceSnapModeling": {
      /*ro, req, object*/
      "enabled": "true,false",
      /*ro, req, string*/
      "QuickModeling": {
        /*ro, opt, object*/
        "enabled": "true,false",
        /*ro, opt, string*/
        "threshold": {
          /*ro, opt, object*/
          "@min": 20,
          /*ro, req, int*/
          "@max": 80,
          /*ro, req, int*/
          "@def": 60
          /*ro, req, int*/
        },
        "snapTime": {
          /*ro, opt, object*/
          "@min": 0.0,
          /*ro, req, float*/
          "@max": 300.0,
          /*ro, req, float*/
          "@def": 2.0
          /*ro, req, float*/
        }
      },
      "LivenessDetection": {
        /*ro, req, object*/
        "enabled": "true,false"
        /*ro, req, string*/
      },
      "alarmStorageEnable": "true,false",
      /*ro, opt, string*/
      "mixedTargetDetectionWithFaceSnapModeling": "true,false"
      /*ro, opt, string*/
    },
    "uploadPictureEnabled": "true,false"
    /*ro, opt, string*/
  }
}

```

14.6.1.32 Get the face modeling parameters

Request URL

GET /ISAPI/Intelligent/channels/<channelID>/modeling?format=json

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```

{
  "Modeling": {
    /*ro, opt, object*/
    "FaceSnapModeling": {
      /*ro, req, object*/
      "enabled": true,
      /*ro, opt, bool*/
      "QuickModeling": {
        /*ro, req, object*/
        "enabled": true,
        /*ro, opt, bool*/
        "threshold": 60,
        /*ro, opt, int*/
        "snapTime": 2.0
        /*ro, opt, float, unit:s*/
      },
      "LivenessDetection": {
        /*ro, req, object*/
        "enabled": true
        /*ro, opt, bool*/
      },
      "alarmStorageEnable": true,
      /*ro, opt, bool*/
      "mixedTargetDetectionWithFaceSnapModeling": true
      /*ro, opt, bool*/
    },
    "uploadPictureEnabled": false
    /*ro, opt, bool*/
  }
}

```

14.6.1.33 Set the face modeling parameters

Request URL

PUT /ISAPI/Intelligent/channels/<channelID>/modeling?format=json

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```

{
  "Modeling": {
    /*opt, object*/
    "FaceSnapModeling": {
      /*req, object*/
      "enabled": true,
      /*opt, bool*/
      "QuickModeling": {
        /*req, object*/
        "enabled": true,
        /*opt, bool*/
        "threshold": 60,
        /*opt, int*/
        "snapTime": 2.0
        /*opt, float, unit:s*/
      },
      "LivenessDetection": {
        /*req, object*/
        "enabled": true
        /*opt, bool*/
      },
      "alarmStorageEnable": true,
      /*opt, bool*/
      "mixedTargetDetectionWithFaceSnapModeling": true
      /*opt, bool*/
    },
    "uploadPictureEnabled": false
    /*opt, bool*/
  }
}

```

Response Message

```

{
  "statusCode": 1,
  /*ro, opt, int*/
  "statusString": "ok",
  /*ro, opt, string, range:[1,64]*/
  "subStatusCode": "ok",
  /*ro, opt, string, range:[1,64]*/
  "errorCode": 1,
  /*ro, opt, int*/
  "errorMsg": "ok"
  /*ro, opt, string*/
}

```

14.6.1.34 Set the overlay parameters of captured face picture

Request URL

PUT /ISAPI/Intelligent/channels/<channelID>/picInfoOverlap/faceSnap?format=json

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```

{
  "PicInfoOverlap": {
    /*req, object*/
    "enabled": true,
    /*req, bool*/
    "OverlapItem": [
      /*req, array, subType:object*/
      {
        "overlapItemId": "1",
        /*req, string*/
        "itemType": "cameraNo"
        /*req, enum, subType:string*/
      }
    ]
  }
}

```

Response Message

```

{
  "statusCode": 1,
  /*ro, opt, int*/
  "statusString": "ok",
  /*ro, opt, string, range:[1,64]*/
  "subStatusCode": "ok",
  /*ro, opt, string, range:[1,64]*/
  "errorCode": 1,
  /*ro, opt, int*/
  "errorMsg": "ok"
  /*ro, opt, string*/
}

```

14.6.1.35 Get the overlay parameters of captured face picture

Request URL

GET /ISAPI/Intelligent/channels/<channelID>/picInfoOverlap/faceSnap?format=json

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```

{
  "PicInfoOverlap": {
    /*ro, req, object*/
    "enabled": true,
    /*ro, req, bool*/
    "OverlapItem": [
      /*ro, req, array, subType:object*/
      {
        "overlapItemId": "1",
        /*ro, req, string*/
        "itemType": "cameraNo"
        /*ro, req, enum, subType:string*/
      }
    ]
  }
}

```

14.6.1.36 Face capture and recognition event

EventType:faceCapture

```

{
  "ipAddress": "172.6.64.7",
  /*ro, req, string, IPv4 address of the device that triggers the alarm*/
  "ipv6Address": "1080:0:0:0:8:800:200C:417A",
  /*ro, opt, string, IPv6 address of the device that triggers the alarm*/
  "portNo": 80,
  /*ro, opt, int, communication port No. of the device that triggers the alarm*/
  "protocol": "HTTP",
  /*ro, opt, enum, protocol type, subType:string, desc:"HTTP", "HTTPS", "EHome"*/
  "macAddress": "01:17:24:45:D9:F4",
  /*ro, opt, string, MAC address*/
  "channelID": 1,
  /*ro, opt, int, channel No. of the device that triggers the alarm*/
  "releatedChannelList": [1, 2, 3],
  /*ro, opt, array, list of alarm related channels, which are of the same camera with channelID, subType:int, desc:this parameter is used for live view or
  playback on the platform*/
  "dateTime": "2004-05-03T17:30:08+08:00",
  /*ro, req, datetime, alarm trigger time*/
  "activePostCount": 1,
  /*ro, req, int, times that the same alarm has been uploaded*/
  "eventType": "faceCapture",
  /*ro, req, string, event type*/
  "eventState": "active",
  /*ro, req, enum, event status, subType:string, desc:for durative event: active (valid), inactive (invalid)*/
  "eventDescription": "faceCapture",
  /*ro, req, string, event description, desc:face capture data upload*/
  "channelName": "ABC",
  /*ro, req, string, channel name (camera name)*/
  "deviceID": "test0123",
  /*ro, opt, string, device ID (PUID)*/
  "isDataRetransmission": true,
  /*ro, opt, bool, whether the data is replenished*/
  "faceCapture": [
    /*ro, opt, array, face capture and recognition results, one result can contain multiple pictures and one picture can contains multiple faces,
    subType:object*/
    {
      "errorCode": 1,
      /*ro, opt, int, error code*/
      "errorMsg": "ok",
      /*ro, opt, string, error code description*/
      "taskId": "temp_dfasdffsadsadada",
      /*ro, opt, string, task ID*/
      "faceTime": "2004-05-03T17:30:08+08:00",
      /*ro, opt, datetime, capture time*/
      "traceUuid": "sdddddddf",
      /*ro, opt, string, target ID, the same person in multiple capture results corresponds to same target ID*/
      "traceIdx": 1,
      /*ro, opt, int, No. of picture with highest comparison similarity*/
      "targetAttrs": {
        /*ro, opt, object, face attributes*/
        "deviceId": "ee3c4000-a22d-11b4-8334-5803fb77894c",
        /*ro, opt, string, device UUID*/
        "deviceChannel": 1,
        /*ro, opt, int, device channel No.*/
        "deviceName": "shebei",
        /*ro, opt, string, device name*/
        "faceTime": "2004-05-03T17:30:08+08:00",
        /*ro, opt, datetime, capture time*/
        "bkgUrl": "test",
        /*ro, opt, string, background picture URL*/
        "thermalURL": "test",
        /*ro, opt, string, thermal picture URL*/
        "contentID": "backgroundImage",
        /*ro, opt, string, background picture (binary)*/
        "pId": "F4F665D6A18E41308CE9934DCDD01111"
        /*ro, opt, string*/
      }
    }
  ]
}

```

```

"faces": [
  /*ro, opt, array, face picture information, which contains the recognition results, face attributes, modeling, matched list, and so on,
  subType:object*/
  {
    "faceId": 1,
    /*ro, opt, int, face ID*/
    "faceRect": {
      /*ro, opt, object, face thumbnail frame, desc:the origin is the upper-left corner of the screen*/
      "height": 1.000,
      /*ro, opt, float, height, range:[0.000,1.000]*/
      "width": 1.000,
      /*ro, opt, float, width, range:[0.000,1.000]*/
      "x": 0.000,
      /*ro, opt, float, X-coordinate, range:[0.000,1.000]*/
      "y": 0.000
      /*ro, opt, float, Y-coordinate, range:[0.000,1.000]*/
    },
    "age": {
      /*ro, opt, object, age*/
      "range": 5,
      /*ro, opt, int, age deviation*/
      "value": 23,
      /*ro, opt, int, age*/
      "ageGroup": "old"
      /*ro, opt, string, age group*/
    },
    "gender": {
      /*ro, opt, object, gender*/
      "confidence": 99.9999,
      /*ro, opt, float, confidence*/
      "value": "male"
      /*ro, opt, enum, gender, subType:string, desc:"male", "female", "unknown"*/
    },
    "glass": {
      /*ro, opt, object, whether the person wears glasses*/
      "confidence": 99.945,
      /*ro, opt, float, confidence*/
      "value": "yes"
      /*ro, opt, enum, whether the person wears glasses, subType:string, desc:"no", "yes"*/
    },
    "mask": {
      /*ro, opt, object, whether the person wears a mask*/
      "confidence": 99.945,
      /*ro, opt, float, confidence*/
      "value": "yes"
      /*ro, opt, enum, whether the person wears a mask, subType:string, desc:"no", "yes"*/
    },
    "smile": {
      /*ro, opt, object, whether the person is smiling*/
      "confidence": 99.945,
      /*ro, opt, float, confidence*/
      "value": "no"
      /*ro, opt, enum, whether the person is smiling, subType:string, desc:"no", "yes"*/
    },
    "faceExpression": {
      /*ro, opt, object, facial expression*/
      "value": "unknown"
      /*ro, opt, enum, facial expression, subType:string, desc:"unknown", "surprised", "panic", "disgusted", "happy", "sad", "angry",
      "poker-faced"*/
    },
    "hat": {
      /*ro, opt, object, whether the person wears a hat*/
      "value": "no"
      /*ro, opt, enum, whether the person wears a hat, subType:string, desc:"no", "yes", "unknown"*/
    },
    "URL": "xxxxxxx",
    /*ro, opt, string, face picture thumbnail URL*/
    "contentID": "faceImage",
    /*ro, opt, string, face picture thumbnail (binary)*/
    "stayDuration": 20,
    /*ro, opt, int, dwell time duration in the image, unit:ms*/
    "faceScore": 30,
    /*ro, req, int, face score (face picture quality), range:[0,100]*/
    "captureEndMark": true,
    /*ro, req, bool, end flag of capture, desc:true (ended), false (not ended)*/
    "targetID": "xxxxxxx",
    /*ro, opt, string, face and human body linkage ID*/
    "FacePictureRect": {
      /*ro, opt, object, rectangle frame for human face, desc:the origin is the upper-left corner of the screen*/
      "height": 1.000,
      /*ro, req, float, height, range:[0.000,1.000]*/
      "width": 1.000,
      /*ro, req, float, width, range:[0.000,1.000]*/
      "x": 0.000,
      /*ro, req, float, X-coordinate, range:[0.000,1.000]*/
      "y": 0.000
      /*ro, req, float, Y-coordinate, range:[0.000,1.000]*/
    },
    "blockingState": "noBlocking",
    /*ro, opt, enum, target face shielding status, subType:string, desc:"noBlocking" (unshielded), "instantaneousInsignificantBlocking"
    (lightly shielded), "continuousInsignificantBlocking" (keep shielding), "significantBlocking" (seriously shielded), "OSD", "unknown"*/
    "swingAngle": -90,
    /*ro, opt, int, panning angle, range:[-90,90]*/
    "tiltAngle": -90
  }
]

```



```

        "tiltingAngle": 0,
        /*ro, opt, int, tilting angle, range:[-90,90]*/
        "pupilDistance": 10,
        /*ro, opt, int, pupil distance of target face, desc:the maximum value is 10 bytes, and the maximum value is (resolution width/1.6),
unit: pixel*/
        "livenessDetectionStatus": "liveFace",
        /*ro, opt, enum, face anti-spoofing detection status, subType:string, desc:"liveFace" (live face), "notLiveFace" (the face is not real),
"detectionFailed" (detection failed), "notEnabled" (disabled).*/
        "pId": "F4F665D6A18E41308CE9934DCDD02222",
        /*ro, opt, string*/
        "enterTime": "2004-05-03T17:30:08+08:00",
        /*ro, opt, datetime*/
        "exitTime": "2004-05-03T17:30:08+08:00",
        /*ro, opt, datetime*/
        "perClassify": 0,
        /*ro, opt, int, face data presorting*/
        "faceSnapThermometryEnabled": true,
        /*ro, opt, bool, whether to enable uploading captured face picture with temperature information*/
        "currTemperature": 36.8,
        /*ro, opt, float, face temperature*/
        "isAbnormalTemperature": true,
        /*ro, opt, bool, whether the temperature is abnormal or not: true, false*/
        "thermometryUnit": "celsius",
        /*ro, opt, enum, temperature unit, subType:string, desc:"celsius", "fahrenheit", "kelvin"*/
        "alarmTemperature": 36.7,
        /*ro, opt, float, temperature threshold to trigger alarm*/
        "interiorPosition": "driver"
        /*ro, opt, enum, subType:string*/
    }
},
"uid": "2019052010392202600Kb4s3iQPzLignc1sRubFT0hR039Y0Yzult0VLf199yZi",
/*ro, opt, string, the unique ID of event uploading*/
"OperatorInfo": {
/*ro, opt, object, operator information, desc:operator information*/
    "personUUID": "test",
    /*ro, opt, string, range:[1,32]*/
    "personName": "test"
    /*ro, opt, string, range:[1,64]*/
},
"MEFData": [
/*ro, opt, array, subType:object*/
    {
        "time": "2004-05-03T17:30:08.000+08:00",
        /*ro, req, datetime, it should be accurate to the millisecond, desc:it should be accurate to the millisecond*/
        "IMSI": "460001357924680",
        /*ro, req, string, range:[1,15]*/
        "bandIdx": 11
        /*ro, opt, enum, subType:int*/
    }
],
"isNeedVerification": true
/*ro, opt, bool*/
}
},
"GPS": {
/*ro, opt, object*/
    "divisionEW": "E",
    /*ro, req, enum, "E" (Eastern Hemisphere), W" (West Hemisphere), subType:string, desc:"E" (Eastern Hemisphere), W" (West Hemisphere)*/
    "longitude": 100,
    /*ro, req, int, longitude, desc:longitude*/
    "divisionNS": "N",
    /*ro, req, enum, "S" (Southern Hemisphere), "N" (North Hemisphere), subType:string, desc:"S" (Southern Hemisphere), "N" (North Hemisphere)*/
    "latitude": 100
    /*ro, req, int, latitude, desc:latitude*/
},
"URLCertificationType": "digest"
/*ro, opt, enum, picture URL authentication method, subType:string, desc:"no" (no authentication, it is used for the cloud protocol), "digest" (digest
authentication, it is used for local picture URL returned by NVR or DVR)*/
}

```

Parameter Name	Parameter Value	Parameter Type(Content-Type)	Content-ID	File Name	Description
faceCapture	[Message content]	application/json	--	--	--
..	[Binary picture data]	image/jpeg	backgroundImage	backgroundImage.jpeg	--
..	[Binary picture data]	image/jpeg	faceImage	faceImage.jpeg	--

Note: The protocol is transmitted in form format. See Chapter 4.5.1.4 for form framework description, as shown in the instance below.

--<frontier>

Content-Disposition: form-data; name=Parameter Name;filename=File Name

Content-Type: Parameter Type

Content-Length: ****

Content-ID: Content ID

Parameter Value

- Parameter Name: the name property of Content-Disposition in the header of form unit; it refers to the form unit name.
- Parameter Type (Content-Type): the Content-Type property in the header of form unit.
- File Name (filename): the filename property of Content-Disposition of form unit Headers. It exists only when the transmitted data of form unit is file, and it refers to the file name of form unit body.
- Parameter Value: the body content of form unit.

14.7 Smart Event (Perimeter Intrusion Detection)

14.7.1 Intrusion Detection

14.7.1.1 Set intrusion detection arming schedules of all channels

Request URL

PUT /ISAPI/Event/schedules/fieldDetections

Query Parameter

None

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<FieldDetectionScheduleList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, refer to the message XML_Schedule for details, attr:version{req, string, protocolVersion}-->
  <Schedule>
    <!--opt, object-->
    <id>
      <!--req, string-->test
    </id>
    <eventType>
      <!--opt, enum, event type, subType:string-->fieldDetection
    </eventType>
    <videoInputChannelID>
      <!--opt, string, video input channel ID-->test
    </videoInputChannelID>
    <TimeBlockList size="8">
      <!--req, object, arming time list, attr:size{req, int}-->
      <TimeBlock>
        <!--opt, object, arming time-->
        <dayOfWeek>
          <!--opt, enum, day of the week, subType:int, desc:1 (Monday), 2 (Tuesday), 3 (Wednesday), 4 (Thursday), 5 (Friday), 6 (Saturday), 7 (Sunday)-->1
        </dayOfWeek>
        <TimeRange>
          <!--req, object, time range-->
          <beginTime>
            <!--req, time, start time-->00:00:00
          </beginTime>
          <endTime>
            <!--req, time, end time-->00:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </TimeBlockList>
    <HolidayBlockList>
      <!--opt, object, holiday arming time-->
      <TimeBlock>
        <!--opt, object, arming time-->
        <TimeRange>
          <!--req, object, time range-->
          <beginTime>
            <!--req, time, start time-->00:00:00
          </beginTime>
          <endTime>
            <!--req, time, end time-->00:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </HolidayBlockList>
  </Schedule>
</FieldDetectionScheduleList>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code description-->OK
  </subStatusCode>
</ResponseStatus>
```

14.7.1.2 Get arming schedules of all channels for intrusion detection

Request URL

GET /ISAPI/Event/schedules/fieldDetections

Query Parameter

None

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<FieldDetectionScheduleList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, refer to the message XML_Schedule for details, attr:version{req, string, protocolVersion}-->
  <Schedule>
    <!--ro, opt, object, configuration of intrusion detection arming schedules-->
    <id>
      <!--ro, req, string, ID, desc:format: event type-channel No.-->test
    </id>
    <eventType>
      <!--ro, opt, enum, event type, subType:string-->fieldDetection
    </eventType>
    <videoInputChannelID>
      <!--ro, opt, string, video input channel ID-->test
    </videoInputChannelID>
    <TimeBlockList size="8">
      <!--ro, req, object, List of arming schedules, attr:size{req, int}-->
      <TimeBlock>
        <!--ro, opt, object, arming schedules-->
        <dayOfWeek>
          <!--ro, opt, enum, day of a week, subType:int, desc:1 (Monday), 2 (Tuesday), 3 (Wednesday), 4 (Thursday), 5 (Friday), 6 (Saturday), 7 (Sunday)-->1
        </dayOfWeek>
        <TimeRange>
          <!--ro, req, object, time range-->
          <beginTime>
            <!--ro, req, time, start time-->00:00:00
          </beginTime>
          <endTime>
            <!--ro, req, time, end time-->00:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </TimeBlockList>
    <HolidayBlockList>
      <!--ro, opt, object, holiday arming schedules-->
      <TimeBlock>
        <!--ro, opt, object, arming schedules-->
        <TimeRange>
          <!--ro, req, object, time range-->
          <beginTime>
            <!--ro, req, time, start time-->00:00:00
          </beginTime>
          <endTime>
            <!--ro, req, time, end time-->00:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </HolidayBlockList>
  </Schedule>
</FieldDetectionScheduleList>
```

14.7.1.3 Set the arming schedule of intrusion detection for a specified channel

Request URL

PUT /ISAPI/Event/schedules/fieldDetections/fieldDetection-<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```

<?xml version="1.0" encoding="UTF-8"?>

<Schedule xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string-->格式: 事件类型-通道号
  </id>
  <eventType>
    <!--opt, string-->fieldDetection
  </eventType>
  <videoInputChannelID>
    <!--opt, string-->test
  </videoInputChannelID>
  <TimeBlockList size="8">
    <!--req, object, attr:size{req, int}-->
    <TimeBlock>
      <!--opt, object-->
      <dayOfWeek>
        <!--opt, enum, subType:int-->1
      </dayOfWeek>
      <TimeRange>
        <!--req, object-->
        <beginTime>
          <!--req, time-->00:00:00
        </beginTime>
        <endTime>
          <!--req, time-->00:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </TimeBlockList>
  <HolidayBlockList>
    <!--opt, object-->
    <TimeBlock>
      <!--opt, object-->
      <TimeRange>
        <!--req, object-->
        <beginTime>
          <!--req, time-->00:00:00
        </beginTime>
        <endTime>
          <!--req, time-->00:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </HolidayBlockList>
</Schedule>

```

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>

```

14.7.1.4 Get the arming schedule of intrusion detection for a specified channel

Request URL

GET /ISAPI/Event/schedules/fieldDetections/fieldDetection-<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<Schedule xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string-->test
  </id>
  <eventType>
    <!--ro, opt, string-->fieldDetection
  </eventType>
  <videoInputChannelID>
    <!--ro, opt, string-->test
  </videoInputChannelID>
  <TimeBlockList size="8">
    <!--ro, req, object, attr:size{req, int}-->
    <TimeBlock>
      <!--ro, opt, object-->
      <dayOfWeek>
        <!--ro, opt, enum, subType:int-->1
      </dayOfWeek>
      <TimeRange>
        <!--ro, req, object-->
        <beginTime>
          <!--ro, req, time-->00:00:00
        </beginTime>
        <endTime>
          <!--ro, req, time-->00:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </TimeBlockList>
  <HolidayBlockList>
    <!--ro, opt, object-->
    <TimeBlock>
      <!--ro, opt, object-->
      <TimeRange>
        <!--ro, req, object-->
        <beginTime>
          <!--ro, req, time-->00:00:00
        </beginTime>
        <endTime>
          <!--ro, req, time-->00:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </HolidayBlockList>
</Schedule>
```

14.7.1.5 Get arming schedules of all radar channels for intrusion detection

Request URL

GET /ISAPI/Event/schedules/radarFieldDetections

Query Parameter

None

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<RadarFieldDetectionScheduleList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, array, list of arming schedules, subType:object, attr:version{req, string, protocolVersion}-->
  <Schedule>
    <!--ro, opt, object, arming schedule information-->
    <id>
      <!--ro, req, string, ID, desc:format: event type-channel No.-->radarFieldDetection-1
    </id>
    <eventType>
      <!--ro, opt, enum, event type, subType:string-->radarFieldDetection
    </eventType>
    <videoInputChannelID>
      <!--ro, opt, string, video input channel ID-->1
    </videoInputChannelID>
    <TimeBlockList size="8">
      <!--ro, req, array, list of arming schedules, subType:object, attr:size{opt, int}-->
      <TimeBlock>
        <!--ro, opt, object, arming schedules-->
        <dayOfWeek>
          <!--ro, opt, enum, day of a week, subType:int, desc:1 (Monday), 2 (Tuesday), 3 (Wednesday), 4 (Thursday), 5 (Friday), 6 (Saturday), 7 (Sunday)-->1
        </dayOfWeek>
        <TimeRange>
          <!--ro, req, object, time range-->
          <beginTime>
            <!--ro, req, time, start time-->10:00:00
          </beginTime>
          <endTime>
            <!--ro, req, time, end time-->10:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </TimeBlockList>
    <HolidayBlockList>
      <!--ro, opt, array, holiday arming schedules, subType:object-->
      <TimeBlock>
        <!--ro, opt, object, arming schedules-->
        <TimeRange>
          <!--ro, req, object, time range-->
          <beginTime>
            <!--ro, req, time, start time-->10:00:00
          </beginTime>
          <endTime>
            <!--ro, req, time, end time-->10:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </HolidayBlockList>
  </Schedule>
</RadarFieldDetectionScheduleList>
```

14.7.1.6 Set arming schedules of all radar channels for intrusion detection

Request URL

PUT /ISAPI/Event/schedules/radarFieldDetections

Query Parameter

None

Request Message

```

<?xml version="1.0" encoding="UTF-8"?>

<RadarFieldDetectionScheduleList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, array, refer to the message XML_Schedule for details, subType:object, attr:version{req, string, protocolVersion}-->
  <Schedule>
    <!--opt, object-->
    <id>
      <!--req, string-->radarFieldDetection-1
    </id>
    <eventType>
      <!--opt, enum, event type, subType:string-->radarFieldDetection
    </eventType>
    <videoInputChannelID>
      <!--opt, string, video input channel ID-->1
    </videoInputChannelID>
    <TimeBlockList size="8">
      <!--req, array, arming time list, subType:object, attr:size{opt, int}-->
      <TimeBlock>
        <!--opt, object, arming time-->
        <dayOfWeek>
          <!--opt, enum, day of the week, subType:int, desc:1 (Monday), 2 (Tuesday), 3 (Wednesday), 4 (Thursday), 5 (Friday), 6 (Saturday), 7 (Sunday)-->1
        </dayOfWeek>
        <TimeRange>
          <!--req, object, time range-->
          <beginTime>
            <!--req, time, start time-->10:00:00
          </beginTime>
          <endTime>
            <!--req, time, end time-->10:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </TimeBlockList>
    <HolidayBlockList>
      <!--opt, array, holiday arming time, subType:object-->
      <TimeBlock>
        <!--opt, object, arming time-->
        <TimeRange>
          <!--req, object, time range-->
          <beginTime>
            <!--req, time, start time-->10:00:00
          </beginTime>
          <endTime>
            <!--req, time, end time-->10:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </HolidayBlockList>
  </Schedule>
</RadarFieldDetectionScheduleList>

```

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code description-->OK
  </subStatusCode>
</ResponseStatus>

```

14.7.1.7 Set the arming schedule of radar intrusion detection for a specified channel

Request URL

POT /ISAPI/Event/schedules/radarFieldDetections/radarFieldDetection-<radarChannelID>

Query Parameter

Parameter Name	Parameter Type	Description
radarChannelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<Schedule xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string-->radarFieldDetection-1
  </id>
  <eventType>
    <!--opt, enum, subType:string-->radarFieldDetection
  </eventType>
  <videoInputChannelID>
    <!--opt, string-->1
  </videoInputChannelID>
  <TimeBlockList size="8">
    <!--req, array, subType:object, attr:size{opt, int}-->
    <TimeBlock>
      <!--opt, object-->
      <dayOfWeek>
        <!--opt, enum, subType:int-->1
      </dayOfWeek>
      <TimeRange>
        <!--req, object-->
        <beginTime>
          <!--req, time-->10:00:00
        </beginTime>
        <endTime>
          <!--req, time-->10:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </TimeBlockList>
  <HolidayBlockList>
    <!--opt, array, subType:object-->
    <TimeBlock>
      <!--opt, object-->
      <TimeRange>
        <!--req, object-->
        <beginTime>
          <!--req, time-->10:00:00
        </beginTime>
        <endTime>
          <!--req, time-->10:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </HolidayBlockList>
</Schedule>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.7.1.8 Get the arming schedule of radar intrusion detection for a specified channel

Request URL

GET /ISAPI/Event/schedules/radarFieldDetections/radarFieldDetection-<radarChannelID>

Query Parameter

Parameter Name	Parameter Type	Description
radarChannelID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<Schedule xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string-->radarFieldDetection-1
  </id>
  <eventType>
    <!--ro, opt, enum, subType:string-->radarFieldDetection
  </eventType>
  <videoInputChannelID>
    <!--ro, opt, string-->1
  </videoInputChannelID>
  <TimeBlockList size="8">
    <!--ro, req, array, subType:object, attr:size{opt, int}-->
    <TimeBlock>
      <!--ro, opt, object-->
      <dayOfWeek>
        <!--ro, opt, enum, subType:int-->1
      </dayOfWeek>
      <TimeRange>
        <!--ro, req, object-->
        <beginTime>
          <!--ro, req, time-->10:00:00
        </beginTime>
        <endTime>
          <!--ro, req, time-->10:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </TimeBlockList>
  <HolidayBlockList>
    <!--ro, opt, array, subType:object-->
    <TimeBlock>
      <!--ro, opt, object-->
      <TimeRange>
        <!--ro, req, object-->
        <beginTime>
          <!--ro, req, time-->10:00:00
        </beginTime>
        <endTime>
          <!--ro, req, time-->10:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </HolidayBlockList>
</Schedule>
```

14.7.1.9 Set the linkage triggering parameters of intrusion detection event for a specified channel

Request URL

PUT /ISAPI/Event/triggers/FieldDetection-<channelID>/notifications

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```

<?xml version="1.0" encoding="UTF-8"?>

<EventTriggerNotificationList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, array, subType:object, attr:version{req, string, protocolVersion}-->
  <EventTriggerNotification>
    <!--opt, object-->
    <id>
      <!--req, string-->test
    </id>
    <notificationMethod>
      <!--req, enum, subType:string-->email
    </notificationMethod>
    <notificationRecurrence>
      <!--opt, enum, subType:string-->beginning
    </notificationRecurrence>
    <notificationInterval>
      <!--opt, int, unit:ms-->1
    </notificationInterval>
    <outputIOPortID>
      <!--opt, string-->1
    </outputIOPortID>
    <dynOutputIOPortID>
      <!--opt, string-->1
    </dynOutputIOPortID>
    <videoInputID>
      <!--opt, string-->1
    </videoInputID>
    <dynVideoInputID>
      <!--opt, string-->1
    </dynVideoInputID>
    <ptzAction>
      <!--opt, object-->
      <ptzChannelID>
        <!--req, string-->1
      </ptzChannelID>
      <actionName>
        <!--req, enum, subType:string-->preset
      </actionName>
      <actionNum>
        <!--opt, int-->1
      </actionNum>
    </ptzAction>
    <WhiteLightAction>
      <!--opt, object-->
      <whiteLightDurationTime>
        <!--opt, int, range:[1,60]-->1
      </whiteLightDurationTime>
    </WhiteLightAction>
    <AudioAction>
      <!--opt, object-->
      <audioID>
        <!--req, int-->1
      </audioID>
      <alarmTimes>
        <!--req, int, range:[0,9]-->1
      </alarmTimes>
    </AudioAction>
    <SupplementLightAlarm>
      <!--opt, object-->
      <durationTime>
        <!--opt, int, range:[0,90], unit:s-->5
      </durationTime>
    </SupplementLightAlarm>
  </EventTriggerNotification>
</EventTriggerNotificationList>

```

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>

```

14.7.1.10 Get the linkage triggering parameters of intrusion detection event for a specified channel

Request URL

GET /ISAPI/Event/triggers/FieldDetection-<channelID>/notifications

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

VISION E INGENIO SOFTWARE SA DE CV (VIINSOFT)
dzambrano@vinsoft.com.mx

```

<?xml version="1.0" encoding="UTF-8"?>

<EventTriggerNotificationList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, array, subType:object, attr:version{req, string, protocolVersion}-->
  <EventTriggerNotification>
    <!--ro, opt, object-->
    <id>
      <!--ro, req, string-->test
    </id>
    <notificationMethod>
      <!--ro, req, enum, subType:string-->email
    </notificationMethod>
    <notificationRecurrence>
      <!--ro, opt, enum, subType:string-->beginning
    </notificationRecurrence>
    <notificationInterval>
      <!--ro, opt, int, unit:ms-->1
    </notificationInterval>
    <outputIOPortID>
      <!--ro, opt, string-->1
    </outputIOPortID>
    <dynOutputIOPortID>
      <!--ro, opt, string-->1
    </dynOutputIOPortID>
    <videoInputID>
      <!--ro, opt, string-->1
    </videoInputID>
    <dynVideoInputID>
      <!--ro, opt, string-->1
    </dynVideoInputID>
    <ptzAction>
      <!--ro, opt, object-->
      <ptzChannelID>
        <!--ro, req, string-->1
      </ptzChannelID>
      <actionName>
        <!--ro, req, enum, subType:string-->preset
      </actionName>
      <actionNum>
        <!--ro, opt, int-->1
      </actionNum>
    </ptzAction>
    <WhiteLightAction>
      <!--ro, opt, object-->
      <whiteLightDurationTime>
        <!--ro, opt, int, range:[1,60]-->1
      </whiteLightDurationTime>
    </WhiteLightAction>
    <AudioAction>
      <!--ro, opt, object-->
      <audioID>
        <!--ro, req, int-->1
      </audioID>
      <alarmTimes>
        <!--ro, req, int, range:[0,9]-->1
      </alarmTimes>
    </AudioAction>
    <SupplementLightAlarm>
      <!--ro, opt, object-->
      <durationTime>
        <!--ro, opt, int, range:[0,90], unit:s-->5
      </durationTime>
    </SupplementLightAlarm>
    <customOverHTTPList>
      <!--ro, opt, array, subType:object, dep:and,{$.EventTriggerNotificationList[*].EventTriggerNotification.notificationMethod,eq,customOverHTTP}-->
      <customOverHTTP>
        <!--ro, opt, object-->
        <id>
          <!--ro, req, int-->1
        </id>
        <enabled>
          <!--ro, req, bool-->true
        </enabled>
        <hostID>
          <!--ro, opt, int-->1
        </hostID>
        <customInfo>
          <!--ro, opt, string, range:[1,512]-->test
        </customInfo>
      </customOverHTTP>
    </customOverHTTPList>
  </EventTriggerNotification>
</EventTriggerNotificationList>

```

14.7.1.11 Set the linkage parameters of intrusion detection event for a specified channel

Request URL

PUT /ISAPI/Event/triggers/FieldDetection-<channelID>?triggersEnabledStatus=<triggersEnabledStatus>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--
triggersEnabledStatus	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>
<EventTrigger xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string-->1
  </id>
  <eventType>
    <!--req, enum, subType:string-->fielddetection
  </eventType>
  <eventDescription>
    <!--opt, string-->test
  </eventDescription>
  <videoInputChannelID>
    <!--opt, string-->1
  </videoInputChannelID>
  <dynVideoInputChannelID>
    <!--opt, string-->1
  </dynVideoInputChannelID>
  <EventTriggerNotificationList>
    <!--opt, array, subType:object-->
    <EventTriggerNotification>
      <!--opt, object-->
      <id>
        <!--req, string-->test
      </id>
      <notificationMethod>
        <!--req, enum, subType:string-->email
      </notificationMethod>
      <notificationRecurrence>
        <!--opt, enum, subType:string-->beginning
      </notificationRecurrence>
      <videoInputID>
        <!--opt, string-->1
      </videoInputID>
    </EventTriggerNotification>
  </EventTriggerNotificationList>
</EventTrigger>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>
<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.7.1.12 Get the linkage parameters of intrusion detection event for a specified channel

Request URL

GET /ISAPI/Event/triggers/FieldDetection-<channelID>?triggersEnabledStatus=<triggersEnabledStatus>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.
triggersEnabledStatus	string	Linkage enabling status (if this node is included in the URL, the enabling and disabling of the linkage mode should be determined based on the triggerEnabled status in the linkage list). This node is supported if the value of isSupportTriggersEnabled in /ISAPI/Event/triggersCap contains is true.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>
<EventTrigger xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string-->1
  </id>
  <eventType>
    <!--ro, req, enum, subType:string-->fieldddetection
  </eventType>
  <eventDescription>
    <!--ro, opt, string-->test
  </eventDescription>
  <videoInputChannelID>
    <!--ro, opt, string-->1
  </videoInputChannelID>
  <dynVideoInputChannelID>
    <!--ro, opt, string-->1
  </dynVideoInputChannelID>
  <EventTriggerNotificationList>
    <!--ro, opt, array, subType:object-->
    <EventTriggerNotification>
      <!--ro, opt, object-->
      <id>
        <!--ro, req, string-->test
      </id>
      <notificationMethod>
        <!--ro, req, enum, subType:string-->email
      </notificationMethod>
      <notificationRecurrence>
        <!--ro, opt, enum, subType:string-->beginning
      </notificationRecurrence>
      <videoInputID>
        <!--ro, opt, string-->1
      </videoInputID>
      <SupplementLightAlarm>
        <!--ro, opt, object-->
        <durationTime>
          <!--ro, opt, int, range:[0,90], unit:s-->5
        </durationTime>
      </SupplementLightAlarm>
    </EventTriggerNotification>
  </EventTriggerNotificationList>
</EventTrigger>
```

14.7.1.13 Get the linkage parameters of radar intrusion detection event for a specified channel

Request URL

GET /ISAPI/Event/triggers/radarFieldDetection-<radarChannelID>

Query Parameter

Parameter Name	Parameter Type	Description
radarChannelID	string	--

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<EventTrigger xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string-->radarFieldDetection-1
  </id>
  <eventType>
    <!--ro, req, enum, subType:string-->radarFieldDetection
  </eventType>
  <eventDescription>
    <!--ro, opt, string-->test
  </eventDescription>
  <inputIOPortID>
    <!--ro, opt, string-->test
  </inputIOPortID>
  <dynInputIOPortID>
    <!--ro, opt, string-->test
  </dynInputIOPortID>
  <videoInputChannelID>
    <!--ro, opt, string-->1
  </videoInputChannelID>
  <dynVideoInputChannelID>
    <!--ro, opt, string-->1
  </dynVideoInputChannelID>
  <intervalBetweenEvents>
    <!--ro, opt, int, unit:s-->1
  </intervalBetweenEvents>
  <WLSensorID>
    <!--ro, opt, string-->1
  </WLSensorID>
  <EventTriggerNotificationList>
    <!--ro, opt, array, subType:object-->
    <EventTriggerNotification>
      <!--ro, opt, object-->
      <id>
        <!--ro, req, string-->test
      </id>
      <notificationMethod>
        <!--ro, req, enum, subType:string-->FTP
      </notificationMethod>
      <notificationRecurrence>
        <!--ro, opt, enum, subType:string-->beginning
      </notificationRecurrence>
      <notificationInterval>
        <!--ro, opt, int, unit:ms-->1
      </notificationInterval>
      <videoInputID>
        <!--ro, opt, string-->1
      </videoInputID>
      <dynVideoInputID>
        <!--ro, opt, string-->1
      </dynVideoInputID>
      <ptzAction>
        <!--ro, opt, object-->
        <ptzChannelID>
          <!--ro, req, string-->1
        </ptzChannelID>
        <actionName>
          <!--ro, req, enum, subType:string-->preset
        </actionName>
        <actionNum>
          <!--ro, opt, int-->1
        </actionNum>
      </ptzAction>
      <WhiteLightAction>
        <!--ro, opt, object-->
        <WhiteLightDurationTime>
          <!--ro, opt, int, range:[1,60], unit:s-->1
        </WhiteLightDurationTime>
      </WhiteLightAction>
    </EventTriggerNotification>
  </EventTriggerNotificationList>
</EventTrigger>

```

14.7.1.14 Set intrusion detection parameters of all channels

Request URL

PUT /ISAPI/Smart/FieldDetection

Query Parameter

None

Request Message

```

<?xml version="1.0" encoding="UTF-8"?>

```



```

<FieldDetectionList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, array, subType:object, attr:version(req, string, protocolVersion)-->
  <FieldDetection>
    <!--opt, object-->
    <id>
      <!--req, string, channel No.-->test
    </id>
    <enabled>
      <!--req, bool-->true
    </enabled>
    <intelliBackSearch>
      <!--opt, bool, whether the device supports video dual-VCA-->true
    </intelliBackSearch>
    <startTriggerTime>
      <!--req, int, unit:ms-->1
    </startTriggerTime>
    <endTriggerTime>
      <!--req, int, unit:ms-->1
    </endTriggerTime>
    <normalizedScreenSize>
      <!--opt, object, normalized size-->
      <normalizedScreenWidth>
        <!--req, int, normalized width-->1
      </normalizedScreenWidth>
      <normalizedScreenHeight>
        <!--req, int, normalized height-->1
      </normalizedScreenHeight>
    </normalizedScreenSize>
    <minObjectSize>
      <!--opt, int, minimum pixels of each object-->1
    </minObjectSize>
    <maxObjectSize>
      <!--opt, int, maximum pixels of each object-->1
    </maxObjectSize>
    <FieldDetectionRegionList size="4">
      <!--opt, array, subType:object, attr:size(req, int)-->
      <FieldDetectionRegion>
        <!--opt, object, intrusion region-->
        <id>
          <!--req, string-->1
        </id>
        <enabled>
          <!--req, bool, whether to enable the function-->true
        </enabled>
        <sensitivityLevel>
          <!--req, int, sensitivity, range:[0,100]-->1
        </sensitivityLevel>
        <timeThreshold>
          <!--req, int-->1
        </timeThreshold>
        <objectOccupation>
          <!--req, int, percentage-->1
        </objectOccupation>
        <detectionTarget>
          <!--opt, enum, detection target, subType:string, desc:detection target-->all
        </detectionTarget>
        <RegionCoordinatesList>
          <!--opt, array, rectangle, subType:object, range:[0,4], desc:rectangle-->
          <RegionCoordinates>
            <!--opt, object, area coordinates, desc:the origin is the lower-left corner of the screen-->
            <positionX>
              <!--req, int, x-coordinate, range:[0,1000]-->1
            </positionX>
            <positionY>
              <!--req, int, y-coordinate, range:[0,1000]-->1
            </positionY>
          </RegionCoordinates>
        </RegionCoordinatesList>
        <humanMisinfoFilterEnabled>
          <!--opt, bool, whether to enable false alarm filtering (human)-->true
        </humanMisinfoFilterEnabled>
        <vehicleMisinfoFilterEnabled>
          <!--opt, bool, whether to enable false alarm filtering (vehicle)-->true
        </vehicleMisinfoFilterEnabled>
        <priority>
          <!--opt, enum, priority, subType:string, desc:priority-->low
        </priority>
        <alarmConfidence>
          <!--opt, enum, subType:string-->low
        </alarmConfidence>
        <recordConfidence>
          <!--opt, enum, subType:string-->low
        </recordConfidence>
      </FieldDetectionRegion>
    </FieldDetectionRegionList>
    <humanMisinfoFilterEnabled>
      <!--opt, bool, whether to enable false alarm filtering (human)-->true
    </humanMisinfoFilterEnabled>
    <vehicleMisinfoFilterEnabled>
      <!--opt, bool, whether to enable false alarm filtering (vehicle)-->true
    </vehicleMisinfoFilterEnabled>
  </FieldDetection>

```

```
</FieldDetectionList>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code description-->OK
  </subStatusCode>
</ResponseStatus>
```

14.7.1.15 Get intrusion detection parameters of all channels

Request URL

GET /ISAPI/Smart/FieldDetection

Query Parameter

None

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<FieldDetectionList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, array, intrusion detection parameter list, subType:object, attr:version{req, string, protocolVersion}-->
  <FieldDetection>
    <!--ro, opt, object, intrusion detection parameters-->
    <id>
      <!--ro, req, string, channel No.-->test
    </id>
    <enabled>
      <!--ro, req, bool-->true
    </enabled>
    <intelliBackSearch>
      <!--ro, opt, bool, whether the device supports video dual-VCA-->true
    </intelliBackSearch>
    <startTriggerTime>
      <!--ro, req, int, unit:ms-->1
    </startTriggerTime>
    <endTriggerTime>
      <!--ro, req, int, unit:ms-->1
    </endTriggerTime>
    <normalizedScreenSize>
      <!--ro, opt, object, normalized size-->
      <normalizedScreenWidth>
        <!--ro, req, int, normalized width-->1
      </normalizedScreenWidth>
      <normalizedScreenHeight>
        <!--ro, req, int, normalized height-->1
      </normalizedScreenHeight>
    </normalizedScreenSize>
    <minObjectSize>
      <!--ro, opt, int, minimum pixels of each object-->1
    </minObjectSize>
    <maxObjectSize>
      <!--ro, opt, int, maximum pixels of each object-->1
    </maxObjectSize>
    <FieldDetectionRegionList size="4">
      <!--ro, opt, array, subType:object, attr:size{req, int}-->
      <FieldDetectionRegion>
        <!--ro, opt, object-->
        <id>
          <!--ro, req, string-->1
        </id>
        <enabled>
          <!--ro, req, bool, whether to enable the function-->true
        </enabled>
```

```

<sensitivityLevel>
  <!--ro, req, int, sensitivity-->1
</sensitivityLevel>
<timeThreshold>
  <!--ro, req, int, time threshold-->1
</timeThreshold>
<objectOccupation>
  <!--ro, req, int, percentage-->1
</objectOccupation>
<detectionTarget>
  <!--ro, opt, enum, detection target, subType:string, desc:detection target-->all
</detectionTarget>
<RegionCoordinatesList>
  <!--ro, opt, array, rectangle, subType:object, range:[0,4], desc:rectangle-->
  <RegionCoordinates>
    <!--ro, opt, object, area coordinates, desc:the origin is the lower-left corner of the screen-->
    <positionX>
      <!--ro, req, int, X-coordinate, range:[0,1000]-->1
    </positionX>
    <positionY>
      <!--ro, req, int, Y-coordinate, range:[0,1000]-->1
    </positionY>
  </RegionCoordinates>
</RegionCoordinatesList>
<humanMisinfoFilterEnabled>
  <!--ro, opt, bool, whether to enable false alarm filtering (human)-->true
</humanMisinfoFilterEnabled>
<vehicleMisinfoFilterEnabled>
  <!--ro, opt, bool, whether to enable false alarm filtering (vehicle)-->true
</vehicleMisinfoFilterEnabled>
<priority>
  <!--ro, opt, enum, priority, subType:string, desc:priority-->low
</priority>
<alarmConfidence>
  <!--ro, opt, enum, subType:string-->low
</alarmConfidence>
<recordConfidence>
  <!--ro, opt, enum, subType:string-->low
</recordConfidence>
</FieldDetectionRegion>
</FieldDetectionRegionList>
<humanMisinfoFilterEnabled>
  <!--ro, opt, bool-->true
</humanMisinfoFilterEnabled>
<vehicleMisinfoFilterEnabled>
  <!--ro, opt, bool, whether to enable false alarm filtering (vehicle)-->true
</vehicleMisinfoFilterEnabled>
</FieldDetection>
</FieldDetectionList>

```

14.7.1.16 Get intrusion detection parameters by video input channel

Request URL

GET /ISAPI/Smart/FieldDetection/<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<FieldDetection xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, intrusion detection, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string, channel No.-->test
  </id>
  <enabled>
    <!--ro, req, bool, whether to enable the function-->true
  </enabled>
  <intelliBackSearch>
    <!--ro, opt, bool, whether the device supports video dual-VCA-->true
  </intelliBackSearch>
  <startTriggerTime>
    <!--ro, req, int, unit: milliseconds, unit:ms-->1
  </startTriggerTime>
  <endTriggerTime>
    <!--ro, req, int, unit: milliseconds, unit:ms-->1
  </endTriggerTime>

```

```

</enum>
<normalizedScreenSize>
  <!--ro, opt, object, normalized size-->
  <normalizedScreenWidth>
    <!--ro, req, int, normalized width-->1
  </normalizedScreenWidth>
  <normalizedScreenHeight>
    <!--ro, req, int, normalized height-->1
  </normalizedScreenHeight>
</normalizedScreenSize>
<minObjectSize>
  <!--ro, opt, int, minimum pixels of each object-->1
</minObjectSize>
<maxObjectSize>
  <!--ro, opt, int, maximum pixels of each object-->1
</maxObjectSize>
<FieldDetectionRegionList size="4">
  <!--ro, opt, array, subType:object, attr:size{req, int}-->
  <FieldDetectionRegion>
    <!--ro, opt, object-->
    <id>
      <!--ro, req, string, ID-->1
    </id>
    <enabled>
      <!--ro, opt, bool, whether to enable the function, desc:whether to enable the function-->true
    </enabled>
    <sensitivityLevel>
      <!--ro, req, int, sensitivity-->1
    </sensitivityLevel>
    <timeThreshold>
      <!--ro, req, int, time threshold-->1
    </timeThreshold>
    <objectOccupation>
      <!--ro, req, int, percentage-->1
    </objectOccupation>
    <detectionTarget>
      <!--ro, opt, enum, detection target, subType:string, desc:detection target-->all
    </detectionTarget>
    <RegionCoordinatesList>
      <!--ro, opt, array, area coordinate list, subType:object, range:[0,4], desc:rectangle-->
      <RegionCoordinates>
        <!--ro, opt, object, area coordinates, desc:the origin is the lower-left corner of the screen-->
        <positionX>
          <!--ro, req, int, X-coordinate, range:[0,1000]-->1
        </positionX>
        <positionY>
          <!--ro, req, int, Y-coordinate, range:[0,1000]-->1
        </positionY>
      </RegionCoordinates>
    </RegionCoordinatesList>
    <humanMisinfoFilterEnabled>
      <!--ro, opt, bool, whether to enable false alarm filtering (human)-->true
    </humanMisinfoFilterEnabled>
    <vehicleMisinfoFilterEnabled>
      <!--ro, opt, bool, whether to enable false alarm filtering (vehicle)-->true
    </vehicleMisinfoFilterEnabled>
    <priority>
      <!--ro, opt, enum, priority, subType:string, desc:priority-->low
    </priority>
    <alarmConfidence>
      <!--ro, opt, enum, subType:string-->low
    </alarmConfidence>
    <recordConfidence>
      <!--ro, opt, enum, subType:string-->low
    </recordConfidence>
    <ruleName>
      <!--ro, opt, string, range:[1,64]-->test
    </ruleName>
    <detectionTargetProperty>
      <!--ro, opt, object-->
      <human>
        <!--ro, opt, object, dep:or,{$.FieldDetection.FieldDetectionRegionList.FieldDetectionRegion.detectionTarget,eq,all},
        {$.FieldDetection.FieldDetectionRegionList.FieldDetectionRegion.detectionTarget,eq,human}-->
        <propertyList>
          <!--ro, opt, array, subType:object-->
          <property>
            <!--ro, opt, enum, subType:string-->nonMotor
          </property>
        </propertyList>
      </human>
      <animal>
        <!--ro, opt, object, dep:or,{$.FieldDetection.FieldDetectionRegionList.FieldDetectionRegion.detectionTarget,eq,all},
        {$.FieldDetection.FieldDetectionRegionList.FieldDetectionRegion.detectionTarget,eq,animal}-->
        <propertyList>
          <!--ro, opt, array, subType:object-->
          <property>
            <!--ro, opt, enum, subType:string-->large
          </property>
        </propertyList>
      </animal>
    </detectionTargetProperty>
  </FieldDetectionRegion>
</FieldDetectionRegionList>
<humanMisinfoFilterEnabled>

```

```

    <!--ro, opt, bool, whether to enable false alarm filtering (human)-->true
</humanMisinfoFilterEnabled>
<vehicleMisinfoFilterEnabled>
    <!--ro, opt, bool, whether to enable false alarm filtering (vehicle)-->true
</vehicleMisinfoFilterEnabled>
<contAlarmForStaticTargetEnabled>
    <!--ro, opt, bool-->true
</contAlarmForStaticTargetEnabled>
<targetAlarmInterval>
    <!--ro, opt, int, range:[1,5], step:1, unit:s, dep:and,{$.FieldDetection.targetAlarmInterval,eq,true}-->1
</targetAlarmInterval>
<stackTarget>
    <!--ro, opt, bool-->true
</stackTarget>
<targetSensitivityLevel>
    <!--ro, opt, int, range:[0,100]-->50
</targetSensitivityLevel>
</FieldDetection>

```

14.7.1.17 Set intrusion detection parameters by channel

Request URL

PUT /ISAPI/Smart/FieldDetection/<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```

<?xml version="1.0" encoding="UTF-8"?>

<FieldDetection xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
    <!--opt, object, intrusion detection parameters, attr:version{req, string, protocolVersion}-->
    <id>
        <!--req, string, channel No.-->test
    </id>
    <enabled>
        <!--req, bool, whether to enable the function-->true
    </enabled>
    <intelliBackSearch>
        <!--opt, bool, whether the device supports video dual-VCA-->true
    </intelliBackSearch>
    <startTriggerTime>
        <!--req, int, trigger start time, unit:ms-->1
    </startTriggerTime>
    <endTriggerTime>
        <!--req, int, trigger end time, unit:ms-->1
    </endTriggerTime>
    <normalizedScreenSize>
        <!--opt, object, normalized size-->
        <normalizedScreenWidth>
            <!--req, int, normalized width-->1
        </normalizedScreenWidth>
        <normalizedScreenHeight>
            <!--req, int, normalized height-->1
        </normalizedScreenHeight>
    </normalizedScreenSize>
    <minObjectSize>
        <!--opt, int, minimum pixels of each object-->1
    </minObjectSize>
    <maxObjectSize>
        <!--opt, int, maximum pixels of each object-->1
    </maxObjectSize>
    <FieldDetectionRegionList size="4">
        <!--opt, array, intrusion detection region list, subType:object, attr:size{req, int}-->
        <FieldDetectionRegion>
            <!--opt, object, intrusion detection region-->
            <id>
                <!--req, string, region ID-->1
            </id>
            <enabled>
                <!--req, bool, whether to enable the function-->true
            </enabled>
            <sensitivityLevel>
                <!--req, int, sensitivity-->1
            </sensitivityLevel>
            <timeThreshold>
                <!--req, int, time threshold-->1
            </timeThreshold>
            <objectOccupation>
                <!--req, int, percentage-->1
            </objectOccupation>
            <detectionTarget>

```

```

    <!--opt, enum, detection target, subType:string-->test
  </detectionTarget>
  <RegionCoordinatesList>
    <!--opt, array, region coordinate list, subType:object, range:[0,4], desc:rectangle-->
    <RegionCoordinates>
      <!--opt, object, region coordinates, desc:the origin is the Lower-Left corner of the screen-->
      <positionX>
        <!--req, int, X-coordinate, range:[0,1000]-->1
      </positionX>
      <positionY>
        <!--req, int, Y-coordinate, range:[0,1000]-->1
      </positionY>
    </RegionCoordinates>
  </RegionCoordinatesList>
  <humanMisinfoFilterEnabled>
    <!--opt, bool, whether to enable false alarm filtering of human body detection-->true
  </humanMisinfoFilterEnabled>
  <vehicleMisinfoFilterEnabled>
    <!--opt, bool, whether to enable false alarm filtering of vehicle detection-->true
  </vehicleMisinfoFilterEnabled>
  <priority>
    <!--opt, enum, priority, subType:string, desc:"Low", "middle", "high"-->low
  </priority>
  <alarmConfidence>
    <!--opt, enum, alarm confidence, subType:string, desc:"Low" (default value), "mediumLow", "mediumHigh", "high"-->low
  </alarmConfidence>
  <recordConfidence>
    <!--opt, enum, video confidence, subType:string, desc:"Low" (default value), "mediumLow", "mediumHigh", "high"-->low
  </recordConfidence>
  <FieldDetectionRegion>
  </FieldDetectionRegionList>
  <humanMisinfoFilterEnabled>
    <!--opt, bool, whether to enable false alarm filtering of human body detection-->true
  </humanMisinfoFilterEnabled>
  <vehicleMisinfoFilterEnabled>
    <!--opt, bool, whether to enable false alarm filtering of vehicle detection-->true
  </vehicleMisinfoFilterEnabled>
</FieldDetection>

```

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>

```

14.7.1.18 Get configuration capability of intrusion detection by channel

Request URL

GET /ISAPI/Smart/FieldDetection/<channelID>/capabilities

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>
<FieldDetection xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string, channel No.-->test
  </id>
  <enabled opt="true,false">
    <!--ro, req, bool, attr:opt{req, string}-->true
  </enabled>
  <enableDualVca opt="true,false">
    <!--ro, req, bool, attr:opt{req, string}-->true
  </enableDualVca>
  <normalizedScreenSize>
    <!--ro, opt, object-->
    <normalizedScreenWidth>
      <!--ro, req, int-->1
    </normalizedScreenWidth>
    <normalizedScreenHeight>
      <!--ro, req, int-->1
    </normalizedScreenHeight>
  </normalizedScreenSize>
  <FieldDetectionRegionList size="4">
    <!--ro, opt, array, subType:object, attr:size{req, int}-->
    <FieldDetectionRegion>
      <!--ro, opt, object-->
      <id>
        <!--ro, req, string, region ID-->1
      </id>
      <minRegionCoordinatesNum>
        <!--ro, opt, int-->1
      </minRegionCoordinatesNum>
      <maxRegionCoordinatesNum>
        <!--ro, opt, int-->1
      </maxRegionCoordinatesNum>
      <sensitivityLevel>
        <!--ro, req, int, sensitivity-->1
      </sensitivityLevel>
      <timeThreshold min="0" max="60" def="0">
        <!--ro, req, int, time threshold, attr:min{req, int},max{req, int},def{req, int}-->1
      </timeThreshold>
      <detectionTarget opt="all,human,vehicle,animal,others" def="human">
        <!--ro, opt, enum, detection target, subType:string, attr:opt{req, string},def{req, string}, desc:detection target-->all
      </detectionTarget>
      <alarmConfidence opt="low,mediumLow,mediumHigh,high" def="low">
        <!--ro, opt, enum, subType:string, attr:opt{req, string},def{req, string}-->low
      </alarmConfidence>
    </FieldDetectionRegion>
  </FieldDetectionRegionList>
  <isSupportMultiScene opt="true,false">
    <!--ro, req, bool, whether it supports multiple scene detection, attr:opt{req, string}-->true
  </isSupportMultiScene>
  <isSupportHumanMisinfoFilter>
    <!--ro, opt, bool, whether it supports false human body alarm prevention, desc:if this function is supported, this node will be returned and its value is true; otherwise, this node will not be returned-->true
  </isSupportHumanMisinfoFilter>
  <isSupportVehicleMisinfoFilter>
    <!--ro, opt, bool, whether it supports false vehicle alarm prevention, desc:if this function is supported, this node will be returned and its value is true; otherwise, this node will not be returned-->true
  </isSupportVehicleMisinfoFilter>
  <isSupportTargetMultiSelect>
    <!--ro, opt, bool, whether it supports selecting multiple detection targets, desc:if this function is supported, this node will be returned and its value is true; otherwise, this node will not be returned-->true
  </isSupportTargetMultiSelect>
  <isSupportAllDayUpload>
    <!--ro, opt, bool, whether it supports uploading all-day event-->true
  </isSupportAllDayUpload>
</FieldDetection>

```

14.7.1.19 Get parameters of all intrusion detection regions of a specific channel

Request URL

GET /ISAPI/Smart/FieldDetection/<channelID>/regions

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<FieldDetectionRegionList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, array, subType:object, attr:version{req, string, protocolVersion}-->
  <channelEnabled>
    <!--ro, opt, bool-->true
  </channelEnabled>
  <FieldDetectionRegion>
    <!--ro, opt, object, intrusion detection-->
    <id>
      <!--ro, req, string, ID-->1
    </id>
    <enabled>
      <!--ro, opt, bool-->true
    </enabled>
    <sensitivityLevel>
      <!--ro, req, int, sensitivity, range:[0,100]-->1
    </sensitivityLevel>
    <timeThreshold>
      <!--ro, req, int, time threshold-->1
    </timeThreshold>
    <objectOccupation>
      <!--ro, req, int-->1
    </objectOccupation>
    <detectionTarget>
      <!--ro, opt, enum, detection target, subType:string, desc:"all", "human", "vehicle", "others"-->all
    </detectionTarget>
    <RegionCoordinatesList>
      <!--ro, opt, array, list of area coordinates, subType:object, range:[0,4], desc:rectangle-->
      <RegionCoordinates>
        <!--ro, opt, object, area coordinates, desc:the origin is the Lower-Left corner of the screen-->
        <positionX>
          <!--ro, req, int, X-coordinate, range:[0,1000]-->1
        </positionX>
        <positionY>
          <!--ro, req, int, Y-coordinate, range:[0,1000]-->1
        </positionY>
      </RegionCoordinates>
    </RegionCoordinatesList>
    <humanMisinfoFilterEnabled>
      <!--ro, opt, bool, whether to enable false alarm filtering (human)-->true
    </humanMisinfoFilterEnabled>
    <vehicleMisinfoFilterEnabled>
      <!--ro, opt, bool, whether to enable false alarm filtering (vehicle)-->true
    </vehicleMisinfoFilterEnabled>
    <priority>
      <!--ro, opt, enum, priority, subType:string, desc:"Low", "middle", "high"-->low
    </priority>
    <alarmConfidence>
      <!--ro, opt, enum, confidence of alarm notification, subType:string, desc:confidence of alarm notification-->low
    </alarmConfidence>
    <recordConfidence>
      <!--ro, opt, enum, confidence of video recording, subType:string, desc:confidence of video recording-->low
    </recordConfidence>
  </FieldDetectionRegion>
</FieldDetectionRegionList>

```

14.7.1.20 Set parameters of all intrusion detection regions of a specified channel

Request URL

PUT /ISAPI/Smart/FieldDetection/<channelID>/regions

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message


```
<?xml version="1.0" encoding="UTF-8"?>

<FieldDetectionRegionList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, array, parameters of all intrusion detection regions, subType:object, attr:version{req, string, protocolVersion}-->
  <FieldDetectionRegion>
    <!--opt, object, intrusion detection regions-->
    <id>
      <!--req, string, No.-->1
    </id>
    <enabled>
      <!--req, bool, whether to enable the function-->true
    </enabled>
    <sensitivityLevel>
      <!--req, int, sensitivity-->1
    </sensitivityLevel>
    <timeThreshold>
      <!--req, int, time threshold-->1
    </timeThreshold>
    <objectOccupation>
      <!--req, int, percentage-->1
    </objectOccupation>
    <detectionTarget>
      <!--opt, enum, detection target, subType:string, desc:"all", "human", "vehicle", "others" (targets except human bodies and vehicles). The value "all"
is mutually exclusive with "others"-->all
    </detectionTarget>
    <RegionCoordinatesList>
      <!--opt, array, region coordinate list, subType:object, range:[0,4], desc:rectangle-->
      <RegionCoordinates>
        <!--opt, object, region coordinates, desc:the origin is the lower-left corner of the screen-->
        <positionX>
          <!--req, int, X-coordinate, range:[0,1000]-->1
        </positionX>
        <positionY>
          <!--req, int, Y-coordinate, range:[0,1000]-->1
        </positionY>
      </RegionCoordinates>
    </RegionCoordinatesList>
    <humanMisinfoFilterEnabled>
      <!--opt, bool, whether to enable false alarm filtering of human body detection-->true
    </humanMisinfoFilterEnabled>
    <vehicleMisinfoFilterEnabled>
      <!--opt, bool, whether to enable false alarm filtering of vehicle detection-->true
    </vehicleMisinfoFilterEnabled>
    <priority>
      <!--opt, enum, priority, subType:string, desc:"Low", "middle", "high"-->low
    </priority>
    <alarmConfidence>
      <!--opt, enum, alarm confidence, subType:string, desc:"Low" (default value), "mediumLow", "mediumHigh", "high"-->low
    </alarmConfidence>
    <recordConfidence>
      <!--opt, enum, video confidence, subType:string, desc:"Low" (default value), "mediumLow", "mediumHigh", "high"-->low
    </recordConfidence>
  </FieldDetectionRegion>
</FieldDetectionRegionList>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6
(Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format",
"Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.7.1.21 Get parameters of an intrusion detection region of a specific channel

Request URL

GET /ISAPI/Smart/FieldDetection/<channelID>/regions/<regionID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.
regionID	string	Region ID

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<FieldDetectionRegion xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string, ID-->1
  </id>
  <enabled>
    <!--ro, opt, bool-->true
  </enabled>
  <sensitivityLevel>
    <!--ro, req, int, sensitivity, range:[0,100]-->1
  </sensitivityLevel>
  <timeThreshold>
    <!--ro, req, int, time threshold-->1
  </timeThreshold>
  <objectOccupation>
    <!--ro, req, int-->1
  </objectOccupation>
  <detectionTarget>
    <!--ro, opt, enum, detection target, subType:string, desc:"all", "human", "vehicle", "others"-->all
  </detectionTarget>
  <RegionCoordinatesList>
    <!--ro, opt, object, List of area coordinates-->
    <RegionCoordinates>
      <!--ro, opt, object, area coordinates-->
      <positionX>
        <!--ro, req, int, X-coordinate-->1
      </positionX>
      <positionY>
        <!--ro, req, int, Y-coordinate-->1
      </positionY>
    </RegionCoordinates>
  </RegionCoordinatesList>
  <humanMisinfoFilterEnabled>
    <!--ro, opt, bool, whether to enable false alarm filtering (human)-->true
  </humanMisinfoFilterEnabled>
  <vehicleMisinfoFilterEnabled>
    <!--ro, opt, bool, whether to enable false alarm filtering (vehicle)-->true
  </vehicleMisinfoFilterEnabled>
  <priority>
    <!--ro, opt, enum, priority, subType:string, desc:"Low", "middle", "high"-->low
  </priority>
  <alarmConfidence>
    <!--ro, opt, enum, confidence of alarm notification, subType:string, desc:confidence of alarm notification: "Low", "mediumLow", "mediumHigh", "high", "Low"-->low
  </alarmConfidence>
  <recordConfidence>
    <!--ro, opt, enum, confidence of video recording, subType:string, desc:confidence of recording video: "Low", "mediumLow", "mediumHigh", "high", "Low"-->low
  </recordConfidence>
  <ruleName>
    <!--ro, opt, string, range:[1,64]-->test
  </ruleName>
  <detectionTargetProperty>
    <!--ro, opt, object-->
    <human>
      <!--ro, opt, object, dep:or,{$.FieldDetectionRegion.detectionTarget,eq,all},{$.FieldDetectionRegion.detectionTarget,eq,human}-->
      <propertyList>
        <!--ro, opt, array, subType:object-->
        <property>
          <!--ro, opt, enum, subType:string-->nonMotor
        </property>
      </propertyList>
    </human>
    <animal>
      <!--ro, opt, object, dep:or,{$.FieldDetectionRegion.detectionTarget,eq,all},{$.FieldDetectionRegion.detectionTarget,eq,animal}-->
      <propertyList>
        <!--ro, opt, array, subType:object-->
        <property>
          <!--ro, opt, enum, subType:string-->large
        </property>
      </propertyList>
    </animal>
  </detectionTargetProperty>
</FieldDetectionRegion>
```

14.7.1.22 Set parameters of an intrusion detection region of a specified channel

Request URL

PUT /ISAPI/Smart/FieldDetection/<channelID>/regions/<regionID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--
regionID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<FieldDetectionRegion xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, parameters of an intrusion detection region of a specified channel, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string, No.-->1
  </id>
  <enabled>
    <!--req, bool, whether to enable the function-->true
  </enabled>
  <sensitivityLevel>
    <!--req, int, sensitivity-->1
  </sensitivityLevel>
  <timeThreshold>
    <!--req, int, time threshold-->1
  </timeThreshold>
  <objectOccupation>
    <!--req, int, percentage-->1
  </objectOccupation>
  <detectionTarget>
    <!--opt, enum, detection target, subType:string, desc:"all", "human", "vehicle", "others" (targets except human bodies and vehicles). The value "all" is mutually exclusive with "others"-->all
  </detectionTarget>
  <RegionCoordinatesList>
    <!--opt, object, region coordinate list-->
    <RegionCoordinates>
      <!--opt, object, region coordinates-->
      <positionX>
        <!--req, int, X-coordinate-->1
      </positionX>
      <positionY>
        <!--req, int, Y-coordinate-->1
      </positionY>
    </RegionCoordinates>
  </RegionCoordinatesList>
  <humanMisinfoFilterEnabled>
    <!--opt, bool, whether to enable false alarm filtering of human body detection-->true
  </humanMisinfoFilterEnabled>
  <vehicleMisinfoFilterEnabled>
    <!--opt, bool, whether to enable false alarm filtering of vehicle detection-->true
  </vehicleMisinfoFilterEnabled>
  <priority>
    <!--opt, enum, priority, subType:string, desc:"Low", "middle", "high"-->low
  </priority>
  <alarmConfidence>
    <!--opt, enum, alarm confidence, subType:string, desc:"Low" (default value), "mediumLow", "mediumHigh", "high"-->low
  </alarmConfidence>
  <recordConfidence>
    <!--opt, enum, video confidence, subType:string, desc:"Low" (default value), "mediumLow", "mediumHigh", "high"-->low
  </recordConfidence>
</FieldDetectionRegion>
```

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6
    (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format",
    "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>

```

14.7.1.23 Get configuration capability of intrusion detection by channel

Request URL

GET /ISAPI/Smart/FieldDetection/<channelID>/regions/<regionID>/capabilities

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.
regionID	string	Region ID

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<FieldDetectionRegion xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string, detection area ID-->1
  </id>
  <enabled>
    <!--ro, req, bool, whether to enable the function-->true
  </enabled>
  <sensitivityLevel min="1" max="100">
    <!--ro, req, int, sensitivity, range:[1,100], attr:min{req, int},max{req, int}-->1
  </sensitivityLevel>
  <timeThreshold min="1" max="100" def="1">
    <!--ro, req, int, range:[1,100], attr:min{req, int},max{req, int},def{req, int}-->1
  </timeThreshold>
  <objectOccupation min="1" max="100">
    <!--ro, req, int, range:[1,100], attr:min{req, int},max{req, int}-->1
  </objectOccupation>
  <maxRegionCoordinatesNum>
    <!--ro, req, int, the maximum number of coordinates-->1
  </maxRegionCoordinatesNum>
  <minRegionCoordinatesNum>
    <!--ro, req, int, the minimum number of coordinates-->1
  </minRegionCoordinatesNum>
  <detectionTarget opt="all,human,vehicle,animal,others">
    <!--ro, opt, enum, detection target, subType:string, attr:opt{req, string}, desc:detection target-->all
  </detectionTarget>
  <RegionCoordinatesList>
    <!--ro, opt, array, area coordinates List, subType:object, range:[0,4], desc:rectangle-->
    <RegionCoordinates>
      <!--ro, opt, object, area coordinates, desc:the origin is the lower-left corner of the screen-->
      <positionX>
        <!--ro, req, int, X-coordinate, range:[0,1000]-->1
      </positionX>
      <positionY>
        <!--ro, req, int, Y-coordinate, range:[0,1000]-->1
      </positionY>
    </RegionCoordinates>
  </RegionCoordinatesList>
  <humanMisinfoFilterEnabled opt="true,false">
    <!--ro, opt, bool, false alarm reduction of human body, attr:opt{req, string}-->true
  </humanMisinfoFilterEnabled>
  <vehicleMisinfoFilterEnabled opt="true,false">
    <!--ro, opt, bool, false alarm reduction of vehicle, attr:opt{req, string}-->true
  </vehicleMisinfoFilterEnabled>
  <priority opt="low,middle,high">
    <!--ro, opt, enum, priority, subType:string, attr:opt{req, string}, desc:priority: "low,middle,high"-->low
  </priority>
  <isSupportAllTargetDetectionWebDisplay>
    <!--ro, opt, bool-->false
  </isSupportAllTargetDetectionWebDisplay>
  <ruleName min="1" max="64">
    <!--ro, opt, string, attr:min{req, int},max{req, int}-->test
  </ruleName>
  <detectionTargetProperty>
    <!--ro, opt, object-->
    <human>
      <!--ro, opt, object-->
      <propertyList size="1">
        <!--ro, opt, object, attr:size{req, int}-->
        <property opt="nonMotor">
          <!--ro, opt, enum, subType:string, attr:opt{req, string}-->nonMotor
        </property>
      </propertyList>
    </human>
    <animal>
      <!--ro, opt, object-->
      <propertyList size="3">
        <!--ro, opt, object, attr:size{req, int}-->
        <property opt="large,small,poultry">
          <!--ro, opt, enum, subType:string, attr:opt{req, string}-->large
        </property>
      </propertyList>
    </animal>
  </detectionTargetProperty>
</FieldDetectionRegion>

```

14.7.1.24 Get radar intrusion detection capability

Request URL

GET /ISAPI/Smart/RadarChannels/<radarChannelID>/radarFieldDetection/capabilities?format=json

Query Parameter

Parameter Name	Parameter Type	Description
radarChannelID	string	--

Request Message

None

Response Message

VISION E INGENIO SOFTWARE SA DE CV (VIINSOFT)
dzambrano@viinsoft.com.mx

```

{
  "RadarFieldDetectionCap": {
    /*ro, req, object, radar intrusion detection capability*/
    "enabled": [true, false],
    /*ro, req, array, whether to enable detection, subType:bool*/
    "intelliBackSearch": true,
    /*ro, req, bool, whether it supports dual-VCA search*/
    "startTriggerTime": {
      /*ro, req, object, triggering start time*/
      "@min": 1,
      /*ro, req, int, the minimum value*/
      "@max": 100
      /*ro, req, int, the maximum value*/
    },
    "endTriggerTime": {
      /*ro, req, object, triggering end time*/
      "@min": 0,
      /*ro, req, int, the minimum value*/
      "@max": 0
      /*ro, req, int, the maximum value*/
    },
    "minObjectSize": {
      /*ro, opt, object, the minimum number of pixels*/
      "@min": 0,
      /*ro, req, int, the minimum value*/
      "@max": 0
      /*ro, req, int, the maximum value*/
    },
    "maxObjectSize": {
      /*ro, opt, object, the maximum number of pixels*/
      "@min": 0,
      /*ro, req, int, the minimum value*/
      "@max": 0
      /*ro, req, int, the maximum value*/
    },
    "RegionListCap": {
      /*ro, req, object, detection region parameters*/
      "maxSize": 4,
      /*ro, req, int, the maximum number of detection regions*/
      "enabled": [true, false],
      /*ro, req, array, whether to enable detection, subType:bool*/
      "sensitivityLevel": {
        /*ro, req, object, detection sensitivity*/
        "@min": 1,
        /*ro, req, int, the minimum value*/
        "@max": 100
        /*ro, req, int, the maximum value*/
      },
      "objectOccupation": {
        /*ro, req, object*/
        "@min": 1,
        /*ro, req, int, the minimum value*/
        "@max": 1
        /*ro, req, int, the maximum value*/
      },
      "RegionCap": {
        /*ro, opt, object*/
        "minSize": 3,
        /*ro, req, int, the minimum number of detection region edges*/
        "maxSize": 10,
        /*ro, req, int, the maximum number of detection regions*/
        "x": {
          /*ro, req, object, x-coordinate, desc:the origin is the lower-left corner of the screen*/
          "@min": 0.000,
          /*ro, req, float, the minimum value, range:[0.000,1.000]*/
          "@max": 1.000
          /*ro, req, float, the maximum value, range:[0.000,1.000]*/
        },
        "y": {
          /*ro, req, object, y-coordinate, desc:the origin is the lower-left corner of the screen*/
          "@min": 0.000,
          /*ro, req, float, the minimum value, range:[0.000,1.000]*/
          "@max": 1.000
          /*ro, req, float, the maximum value, range:[0.000,1.000]*/
        }
      }
    },
    "isSupportMultiScene": true,
    /*ro, opt, bool, whether it supports multi-scene mode*/
    "humanMisinfoFilter": [true, false],
    /*ro, opt, array, whether it supports preventing false human body detection alarm, subType:bool*/
    "vehicleMisinfoFilter": [true, false],
    /*ro, opt, array, whether it supports preventing false vehicle detection alarm, subType:bool*/
    "isSupportTargetMultiSelect": true,
    /*ro, opt, bool, whether it supports multi-target detection*/
    "isSupportAllDayUpload": true
    /*ro, opt, bool, whether it supports uploading all-day events*/
  }
}

```

14.7.1.25 Get parameters of a radar detection region

Request URL

GET /ISAPI/Smart/RadarChannels/<radarChannelID>/radarFieldDetection/regions/<regionID>?format=json

Query Parameter

Parameter Name	Parameter Type	Description
radarChannelID	string	--
regionID	string	--

Request Message

None

Response Message

```
{
  "RegionInfo": {
    /*ro, opt, object, region information*/
    "regionID": 1,
    /*ro, req, int, region ID*/
    "enabled": true,
    /*ro, req, bool, whether to enable the function*/
    "sensitivityLevel": 50,
    /*ro, req, int, region detection sensitivity, range:[1,100]*/
    "objectOccupation": 1,
    /*ro, req, int, object occupation rate*/
    "Region": [
      /*ro, opt, array, area, subType:object, range:[3,10], desc:the origin is the lower-left corner of the screen*/
      {
        "x": 0.120,
        /*ro, req, float, X-coordinate, range:[0.000,1.000]*/
        "y": 0.120
        /*ro, req, float, Y-coordinate, range:[0.000,1.000]*/
      }
    ]
  }
}
```

14.7.1.26 Set parameters of all radar detection regions

Request URL

PUT /ISAPI/Smart/RadarChannels/<radarChannelID>/radarFieldDetection/regions?format=json

Query Parameter

Parameter Name	Parameter Type	Description
radarChannelID	string	--

Request Message


```

{
  "RegionList": [
    /*opt, array, region information list, subType:object*/
    {
      "RegionInfo": {
        /*opt, object, region information*/
        "regionID": 1,
        /*req, int, region ID*/
        "enabled": true,
        /*req, bool, whether to enable the function*/
        "sensitivityLevel": 50,
        /*req, int, region detection sensitivity, range:[1,100]*/
        "objectOccupation": 1,
        /*req, int, object occupation rate*/
        "Region": [
          /*opt, array, region coordinates, subType:object, range:[3,10], desc:the origin is the lower-left corner of the screen*/
          {
            "x": 0.120,
            /*req, float, X-coordinate, range:[0.000,1.000]*/
            "y": 0.120
            /*req, float, Y-coordinate, range:[0.000,1.000]*/
          }
        ]
      }
    }
  ]
}

```

Response Message

```

{
  "statusCode": 1,
  /*ro, opt, int, status code, desc:1 (succeeded). It is required when an error occurred*/
  "statusString": "ok",
  /*ro, opt, string, status description, range:[1,64], desc:"ok" (succeeded). It is required when an error occurred*/
  "subStatusCode": "ok",
  /*ro, opt, string, sub status code, range:[1,64], desc:"ok" (succeeded). It is required when an error occurred*/
  "errorCode": 1,
  /*ro, opt, int, error code, desc:it is required when the value of statusCode is not 1, it corresponds to subStatusCode*/
  "errorMsg": "ok"
  /*ro, opt, string, error information, desc:this field is required when the value of statusCode is not 1*/
}

```

14.7.1.27 Get parameters of radar intrusion detection

Request URL

GET /ISAPI/Smart/RadarChannels/<radarChannelID>/radarFieldDetection?format=json

Query Parameter

Parameter Name	Parameter Type	Description
radarChannelID	string	--

Request Message

None

Response Message

```

{
  "RadarFieldDetection": {
    /*ro, req, object, radar intrusion detection parameters*/
    "enabled": true,
    /*ro, req, bool, whether to enable the function*/
    "intelliBackSearch": true,
    /*ro, opt, bool, whether the device supports video dual-VCA*/
    "startTriggerTime": 50,
    /*ro, req, int, triggering start time, range:[1,100], unit:ms*/
    "endTriggerTime": 50,
    /*ro, req, int, triggering end time, range:[1,100], unit:ms*/
    "minObjectSize": 0,
    /*ro, opt, int, minimum number of pixels*/
    "maxObjectSize": 0,
    /*ro, opt, int, maximum number of pixels*/
    "RegionList": [
      /*ro, opt, array, area information list, subType:object*/
      {
        "RegionInfo": {
          /*ro, opt, object, area information*/
          "regionID": 1,
          /*ro, req, int, area ID*/
          "enabled": true,
          /*ro, req, bool, whether to enable detection*/
          "sensitivityLevel": 50,
          /*ro, req, int, detection sensitivity, range:[1,100]*/
          "objectOccupation": 1,
          /*ro, req, int*/
          "Region": [
            /*ro, opt, array, area, subType:object, range:[3,10], desc:the origin is the lower-left corner of the screen*/
            {
              "x": 0.120,
              /*ro, req, float, X-coordinate, range:[0.000,1.000]*/
              "y": 0.120
              /*ro, req, float, Y-coordinate, range:[0.000,1.000]*/
            }
          ]
        }
      }
    ],
    "humanMisinfoFilter": true,
    /*ro, opt, bool, whether it supports preventing false human body detection alarm; if it does not support, this node will not be returned*/
    "vehicleMisinfoFilter": true
    /*ro, opt, bool, whether it supports preventing false vehicle detection alarm; if it does not support, this node will not be returned*/
  }
}

```

14.7.1.28 Intrusion detection

EventType:fielddetection

```

<?xml version="1.0" encoding="UTF-8"?>

<EventNotificationAlert xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, event alarm, attr:version{opt, string, protocolVersion}-->
  <ipAddress>
    <!--ro, req, string, IPv4 address of the device that triggers the alarm-->172.6.64.7
  </ipAddress>
  <ipv6Address>
    <!--ro, opt, string, IPv6 address of the device that triggers the alarm-->1000:0:0:0:8:800:200C:417A
  </ipv6Address>
  <portNo>
    <!--ro, opt, int, communication port No. of the device that triggers the alarm-->80
  </portNo>
  <protocol>
    <!--ro, opt, enum, transmission communication protocol type, subType:string, desc:when ISAPI protocol is transmitted via HCNetsDK, the channel No. is the video channel No. of private protocol. When ISAPI protocol is transmitted via EZ protocol, the channel No. is the video channel No. of EZ protocol. When ISAPI protocol is transmitted via ISUP, the channel No. is the video channel No. of ISUP-->HTTP
  </protocol>
  <macAddress>
    <!--ro, opt, string, MAC address-->01:17:24:45:D9:F4
  </macAddress>
  <dynChannelID>
    <!--ro, opt, string, digital channel No.-->test
  </dynChannelID>
  <channelID>
    <!--ro, opt, int, channel No. of the device that triggers the alarm, desc:video channel No. that triggers the alarm-->1
  </channelID>
  <relatedChannelList>
    <!--ro, opt, string, list of alarm related channels, which are of the same camera with channelID, desc:this parameter is used for Live view or playback on the platform; multiple channel No.s are separated by commas-->1,2,3
  </relatedChannelList>
  <dateTime>
    <!--ro, req, datetime, alarm trigger time-->2004-05-03T17:30:08+08:00
  </dateTime>
  <activePostCount>
    <!--ro, opt, int, times that the same alarm has been uploaded, desc:event triggering frequency-->1
  </activePostCount>

```

```

<eventType>
  <!--ro, req, enum, event type, subType:string, desc:"fielddetection" (intrusion detection)-->fielddetection
</eventType>
<eventState>
  <!--ro, req, enum, event status, subType:string, desc:for durative event: "active" (valid), "inactive" (invalid)-->active
</eventState>
<eventDescription>
  <!--ro, req, string, event description-->test
</eventDescription>
<deviceID>
  <!--ro, opt, string, device ID, desc:it should be returned for ISUP alarms, e.g., test0123 (Ehome2.0, Ehome4.0, and ISUP5.0)-->12345
</deviceID>
<DetectionRegionList>
  <!--ro, opt, array, detection area list, subType:object-->
  <DetectionRegionEntry>
    <!--ro, opt, object, detection area-->
    <regionID>
      <!--ro, req, string, area ID-->test
    </regionID>
    <sensitivityLevel>
      <!--ro, opt, int, sensitivity, range:[0,100]-->1
    </sensitivityLevel>
    <RegionCoordinatesList>
      <!--ro, opt, array, area coordinates, subType:object, range:[0,4], desc:rectangle-->
      <RegionCoordinates>
        <!--ro, opt, object, area point coordinates, desc:the origin is the upper-left corner of the screen-->
        <positionX>
          <!--ro, req, int, X-coordinate, range:[0,1000]-->50
        </positionX>
        <positionY>
          <!--ro, req, int, Y-coordinate, range:[0,1000]-->50
        </positionY>
      </RegionCoordinates>
    </RegionCoordinatesList>
    <detectionTarget>
      <!--ro, opt, enum, target type, subType:string, desc:"human", "vehicle", "others"-->human
    </detectionTarget>
    <TargetRect>
      <!--ro, opt, object, target area, desc:the origin is the upper-left corner of the screen-->
      <X>
        <!--ro, req, float, target X-coordinate, range:[0.000,1.000]-->0.000
      </X>
      <Y>
        <!--ro, req, float, target Y-coordinate, range:[0.000,1.000]-->0.000
      </Y>
      <width>
        <!--ro, req, float, target width, range:[0.000,1.000]-->1.000
      </width>
      <height>
        <!--ro, req, float, target height, range:[0.000,1.000]-->1.000
      </height>
    </TargetRect>
    <sceneID>
      <!--ro, opt, int, scene ID-->1
    </sceneID>
  </DetectionRegionEntry>
</DetectionRegionList>
<channelName>
  <!--ro, opt, string, channel name, range:[1,64]-->test
</channelName>
<Extensions>
  <!--ro, opt, object, extended information-->
  <serialNumber>
    <!--ro, opt, string, serial No.-->test
  </serialNumber>
  <eventPush>
    <!--ro, opt, string, event notification-->test
  </eventPush>
</Extensions>
<detectionPictureTransType>
  <!--ro, opt, enum, picture transmission mode, subType:string, desc:"url", "binary", "base64"-->url
</detectionPictureTransType>
<detectionPicturesNumber>
  <!--ro, opt, int, number of pictures contained in the alarm received in arming mode, desc:this field will not be returned when there is no picture contained in the alarm-->1
</detectionPicturesNumber>
<bkgUrl>
  <!--ro, opt, string, background picture URL, desc:background picture URL-->test
</bkgUrl>
<URLCertificationType>
  <!--ro, opt, enum, picture URL authentication method, subType:string, desc:authentication mode of picture URL: "no"-no authentication, "digest"-digest authentication (it is used for local picture URL returned by NVR or DVR)-->no
</URLCertificationType>
<pId>
  <!--ro, opt, string, picture ID, desc:the field value is the picture Content-ID when the value of detectionPictureTransType is "binary"-->test
</pId>
<visibleLightURL>
  <!--ro, opt, string, visible light picture URL-->test
</visibleLightURL>
<thermalURL>
  <!--ro, opt, string, thermal imaging picture URL-->test
</thermalURL>
<targetAttrs>
  <!--ro, opt, object, transmitted parameters--> /*可选 透传空码 堆叠值由以下三个空码*/ "deviceId": "1" /*可选 设备ID string类型 最长长度为64*/

```

```

<!--ro, opt, object, transmitted parameter--> /*可选, 设备通道号, integer32类型*/ "deviceChannel": 1, /*可选, 设备ID, string类型, 最大长度为128*/
"deviceName": 1, /*可选, 设备名称, string类型, 最大长度为128*/ }
</targetAttrs>
<TaskInfo>
<!--ro, opt, object, task information submitted by data center products-->
<taskID>
<!--ro, req, string, task ID, range:[0,64]-->test
</taskID>
<algorithmType>
<!--ro, opt, enum, algorithm type, subType:int, desc:1-"highQualityVehicle" (high-quality vehicle),2-"highPerformanceVehicle" (high-performance
vehicle),3-"personStructModel" (person structural modeling),4-"vehicleAndPersonStructModel" (person and vehicle structural modeling),5-"videoFaceDetect"
(video face detection),6-"videoFaceDetectModel" (video face detection and modeling),7-"smart" (face detection (output frame without recognizing
properties)+human body detection (output properties and frame)+behavior detection)-->1
</algorithmType>
<taskName>
<!--ro, opt, string, task name-->test
</taskName>
<algorithmID>
<!--ro, opt, string, algorithm package ID-->test
</algorithmID>
<monitorPointID>
<!--ro, opt, string, camera No.-->test
</monitorPointID>
<monitorPointName>
<!--ro, opt, string, camera name-->test
</monitorPointName>
<streamType>
<!--ro, opt, enum, stream type, subType:string, desc:"realtime" (real-time stream), "historyvideo" (history stream), "Localvideo" (Local stream)--
>realtime
</streamType>
<ruleID>
<!--ro, opt, string, rule ID, desc:it is used to distinguish different tasks with the same name, and the ruleID in the event uploading message
indicates that the event is related to this task-->test
</ruleID>
<ruleCustomName>
<!--ro, req, string, user-defined event name, range:[0,128], desc:it is defined by the caller, and it is included in the message when the alarm is
uploaded. Up to 128 characters are allowed-->test
</ruleCustomName>
<algorithmInfo>
<!--ro, opt, object, algorithm version information, desc:this field is required for secondary analysis-->
<algorithmId>
<!--ro, opt, string, algorithm package ID-->test
</algorithmId>
<algoVendorId>
<!--ro, opt, string, manufacturer ID-->test
</algoVendorId>
<algoVersionId>
<!--ro, opt, string, algorithm version No.-->test
</algoVersionId>
<algoChipType>
<!--ro, opt, string, chip type-->test
</algoChipType>
<algoModelVersion>
<!--ro, opt, string, model version-->test
</algoModelVersion>
</algorithmInfo>
</TaskInfo>
<timeStamp>
<!--ro, opt, string, timestamp of the frame, which triggers the alarm-->test
</timeStamp>
<targetSpeed>
<!--ro, opt, int-->0
</targetSpeed>
<targetDistance>
<!--ro, opt, int, unit:m-->2
</targetDistance>
<triggerType>
<!--ro, opt, enum, subType:string-->video
</triggerType>
<uid>
<!--ro, opt, string, the unique ID of event uploading, range:[0,64], desc:it can be composed of time (accurate to the millisecond) and random digits--
>test
</uid>
<isDataRetransmission>
<!--ro, opt, bool, whether it is a resending data (if the real-time detection data upload fails due to the network condition, the data will be uploaded
again after the device recovers.)-->true
</isDataRetransmission>
<ruleID>
<!--ro, opt, int, rule No., range:[0,7], desc:rule No.-->0
</ruleID>
<ruleName>
<!--ro, opt, string, rule name, range:[0,32], desc:rule name-->test
</ruleName>
<nonTargetRate>
<!--ro, opt, int, range:[1,100], unit:%-->1
</nonTargetRate>
<visibleLightAbsoluteHigh>
<!--ro, opt, object-->
<elevation>
<!--ro, opt, float, range:[-90.00,270.00], step:0.001-->0.00
</elevation>
<azimuth>
<!--ro, opt, float, range:[0,360.00], step:0.001-->0.00
</azimuth>

```

```

<absoluteZoom>
  <!--ro, opt, float, zooming ratio, range:[0,10000.00]-->0.00
</absoluteZoom>
<focus>
  <!--ro, opt, int, range of the focus, range:[1,100000], step:1-->1
</focus>
</visibleLightAbsoluteHigh>
<thermalAbsoluteHigh>
  <!--ro, opt, object-->
<elevation>
  <!--ro, opt, float, range:[-90.00,270.00], step:0.001-->0.00
</elevation>
<azimuth>
  <!--ro, opt, float, range:[0,360.00], step:0.001-->0.00
</azimuth>
<absoluteZoom>
  <!--ro, opt, float, zooming ratio, range:[0,10000.00]-->0.00
</absoluteZoom>
<focus>
  <!--ro, opt, int, range of the focus, range:[1,100000], step:1-->1
</focus>
</thermalAbsoluteHigh>
<deviceLocation>
  <!--ro, opt, object-->
<longitudeType>
  <!--ro, req, enum, subType:string-->W
</longitudeType>
<latitudeType>
  <!--ro, req, enum, subType:string, desc:"S"-south, "N"-north-->S
</latitudeType>
<longitude>
  <!--ro, req, object-->
<degree>
  <!--ro, req, int, degree(s), range:[0,180]-->1
</degree>
<minute>
  <!--ro, req, float, minute(s), range:[0,60]-->0.0
</minute>
<sec>
  <!--ro, req, float, range:[0,60]-->0.0
</sec>
</longitude>
<latitude>
  <!--ro, req, object-->
<degree>
  <!--ro, req, int, range:[0,90]-->1
</degree>
<minute>
  <!--ro, req, float, minute(s), range:[0,60]-->0.0
</minute>
<sec>
  <!--ro, req, float, range:[0,60]-->0.0
</sec>
</latitude>
</deviceLocation>
<laserRanging>
  <!--ro, opt, int, range:[1,10000], step:1, unit:m-->1
</laserRanging>
</EventNotificationAlert>

```

Parameter Name	Parameter Value	Parameter Type(Content-Type)	Content-ID	File Name	Description
fieldddetection	[Message content]	application/xml	--	--	--
visibleLightImage	[Binary picture data]	image/jpeg	visibleLightImage	visibleLightImage.jpg	--
thermallImage	[Binary picture data]	image/jpeg	thermallImage	thermallImage.jpg	--
targetImage	[Binary picture data]	image/jpeg	targetImage	targetImage.jpg	--
POSInfo	[Stream data]	application/octet-stream	POSInfo	POSInfo.dat	--

Note: The protocol is transmitted in form format. See Chapter 4.5.1.4 for form framework description, as shown in the instance below.

--<frontier>

Content-Disposition: form-data; name=Parameter Name;filename=File Name

Content-Type: Parameter Type

Content-Length: ****

Content-ID: Content ID

Parameter Value

- Parameter Name: the name property of Content-Disposition in the header of form unit; it refers to the form unit name.
- Parameter Type (Content-Type): the Content-Type property in the header of form unit.
- File Name (filename): the filename property of Content-Disposition of form unit Headers. It exists only when the transmitted data of form unit is file, and it refers to the file name of form unit body.
- Parameter Value: the body content of form unit.

14.7.2 Line Crossing Detection

14.7.2.1 Get the arming schedules of line crossing detection of all channels

Request URL

GET /ISAPI/Event/schedules/lineDetections

Query Parameter

None

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<LineDetectionScheduleList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, the arming schedules of line crossing detection of all channels, attr:version{req, string, protocolVersion}-->
  <Schedule>
    <!--ro, opt, object, arming schedule information-->
    <id>
      <!--ro, req, string, ID-->test
    </id>
    <eventType>
      <!--ro, opt, enum, event type, subType:string-->lineDetection
    </eventType>
    <videoInputChannelID>
      <!--ro, opt, string, video input channel ID-->1
    </videoInputChannelID>
    <TimeBlockList size="8">
      <!--ro, req, object, arming time list, attr:size{req, int}-->
      <TimeBlock>
        <!--ro, opt, object, arming time-->
        <dayOfWeek>
          <!--ro, opt, enum, day of a week, subType:int, desc:1 (Monday), 2 (Tuesday), 3 (Wednesday), 4 (Thursday), 5 (Friday), 6 (Saturday), 7 (Sunday)-->1
        </dayOfWeek>
        <TimeRange>
          <!--ro, req, object, time range-->
          <beginTime>
            <!--ro, req, time, start time-->00:00:00
          </beginTime>
          <endTime>
            <!--ro, req, time, end time-->00:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </TimeBlockList>
    <HolidayBlockList>
      <!--ro, opt, object, holiday arming time-->
      <TimeBlock>
        <!--ro, opt, object, arming time-->
        <TimeRange>
          <!--ro, req, object, time range-->
          <beginTime>
            <!--ro, req, time, start time-->00:00:00
          </beginTime>
          <endTime>
            <!--ro, req, time, end time-->00:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </HolidayBlockList>
  </Schedule>
</LineDetectionScheduleList>

```

14.7.2.2 Set line crossing detection arming schedules of all channels

Request URL

PUT /ISAPI/Event/schedules/lineDetections

Query Parameter

None

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<LineDetectionScheduleList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, refer to the message XML_Schedule for details, attr:version{req, string, protocolVersion}-->
  <Schedule>
    <!--opt, object, arming information-->
    <id>
      <!--req, string-->test
    </id>
    <eventType>
      <!--opt, enum, event type, subType:string-->lineDetection
    </eventType>
    <videoInputChannelID>
      <!--opt, string, video input channel ID-->1
    </videoInputChannelID>
    <TimeBlockList size="8">
      <!--req, object, attr:size{req, int}-->
      <TimeBlock>
        <!--opt, object-->
        <dayOfWeek>
          <!--opt, enum, day of the week, subType:int, desc:1 (Monday), 2 (Tuesday), 3 (Wednesday), 4 (Thursday), 5 (Friday), 6 (Saturday), 7 (Sunday)-->1
        </dayOfWeek>
        <TimeRange>
          <!--req, object, time range-->
          <beginTime>
            <!--req, time, start time-->00:00:00
          </beginTime>
          <endTime>
            <!--req, time, end time-->00:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </TimeBlockList>
    <HolidayBlockList>
      <!--opt, object, holiday arming time-->
      <TimeBlock>
        <!--opt, object, arming time-->
        <TimeRange>
          <!--req, object, time range-->
          <beginTime>
            <!--req, time, start time-->00:00:00
          </beginTime>
          <endTime>
            <!--req, time, end time-->00:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </HolidayBlockList>
  </Schedule>
</LineDetectionScheduleList>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code description-->OK
  </subStatusCode>
</ResponseStatus>
```

14.7.2.3 Get the arming schedule of line crossing detection for a specified channel

Request URL

GET /ISAPI/Event/schedules/lineDetections/lineDetections_video<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<Schedule xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string-->test
  </id>
  <eventType>
    <!--ro, opt, enum, subType:string-->lineDetection
  </eventType>
  <videoInputChannelID>
    <!--ro, opt, string-->1
  </videoInputChannelID>
  <TimeBlockList size="8">
    <!--ro, req, object, attr:size{req, int}-->
    <TimeBlock>
      <!--ro, opt, object-->
      <dayOfWeek>
        <!--ro, opt, enum, subType:int-->1
      </dayOfWeek>
      <TimeRange>
        <!--ro, req, object-->
        <beginTime>
          <!--ro, req, time-->00:00:00
        </beginTime>
        <endTime>
          <!--ro, req, time-->00:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </TimeBlockList>
  <HolidayBlockList>
    <!--ro, opt, object-->
    <TimeBlock>
      <!--ro, opt, object-->
      <TimeRange>
        <!--ro, req, object-->
        <beginTime>
          <!--ro, req, time-->00:00:00
        </beginTime>
        <endTime>
          <!--ro, req, time-->00:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </HolidayBlockList>
</Schedule>
```

14.7.2.4 Set the arming schedule of line crossing detection for a specified channel

Request URL

PUT /ISAPI/Event/schedules/lineDetections/lineDetections_video<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```

<?xml version="1.0" encoding="UTF-8"?>

<Schedule xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string-->test
  </id>
  <eventType>
    <!--opt, enum, subType:string-->lineDetection
  </eventType>
  <videoInputChannelID>
    <!--opt, string-->1
  </videoInputChannelID>
  <TimeBlockList size="8">
    <!--req, object, attr:size{req, int}-->
    <TimeBlock>
      <!--opt, object-->
      <dayOfWeek>
        <!--opt, enum, subType:int-->1
      </dayOfWeek>
      <TimeRange>
        <!--req, object-->
        <beginTime>
          <!--req, time-->00:00:00
        </beginTime>
        <endTime>
          <!--req, time-->00:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </TimeBlockList>
  <HolidayBlockList>
    <!--opt, object-->
    <TimeBlock>
      <!--opt, object-->
      <TimeRange>
        <!--req, object-->
        <beginTime>
          <!--req, time-->00:00:00
        </beginTime>
        <endTime>
          <!--req, time-->00:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </HolidayBlockList>
</Schedule>

```

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>

```

14.7.2.5 Set the arming schedule of radar intrusion detection for all channels

Request URL

PUT /ISAPI/Event/schedules/radarLineDetections

Query Parameter

None

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<RadarLineDetectionScheduleList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, array, subType:object, attr:version{req, string, protocolVersion}-->
  <Schedule>
    <!--opt, object-->
    <id>
      <!--req, string-->radarLineDetection-1
    </id>
    <eventType>
      <!--opt, enum, subType:string-->radarLineDetection
    </eventType>
    <videoInputChannelID>
      <!--opt, string-->1
    </videoInputChannelID>
    <TimeBlockList size="8">
      <!--req, array, subType:object, attr:size{opt, int}-->
      <TimeBlock>
        <!--opt, object-->
        <dayOfWeek>
          <!--opt, enum, subType:int-->1
        </dayOfWeek>
        <TimeRange>
          <!--req, object-->
          <beginTime>
            <!--req, time-->10:00:00
          </beginTime>
          <endTime>
            <!--req, time-->10:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </TimeBlockList>
    <HolidayBlockList>
      <!--opt, array, subType:object-->
      <TimeBlock>
        <!--opt, object-->
        <TimeRange>
          <!--req, object-->
          <beginTime>
            <!--req, time-->10:00:00
          </beginTime>
          <endTime>
            <!--req, time-->10:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </HolidayBlockList>
  </Schedule>
</RadarLineDetectionScheduleList>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.7.2.6 Get arming schedules of all radar channels for line crossing detection

Request URL

GET /ISAPI/Event/schedules/radarLineDetections

Query Parameter

None

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<RadarLineDetectionScheduleList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, array, list of arming schedules, subType:object, attr:version{req, string, protocolVersion}-->
  <Schedule>
    <!--ro, opt, object, arming schedule information-->
    <id>
      <!--ro, req, string, ID, desc:format: event type-channel No.-->radarLineDetection-1
    </id>
    <eventType>
      <!--ro, opt, enum, event type, subType:string-->radarLineDetection
    </eventType>
    <videoInputChannelID>
      <!--ro, opt, string, video input channel ID-->1
    </videoInputChannelID>
    <TimeBlockList size="8">
      <!--ro, req, array, list of arming schedules, subType:object, attr:size{opt, int}-->
      <TimeBlock>
        <!--ro, opt, object, arming schedules-->
        <dayOfWeek>
          <!--ro, opt, enum, day of a week, subType:int, desc:1 (Monday), 2 (Tuesday), 3 (Wednesday), 4 (Thursday), 5 (Friday), 6 (Saturday), 7 (Sunday)-->1
        </dayOfWeek>
        <TimeRange>
          <!--ro, req, object, time range-->
          <beginTime>
            <!--ro, req, time, start time-->10:00:00
          </beginTime>
          <endTime>
            <!--ro, req, time, end time-->10:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </TimeBlockList>
    <HolidayBlockList>
      <!--ro, opt, array, holiday arming schedules, subType:object-->
      <TimeBlock>
        <!--ro, opt, object, arming schedules-->
        <TimeRange>
          <!--ro, req, object, time range-->
          <beginTime>
            <!--ro, req, time, start time-->10:00:00
          </beginTime>
          <endTime>
            <!--ro, req, time, end time-->10:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </HolidayBlockList>
  </Schedule>
</RadarLineDetectionScheduleList>
```

14.7.2.7 Get the arming schedule of radar line crossing detection for a specified channel

Request URL

GET /ISAPI/Event/schedules/radarLineDetections/radarLineDetection-<radarChannelID>

Query Parameter

Parameter Name	Parameter Type	Description
radarChannelID	string	--

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<Schedule xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string-->radarLineDetection-1
  </id>
  <eventType>
    <!--ro, opt, enum, subType:string-->radarLineDetection
  </eventType>
  <videoInputChannelID>
    <!--ro, opt, string-->1
  </videoInputChannelID>
  <TimeBlockList size="8">
    <!--ro, req, array, subType:object, attr:size{opt, int}-->
    <TimeBlock>
      <!--ro, opt, object-->
      <dayOfWeek>
        <!--ro, opt, enum, subType:int-->1
      </dayOfWeek>
      <TimeRange>
        <!--ro, req, object-->
        <beginTime>
          <!--ro, req, time-->10:00:00
        </beginTime>
        <endTime>
          <!--ro, req, time-->10:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </TimeBlockList>
  <HolidayBlockList>
    <!--ro, opt, array, subType:object-->
    <TimeBlock>
      <!--ro, opt, object-->
      <TimeRange>
        <!--ro, req, object-->
        <beginTime>
          <!--ro, req, time-->10:00:00
        </beginTime>
        <endTime>
          <!--ro, req, time-->10:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </HolidayBlockList>
</Schedule>

```

14.7.2.8 Set the arming schedule of radar line crossing detection for a specified channel

Request URL

PUT /ISAPI/Event/schedules/radarLineDetections/radarLineDetection-<radarChannelID>

Query Parameter

Parameter Name	Parameter Type	Description
radarChannelID	string	--

Request Message

```

<?xml version="1.0" encoding="UTF-8"?>

<Schedule xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string-->radarLineDetection-1
  </id>
  <eventType>
    <!--opt, enum, subType:string-->radarLineDetection
  </eventType>
  <videoInputChannelID>
    <!--opt, string-->1
  </videoInputChannelID>
  <TimeBlockList size="8">
    <!--req, array, subType:object, attr:size{opt, int}-->
    <TimeBlock>
      <!--opt, object-->
      <dayOfWeek>
        <!--opt, enum, subType:int-->1
      </dayOfWeek>
      <TimeRange>
        <!--req, object-->
        <beginTime>
          <!--req, time-->10:00:00
        </beginTime>
        <endTime>
          <!--req, time-->10:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </TimeBlockList>
  <HolidayBlockList>
    <!--opt, array, subType:object-->
    <TimeBlock>
      <!--opt, object-->
      <TimeRange>
        <!--req, object-->
        <beginTime>
          <!--req, time-->10:00:00
        </beginTime>
        <endTime>
          <!--req, time-->10:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </HolidayBlockList>
</Schedule>

```

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>

```

14.7.2.9 Set alarm linkage parameters of line crossing detection by channel

Request URL

PUT /ISAPI/Event/triggers/LineDetection-<channelID>/notifications

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<EventTriggerNotificationList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, array, Linkage action List, subType:object, attr:version{req, string, protocolVersion}-->
  <EventTriggerNotification>
    <!--opt, object, Linkage action-->
    <id>
      <!--req, string, No.-->test
    </id>
    <notificationMethod>
      <!--req, enum, Linkage action, subType:string, desc:"email", "IM" (instant messaging), "IO" (I/O output), "sysLog" (system log), "HTTP" (uploading via HTTP), "FTP" (uploading via FTP), "beep" (buzzer), "ptz" (PTZ), "record" (recording), "monitorAlarm" (alarm on monitor), "center" (uploading to the center), "LightAudioAlarm" (Light and audio alarm), "focus" (focus), "trace" (tracking), "whiteLight" (white Light), "audio" (audio), "supplementLight" (supplement Light)-->email
    </notificationMethod>
    <notificationRecurrence>
      <!--opt, enum, subType:string-->beginning
    </notificationRecurrence>
    <notificationInterval>
      <!--opt, int, Linkage time interval, unit:ms-->1
    </notificationInterval>
    <outputIOPortID>
      <!--opt, string-->1
    </outputIOPortID>
    <dynOutputIOPortID>
      <!--opt, string-->1
    </dynOutputIOPortID>
    <videoInputID>
      <!--opt, string, video channel ID-->1
    </videoInputID>
    <dynVideoInputID>
      <!--opt, string, dynamic video input channel ID-->1
    </dynVideoInputID>
    <ptzAction>
      <!--opt, object, PTZ Linkage-->
      <ptzChannelID>
        <!--req, string, PTZ Linked channel No.-->1
      </ptzChannelID>
      <actionName>
        <!--req, enum, PTZ Linkage action, subType:string, desc:"preset", "pattern", "patrol"-->preset
      </actionName>
      <actionNum>
        <!--opt, int-->1
      </actionNum>
    </ptzAction>
    <whiteLightAction>
      <!--opt, object, Linkage parameters of the white Light, desc:it is valid when the value of notificationMethod is "whiteLight"-->
      <whiteLightDurationTime>
        <!--opt, int, Light flashing duration, range:[1,60], unit:s-->1
      </whiteLightDurationTime>
    </whiteLightAction>
    <supplementLightAlarm>
      <!--opt, object-->
      <durationTime>
        <!--opt, int, supplement Light alarm duration, range:[0,90], unit:s-->5
      </durationTime>
    </supplementLightAlarm>
  </EventTriggerNotification>
</EventTriggerNotificationList>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.7.2.10 Get alarm linkage parameters of a line crossing detection channel

Request URL

GET /ISAPI/Event/triggers/LineDetection-<channelID>/notifications

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

VISION E INGENIO SOFTWARE SA DE CV (VIINSOFT)
dzambrano@viinsoft.com.mx


```

<?xml version="1.0" encoding="UTF-8"?>

<EventTriggerNotificationList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, array, subType:object, attr:version{req, string, protocolVersion}-->
  <EventTriggerNotification>
    <!--ro, opt, object, Linkage type-->
    <id>
      <!--ro, req, string-->test
    </id>
    <notificationMethod>
      <!--ro, req, enum, linkage type, subType:string, desc:Linkage type-->email
    </notificationMethod>
    <notificationRecurrence>
      <!--ro, opt, enum, subType:string-->beginning
    </notificationRecurrence>
    <notificationInterval>
      <!--ro, opt, int, unit:ms-->1
    </notificationInterval>
    <outputIOPortID>
      <!--ro, opt, string-->1
    </outputIOPortID>
    <dynOutputIOPortID>
      <!--ro, opt, string-->1
    </dynOutputIOPortID>
    <videoInputID>
      <!--ro, opt, string-->1
    </videoInputID>
    <dynVideoInputID>
      <!--ro, opt, string-->1
    </dynVideoInputID>
    <ptzAction>
      <!--ro, opt, object-->
      <ptzChannelID>
        <!--ro, req, string-->1
      </ptzChannelID>
      <actionName>
        <!--ro, req, enum, subType:string-->preset
      </actionName>
      <actionNum>
        <!--ro, opt, int-->1
      </actionNum>
    </ptzAction>
    <WhiteLightAction>
      <!--ro, opt, object-->
      <whiteLightDurationTime>
        <!--ro, opt, int, range:[1,60], unit:s-->1
      </whiteLightDurationTime>
    </WhiteLightAction>
    <SupplementLightAlarm>
      <!--ro, opt, object-->
      <durationTime>
        <!--ro, opt, int, range:[0,90], unit:s-->5
      </durationTime>
    </SupplementLightAlarm>
    <customOverHTTPList>
      <!--ro, opt, array, subType:object, dep:and,{$.EventTriggerNotificationList[*].EventTriggerNotification.notificationMethod,eq,customOverHTTP}-->
      <customOverHTTP>
        <!--ro, opt, object-->
        <id>
          <!--ro, req, int-->1
        </id>
        <enabled>
          <!--ro, req, bool-->true
        </enabled>
        <hostID>
          <!--ro, opt, int-->1
        </hostID>
        <customInfo>
          <!--ro, opt, string, range:[1,512]-->test
        </customInfo>
      </customOverHTTP>
    </customOverHTTPList>
  </EventTriggerNotification>
</EventTriggerNotificationList>

```

14.7.2.11 Get the linkage parameters of line crossing detection event for a specified channel

Request URL

GET /ISAPI/Event/triggers/LineDetection-<channelID>?triggersEnabledStatus=<triggersEnabledStatus>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.
triggersEnabledStatus	string	Linkage enabling status (if this node is included in the URL, the enabling and disabling of the linkage mode should be determined based on the triggerEnabled status in the linkage list). This node is supported if the value of isSupportTriggersEnabled in /ISAPI/Event/triggersCap contains is true.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>
<EventTrigger xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string-->1
  </id>
  <eventType>
    <!--ro, req, enum, subType:string-->linedetection
  </eventType>
  <eventDescription>
    <!--ro, opt, string-->test
  </eventDescription>
  <videoInputChannelID>
    <!--ro, opt, string-->1
  </videoInputChannelID>
  <dynVideoInputChannelID>
    <!--ro, opt, string-->1
  </dynVideoInputChannelID>
  <EventTriggerNotificationList>
    <!--ro, opt, array, subType:object-->
    <EventTriggerNotification>
      <!--ro, opt, object-->
      <id>
        <!--ro, req, string-->test
      </id>
      <notificationMethod>
        <!--ro, req, enum, subType:string-->email
      </notificationMethod>
      <notificationRecurrence>
        <!--ro, opt, enum, subType:string-->beginning
      </notificationRecurrence>
      <videoInputID>
        <!--ro, opt, string-->1
      </videoInputID>
      <SupplementLightAlarm>
        <!--ro, opt, object-->
        <durationTime>
          <!--ro, opt, int, range:[0,90], unit:s-->5
        </durationTime>
      </SupplementLightAlarm>
    </EventTriggerNotification>
  </EventTriggerNotificationList>
</EventTrigger>
```

14.7.2.12 Set the linkage parameters of line crossing detection event for a specified channel

Request URL

PUT /ISAPI/Event/triggers/LineDetection- <channelID> ?triggersEnabledStatus= <triggersEnabledStatus>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--
triggersEnabledStatus	string	--

Request Message

```

<?xml version="1.0" encoding="UTF-8"?>
<EventTrigger xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string-->1
  </id>
  <eventType>
    <!--req, enum, subType:string-->LineDetection
  </eventType>
  <eventDescription>
    <!--opt, string-->test
  </eventDescription>
  <videoInputChannelID>
    <!--opt, string-->1
  </videoInputChannelID>
  <dynVideoInputChannelID>
    <!--opt, string-->1
  </dynVideoInputChannelID>
  <EventTriggerNotificationList>
    <!--opt, array, subType:object-->
    <EventTriggerNotification>
      <!--opt, object-->
      <id>
        <!--req, string-->test
      </id>
      <notificationMethod>
        <!--req, enum, subType:string-->email
      </notificationMethod>
      <notificationRecurrence>
        <!--opt, enum, subType:string-->beginning
      </notificationRecurrence>
      <videoInputID>
        <!--opt, string-->1
      </videoInputID>
    </EventTriggerNotification>
  </EventTriggerNotificationList>
</EventTrigger>

```

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>
<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>

```

14.7.2.13 Get the linkage parameters of radar line crossing detection event for a specified channel

Request URL

GET /ISAPI/Event/triggers/radarLineDetection-<radarChannelID>

Query Parameter

Parameter Name	Parameter Type	Description
radarChannelID	string	--

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<EventTrigger xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string-->radarLineDetection-1
  </id>
  <eventType>
    <!--ro, req, enum, subType:string-->radarLineDetection
  </eventType>
  <eventDescription>
    <!--ro, opt, string-->test
  </eventDescription>
  <inputIOPortID>
    <!--ro, opt, string-->test
  </inputIOPortID>
  <dynInputIOPortID>
    <!--ro, opt, string-->test
  </dynInputIOPortID>
  <videoInputChannelID>
    <!--ro, opt, string-->1
  </videoInputChannelID>
  <dynVideoInputChannelID>
    <!--ro, opt, string-->1
  </dynVideoInputChannelID>
  <intervalBetweenEvents>
    <!--ro, opt, int, unit:s-->1
  </intervalBetweenEvents>
  <wLSensorID>
    <!--ro, opt, string-->1
  </wLSensorID>
  <EventTriggerNotificationList>
    <!--ro, opt, array, subType:object-->
    <EventTriggerNotification>
      <!--ro, opt, object-->
      <id>
        <!--ro, req, string-->test
      </id>
      <notificationMethod>
        <!--ro, req, enum, subType:string-->FTP
      </notificationMethod>
      <notificationRecurrence>
        <!--ro, opt, enum, subType:string-->beginning
      </notificationRecurrence>
      <notificationInterval>
        <!--ro, opt, int, unit:ms-->1
      </notificationInterval>
      <videoInputID>
        <!--ro, opt, string-->1
      </videoInputID>
      <dynVideoInputID>
        <!--ro, opt, string-->1
      </dynVideoInputID>
      <ptzAction>
        <!--ro, opt, object-->
        <ptzChannelID>
          <!--ro, req, string-->1
        </ptzChannelID>
        <actionName>
          <!--ro, req, enum, subType:string-->preset
        </actionName>
        <actionNum>
          <!--ro, opt, int-->1
        </actionNum>
      </ptzAction>
      <whiteLightAction>
        <!--ro, opt, object-->
        <whiteLightDurationTime>
          <!--ro, opt, int, range:[1,60], unit:s-->1
        </whiteLightDurationTime>
      </whiteLightAction>
    </EventTriggerNotification>
  </EventTriggerNotificationList>
</EventTrigger>

```

14.7.2.14 Set line crossing detection parameters of all channels

Request URL

PUT /ISAPI/Smart/LineDetection

Query Parameter

None

Request Message

```

<?xml version="1.0" encoding="UTF-8"?>

```

```

<LineDetectionList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, array, subType:object, attr:version(req, string, protocolVersion)-->
  <LineDetection>
    <!--opt, object-->
    <id>
      <!--req, string-->test
    </id>
    <enabled>
      <!--req, bool-->true
    </enabled>
    <intelliBackSearch>
      <!--opt, bool-->true
    </intelliBackSearch>
    <duration>
      <!--opt, int-->1
    </duration>
    <startTriggerTime>
      <!--opt, int-->1
    </startTriggerTime>
    <endTriggerTime>
      <!--opt, int-->1
    </endTriggerTime>
    <normalizedScreenSize>
      <!--opt, object-->
      <normalizedScreenWidth>
        <!--req, int-->1
      </normalizedScreenWidth>
      <normalizedScreenHeight>
        <!--req, int-->1
      </normalizedScreenHeight>
    </normalizedScreenSize>
    <minObjectSize>
      <!--opt, int-->1
    </minObjectSize>
    <maxObjectSize>
      <!--opt, int-->1
    </maxObjectSize>
    <LineItemList size="4">
      <!--opt, array, subType:object, attr:size(req, int)-->
      <LineItem>
        <!--opt, object-->
        <id>
          <!--req, string-->1
        </id>
        <enabled>
          <!--req, bool, whether to enable the function-->true
        </enabled>
        <sensitivityLevel>
          <!--req, int, detection sensitivity, range:[0,100]-->1
        </sensitivityLevel>
        <directionSensitivity>
          <!--opt, enum, detection direction, subType:string, desc:detection direction-->any
        </directionSensitivity>
        <CoordinatesList>
          <!--opt, array, subType:object, range:[0,2]-->
          <Coordinates>
            <!--opt, object, the origin is the lower-left corner of the screen, desc:the origin is the lower-left corner of the screen-->
            <positionX>
              <!--req, int, x-coordinate, range:[0,1000]-->1
            </positionX>
            <positionY>
              <!--req, int, y-coordinate, range:[0,1000]-->1
            </positionY>
          </Coordinates>
        </CoordinatesList>
        <detectionTarget>
          <!--opt, enum, detection target, subType:string, desc:detection target-->all
        </detectionTarget>
        <humanMisinfoFilterEnabled>
          <!--opt, bool, whether to enable false alarm filtering (human body)-->true
        </humanMisinfoFilterEnabled>
        <vehicleMisinfoFilterEnabled>
          <!--opt, bool, whether to enable false alarm filtering (vehicle)-->true
        </vehicleMisinfoFilterEnabled>
        <priority>
          <!--opt, enum, priority, subType:string, desc:priority-->low
        </priority>
        <alarmConfidence>
          <!--opt, enum, subType:string-->low
        </alarmConfidence>
        <recordConfidence>
          <!--opt, enum, subType:string-->low
        </recordConfidence>
      </LineItem>
    </LineItemList>
    <recogRuleType>
      <!--opt, enum, subType:string-->vectorMode
    </recogRuleType>
    <humanMisinfoFilterEnabled>
      <!--opt, bool, whether to enable false alarm filtering (human body)-->true
    </humanMisinfoFilterEnabled>
    <vehicleMisinfoFilterEnabled>

```

```

    <!--opt, bool, whether to enable false alarm filtering (vehicle)-->true
  </vehicleMisinfoFilterEnabled>
</LineDetection>
</LineDetectionList>

```

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6
    (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format",
    "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code description-->OK
  </subStatusCode>
</ResponseStatus>

```

14.7.2.15 Get line crossing detection parameters of all channels

Request URL

GET /ISAPI/Smart/LineDetection

Query Parameter

None

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<LineDetectionList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, array, subType:object, attr:version{req, string, protocolVersion}-->
  <LineDetection>
    <!--ro, opt, object-->
    <id>
      <!--ro, req, string, channel No.-->test
    </id>
    <enabled>
      <!--ro, req, bool, whether to enable the function-->true
    </enabled>
    <intelliBackSearch>
      <!--ro, opt, bool-->true
    </intelliBackSearch>
    <duration>
      <!--ro, opt, int, duration-->1
    </duration>
    <startTriggerTime>
      <!--ro, opt, int-->1
    </startTriggerTime>
    <endTriggerTime>
      <!--ro, opt, int-->1
    </endTriggerTime>
    <normalizedScreenSize>
      <!--ro, opt, object-->
      <normalizedScreenWidth>
        <!--ro, req, int-->1
      </normalizedScreenWidth>
      <normalizedScreenHeight>
        <!--ro, req, int-->1
      </normalizedScreenHeight>
    </normalizedScreenSize>
    <minObjectSize>
      <!--ro, opt, int-->1
    </minObjectSize>
    <maxObjectSize>
      <!--ro, opt, int-->1
    </maxObjectSize>
    <LineItemList size="4">
      <!--ro, opt, array, subType:object, attr:size{req, int}-->
      <LineItem>
        <!--ro, opt, object-->

```

```

<id>
  <!--ro, req, string, ID-->1
</id>
<enabled>
  <!--ro, req, bool, whether to enable the function-->true
</enabled>
<sensitivityLevel>
  <!--ro, req, int, detection sensitivity, range:[0,100]-->1
</sensitivityLevel>
<directionSensitivity>
  <!--ro, opt, enum, detection direction, subType:string, desc:detection direction-->any
</directionSensitivity>
<CoordinatesList>
  <!--ro, opt, array, rectangle, subType:object, range:[0,2], desc:rectangle-->
  <Coordinates>
    <!--ro, opt, object, coordinates, desc:the origin is the Lower-Left corner of the screen-->
    <positionX>
      <!--ro, req, int, X-coordinate, range:[0,1000]-->1
    </positionX>
    <positionY>
      <!--ro, req, int, Y-coordinate, range:[0,1000]-->1
    </positionY>
  </Coordinates>
</CoordinatesList>
<detectionTarget>
  <!--ro, opt, enum, detection target, subType:string, desc:detection target-->all
</detectionTarget>
<humanMisinfoFilterEnabled>
  <!--ro, opt, bool, whether to enable false alarm filtering (human body)-->true
</humanMisinfoFilterEnabled>
<vehicleMisinfoFilterEnabled>
  <!--ro, opt, bool, whether to enable false alarm filtering (vehicle)-->true
</vehicleMisinfoFilterEnabled>
<priority>
  <!--ro, opt, enum, priority, subType:string, desc:priority-->low
</priority>
<alarmConfidence>
  <!--ro, opt, enum, subType:string-->low
</alarmConfidence>
<recordConfidence>
  <!--ro, opt, enum, subType:string-->low
</recordConfidence>
</LineItem>
</LineItemList>
<recogRuleType>
  <!--ro, opt, enum, subType:string-->vectorMode
</recogRuleType>
<humanMisinfoFilterEnabled>
  <!--ro, opt, bool, whether to enable false alarm filtering (human body)-->true
</humanMisinfoFilterEnabled>
<vehicleMisinfoFilterEnabled>
  <!--ro, opt, bool, whether to enable false alarm filtering (vehicle)-->true
</vehicleMisinfoFilterEnabled>
</LineDetection>
</LineDetectionList>

```

14.7.2.16 Set line crossing detection parameters by channel

Request URL

PUT /ISAPI/Smart/LineDetection/<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```

<?xml version="1.0" encoding="UTF-8"?>
<LineDetection xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, Line crossing detection parameters, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string, channel No.-->test
  </id>
  <enabled>
    <!--req, bool, whether to enable the function-->true
  </enabled>
  <intelliBackSearch>
    <!--opt, bool, whether to enable dual-VCA-->true
  </intelliBackSearch>
  <duration>
    <!--opt, int, duration-->1
  </duration>
  <startTriggerTime>

```

```

    <!--opt, int, trigger start time-->1
</startTriggerTime>
<endTriggerTime>
    <!--opt, int, trigger end time-->1
</endTriggerTime>
<normalizedScreenSize>
    <!--opt, object, normalized size-->
    <normalizedScreenWidth>
        <!--req, int, normalized width-->1
    </normalizedScreenWidth>
    <normalizedScreenHeight>
        <!--req, int, normalized height-->1
    </normalizedScreenHeight>
</normalizedScreenSize>
<minObjectSize>
    <!--opt, int, minimum number of pixels of each object-->1
</minObjectSize>
<maxObjectSize>
    <!--opt, int, maximum number of pixels of each object-->1
</maxObjectSize>
<LineItemList size="4">
    <!--opt, array, subType:object, attr:size(req, int)-->
    <id>
        <!--req, string, No.-->1
    </id>
    <enabled>
        <!--req, bool, whether to enable the function-->true
    </enabled>
    <sensitivityLevel>
        <!--req, int, detection sensitivity, range:[0,100]-->1
    </sensitivityLevel>
    <directionSensitivity>
        <!--opt, enum, detection direction, subType:string, desc:"Left-right" (from left to right), "right-left" (from right to left), "any" (all directions)-
->any
    </directionSensitivity>
    <CoordinatesList>
        <!--opt, array, coordinates list, subType:object, range:[0,2], desc:Line-->
    <Coordinates>
        <!--opt, object, coordinates, desc:the origin is the lower-left corner of the screen-->
    <positionX>
        <!--req, int, X-coordinate, range:[0,1000]-->1
    </positionX>
    <positionY>
        <!--req, int, Y-coordinate, range:[0,1000]-->1
    </positionY>
    </Coordinates>
</CoordinatesList>
    <detectionTarget>
        <!--opt, enum, detection target, subType:string, desc:"all", "human", "vehicle", "others" (targets except human bodies and vehicles). The value "all"
is mutually exclusive with "others"-->all
    </detectionTarget>
    <humanMisinfoFilterEnabled>
        <!--opt, bool, whether to enable false alarm filtering of human body detection-->true
    </humanMisinfoFilterEnabled>
    <vehicleMisinfoFilterEnabled>
        <!--opt, bool, whether to enable false alarm filtering (vehicle)-->true
    </vehicleMisinfoFilterEnabled>
    <priority>
        <!--opt, enum, priority, subType:string, desc:"low", "middle", "high"-->low
    </priority>
    <alarmConfidence>
        <!--opt, enum, alarm confidence, subType:string, desc:"low" (default value), "mediumLow", "mediumHigh", "high"-->low
    </alarmConfidence>
    <recordConfidence>
        <!--opt, enum, video confidence, subType:string, desc:"low" (default value), "mediumLow", "mediumHigh", "high"-->low
    </recordConfidence>
</LineItemList>
<recogRuleType>
    <!--opt, enum, direction recognition mode, subType:string, desc:"vectorMode" (vector mode), "slopeMode" (slope mode)-->vectorMode
</recogRuleType>
    <humanMisinfoFilterEnabled>
        <!--opt, bool, whether to enable false alarm filtering of human body detection-->true
    </humanMisinfoFilterEnabled>
    <vehicleMisinfoFilterEnabled>
        <!--opt, bool, whether to enable false alarm filtering of vehicle detection-->true
    </vehicleMisinfoFilterEnabled>
</LineDetection>

```

Response Message


```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.7.2.17 Get configuration capability of line crossing detection by channel

Request URL

GET /ISAPI/Smart/LineDetection/<channelID>/capabilities

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<LineDetection xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string, channel No.-->test
  </id>
  <enabled opt="true,false">
    <!--ro, req, bool, whether to enable the function, attr:opt{req, string}-->true
  </enabled>
  <normalizedScreenSize>
    <!--ro, opt, object-->
    <normalizedScreenWidth>
      <!--ro, req, int-->1
    </normalizedScreenWidth>
    <normalizedScreenHeight>
      <!--ro, req, int-->1
    </normalizedScreenHeight>
  </normalizedScreenSize>
  <LineItemList size="4">
    <!--ro, opt, array, subType:object, attr:size{req, int}-->
    <LineItem>
      <!--ro, opt, object-->
      <id>
        <!--ro, req, string-->test
      </id>
      <enabled opt="true,false">
        <!--ro, req, bool, whether to enable the detection, attr:opt{req, string}-->true
      </enabled>
      <sensitivityLevel min="1" max="100">
        <!--ro, req, int, detection sensitivity, attr:min{req, int},max{req, int}-->1
      </sensitivityLevel>
      <directionSensitivity opt="left-right,right-left,any">
        <!--ro, opt, enum, detection direction, subType:string, attr:opt{req, string}, desc:detection direction-->any
      </directionSensitivity>
      <RegionCoordinatesList>
        <!--ro, opt, array, area coordinate List, subType:object, range:[0,2], desc:Line-->
        <RegionCoordinates>
          <!--ro, req, object, the origin is the Lower-Left corner of the screen, desc:the origin is the Lower-Left corner of the screen-->
          <positionX>
            <!--ro, req, int, X-coordinate, range:[0,1000]-->1
          </positionX>
          <positionY>
            <!--ro, req, int, Y-coordinate, range:[0,1000]-->1
          </positionY>
        </RegionCoordinates>
      </RegionCoordinatesList>
```

```

< detectionTarget opt="all,human,vehicle,animal,others" def="human">
  <!--ro, opt, enum, detection target, subType:string, attr:opt{req, string},def{req, string}, desc:detection target-->all
</detectionTarget>
< alarmConfidence opt="low,mediumLow,mediumHigh,high" def="low">
  <!--ro, opt, enum, subType:string, attr:opt{req, string},def{req, string}-->low
</alarmConfidence>
< recordConfidence opt="low,mediumLow,mediumHigh,high" def="low">
  <!--ro, opt, enum, subType:string, attr:opt{req, string},def{req, string}-->low
</recordConfidence>
< ruleName min="1" max="64">
  <!--ro, opt, string, attr:min{req, int},max{req, int}-->test
</ruleName>
< detectionTargetProperty>
  <!--ro, opt, object-->
  < human>
    <!--ro, opt, object-->
    < propertyList size="1">
      <!--ro, opt, object, attr:size{req, int}-->
      < property opt="nonMotor">
        <!--ro, opt, enum, subType:string, attr:opt{req, string}-->nonMotor
      </property>
    </propertyList>
  </human>
  < animal>
    <!--ro, opt, object-->
    < propertyList size="3">
      <!--ro, opt, object, attr:size{req, int}-->
      < property opt="large,small,poultry">
        <!--ro, opt, enum, subType:string, attr:opt{req, string}-->large
      </property>
    </propertyList>
  </animal>
</detectionTargetProperty>
</LineItem>
</LineItemList>
< isSupportPerimeterDetection opt="true,false">
  <!--ro, opt, bool, attr:opt{req, string}-->true
</isSupportPerimeterDetection>
< isSupportMultiScene opt="true,false">
  <!--ro, opt, bool, whether supports multiple scene detection, attr:opt{req, string}-->true
</isSupportMultiScene>
< recogRuleType>
  <!--ro, opt, enum, subType:string-->vectorMode
</recogRuleType>
< isSupportHumanMisinfoFilter>
  <!--ro, opt, bool, whether supports false human body alarm prevention, desc:If this function is supported, this node will be returned and its value is true; otherwise, this node will not be returned.-->true
</isSupportHumanMisinfoFilter>
< isSupportVehicleMisinfoFilter>
  <!--ro, opt, bool, whether supports false vehicle alarm prevention, desc:If this function is supported, this node will be returned and its value is true; otherwise, this node will not be returned.-->true
</isSupportVehicleMisinfoFilter>
< isSupportTargetMultiSelect>
  <!--ro, opt, bool, whether supports selecting multiple detection targets, desc:If this function is supported, this node will be returned and its value is true; otherwise, this node will not be returned.-->true
</isSupportTargetMultiSelect>
< isSupportAllDayUpload>
  <!--ro, opt, bool, whether supports uploading all-day event-->true
</isSupportAllDayUpload>
< isSupportOverlapParams>
  <!--ro, opt, bool-->true
</isSupportOverlapParams>
< warningSystemEnabled opt="true,false">
  <!--ro, opt, bool, attr:opt{req, string}-->true
</warningSystemEnabled>
< isSupportStackTarget>
  <!--ro, opt, bool-->true
</isSupportStackTarget>
< isSupportAllTargetDetectionWebDisplay>
  <!--ro, opt, bool-->false
</isSupportAllTargetDetectionWebDisplay>
< targetSensitivityLevel min="0" max="100">
  <!--ro, opt, int, attr:min{req, int},max{req, int}-->50
</targetSensitivityLevel>
</LineDetection>

```

14.7.2.18 Add detection lines for a specific channel

Request URL

POST /ISAPI/Smart/LineDetection/<channelID>/lineItem

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<LineItemList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, array, subType:object, attr:version{req, string, protocolVersion}-->
  <LineItem>
    <!--ro, opt, object-->
    <id>
      <!--ro, req, string-->test
    </id>
    <enabled>
      <!--ro, req, bool-->true
    </enabled>
    <sensitivityLevel>
      <!--ro, req, int, detection sensitivity, range:[0,100]-->1
    </sensitivityLevel>
    <directionSensitivity>
      <!--ro, opt, enum, detection direction, subType:string, desc:"left-right" (from left to right), "right-left" (from right to left), "any"-->any
    </directionSensitivity>
    <CoordinatesList>
      <!--ro, opt, array, list of coordinates, subType:object, range:[0,2], desc:Line-->
      <Coordinates>
        <!--ro, opt, object, coordinates, desc:the origin is the lower-left corner of the screen-->
        <positionX>
          <!--ro, req, int, X-coordinate, range:[0,1000]-->1
        </positionX>
        <positionY>
          <!--ro, req, int, Y-coordinate, range:[0,1000]-->1
        </positionY>
      </Coordinates>
    </CoordinatesList>
    <detectionTarget>
      <!--ro, opt, enum, detection target, subType:string, desc:"all", "human", "vehicle", "others"-->all
    </detectionTarget>
    <humanMisinfoFilterEnabled>
      <!--ro, opt, bool, whether to enable false alarm filtering (human)-->true
    </humanMisinfoFilterEnabled>
    <vehicleMisinfoFilterEnabled>
      <!--ro, opt, bool, whether to enable false alarm filtering (vehicle)-->true
    </vehicleMisinfoFilterEnabled>
    <priority>
      <!--ro, opt, enum, priority, subType:string, desc:"Low", "middle" "high"-->low
    </priority>
    <alarmConfidence>
      <!--ro, opt, enum, confidence of alarm notification, subType:string-->low
    </alarmConfidence>
    <recordConfidence>
      <!--ro, opt, enum, confidence of video recording, subType:string-->low
    </recordConfidence>
  </LineItem>
</LineItemList>
```

14.7.2.19 Set parameters of all line crossing detection lines by channel

Request URL

PUT /ISAPI/Smart/LineDetection/<channelID>/lineItem

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<LineItemList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, array, parameters of all line crossing detection lines, subType:object, attr:version{req, string, protocolVersion}-->
  <LineItem>
    <!--opt, object, parameters of a line crossing detection line-->
    <id>
      <!--req, string, No.-->test
    </id>
    <enabled>
      <!--req, bool, whether to enable the function-->true
    </enabled>
    <sensitivityLevel>
      <!--req, int, detection sensitivity, range:[0,100]-->1
    </sensitivityLevel>
    <directionSensitivity>
      <!--opt, enum, detection direction, subType:string, desc:"Left-right" (from left to right), "right-left" (from right to left), "any" (all directions)-
-->any
    </directionSensitivity>
    <CoordinatesList>
      <!--opt, array, coordinates list, subType:object, range:[0,2], desc:Line-->
      <Coordinates>
        <!--opt, object, coordinates, desc:the origin is the lower-left corner of the screen-->
        <positionX>
          <!--req, int, X-coordinate, range:[0,1000]-->1
        </positionX>
        <positionY>
          <!--req, int, Y-coordinate, range:[0,1000]-->1
        </positionY>
      </Coordinates>
    </CoordinatesList>
    <detectionTarget>
      <!--opt, enum, detection target, subType:string, desc:"all", "human", "vehicle", "others" (targets except human bodies and vehicles). The value "all"
is mutually exclusive with "others"-->all
    </detectionTarget>
    <humanMisinfoFilterEnabled>
      <!--opt, bool, whether to enable false alarm filtering of human body detection-->true
    </humanMisinfoFilterEnabled>
    <vehicleMisinfoFilterEnabled>
      <!--opt, bool, whether to enable false alarm filtering of vehicle detection-->true
    </vehicleMisinfoFilterEnabled>
    <priority>
      <!--opt, enum, priority, subType:string, desc:"Low", "middle", "high"-->low
    </priority>
    <alarmConfidence>
      <!--opt, enum, alarm confidence, subType:string, desc:"Low" (default value), "mediumLow", "mediumHigh", "high"-->low
    </alarmConfidence>
    <recordConfidence>
      <!--opt, enum, video confidence, subType:string, desc:"Low" (default value), "mediumLow", "mediumHigh", "high"-->low
    </recordConfidence>
  </LineItem>
</LineItemList>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6
(Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format",
"Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.7.2.20 Delete all detection lines of a specific channel

Request URL

DELETE /ISAPI/Smart/LineDetection/<channelID>/lineItem

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.7.2.21 Get parameters of a detection line of a specific channel

Request URL

GET /ISAPI/Smart/LineDetection/<channelID>/lineItem/<ruleID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.
ruleID	string	Rule ID

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<LineItem xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string, ID-->test
  </id>
  <enabled>
    <!--ro, opt, bool, whether to enable the function, desc:whether to enable the function-->true
  </enabled>
  <sensitivityLevel>
    <!--ro, req, int, detection sensitivity-->1
  </sensitivityLevel>
  <directionSensitivity>
    <!--ro, opt, enum, detection direction, subType:string, desc:"Left-right,right-Left,any"-->any
  </directionSensitivity>
  <CoordinatesList>
    <!--ro, opt, array, Line, subType:object, range:[0,2], desc:Line-->
    <Coordinates>
      <!--ro, opt, object, coordinates, desc:the origin is the Lower-Left corner of the screen-->
      <positionX>
        <!--ro, req, int, X-coordinate, range:[0,1000]-->1
      </positionX>
      <positionY>
        <!--ro, req, int, Y-coordinate, range:[0,1000]-->1
      </positionY>
    </Coordinates>
  </CoordinatesList>
  <detectionTarget>
    <!--ro, opt, enum, detection target, subType:string, desc:"all,human,vehicle,others"-->all
  </detectionTarget>
  <humanMisinfoFilterEnabled>
    <!--ro, opt, bool, whether to enable false alarm filtering (human body)-->true
  </humanMisinfoFilterEnabled>
  <vehicleMisinfoFilterEnabled>
    <!--ro, opt, bool, whether to enable false alarm reduction of vehicle-->true
  </vehicleMisinfoFilterEnabled>
  <priority>
    <!--ro, opt, enum, priority, subType:string, desc:"Low", "middle", "high"-->low
  </priority>
  <alarmConfidence>
    <!--ro, opt, enum, confidence of alarm notification, subType:string, desc:"Low", "mediumLow", "mediumHigh", "high", "Low"-->low
  </alarmConfidence>
  <recordConfidence>
    <!--ro, opt, enum, confidence of recording video, subType:string, desc:"Low", "mediumLow", "mediumHigh", "high", "Low"-->low
  </recordConfidence>
  <ruleName>
    <!--ro, opt, string, range:[1,64]-->test
  </ruleName>
  <detectionTargetProperty>
    <!--ro, opt, object-->
    <human>
      <!--ro, opt, object, dep:or,{$.LineItem.detectionTarget,eq,all},{$.LineItem.detectionTarget,eq,human}-->
      <propertyList>
        <!--ro, opt, array, subType:object-->
        <property>
          <!--ro, opt, enum, subType:string-->noMotor
        </property>
      </propertyList>
    </human>
    <animal>
      <!--ro, opt, object, dep:or,{$.LineItem.detectionTarget,eq,all},{$.LineItem.detectionTarget,eq,animal}-->
      <propertyList>
        <!--ro, opt, array, subType:object-->
        <property>
          <!--ro, opt, enum, subType:string-->large
        </property>
      </propertyList>
    </animal>
  </detectionTargetProperty>
</LineItem>
```

14.7.2.22 Set parameters of a detection line of a specified channel

Request URL

PUT /ISAPI/Smart/LineDetection/<channelID>/lineItem/<ruleID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--
ruleID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<LineItem xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, parameters of a detection line, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string, No.-->test
  </id>
  <enabled>
    <!--req, bool, whether to enable the function-->true
  </enabled>
  <sensitivityLevel>
    <!--req, int, detection sensitivity-->1
  </sensitivityLevel>
  <directionSensitivity>
    <!--opt, enum, detection direction, subType:string, desc:"Left-right" (from Left to right), "right-Left" (from right to Left), "any" (all directions)-->any
  </directionSensitivity>
  <CoordinatesList>
    <!--opt, array, coordinates list, subType:object, range:[0,2], desc:Line-->
    <Coordinates>
      <!--opt, object, coordinates, desc:the origin is the Lower-Left corner of the screen-->
      <positionX>
        <!--req, int, X-coordinate, range:[0,1000]-->1
      </positionX>
      <positionY>
        <!--req, int, Y-coordinate, range:[0,1000]-->1
      </positionY>
    </Coordinates>
  </CoordinatesList>
  <detectionTarget>
    <!--opt, enum, detection target, subType:string, desc:"all", "human", "vehicle", "others" (targets except human bodies and vehicles). The value "all" is mutually exclusive with "others"-->all
  </detectionTarget>
  <humanMisinfoFilterEnabled>
    <!--opt, bool, whether to enable false alarm filtering of human body detection-->true
  </humanMisinfoFilterEnabled>
  <vehicleMisinfoFilterEnabled>
    <!--opt, bool, whether to enable false alarm filtering of vehicle detection-->true
  </vehicleMisinfoFilterEnabled>
  <priority>
    <!--opt, enum, priority, subType:string, desc:"Low", "middle", "high"-->low
  </priority>
  <alarmConfidence>
    <!--opt, enum, alarm confidence, subType:string, desc:"Low" (default value), "mediumLow", "mediumHigh", "high"-->low
  </alarmConfidence>
  <recordConfidence>
    <!--opt, enum, video confidence, subType:string, desc:"Low" (default value), "mediumLow", "mediumHigh", "high"-->low
  </recordConfidence>
</LineItem>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.7.2.23 Delete a detection line of a specific channel

Request URL

DELETE /ISAPI/Smart/LineDetection/<channelID>/lineItem/<ruleID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--
ruleID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.7.2.24 Get configuration capability of line crossing detection by channel

Request URL

GET /ISAPI/Smart/LineDetection/<channelID>/lineItem/<ruleID>/capabilities

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.
ruleID	string	Rule ID

Request Message

None

Response Message


```

<?xml version="1.0" encoding="UTF-8"?>

<LineItem xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string, ID-->test
  </id>
  <enabled opt="true,false">
    <!--ro, req, bool, whether to enable the function, attr:opt{req, string}-->true
  </enabled>
  <sensitivityLevel min="1" max="100">
    <!--ro, req, int, sensitivity, attr:min{req, int},max{req, int}-->1
  </sensitivityLevel>
  <directionSensitivity opt="left-right,right-left,any">
    <!--ro, opt, enum, direction, subType:string, attr:opt{req, string}, desc:direction-->any
  </directionSensitivity>
  <CoordinatesList>
    <!--ro, opt, array, Line, subType:object, range:[0,2], desc:Line-->
    <Coordinates>
      <!--ro, opt, object, coordinates, desc:the origin is the Lower-Left corner of the screen-->
      <positionX>
        <!--ro, req, int, x-coordinate, range:[0,1000]-->1
      </positionX>
      <positionY>
        <!--ro, req, int, y-coordinate, range:[0,1000]-->1
      </positionY>
    </Coordinates>
  </CoordinatesList>
  <detectionTarget opt="all,human,vehicle,animal,others">
    <!--ro, opt, enum, detection target, subType:string, attr:opt{req, string}, desc:detection target-->all
  </detectionTarget>
  <humanMisinfoFilterEnabled opt="true,false">
    <!--ro, opt, bool, whether to enable false alarm filtering (human body), attr:opt{req, string}-->true
  </humanMisinfoFilterEnabled>
  <vehicleMisinfoFilterEnabled opt="true,false">
    <!--ro, opt, bool, whether to enable false alarm filtering (vehicle), attr:opt{req, string}-->true
  </vehicleMisinfoFilterEnabled>
  <priority opt="low,middle,high">
    <!--ro, opt, enum, priority, subType:string, attr:opt{req, string}, desc:priority-->low
  </priority>
  <isSupportAllTargetDetectionWebDisplay>
    <!--ro, opt, bool-->false
  </isSupportAllTargetDetectionWebDisplay>
  <ruleName min="1" max="64">
    <!--ro, opt, string, attr:min{req, int},max{req, int}-->test
  </ruleName>
  <detectionTargetProperty>
    <!--ro, opt, object-->
    <human>
      <!--ro, opt, object-->
      <propertyList size="1">
        <!--ro, opt, object, attr:size{req, int}-->
        <property opt="nonMotor">
          <!--ro, opt, enum, subType:string, attr:opt{req, string}-->nonMotor
        </property>
      </propertyList>
    </human>
    <animal>
      <!--ro, opt, object-->
      <propertyList size="3">
        <!--ro, opt, object, attr:size{req, int}-->
        <property opt="large,small,poultry">
          <!--ro, opt, enum, subType:string, attr:opt{req, string}-->large
        </property>
      </propertyList>
    </animal>
  </detectionTargetProperty>
</LineItem>

```

14.7.2.25 Get radar line crossing detection capability

Request URL

GET /ISAPI/Smart/RadarChannels/<radarChannelID>/radarLineDetection/capabilities?format=json

Query Parameter

Parameter Name	Parameter Type	Description
radarChannelID	string	--

Request Message

None

Response Message

```

{
  "RadarLineDetectionCap": {
    /*ro, req, object, radar line crossing detection capability*/
    "enabled": [true, false],
    /*ro, req, array, whether to enable the function, subType:bool*/
    "intelliBackSearch": "true,false",
    /*ro, req, string, whether it supports dual-VCA search*/
    "duration": {
      /*ro, req, object, duration*/
      "@min": 0,
      /*ro, req, int, minimum value*/
      "@max": 0
      /*ro, req, int, maximum value*/
    },
    "startTriggerTime": {
      /*ro, req, object, triggering start time*/
      "@min": 0,
      /*ro, req, int, minimum value*/
      "@max": 0
      /*ro, req, int, maximum value*/
    },
    "endTriggerTime": {
      /*ro, req, object, triggering end time*/
      "@min": 0,
      /*ro, req, int, minimum value*/
      "@max": 0
      /*ro, req, int, maximum value*/
    },
    "minObjectSize": {
      /*ro, opt, object, optional*/
      "@min": 0,
      /*ro, req, int, minimum value*/
      "@max": 0
      /*ro, req, int, maximum value*/
    },
    "maxObjectSize": {
      /*ro, opt, object, optional*/
      "@min": 0,
      /*ro, req, int, minimum value*/
      "@max": 0
      /*ro, req, int, maximum value*/
    },
    "LineItemListCap": {
      /*ro, req, object, detection line list*/
      "maxSize": 4,
      /*ro, req, int, maximum number of detection lines*/
      "enabled": [true, false],
      /*ro, req, array, whether to enable the detection, subType:bool*/
      "sensitivityLevel": {
        /*ro, req, object, detection sensitivity*/
        "@min": 1,
        /*ro, req, int, minimum value*/
        "@max": 100
        /*ro, req, int, maximum value*/
      },
      "directionSensitivity": {
        /*ro, req, object, detection direction, desc:detection direction: "left-right" (from left to right),"right-left" (from right to left),"any" (all
directions)*/
        "@opt": ["left-right", "right-left", "any"],
        /*ro, req, array, range, subType:string*/
        "@def": "any"
        /*ro, req, string, the default value*/
      },
      "LineItemCap": {
        /*ro, req, object, parameters of a detection line*/
        "maxSize": 2,
        /*ro, req, int, maximum number of detection lines*/
        "x": {
          /*ro, req, object, X-coordinate, desc:the origin is the lower-left corner of the screen*/
          "@min": 0.000,
          /*ro, req, float, minimum value, range:[0.000,1.000]*/
          "@max": 1.000
          /*ro, req, float, maximum value, range:[0.000,1.000]*/
        },
        "y": {
          /*ro, req, object, Y-coordinate, desc:the origin is the lower-left corner of the screen*/
          "@min": 0.000,
          /*ro, req, float, minimum value, range:[0.000,1.000]*/
          "@max": 1.000
          /*ro, req, float, maximum value, range:[0.000,1.000]*/
        }
      }
    },
    "isSupportMultiScene": true,
    /*ro, opt, bool, whether it supports multi-scene mode*/
    "recogRuleType": {
      /*ro, req, object, direction recognition mode, desc:"vectorMode" (vector mode), "slopeMode" (slope mode)*/
      "@opt": "vectorMode,slopeMode"
      /*ro, req, string, range*/
    },
    "humanMisinfoFilter": [true, false],
    /*ro, opt, array, whether it supports preventing false human body detection alarm, subType:bool*/
  }
}

```

```

    "vehicleMisinfoFilter": [true, false],
    /*ro, opt, array, whether it supports preventing false vehicle detection alarm, subType:bool*/
    "isSupportTargetMultiSelect": true,
    /*ro, opt, bool, whether it supports multi-target detection*/
    "isSupportAllDayUpload": true
    /*ro, opt, bool, whether it supports uploading all-day events*/
  }
}

```

14.7.2.26 Set parameters of a radar detection line

Request URL

PUT /ISAPI/Smart/RadarChannels/<radarChannelID>/radarLineDetection/lineItems/<lineRuleID>?format=json

Query Parameter

Parameter Name	Parameter Type	Description
radarChannelID	string	--
lineRuleID	string	--

Request Message

```

{
  "LineItemInfo": {
    /*opt, object, parameters of a radar detection line*/
    "lineID": 4,
    /*req, int, detection line ID*/
    "enabled": true,
    /*req, bool, whether to enable detection*/
    "sensitivityLevel": 50,
    /*req, int, detection sensitivity, range:[0,100]*/
    "directionSensitivity": "any",
    /*req, enum, detection direction, subType:string, desc:"left-right" (from left to right), "right-left" (from right to left), "any" (all directions)*/
    "LineItem": [
      /*req, array, detection line, subType:object, range:[0,2], desc:the origin is the lower-left corner of the screen*/
      {
        "x": 0.120,
        /*req, float, X-coordinate, range:[0.000,1.000]*/
        "y": 0.120
        /*req, float, Y-coordinate, range:[0.000,1.000]*/
      }
    ]
  }
}

```

Response Message

```

{
  "statusCode": 1,
  /*ro, opt, int, status code, desc:1 (succeeded). It is required when an error occurred*/
  "statusString": "ok",
  /*ro, opt, string, status description, range:[1,64], desc:"ok" (succeeded). It is required when an error occurred*/
  "subStatusCode": "ok",
  /*ro, opt, string, sub status code, range:[1,64], desc:"ok" (succeeded). It is required when an error occurred*/
  "errorCode": 1,
  /*ro, opt, int, error code, desc:it is required when the value of statusCode is not 1, it corresponds to subStatusCode*/
  "errorMsg": "ok",
  /*ro, opt, string, error information, desc:this field is required when the value of statusCode is not 1*/
}

```

14.7.2.27 Get parameters of all radar detection lines

Request URL

GET /ISAPI/Smart/RadarChannels/<radarChannelID>/radarLineDetection/lineItems?format=json

Query Parameter

Parameter Name	Parameter Type	Description
radarChannelID	string	--

Request Message

None

Response Message

```
{
  "LineItemList": [
    /*ro, opt, array, subType:object*/
    {
      "LineItemInfo": {
        /*ro, opt, object*/
        "lineID": 4,
        /*ro, req, int, detection line ID*/
        "enabled": true,
        /*ro, req, bool, whether to enable the detection*/
        "sensitivityLevel": 50,
        /*ro, req, int, detection sensitivity, range:[0,100]*/
        "directionSensitivity": "any",
        /*ro, req, enum, detection direction, subType:string, desc:detection direction: "left-right" (from left to right),"right-left" (from right
to left),"any" (all directions)*/
        "LineItem": [
          /*ro, req, array, parameters of a detection line, subType:object, range:[0,2], desc:the origin is the lower-left corner of the screen*/
          {
            "x": 0.120,
            /*ro, req, float, X-coordinate, range:[0.000,1.000]*/
            "y": 0.120
            /*ro, req, float, Y-coordinate, range:[0.000,1.000]*/
          }
        ]
      }
    }
  ]
}
```

14.7.2.28 Get parameters of radar's line crossing detection rule

Request URL

GET /ISAPI/Smart/RadarChannels/<radarChannelID>/radarLineDetection?format=json

Query Parameter

Parameter Name	Parameter Type	Description
radarChannelID	string	--

Request Message

None

Response Message

```

{
  "RadarLineDetection": {
    /*ro, req, object, parameters of radar's line crossing detection rule*/
    "enabled": true,
    /*ro, req, bool, whether to enable detection*/
    "intelliBackSearch": true,
    /*ro, req, bool, dual-VCA search*/
    "duration": 500,
    /*ro, req, int, duration*/
    "startTriggerTime": 500,
    /*ro, req, int, triggering start time, range:[0,100], unit:ms*/
    "endTriggerTime": 500,
    /*ro, req, int, triggering end time, range:[0,100], unit:ms*/
    "minObjectSize": 0,
    /*ro, opt, int, minimum pixels of each object*/
    "maxObjectSize": 0,
    /*ro, opt, int, maximum pixels of each object*/
    "LineItemList": [
      /*ro, opt, array, detection line list, subType:object*/
      {
        "LineItemInfo": {
          /*ro, opt, object*/
          "lineID": 4,
          /*ro, req, int, detection line ID*/
          "enabled": true,
          /*ro, req, bool, whether to enable detection*/
          "sensitivityLevel": 50,
          /*ro, req, int, detection sensitivity, range:[0,100]*/
          "directionSensitivity": "any",
          /*ro, req, enum, detection direction, subType:string, desc:"left-right" (from left to right), "right-left" (from right to left), "any"
(all directions)*/
          "LineItem": [
            /*ro, req, array, parameters of a detection line, subType:object, range:[0,2], desc:the origin is the lower-left corner of the screen*/
            {
              "x": 0.120,
              /*ro, req, float, X-coordinate, range:[0.000,1.000]*/
              "y": 0.120
              /*ro, req, float, Y-coordinate, range:[0.000,1.000]*/
            }
          ]
        }
      }
    ],
    "recogRuleType": "vectorMode",
    /*ro, opt, enum, direction recognition mode, subType:string, desc:"vectorMode" (vector mode), "slopeMode" (slope mode)*/
    "humanMisinfoFilter": true,
    /*ro, opt, bool, whether to enable false alarm filtering of human body detection*/
    "vehicleMisinfoFilter": true
    /*ro, opt, bool, whether to enable false alarm filtering of vehicle detection*/
  }
}

```

14.7.2.29 Line crossing detection

EventType:linedetection

```

<?xml version="1.0" encoding="UTF-8"?>

<EventNotificationAlert xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, event alarm, attr:version[opt, string, protocolVersion]-->
  <ipAddress>
    <!--ro, req, string, IPv4 address of the device that triggers the alarm-->172.6.64.7
  </ipAddress>
  <ipv6Address>
    <!--ro, opt, string, IPv6 address of the device that triggers the alarm-->1000:0:0:0:8:800:200C:417A
  </ipv6Address>
  <portNo>
    <!--ro, opt, int, communication port No. of the device that triggers the alarm-->80
  </portNo>
  <protocol>
    <!--ro, opt, enum, transmission communication protocol type, subType:string, desc:when ISAPI protocol is transmitted via HCNetsDK, the channel No. is the video channel No. of private protocol. When ISAPI protocol is transmitted via EZ protocol, the channel No. is the video channel No. of EZ protocol. When ISAPI protocol is transmitted via ISUP, the channel No. is the video channel No. of ISUP-->HTTP
  </protocol>
  <macAddress>
    <!--ro, opt, string, MAC address-->01:17:24:45:D9:F4
  </macAddress>
  <dynChannelID>
    <!--ro, opt, string, digital channel No.-->test
  </dynChannelID>
  <channelID>
    <!--ro, opt, int, channel No. of the device that triggers the alarm, desc:video channel No. that triggers the alarm-->1
  </channelID>
  <relatedChannelList>
    <!--ro, opt, string, List of alarm related channels, which are of the same camera with channelID, desc:this parameter is used for Live view or playback on the platform; multiple channel No.s are separated by commas-->1,2,3
  </relatedChannelList>
  <dateTime>

```

```

    <!--ro, req, datetime, alarm trigger time-->2004-05-03T17:30:08+08:00
  </dateTime>
  <activePostCount>
    <!--ro, opt, int, times that the same alarm has been uploaded, desc:event triggering frequency-->1
  </activePostCount>
  <eventType>
    <!--ro, req, enum, event type, subType:string, desc:"linedetection" (Line Crossing Detection)-->linedetection
  </eventType>
  <eventState>
    <!--ro, req, enum, event status, subType:string, desc:for durative event: "active" (valid), "inactive" (invalid)-->active
  </eventState>
  <eventDescription>
    <!--ro, req, string, event description-->test
  </eventDescription>
  <deviceId>
    <!--ro, opt, string, device ID, desc:it should be returned for ISUP alarms, e.g., test0123 (Ehome2.0, Ehome4.0, and ISUP5.0)-->12345
  </deviceId>
  <DetectionRegionList>
    <!--ro, opt, array, detection area list, subType:object-->
    <DetectionRegionEntry>
      <!--ro, opt, object, detection area-->
      <regionID>
        <!--ro, req, string, area ID-->test
      </regionID>
      <sensitivityLevel>
        <!--ro, opt, int, sensitivity, range:[0,100]-->1
      </sensitivityLevel>
      <RegionCoordinatesList>
        <!--ro, opt, array, area coordinates, subType:object, range:[0,4], desc:rectangle-->
        <RegionCoordinates>
          <!--ro, opt, object, area point coordinates, desc:the origin is the upper-left corner of the screen-->
          <positionX>
            <!--ro, req, int, X-coordinate, range:[0,1000]-->50
          </positionX>
          <positionY>
            <!--ro, req, int, Y-coordinate, range:[0,1000]-->50
          </positionY>
        </RegionCoordinates>
      </RegionCoordinatesList>
      <detectionTarget>
        <!--ro, opt, enum, target type, subType:string, desc:"human", "vehicle", "others"-->human
      </detectionTarget>
      <TargetRect>
        <!--ro, opt, object, target area, desc:the origin is the upper-left corner of the screen-->
        <X>
          <!--ro, req, float, target X-coordinate, range:[0.000,1.000]-->0.000
        </X>
        <Y>
          <!--ro, req, float, target Y-coordinate, range:[0.000,1.000]-->0.000
        </Y>
        <width>
          <!--ro, req, float, target width, range:[0.000,1.000]-->1.000
        </width>
        <height>
          <!--ro, req, float, target height, range:[0.000,1.000]-->1.000
        </height>
      </TargetRect>
      <sceneID>
        <!--ro, opt, int, scene ID-->1
      </sceneID>
    </DetectionRegionEntry>
  </DetectionRegionList>
  <channelName>
    <!--ro, opt, string, channel name, range:[1,64]-->test
  </channelName>
  <Extensions>
    <!--ro, opt, object, extended information-->
    <serialNumber>
      <!--ro, opt, string, serial No.-->test
    </serialNumber>
    <eventPush>
      <!--ro, opt, string, event notification-->test
    </eventPush>
  </Extensions>
  <detectionPictureTransType>
    <!--ro, opt, enum, picture transmission mode, subType:string, desc:"url", "binary", "base64"-->url
  </detectionPictureTransType>
  <detectionPicturesNumber>
    <!--ro, opt, int, number of pictures contained in the alarm received in arming mode, desc:this field will not be returned when there is no picture contained in the alarm-->1
  </detectionPicturesNumber>
  <bkgUrl>
    <!--ro, opt, string, background picture URL, desc:background picture URL-->test
  </bkgUrl>
  <URLCertificationType>
    <!--ro, opt, enum, picture URL authentication method, subType:string, desc:authentication mode of picture URL: "no"-no authentication, "digest"-digest authentication (it is used for local picture URL returned by NVR or DVR)-->no
  </URLCertificationType>
  <pId>
    <!--ro, opt, string, picture ID, desc:the field value is the picture Content-ID when the value of detectionPictureTransType is "binary"-->test
  </pId>
  <visibleLightURL>
    <!--ro, opt, string, visible light picture URL-->test
  </visibleLightURL>

```

```

</visibleLightOn>
<thermalURL>
  <!--ro, opt, string, thermal imaging picture URL-->test
</thermalURL>
<targetAttrs>
  <!--ro, opt, object, transmitted parameters-->{ /*可选,透传字段,推荐使用以下三个字段*/ "deviceId": "1", /*可选, 设备ID, string类型, 最大长度为64*/
"deviceChannel": 1, /*可选, 设备通道号, integer32类型*/ "deviceName": "shebei", /*可选, 设备名称, string类型, 最大长度为128*/ }
</targetAttrs>
<TaskInfo>
  <!--ro, opt, object, task information submitted by data center products-->
  <taskID>
    <!--ro, req, string, task ID, range:[0,64]-->test
  </taskID>
  <algorithmType>
    <!--ro, opt, enum, algorithm type, subType:int, desc:1-"highQualityVehicle" (high-quality vehicle),2-"highPerformanceVehicle" (high-performance
vehicle),3-"personStructModel" (person structural modeling),4-"vehicleAndPersonStructModel" (person and vehicle structural modeling),5-"videoFaceDetect"
(video face detection),6-"videoFaceDetectModel" (video face detection and modeling),7-"smart" (face detection (output frame without recognizing
properties)+human body detection (output properties and frame)+behavior detection)-->1
  </algorithmType>
  <taskName>
    <!--ro, opt, string, task name-->test
  </taskName>
  <algorithmID>
    <!--ro, opt, string, algorithm package ID-->test
  </algorithmID>
  <monitorPointID>
    <!--ro, opt, string, camera No.-->test
  </monitorPointID>
  <monitorPointName>
    <!--ro, opt, string, camera name-->test
  </monitorPointName>
  <streamType>
    <!--ro, opt, enum, stream type, subType:string, desc:"realtime" (real-time stream), "historyvideo" (history stream), "localvideo" (Local stream)--
>realtime
  </streamType>
  <ruleID>
    <!--ro, opt, string, rule ID, desc:it is used to distinguish different tasks with the same name, and the ruleID in the event uploading message
indicates that the event is related to this task-->test
  </ruleID>
  <ruleCustomName>
    <!--ro, req, string, user-defined event name, range:[0,128], desc:it is defined by the caller, and it is included in the message when the alarm is
uploaded. Up to 128 characters are allowed-->test
  </ruleCustomName>
  <algorithmInfo>
    <!--ro, opt, object, algorithm version information, desc:this field is required for secondary analysis-->
    <algorithmID>
      <!--ro, opt, string, algorithm package ID-->test
    </algorithmID>
    <algoVendorID>
      <!--ro, opt, string, manufacturer ID-->test
    </algoVendorID>
    <algoVersionID>
      <!--ro, opt, string, algorithm version No.-->test
    </algoVersionID>
    <algoChipType>
      <!--ro, opt, string, chip type-->test
    </algoChipType>
    <algoModelVersion>
      <!--ro, opt, string, model version-->test
    </algoModelVersion>
  </algorithmInfo>
</TaskInfo>
<timeStamp>
  <!--ro, opt, string, timestamp of the frame, which triggers the alarm-->test
</timeStamp>
<targetSpeed>
  <!--ro, opt, datetime-->2019-12-30T15:29:23+08:00
</targetSpeed>
<targetDistance>
  <!--ro, opt, int, unit:m-->2
</targetDistance>
<triggerType>
  <!--ro, opt, enum, subType:string-->video
</triggerType>
<uid>
  <!--ro, opt, string, the unique ID of event uploading, range:[0,64], desc:it can be composed of time (accurate to the millisecond) and random digits--
>test
</uid>
<isDataRetransmission>
  <!--ro, opt, bool, whether it is a resending data (if the real-time detection data upload fails due to the network condition, the data will be uploaded
again after the device recovers.)-->true
</isDataRetransmission>
<ruleID>
  <!--ro, opt, int, rule No., range:[0,7], desc:rule No.-->0
</ruleID>
<ruleName>
  <!--ro, opt, string, rule name, range:[0,32], desc:rule name-->test
</ruleName>
<applicationScene>
  <!--ro, opt, enum, Application Scene, subType:string-->indoor
</applicationScene>
<visibleLightAbsoluteHigh>
  <!--ro, opt, object-->
  <elevation>

```

```

    <!--ro, opt, float, range:[-90.00,270.00], step:0.001-->0.00
</elevation>
<azimuth>
    <!--ro, opt, float, range:[0,360.00], step:0.001-->0.00
</azimuth>
<absoluteZoom>
    <!--ro, opt, float, zooming ratio, range:[0,10000.00]-->0.00
</absoluteZoom>
<focus>
    <!--ro, opt, int, range of the focus, range:[1,100000], step:1-->1
</focus>
</visibleLightAbsoluteHigh>
<thermalAbsoluteHigh>
    <!--ro, opt, object-->
    <elevation>
        <!--ro, opt, float, range:[-90.00,270.00], step:0.001-->0.00
    </elevation>
    <azimuth>
        <!--ro, opt, float, range:[0,360.00], step:0.001-->0.00
    </azimuth>
    <absoluteZoom>
        <!--ro, opt, float, zooming ratio, range:[0,10000.00]-->0.00
    </absoluteZoom>
    <focus>
        <!--ro, opt, int, range of the focus, range:[1,100000], step:1-->1
    </focus>
</thermalAbsoluteHigh>
<deviceLocation>
    <!--ro, opt, object-->
    <longitudeType>
        <!--ro, req, enum, subType:string-->W
    </longitudeType>
    <latitudeType>
        <!--ro, req, enum, subType:string, desc:"S"-south, "N"-north-->S
    </latitudeType>
    <longitude>
        <!--ro, req, object-->
        <degree>
            <!--ro, req, int, degree(s), range:[0,180]-->1
        </degree>
        <minute>
            <!--ro, req, float, minute(s), range:[0,60]-->0.0
        </minute>
        <sec>
            <!--ro, req, float, range:[0,60]-->0.0
        </sec>
    </longitude>
    <latitude>
        <!--ro, req, object-->
        <degree>
            <!--ro, req, int, range:[0,90]-->1
        </degree>
        <minute>
            <!--ro, req, float, minute(s), range:[0,60]-->0.0
        </minute>
        <sec>
            <!--ro, req, float, range:[0,60]-->0.0
        </sec>
    </latitude>
</deviceLocation>
<laserRanging>
    <!--ro, opt, int, range:[1,10000], step:1, unit:m-->1
</laserRanging>
</EventNotificationAlert>

```

Parameter Name	Parameter Value	Parameter Type(Content-Type)	Content-ID	File Name	Description
linedetection	[Message content]	application/xml	--	--	--
visibleLightImage	[Binary picture data]	image/jpeg	visibleLightImage	visibleLightImage.jpg	--
thermallImage	[Binary picture data]	image/jpeg	thermallImage	thermallImage.jpg	--
targetImage	[Binary picture data]	image/jpeg	targetImage	targetImage.jpg	--
POSInfo	[Stream data]	application/octet-stream	POSInfo	POSInfo.dat	--

Note: The protocol is transmitted in form format. See Chapter 4.5.1.4 for form framework description, as shown in the instance below.

```
--<frontier>
Content-Disposition: form-data; name=Parameter Name;filename=File Name
Content-Type: Parameter Type
Content-Length: ****
Content-ID: Content ID
Parameter Value
```

- Parameter Name: the name property of Content-Disposition in the header of form unit; it refers to the form unit name.
- Parameter Type (Content-Type): the Content-Type property in the header of form unit.
- File Name (filename): the filename property of Content-Disposition of form unit Headers. It exists only when the transmitted data of form unit is file, and it refers to the file name of form unit body.
- Parameter Value: the body content of form unit.

14.7.3 Region Entrance Detection

14.7.3.1 Set region entrance detection arming schedules of all channels

Request URL

PUT /ISAPI/Event/schedules/regionEntrances

Query Parameter

None

Request Message

```

<?xml version="1.0" encoding="UTF-8"?>

<RegionEntranceScheduleList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, refer to the message XML_Schedule for details, attr:version{req, string, protocolVersion}-->
  <Schedule>
    <!--opt, object-->
    <id>
      <!--req, string-->test
    </id>
    <eventType>
      <!--opt, string, event type-->regionEntrance
    </eventType>
    <videoInputChannelID>
      <!--opt, string, video input channel ID-->test
    </videoInputChannelID>
    <TimeBlockList size="8">
      <!--req, object, arming time list, attr:size{req, int}-->
      <TimeBlock>
        <!--opt, object, arming time-->
        <dayOfWeek>
          <!--opt, enum, day of a week, subType:int, desc:day of a week-->1
        </dayOfWeek>
        <TimeRange>
          <!--req, object, time range-->
          <beginTime>
            <!--req, time, start time-->00:00:00
          </beginTime>
          <endTime>
            <!--req, time, end time-->00:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </TimeBlockList>
    <HolidayBlockList>
      <!--opt, object, holiday arming time-->
      <TimeBlock>
        <!--opt, object, arming time-->
        <TimeRange>
          <!--req, object, time range-->
          <beginTime>
            <!--req, time, start time-->00:00:00
          </beginTime>
          <endTime>
            <!--req, time, end time-->00:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </HolidayBlockList>
  </Schedule>
</RegionEntranceScheduleList>

```

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code description-->OK
  </subStatusCode>
</ResponseStatus>

```

14.7.3.2 Get arming schedules of all channels for region entrance detection

Request URL

GET /ISAPI/Event/schedules/regionEntrances

Query Parameter

None

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<RegionEntranceScheduleList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, refer to the message XML_Schedule for details, attr:version{req, string, protocolVersion}-->
  <Schedule>
    <!--ro, opt, object, configuration of region entrance detection arming schedules-->
    <id>
      <!--ro, req, string, ID, desc:format: event type-channel No.-->1
    </id>
    <eventType>
      <!--ro, opt, string, event type-->regionEntrance
    </eventType>
    <videoInputChannelID>
      <!--ro, opt, string, video input channel ID-->test
    </videoInputChannelID>
    <TimeBlockList size="8">
      <!--ro, req, object, List of arming schedules, attr:size{req, int}-->
      <TimeBlock>
        <!--ro, opt, object, arming schedules-->
        <dayOfWeek>
          <!--ro, opt, enum, day of a week, subType:int, desc:1 (Monday), 2 (Tuesday), 3 (Wednesday), 4 (Thursday), 5 (Friday), 6 (Saturday), 7 (Sunday)-->1
        </dayOfWeek>
        <TimeRange>
          <!--ro, req, object, time range-->
          <beginTime>
            <!--ro, req, time, start time-->00:00:00
          </beginTime>
          <endTime>
            <!--ro, req, time, end time-->00:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </TimeBlockList>
    <HolidayBlockList>
      <!--ro, opt, object, holiday arming schedule-->
      <TimeBlock>
        <!--ro, opt, object, arming schedules-->
        <TimeRange>
          <!--ro, req, object, time range-->
          <beginTime>
            <!--ro, req, time, start time-->00:00:00
          </beginTime>
          <endTime>
            <!--ro, req, time, end time-->00:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </HolidayBlockList>
  </Schedule>
</RegionEntranceScheduleList>
```

14.7.3.3 Set the arming schedule of region entrance detection for a specified channel

Request URL

PUT /ISAPI/Event/schedules/regionEntrances/regionEntrance-<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<Schedule xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string-->1
  </id>
  <eventType>
    <!--opt, string-->regionEntrance
  </eventType>
  <videoInputChannelID>
    <!--opt, string-->test
  </videoInputChannelID>
  <TimeBlockList size="8">
    <!--req, object, attr:size{req, int}-->
    <TimeBlock>
      <!--opt, object-->
      <dayOfWeek>
        <!--opt, enum, subType:int-->1
      </dayOfWeek>
      <TimeRange>
        <!--req, object-->
        <beginTime>
          <!--req, time-->00:00:00
        </beginTime>
        <endTime>
          <!--req, time-->00:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </TimeBlockList>
  <HolidayBlockList>
    <!--opt, object-->
    <TimeBlock>
      <!--opt, object-->
      <TimeRange>
        <!--req, object-->
        <beginTime>
          <!--req, time-->00:00:00
        </beginTime>
        <endTime>
          <!--req, time-->00:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </HolidayBlockList>
</Schedule>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.7.3.4 Get the arming schedule of region entrance detection for a specified channel

Request URL

GET /ISAPI/Event/schedules/regionEntrances/regionEntrance-<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<Schedule xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string-->1
  </id>
  <eventType>
    <!--ro, opt, string-->regionEntrance
  </eventType>
  <videoInputChannelID>
    <!--ro, opt, string-->test
  </videoInputChannelID>
  <TimeBlockList size="8">
    <!--ro, req, object, attr:size{req, int}-->
    <TimeBlock>
      <!--ro, opt, object-->
      <dayOfWeek>
        <!--ro, opt, enum, subType:int-->1
      </dayOfWeek>
      <TimeRange>
        <!--ro, req, object-->
        <beginTime>
          <!--ro, req, time-->00:00:00
        </beginTime>
        <endTime>
          <!--ro, req, time-->00:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </TimeBlockList>
  <HolidayBlockList>
    <!--ro, opt, object-->
    <TimeBlock>
      <!--ro, opt, object-->
      <TimeRange>
        <!--ro, req, object-->
        <beginTime>
          <!--ro, req, time-->00:00:00
        </beginTime>
        <endTime>
          <!--ro, req, time-->00:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </HolidayBlockList>
</Schedule>
```

14.7.3.5 Get the linkage triggering parameters of region entrance for a specified channel

Request URL

GET /ISAPI/Event/triggers/regionEntrance-<channelID>/notifications

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<EventTriggerNotificationList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, array, subType:object, attr:version{req, string, protocolVersion}-->
  <EventTriggerNotification>
    <!--ro, opt, object-->
    <id>
      <!--ro, req, string-->test
    </id>
    <notificationMethod>
      <!--ro, req, enum, subType:string-->email
    </notificationMethod>
    <notificationRecurrence>
      <!--ro, opt, enum, subType:string-->beginning
    </notificationRecurrence>
    <notificationInterval>
      <!--ro, opt, int, unit:ms-->1
    </notificationInterval>
    <outputIOPortID>
      <!--ro, opt, string-->1
    </outputIOPortID>
    <dynOutputIOPortID>
      <!--ro, opt, string-->1
    </dynOutputIOPortID>
    <videoInputID>
      <!--ro, opt, string-->1
    </videoInputID>
    <dynVideoInputID>
      <!--ro, opt, string-->1
    </dynVideoInputID>
    <ptzAction>
      <!--ro, opt, object-->
      <ptzChannelID>
        <!--ro, req, string-->1
      </ptzChannelID>
      <actionName>
        <!--ro, req, enum, subType:string-->preset
      </actionName>
      <actionNum>
        <!--ro, opt, int-->1
      </actionNum>
    </ptzAction>
    <WhiteLightAction>
      <!--ro, opt, object-->
      <whiteLightDurationTime>
        <!--ro, opt, int, range:[1,60], unit:s-->1
      </whiteLightDurationTime>
    </WhiteLightAction>
    <SupplementLightAlarm>
      <!--ro, opt, object-->
      <durationTime>
        <!--ro, opt, int, range:[0,90], unit:s-->5
      </durationTime>
    </SupplementLightAlarm>
    <customOverHTTPList>
      <!--ro, opt, array, subType:object, dep:and,{$.EventTriggerNotificationList[*].EventTriggerNotification.notificationMethod,eq,customOverHTTP}-->
      <customOverHTTP>
        <!--ro, opt, object-->
        <id>
          <!--ro, req, int-->1
        </id>
        <enabled>
          <!--ro, req, bool-->true
        </enabled>
        <hostID>
          <!--ro, opt, int-->1
        </hostID>
        <customInfo>
          <!--ro, opt, string, range:[1,512]-->test
        </customInfo>
      </customOverHTTP>
    </customOverHTTPList>
  </EventTriggerNotification>
</EventTriggerNotificationList>

```

14.7.3.6 Set the linkage triggering parameters of region entrance for a specified channel

Request URL

PUT /ISAPI/Event/triggers/regionEntrance-<channelID>/notifications

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<EventTriggerNotificationList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, array, subType:object, attr:version{req, string, protocolVersion}-->
  <EventTriggerNotification>
    <!--opt, object-->
    <id>
      <!--req, string-->test
    </id>
    <notificationMethod>
      <!--req, enum, subType:string-->email
    </notificationMethod>
    <notificationRecurrence>
      <!--opt, enum, subType:string-->beginning
    </notificationRecurrence>
    <notificationInterval>
      <!--opt, int, unit:ms-->1
    </notificationInterval>
    <outputIOPortID>
      <!--opt, string-->1
    </outputIOPortID>
    <dynOutputIOPortID>
      <!--opt, string-->1
    </dynOutputIOPortID>
    <videoInputID>
      <!--opt, string-->1
    </videoInputID>
    <dynVideoInputID>
      <!--opt, string-->1
    </dynVideoInputID>
    <ptzAction>
      <!--opt, object-->
      <ptzChannelID>
        <!--req, string-->1
      </ptzChannelID>
      <actionName>
        <!--req, enum, subType:string-->preset
      </actionName>
      <actionNum>
        <!--opt, int-->1
      </actionNum>
    </ptzAction>
    <WhiteLightAction>
      <!--opt, object-->
      <WhiteLightDurationTime>
        <!--opt, int, range:[1,60], unit:s-->1
      </WhiteLightDurationTime>
    </WhiteLightAction>
    <SupplementLightAlarm>
      <!--opt, object-->
      <durationTime>
        <!--opt, int, range:[0,90], unit:s-->5
      </durationTime>
    </SupplementLightAlarm>
  </EventTriggerNotification>
</EventTriggerNotificationList>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.7.3.7 Get the linkage parameters of region entrance for a specified channel

Request URL

GET /ISAPI/Event/triggers/regionEntrance-**<channelID>**?triggersEnabledStatus=**<triggersEnabledStatus>**

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.
triggersEnabledStatus	string	Linkage enabling status (if this node is included in the URL, the enabling and disabling of the linkage mode should be determined based on the triggerEnabled status in the linkage list). This node is supported if the value of isSupportTriggersEnabled in /ISAPI/Event/triggersCap contains is true.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>
<EventTrigger xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string-->1
  </id>
  <eventType>
    <!--ro, req, enum, subType:string-->regionEntrance
  </eventType>
  <eventDescription>
    <!--ro, opt, string-->test
  </eventDescription>
  <videoInputChannelID>
    <!--ro, opt, string-->1
  </videoInputChannelID>
  <dynVideoInputChannelID>
    <!--ro, opt, string-->1
  </dynVideoInputChannelID>
  <EventTriggerNotificationList>
    <!--ro, opt, array, subType:object-->
    <EventTriggerNotification>
      <!--ro, opt, object-->
      <id>
        <!--ro, req, string-->test
      </id>
      <notificationMethod>
        <!--ro, req, enum, subType:string-->email
      </notificationMethod>
      <notificationRecurrence>
        <!--ro, opt, enum, subType:string-->beginning
      </notificationRecurrence>
      <videoInputID>
        <!--ro, opt, string-->1
      </videoInputID>
      <SupplementLightAlarm>
        <!--ro, opt, object-->
        <durationTime>
          <!--ro, opt, int, range:[0,90], unit:s-->5
        </durationTime>
      </SupplementLightAlarm>
    </EventTriggerNotification>
  </EventTriggerNotificationList>
</EventTrigger>
```

14.7.3.8 Set the linkage parameters of region entrance for a specified channel

Request URL

PUT /ISAPI/Event/triggers/regionEntrance- <channelID> ?triggersEnabledStatus= <triggersEnabledStatus>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--
triggersEnabledStatus	string	--

Request Message


```

<?xml version="1.0" encoding="UTF-8"?>

<EventTrigger xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string-->1
  </id>
  <eventType>
    <!--req, enum, subType:string-->regionEntrance
  </eventType>
  <eventDescription>
    <!--opt, string-->test
  </eventDescription>
  <inputIOPortID>
    <!--opt, string-->1
  </inputIOPortID>
  <dynInputIOPortID>
    <!--opt, string-->1
  </dynInputIOPortID>
  <videoInputChannelID>
    <!--opt, string-->1
  </videoInputChannelID>
  <dynVideoInputChannelID>
    <!--opt, string-->1
  </dynVideoInputChannelID>
  <intervalBetweenEvents>
    <!--opt, int, unit:s-->1
  </intervalBetweenEvents>
  <wLSensorID>
    <!--opt, string-->1
  </wLSensorID>
  <EventTriggerNotificationList>
    <!--opt, array, subType:object-->
    <EventTriggerNotification>
      <!--opt, object-->
      <id>
        <!--req, string-->test
      </id>
      <notificationMethod>
        <!--req, enum, subType:string-->email
      </notificationMethod>
      <notificationRecurrence>
        <!--opt, enum, subType:string-->beginning
      </notificationRecurrence>
      <notificationInterval>
        <!--opt, int, unit:ms-->1
      </notificationInterval>
      <outputIOPortID>
        <!--opt, string-->1
      </outputIOPortID>
      <dynOutputIOPortID>
        <!--opt, string-->1
      </dynOutputIOPortID>
      <videoInputID>
        <!--opt, string-->1
      </videoInputID>
      <dynVideoInputID>
        <!--opt, string-->1
      </dynVideoInputID>
      <ptzAction>
        <!--opt, object-->
        <ptzChannelID>
          <!--req, string-->1
        </ptzChannelID>
        <actionName>
          <!--req, enum, subType:string-->preset
        </actionName>
        <actionNum>
          <!--opt, int-->1
        </actionNum>
      </ptzAction>
      <whiteLightAction>
        <!--opt, object-->
        <whiteLightDurationTime>
          <!--opt, int, range:[1,60], unit:s-->1
        </whiteLightDurationTime>
      </whiteLightAction>
      <SupplementLightAlarm>
        <!--opt, object-->
        <durationTime>
          <!--opt, int, range:[0,90], unit:s-->5
        </durationTime>
      </SupplementLightAlarm>
    </EventTriggerNotification>
  </EventTriggerNotificationList>
</EventTrigger>

```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.7.3.9 Set region entrance detection parameters of all channels

Request URL

PUT /ISAPI/Smart/regionEntrance

Query Parameter

None

Request Message

<?xml version="1.0" encoding="UTF-8"?>

```
<RegionEntranceList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, refer to the message XML_RegionEntrance for details, attr:version{req, string, protocolVersion}-->
  <RegionEntrance>
    <!--opt, object-->
    <id>
      <!--req, string-->test
    </id>
    <enabled>
      <!--req, bool-->true
    </enabled>
    <normalizedScreenSize>
      <!--opt, object, normalized size-->
      <normalizedScreenWidth>
        <!--req, int, normalized width-->1
      </normalizedScreenWidth>
      <normalizedScreenHeight>
        <!--req, int, normalized height-->1
      </normalizedScreenHeight>
    </normalizedScreenSize>
    <RegionEntranceRegionList>
      <!--opt, object, area list-->
      <RegionEntranceRegion>
        <!--opt, object, intrusion region-->
        <id>
          <!--req, string, detection area ID-->1
        </id>
        <sensitivityLevel>
          <!--opt, int, sensitivity, range:[0,100]-->1
        </sensitivityLevel>
        <RegionCoordinatesList>
          <!--opt, array, region coordinates list, subType:object, range:[3,10]-->
          <RegionCoordinates>
            <!--opt, object, area coordinates, desc:the origin is the Lower-Left corner of the screen-->
            <positionX>
              <!--req, int, x-coordinate, range:[0,1000]-->1
            </positionX>
            <positionY>
              <!--req, int, y-coordinate, range:[0,1000]-->1
            </positionY>
          </RegionCoordinates>
        </RegionCoordinatesList>
        <detectionTarget>
          <!--opt, enum, detection target, subType:string, desc:detection target-->all
        </detectionTarget>
        <humanMisinfoFilterEnabled>
          <!--opt, bool, whether to enable false alarm filtering (human body)-->true
        </humanMisinfoFilterEnabled>
        <vehicleMisinfoFilterEnabled>
          <!--opt, bool, whether to enable false alarm filtering (vehicle)-->true
        </vehicleMisinfoFilterEnabled>
        <priority>
          <!--opt, enum, priority, subType:string, desc:priority-->low
        </priority>
        <alarmConfidence>
          <!--opt, enum, subType:string-->low
        </alarmConfidence>
        <recordConfidence>
          <!--opt, enum, subType:string-->low
        </recordConfidence>
      </RegionEntranceRegion>
    </RegionEntranceRegionList>
    <mutexAbility opt="PDC">
      <!--opt, string, attr:opt{req, string}-->PDC
    </mutexAbility>
    <isSupportMultiScene>
      <!--opt, bool, whether supports multiple scene detection-->true
    </isSupportMultiScene>
    <humanMisinfoFilterEnabled>
      <!--opt, bool, whether to enable false alarm filtering (human body)-->true
    </humanMisinfoFilterEnabled>
    <vehicleMisinfoFilterEnabled>
      <!--opt, bool, whether to enable false alarm filtering (vehicle)-->true
    </vehicleMisinfoFilterEnabled>
  </RegionEntrance>
</RegionEntranceList>
```

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6
    (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format",
    "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code description-->OK
  </subStatusCode>
</ResponseStatus>

```

14.7.3.10 Get region entrance detection parameters of all channels

Request URL

GET /ISAPI/Smart/regionEntrance

Query Parameter

None

Request Message

None

Response Message

dzambrano@viinsoft.com.mx
 VISION E INGENIO SOFTWARE SA DE CV (VIINSOFT)

```

<?xml version="1.0" encoding="UTF-8"?>

<RegionEntranceList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, refer to the message XML_RegionEntrance for details, attr:version{req, string, protocolVersion}-->
  <RegionEntrance>
    <!--ro, opt, object-->
    <id>
      <!--ro, req, string, channel No.-->test
    </id>
    <enabled>
      <!--ro, req, bool, whether to enable the function-->true
    </enabled>
    <normalizedScreenSize>
      <!--ro, opt, object, normalized size-->
      <normalizedScreenWidth>
        <!--ro, req, int, normalized width-->1
      </normalizedScreenWidth>
      <normalizedScreenHeight>
        <!--ro, req, int, normalized height-->1
      </normalizedScreenHeight>
    </normalizedScreenSize>
    <RegionEntranceRegionList>
      <!--ro, opt, array, area List, subType:object-->
      <RegionEntranceRegion>
        <!--ro, opt, object-->
        <id>
          <!--ro, req, string-->1
        </id>
        <sensitivityLevel>
          <!--ro, opt, int, sensitivity, range:[1,100]-->1
        </sensitivityLevel>
        <RegionCoordinatesList>
          <!--ro, opt, array, region coordinates List, subType:object, range:[3,10]-->
          <RegionCoordinates>
            <!--ro, opt, object, area coordinates, desc:the origin is the Lower-Left corner of the screen-->
            <positionX>
              <!--ro, req, int, X-coordinate, range:[0,1000]-->1
            </positionX>
            <positionY>
              <!--ro, req, int, Y-coordinate, range:[0,1000]-->1
            </positionY>
          </RegionCoordinates>
        </RegionCoordinatesList>
        <detectionTarget>
          <!--ro, opt, enum, detection target, subType:string, desc:detection target-->all
        </detectionTarget>
        <humanMisinfoFilterEnabled>
          <!--ro, opt, bool, whether to enable false alarm filtering (human body)-->true
        </humanMisinfoFilterEnabled>
        <vehicleMisinfoFilterEnabled>
          <!--ro, opt, bool, whether to enable false alarm filtering (vehicle)-->true
        </vehicleMisinfoFilterEnabled>
        <priority>
          <!--ro, opt, enum, priority, subType:string, desc:priority-->low
        </priority>
        <alarmConfidence>
          <!--ro, opt, enum, subType:string-->low
        </alarmConfidence>
        <recordConfidence>
          <!--ro, opt, enum, subType:string-->low
        </recordConfidence>
      </RegionEntranceRegion>
    </RegionEntranceRegionList>
    <mutexAbility opt="PDC">
      <!--ro, opt, string, attr:opt{req, string}-->PDC
    </mutexAbility>
    <isSupportMultiScene>
      <!--ro, opt, bool, whether supports multiple scene detection-->true
    </isSupportMultiScene>
    <humanMisinfoFilterEnabled>
      <!--ro, opt, bool, whether to enable false alarm filtering (human body)-->true
    </humanMisinfoFilterEnabled>
    <vehicleMisinfoFilterEnabled>
      <!--ro, opt, bool, whether to enable false alarm filtering (vehicle)-->true
    </vehicleMisinfoFilterEnabled>
  </RegionEntrance>
</RegionEntranceList>

```

14.7.3.11 Set parameters of the region entrance detection rule by channel

Request URL

PUT /ISAPI/Smart/regionEntrance/<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<RegionEntrance xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, region entrance detection configuration, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string, channel No.-->test
  </id>
  <enabled>
    <!--req, bool, whether to enable the function-->true
  </enabled>
  <normalizedScreenSize>
    <!--opt, object, normalized size-->
    <normalizedScreenWidth>
      <!--req, int, normalized width-->1
    </normalizedScreenWidth>
    <normalizedScreenHeight>
      <!--req, int, normalized height-->1
    </normalizedScreenHeight>
  </normalizedScreenSize>
  <RegionEntranceRegionList>
    <!--opt, object, region List-->
    <RegionEntranceRegion>
      <!--opt, object, region entrance detection region-->
      <id>
        <!--req, string, region ID-->1
      </id>
      <sensitivityLevel>
        <!--opt, int, sensitivity, range:[0,100]-->1
      </sensitivityLevel>
      <RegionCoordinatesList>
        <!--opt, object, region coordinate List-->
        <RegionCoordinates>
          <!--opt, object, region coordinates-->
          <positionX>
            <!--req, int, X-coordinate-->1
          </positionX>
          <positionY>
            <!--req, int, Y-coordinate-->1
          </positionY>
        </RegionCoordinates>
      </RegionCoordinatesList>
      <detectionTarget>
        <!--opt, enum, detection target, subType:string, desc:"all", "human", "vehicle", "others" (targets except human bodies and vehicles). The value "all" is mutually exclusive with "others"-->all
      </detectionTarget>
      <humanMisinfoFilterEnabled>
        <!--opt, bool, whether to enable false alarm filtering of human body detection-->true
      </humanMisinfoFilterEnabled>
      <vehicleMisinfoFilterEnabled>
        <!--opt, bool, whether to enable false alarm filtering of vehicle detection-->true
      </vehicleMisinfoFilterEnabled>
      <priority>
        <!--opt, enum, priority, subType:string, desc:"Low", "middle", "high"-->low
      </priority>
      <alarmConfidence>
        <!--opt, enum, alarm confidence, subType:string, desc:"Low" (default value), "mediumLow", "mediumHigh", "high"-->low
      </alarmConfidence>
      <recordConfidence>
        <!--opt, enum, video confidence, subType:string, desc:"Low" (default value), "mediumLow", "mediumHigh", "high"-->low
      </recordConfidence>
    </RegionEntranceRegion>
  </RegionEntranceRegionList>
  <mutexAbility opt="PDC">
    <!--opt, string, mutually exclusive capability: "PDC" (people counting statistics, which is not supported during region entrance detection), attr:opt{req, string}-->PDC
  </mutexAbility>
  <isSupportMultiScene>
    <!--opt, bool, whether the device supports multiple scenes detection-->true
  </isSupportMultiScene>
  <humanMisinfoFilterEnabled>
    <!--opt, bool, whether to enable false alarm filtering of human body detection-->true
  </humanMisinfoFilterEnabled>
  <vehicleMisinfoFilterEnabled>
    <!--opt, bool, whether to enable false alarm filtering of vehicle detection-->true
  </vehicleMisinfoFilterEnabled>
</RegionEntrance>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.7.3.12 Get region entrance detection parameters by video input channel

Request URL

GET /ISAPI/Smart/regionEntrance/<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<RegionEntrance xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, read-only, "PDC"-people counting statistics, which is not supported during region entrance detection, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string-->test
  </id>
  <enabled>
    <!--ro, req, bool, whether to enable the function-->true
  </enabled>
  <normalizedScreenSize>
    <!--ro, opt, object, normalized size-->
    <normalizedScreenWidth>
      <!--ro, req, int, normalized width-->1
    </normalizedScreenWidth>
    <normalizedScreenHeight>
      <!--ro, req, int, normalized height-->1
    </normalizedScreenHeight>
  </normalizedScreenSize>
  <RegionEntranceRegionList>
    <!--ro, opt, object-->
    <RegionEntranceRegion>
      <!--ro, opt, object, Intrusion Region-->
      <id>
        <!--ro, req, string-->1
      </id>
      <sensitivityLevel>
        <!--ro, opt, int, range:[0,100]-->1
      </sensitivityLevel>
      <RegionCoordinatesList>
        <!--ro, opt, array, area coordinate List, subType:object, range:[3,10]-->
        <RegionCoordinates>
          <!--ro, opt, object, area coordinates, desc:the origin is the lower-left corner of the screen-->
          <positionX>
            <!--ro, req, int, x-coordinate, range:[0,1000]-->1
          </positionX>
          <positionY>
            <!--ro, req, int, range:[0,1000]-->1
          </positionY>
        </RegionCoordinates>
      </RegionCoordinatesList>
      <detectionTarget>
        <!--ro, opt, enum, detection target, subType:string, desc:detection target-->all
      </detectionTarget>
      <humanMisinfoFilterEnabled>
        <!--ro, opt, bool, whether to enable false alarm filtering (human body)-->true
      </humanMisinfoFilterEnabled>
    </RegionEntranceRegion>
  </RegionEntranceRegionList>
</RegionEntrance>
```

```

</humanMisinfoFilterEnabled>
<vehicleMisinfoFilterEnabled>
  <!--ro, opt, bool, whether to enable false alarm filtering (vehicle)-->true
</vehicleMisinfoFilterEnabled>
<priority>
  <!--ro, opt, enum, priority, subType:string, desc:priority-->low
</priority>
<alarmConfidence>
  <!--ro, opt, enum, subType:string-->low
</alarmConfidence>
<recordConfidence>
  <!--ro, opt, enum, subType:string-->low
</recordConfidence>
<ruleName>
  <!--ro, opt, string, range:[1,64]-->test
</ruleName>
<detectioTargetProperty>
  <!--ro, opt, object-->
  <human>
    <!--ro, opt, object, dep:or,{$.RegionEntrance.RegionEntranceRegionList.RegionEntranceRegion.detectionTarget,eq,all},
    {$.RegionEntrance.RegionEntranceRegionList.RegionEntranceRegion.detectionTarget,eq,human}-->
    <propertyList>
      <!--ro, opt, array, subType:object-->
      <property>
        <!--ro, opt, enum, subType:string-->nonMotor
      </property>
    </propertyList>
  </human>
  <animal>
    <!--ro, opt, object, dep:or,{$.RegionEntrance.RegionEntranceRegionList.RegionEntranceRegion.detectionTarget,eq,all},
    {$.RegionEntrance.RegionEntranceRegionList.RegionEntranceRegion.detectionTarget,eq,animal}-->
    <propertyList>
      <!--ro, opt, array, subType:object-->
      <property>
        <!--ro, opt, enum, subType:string-->large
      </property>
    </propertyList>
  </animal>
</detectioTargetProperty>
</RegionEntranceRegion>
</RegionEntranceRegionList>
<mutexAbility opt="PDC">
  <!--ro, opt, string, attr:opt{req, string}-->PDC
</mutexAbility>
<isSupportMultiScene>
  <!--ro, opt, bool, whether supports multiple-scene detection-->true
</isSupportMultiScene>
<humanMisinfoFilterEnabled>
  <!--ro, opt, bool, whether to enable false alarm filtering (human body)-->true
</humanMisinfoFilterEnabled>
<vehicleMisinfoFilterEnabled>
  <!--ro, opt, bool, whether to enable false alarm filtering (vehicle)-->true
</vehicleMisinfoFilterEnabled>
<stackTarget>
  <!--ro, opt, bool-->true
</stackTarget>
<targetSensitivityLevel>
  <!--ro, opt, int, range:[0,100]-->50
</targetSensitivityLevel>
</RegionEntrance>

```

14.7.3.13 Get configuration capability of region entrance detection by channel

Request URL

GET /ISAPI/Smart/regionEntrance/<channelID>/capabilities

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<RegionEntrance xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, ro, mutex capability, it indicates that which function is mutually exclusive with the region entrance detection function:
  "PDC, videoFrameRate50, videoFrameRate60, 19-1920*1080@50fps, 20-1920*1080@60fps, scheduled recording", attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string, channel No.-->test
  </id>

```



```

<enabled opt="true,false">
  <!--ro, req, bool, whether to enable, attr:opt{req, string}-->true
</enabled>
<normalizedScreenSize>
  <!--ro, opt, object, normalized screen size-->
  <normalizedScreenWidth>
    <!--ro, req, int, normalized screen width-->1
  </normalizedScreenWidth>
  <normalizedScreenHeight>
    <!--ro, req, int, normalized screen height-->1
  </normalizedScreenHeight>
</normalizedScreenSize>
<RegionEntranceRegionList size="4">
  <!--ro, opt, array, subType:object, attr:size{req, int}-->
  <RegionEntranceRegion>
    <!--ro, opt, object-->
    <id>
      <!--ro, req, string-->1
    </id>
    <sensitivityLevel min="1" max="100">
      <!--ro, req, int, sensitivity, attr:min{req, int},max{req, int}-->1
    </sensitivityLevel>
    <RegionCoordinatesList size="10">
      <!--ro, opt, array, region coordinate List, subType:object, range:[3,10], attr:size{req, int}, desc:region coordinate List-->
      <RegionCoordinates>
        <!--ro, opt, object, region coordinates, desc:the origin is the Lower-Left corner of the screen-->
        <positionX>
          <!--ro, req, int, X-coordinate, range:[0,1000]-->1
        </positionX>
        <positionY>
          <!--ro, req, int, Y-coordinate, range:[0,1000]-->1
        </positionY>
      </RegionCoordinates>
    </RegionCoordinatesList>
    <maxRegionCoordinatesNum>
      <!--ro, opt, int-->1
    </maxRegionCoordinatesNum>
    <minRegionCoordinatesNum>
      <!--ro, opt, int-->1
    </minRegionCoordinatesNum>
    <detectionTarget>
      <!--ro, opt, enum, detection target, subType:string, desc:detection target-->all
    </detectionTarget>
    <alarmConfidence opt="low,mediumLow,mediumHigh,high" def="low">
      <!--ro, opt, enum, subType:string, attr:opt{req, string},def{req, string}-->low
    </alarmConfidence>
    <recordConfidence opt="low,mediumLow,mediumHigh,high" def="low">
      <!--ro, opt, enum, subType:string, attr:opt{req, string},def{req, string}-->low
    </recordConfidence>
    <ruleName min="1" max="64">
      <!--ro, opt, string, attr:min{req, int},max{req, int}-->test
    </ruleName>
    <detectionTargetProperty>
      <!--ro, opt, object-->
      <human>
        <!--ro, opt, object-->
        <propertyList size="1">
          <!--ro, opt, object, attr:size{req, int}-->
          <property opt="nonMotor">
            <!--ro, opt, enum, subType:string, attr:opt{req, string}-->nonMotor
          </property>
        </propertyList>
      </human>
      <animal>
        <!--ro, opt, object-->
        <propertyList size="3">
          <!--ro, opt, object, attr:size{req, int}-->
          <property opt="large,small,poultry">
            <!--ro, opt, enum, subType:string, attr:opt{req, string}-->large
          </property>
        </propertyList>
      </animal>
    </detectionTargetProperty>
  </RegionEntranceRegion>
</RegionEntranceRegionList>
<mutexAbility opt="PDC">
  <!--ro, opt, string, attr:opt{req, string}-->PDC
</mutexAbility>
<isSupportMultiScene opt="true,false">
  <!--ro, req, bool, whether supports multiple scenes detection, attr:opt{req, string}-->true
</isSupportMultiScene>
<isSupportHumanMisinfoFilter>
  <!--ro, opt, bool, whether supports preventing false human body alarm, desc:if this function is supported, this node will be returned and its value is true; otherwise, this node will not be returned-->true
</isSupportHumanMisinfoFilter>
<isSupportVehicleMisinfoFilter>
  <!--ro, opt, bool, whether supports preventing false vehicle alarm, desc:if this function is supported, this node will be returned and its value is true; otherwise, this node will not be returned-->true
</isSupportVehicleMisinfoFilter>
<isSupportTargetMultiSelect>
  <!--ro, opt, bool, whether supports selecting multiple detection targets, desc:if this function is supported, this node will be returned and its value is true; otherwise, this node will not be returned-->true
</isSupportTargetMultiSelect>
<isSupportAllDataInLock>

```

```

<!--ro, opt, bool, whether supports uploading all-day event-->true
</isSupportAllDayUpload>
<isSupportOverlapParams>
  <!--ro, opt, bool-->true
</isSupportOverlapParams>
<isSupportStackTarget>
  <!--ro, opt, bool-->true
</isSupportStackTarget>
<isSupportAllTargetDetectionWebDisplay>
  <!--ro, opt, bool-->false
</isSupportAllTargetDetectionWebDisplay>
<targetSensitivityLevel min="0" max="100">
  <!--ro, opt, int, attr:min{req, int},max{req, int}-->50
</targetSensitivityLevel>
</RegionEntrance>

```

14.7.3.14 Get parameters of all region entrance detection regions by channel

Request URL

GET /ISAPI/Smart/regionEntrance/<channelID>/regions

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<RegionEntranceRegionList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, refer to the message XML_RegionEntranceRegion for details, attr:version{req, string, protocolVersion}-->
  <RegionEntranceRegion>
    <!--ro, opt, object-->
    <id>
      <!--ro, req, string, region ID-->1
    </id>
    <sensitivityLevel>
      <!--ro, req, int, sensitivity-->1
    </sensitivityLevel>
    <RegionCoordinatesList>
      <!--ro, opt, array, region coordinate list, subType:object, range:[3,10]-->
      <RegionCoordinates>
        <!--ro, opt, object, region coordinates, desc:the origin is the lower-left corner of the screen-->
        <positionX>
          <!--ro, req, int, X-coordinate, range:[0,1000]-->1
        </positionX>
        <positionY>
          <!--ro, req, int, Y-coordinate, range:[0,1000]-->1
        </positionY>
      </RegionCoordinates>
    </RegionCoordinatesList>
    <detectionTarget>
      <!--ro, opt, enum, detection target, subType:string, desc:detection target-->all
    </detectionTarget>
    <humanMisinfoFilterEnabled>
      <!--ro, opt, bool, whether to enable false alarm filtering (human)-->true
    </humanMisinfoFilterEnabled>
    <vehicleMisinfoFilterEnabled>
      <!--ro, opt, bool, whether to enable false alarm filtering (vehicle)-->true
    </vehicleMisinfoFilterEnabled>
    <priority>
      <!--ro, opt, enum, priority, subType:string, desc:priority-->low
    </priority>
    <alarmConfidence>
      <!--ro, opt, enum, subType:string-->low
    </alarmConfidence>
    <recordConfidence>
      <!--ro, opt, enum, subType:string-->low
    </recordConfidence>
  </RegionEntranceRegion>
</RegionEntranceRegionList>

```

14.7.3.15 Set parameters of all region entrance detection regions by channel

Request URL

PUT /ISAPI/Smart/regionEntrance/<channelID>/regions

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<RegionEntranceRegionList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, region parameters List, attr:version{req, string, protocolVersion}-->
  <RegionEntranceRegion>
    <!--opt, object, region parameters-->
    <id>
      <!--req, string, region ID-->1
    </id>
    <sensitivityLevel>
      <!--req, int, sensitivity-->1
    </sensitivityLevel>
    <RegionCoordinatesList>
      <!--opt, array, region coordinate List, subType:object, range:[3,10]-->
      <RegionCoordinates>
        <!--opt, object, region coordinates, desc:the origin is the lower-left corner of the screen-->
        <positionX>
          <!--req, int, X-coordinate, range:[0,1000]-->1
        </positionX>
        <positionY>
          <!--req, int, Y-coordinate, range:[0,1000]-->1
        </positionY>
      </RegionCoordinates>
    </RegionCoordinatesList>
    <detectionTarget>
      <!--opt, enum, detection target, subType:string, desc:"all", "human", "vehicle", "others" (targets except human bodies and vehicles). The value "all" is mutually exclusive with "others"-->all
    </detectionTarget>
    <humanMisinfoFilterEnabled>
      <!--opt, bool, whether to enable false alarm filtering of human body detection-->true
    </humanMisinfoFilterEnabled>
    <vehicleMisinfoFilterEnabled>
      <!--opt, bool, whether to enable false alarm filtering of vehicle detection-->true
    </vehicleMisinfoFilterEnabled>
    <priority>
      <!--opt, enum, priority, subType:string, desc:"low", "middle", "high"-->low
    </priority>
    <alarmConfidence>
      <!--opt, enum, alarm confidence, subType:string, desc:"low" (default value), "mediumLow", "mediumHigh", "high"-->low
    </alarmConfidence>
    <recordConfidence>
      <!--opt, enum, video confidence, subType:string, desc:"low" (default value), "mediumLow", "mediumHigh", "high"-->low
    </recordConfidence>
  </RegionEntranceRegion>
</RegionEntranceRegionList>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.7.3.16 Set parameters of a region entrance detection region by channel

Request URL

PUT /ISAPI/Smart/regionEntrance/<channelID>/regions/<regionID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--
regionID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<RegionEntranceRegion xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, region configuration, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string, region ID-->1
  </id>
  <sensitivityLevel>
    <!--req, int, sensitivity-->1
  </sensitivityLevel>
  <RegionCoordinatesList>
    <!--opt, array, region coordinate List, subType:object, range:[3,10]-->
    <RegionCoordinates>
      <!--opt, object, area coordinates, desc:the origin is the lower-left corner of the screen-->
      <positionX>
        <!--req, int, X-coordinate, range:[0,1000]-->1
      </positionX>
      <positionY>
        <!--req, int, Y-coordinate, range:[0,1000]-->1
      </positionY>
    </RegionCoordinates>
  </RegionCoordinatesList>
  <detectionTarget>
    <!--opt, enum, detection target, subType:string, desc:"all", "human", "vehicle", "others" (targets except human bodies and vehicles). The value "all" is mutually exclusive with "others"-->all
  </detectionTarget>
  <humanMisinfoFilterEnabled>
    <!--opt, bool, whether to enable false alarm filtering of human body detection-->true
  </humanMisinfoFilterEnabled>
  <vehicleMisinfoFilterEnabled>
    <!--opt, bool, whether to enable false alarm filtering of vehicle detection-->true
  </vehicleMisinfoFilterEnabled>
  <priority>
    <!--opt, enum, priority, subType:string, desc:"low", "middle", "high"-->low
  </priority>
  <alarmConfidence>
    <!--opt, enum, alarm confidence, subType:string, desc:"low", "mediumLow", "mediumHigh", "high"-->low
  </alarmConfidence>
  <recordConfidence>
    <!--opt, enum, video confidence, subType:string, desc:"low" (default value), "mediumLow", "mediumHigh", "high"-->low
  </recordConfidence>
</RegionEntranceRegion>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.7.3.17 Get parameters of a region entrance detection region of a specific channel

Request URL

GET /ISAPI/Smart/regionEntrance/<channelID>/regions/<regionID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.
regionID	string	Region ID

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<RegionEntranceRegion xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string, region ID-->1
  </id>
  <sensitivityLevel>
    <!--ro, req, int, sensitivity-->1
  </sensitivityLevel>
  <RegionCoordinatesList>
    <!--ro, opt, array, list of area coordinates, subType:object, range:[3,10]-->
    <RegionCoordinates>
      <!--ro, opt, object, area coordinates, desc:the origin is the lower-left corner of the screen-->
      <positionX>
        <!--ro, req, int, X-coordinate, range:[0,1000]-->1
      </positionX>
      <positionY>
        <!--ro, req, int, Y-coordinate, range:[0,1000]-->1
      </positionY>
    </RegionCoordinates>
  </RegionCoordinatesList>
  <detectionTarget>
    <!--ro, opt, enum, detection target, subType:string, desc:"all", "human", "vehicle", "others"-->all
  </detectionTarget>
  <humanMisinfoFilterEnabled>
    <!--ro, opt, bool, whether to enable false alarm filtering (human)-->true
  </humanMisinfoFilterEnabled>
  <vehicleMisinfoFilterEnabled>
    <!--ro, opt, bool, whether to enable false alarm filtering (vehicle)-->true
  </vehicleMisinfoFilterEnabled>
  <priority>
    <!--ro, opt, enum, priority, subType:string, desc:"Low", "middle", "high"-->low
  </priority>
  <alarmConfidence>
    <!--ro, opt, enum, confidence of alarm notification, subType:string, desc:confidence of alarm notification: "Low", "mediumLow", "mediumHigh", "high", "Low"-->low
  </alarmConfidence>
  <recordConfidence>
    <!--ro, opt, enum, confidence of video recording, subType:string, desc:confidence of recording video: "Low", "mediumLow", "mediumHigh", "high", "Low"-->low
  </recordConfidence>
  <ruleName>
    <!--ro, opt, string, range:[1,64]-->test
  </ruleName>
  <detectionTargetProperty>
    <!--ro, opt, object-->
    <human>
      <!--ro, opt, object, dep:or,{$.RegionEntranceRegion.detectionTarget,eq,all},{$.RegionEntranceRegion.detectionTarget,eq,human}-->
      <propertyList>
        <!--ro, opt, array, subType:object-->
        <property>
          <!--ro, opt, enum, subType:string-->nonMotor
        </property>
      </propertyList>
    </human>
    <animal>
      <!--ro, opt, object, dep:or,{$.RegionEntranceRegion.detectionTarget,eq,all},{$.RegionEntranceRegion.detectionTarget,eq,animal}-->
      <propertyList>
        <!--ro, opt, array, subType:object-->
        <property>
          <!--ro, opt, enum, subType:string-->large
        </property>
      </propertyList>
    </animal>
  </detectionTargetProperty>
</RegionEntranceRegion>
```

14.7.3.18 Region entrance

EventType:regionEntrance

```
<?xml version="1.0" encoding="UTF-8"?>
```

```

<EventNotificationAlert xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, event alarm, attr:version[opt, string, protocolVersion]-->
  <ipAddress>
    <!--ro, req, string, IPv4 address of the device that triggers the alarm-->172.6.64.7
  </ipAddress>
  <ipv6Address>
    <!--ro, opt, string, IPv6 address of the device that triggers the alarm-->1080:0:0:0:8:800:200C:417A
  </ipv6Address>
  <portNo>
    <!--ro, opt, int, communication port No. of the device that triggers the alarm-->80
  </portNo>
  <protocol>
    <!--ro, opt, enum, transmission communication protocol type, subType:string, desc:when ISAPI protocol is transmitted via HCNetsDK, the channel No. is the video channel No. of private protocol. When ISAPI protocol is transmitted via EZ protocol, the channel No. is the video channel No. of EZ protocol. When ISAPI protocol is transmitted via ISUP, the channel No. is the video channel No. of ISUP-->HTTP
  </protocol>
  <macAddress>
    <!--ro, opt, string, MAC address-->01:17:24:45:D9:F4
  </macAddress>
  <dynChannelID>
    <!--ro, opt, string, digital channel No.-->test
  </dynChannelID>
  <channelID>
    <!--ro, opt, int, channel No. of the device that triggers the alarm, desc:video channel No. that triggers the alarm-->1
  </channelID>
  <relatedChannelList>
    <!--ro, opt, string, List of alarm related channels, which are of the same camera with channelID, desc:this parameter is used for live view or playback on the platform; multiple channel No.s are separated by commas-->1,2,3
  </relatedChannelList>
  <dateTime>
    <!--ro, req, datetime, alarm trigger time-->2004-05-03T17:30:08+08:00
  </dateTime>
  <activePostCount>
    <!--ro, opt, int, times that the same alarm has been uploaded, desc:event triggering frequency-->1
  </activePostCount>
  <eventType>
    <!--ro, req, enum, event type, subType:string, desc:"regionEntrance" (region entrance)-->regionEntrance
  </eventType>
  <eventState>
    <!--ro, req, enum, event status, subType:string, desc:for durative event: active (valid), inactive (invalid)-->active
  </eventState>
  <eventDescription>
    <!--ro, req, string, event description-->test
  </eventDescription>
  <deviceID>
    <!--ro, opt, string, device ID, desc:it should be returned for ISUP alarms, e.g., test0123 (Ehome2.0, Ehome4.0, and ISUP5.0)-->12345
  </deviceID>
  <DetectionRegionList>
    <!--ro, opt, array, detection area List, subType:object-->
    <DetectionRegionEntry>
      <!--ro, opt, object, detection area-->
      <regionID>
        <!--ro, req, string, area ID-->test
      </regionID>
      <sensitivityLevel>
        <!--ro, opt, int, sensitivity, range:[0,100]-->1
      </sensitivityLevel>
      <RegionCoordinatesList>
        <!--ro, opt, array, area coordinates, subType:object, range:[0,4], desc:rectangle-->
        <RegionCoordinates>
          <!--ro, opt, object, area points coordinates, desc:the origin is the upper-left corner of the screen-->
          <positionX>
            <!--ro, req, int, X-coordinate, range:[0,1000]-->50
          </positionX>
          <positionY>
            <!--ro, req, int, Y-coordinate, range:[0,1000]-->50
          </positionY>
        </RegionCoordinates>
      </RegionCoordinatesList>
      <detectionTarget>
        <!--ro, opt, enum, target type, subType:string, desc:"human", "vehicle", "others"-->human
      </detectionTarget>
      <TargetRect>
        <!--ro, opt, object, target area, desc:the origin is the upper-left corner of the screen-->
        <X>
          <!--ro, req, float, target X-coordinate, range:[0.000,1.000]-->0.000
        </X>
        <Y>
          <!--ro, req, float, target Y-coordinate, range:[0.000,1.000]-->0.000
        </Y>
        <width>
          <!--ro, req, float, target width, range:[0.000,1.000]-->1.000
        </width>
        <height>
          <!--ro, req, float, target height, range:[0.000,1.000]-->1.000
        </height>
      </TargetRect>
      <sceneID>
        <!--ro, opt, int, scene ID-->1
      </sceneID>
    </DetectionRegionEntry>
  </DetectionRegionList>
  <channelName>
    <!--ro, opt, string, channel name, range:[0,64]-->test
  </channelName>

```

```

<!--ro, opt, string, channel name, range:[1,64]-->test
</channelName>
<Extensions>
  <!--ro, opt, object, extended information-->
  <serialNumber>
    <!--ro, opt, string, serial No.-->test
  </serialNumber>
  <eventPush>
    <!--ro, opt, string, event notification-->test
  </eventPush>
</Extensions>
<detectPictureTransType>
  <!--ro, opt, enum, picture transmission mode, subType:string, desc:"url", "binary", "base64"-->url
</detectPictureTransType>
<detectPicturesNumber>
  <!--ro, opt, int, number of pictures contained in the alarm received in arming mode, desc:this field will not be returned when there is no picture
  contained in the alarm-->1
</detectPicturesNumber>
<bgkUrl>
  <!--ro, opt, string, background picture URL, desc:background picture URL-->test
</bgkUrl>
<URLCertificationType>
  <!--ro, opt, enum, picture URL authentication method, subType:string, desc:authentication mode of picture URL: "no"-no authentication, "digest"-digest
  authentication (it is used for Local picture URL returned by NVR or DVR)-->no
</URLCertificationType>
<pId>
  <!--ro, opt, string, picture ID, desc:the field value is the picture Content-ID when the value of detectPictureTransType is "binary"-->test
</pId>
<visibleLightURL>
  <!--ro, opt, string, visible light picture URL-->test
</visibleLightURL>
<thermalURL>
  <!--ro, opt, string, thermal imaging picture URL-->test
</thermalURL>
<targetAttrs>
  <!--ro, opt, object, transparent transmission field-->{ /*可选,透传字段,推荐使用以下三个字段*/ "deviceId": "1", /*可选,设备ID, string类型, 最大长度为
  64*/ "deviceChannel": 1, /*可选,设备通道号, integer32类型*/ "deviceName": "shebei", /*可选,设备名称, string类型, 最大长度为128*/ }
</targetAttrs>
<TaskInfo>
  <!--ro, opt, object, task information submitted by data center products-->
  <taskID>
    <!--ro, req, string, task ID, range:[0,64]-->test
  </taskID>
  <algorithmType>
    <!--ro, opt, enum, algorithm type, subType:int, desc:1-"highQualityVehicle" (high-quality vehicle),2-"highPerformanceVehicle" (high-performance
    vehicle),3-"personStructModel" (person structural modeling),4-"vehicleAndPersonStructModel" (person and vehicle structural modeling),5-"videoFaceDetect"
    (video face detection),6-"videoFaceDetectModel" (video face detection and modeling),7-"smart" (face detection (output frame without recognizing
    properties)+human body detection (output properties and frame)+behavior detection)-->1
  </algorithmType>
  <taskName>
    <!--ro, opt, string, task name-->test
  </taskName>
  <algorithmID>
    <!--ro, opt, string, algorithm package ID-->test
  </algorithmID>
  <monitorPointID>
    <!--ro, opt, string, camera No.-->test
  </monitorPointID>
  <monitorPointName>
    <!--ro, opt, string, camera name-->test
  </monitorPointName>
  <streamType>
    <!--ro, opt, enum, stream type, subType:string, desc:"realtime" (real-time stream), "historyvideo" (history stream), "Localvideo" (Local stream)--
  >realtime
  </streamType>
  <ruleID>
    <!--ro, opt, string, rule ID, desc:it is used to distinguish different tasks with the same name, and the ruleID in the event uploading message
    indicates that the event is related to this task-->test
  </ruleID>
  <ruleCustomName>
    <!--ro, req, string, user-defined event name, range:[0,128], desc:it is defined by the caller, and it is included in the message when the alarm is
    uploaded. Up to 128 characters are allowed-->test
  </ruleCustomName>
  <algorithmInfo>
    <!--ro, opt, object, algorithm version information, desc:this field is required for secondary analysis-->
    <algorithmId>
      <!--ro, opt, string, algorithm package ID-->test
    </algorithmId>
    <algoVendorId>
      <!--ro, opt, string, manufacturer ID-->test
    </algoVendorId>
    <algoVersionId>
      <!--ro, opt, string, algorithm version No.-->test
    </algoVersionId>
    <algoChipType>
      <!--ro, opt, string, chip type-->test
    </algoChipType>
    <algoModelVersion>
      <!--ro, opt, string, model version-->test
    </algoModelVersion>
  </algorithmInfo>
</TaskInfo>
<timeStamp>
  <!--ro, opt, string, timestamp of the frame, which triggers the alarm-->test

```

```

</timeStamp>
<uid>
  <!--ro, opt, string, the unique ID of event uploading, range:[0,64], desc:it can be composed of time (accurate to the millisecond) and random digits-->
</uid>
<isDataRetransmission>
  <!--ro, opt, bool, whether it is a resending data (if the real-time detection data upload fails due to the network condition, the data will be uploaded again after the device recovers.)-->true
</isDataRetransmission>
<ruleID>
  <!--ro, opt, int, rule No., range:[0,7], desc:Rule No.-->0
</ruleID>
<ruleName>
  <!--ro, opt, string, rule name, range:[0,32], desc:Rule Name-->test
</ruleName>
<visibleLightAbsoluteHigh>
  <!--ro, opt, object-->
  <elevation>
    <!--ro, opt, float, range:[-90.00,270.00], step:0.001-->0.00
  </elevation>
  <azimuth>
    <!--ro, opt, float, range:[0,360.00], step:0.001-->0.00
  </azimuth>
  <absoluteZoom>
    <!--ro, opt, float, zooming ratio, range:[0,10000.00]-->0.00
  </absoluteZoom>
  <focus>
    <!--ro, opt, int, range of the focus, range:[1,100000], step:1-->1
  </focus>
</visibleLightAbsoluteHigh>
<thermalAbsoluteHigh>
  <!--ro, opt, object-->
  <elevation>
    <!--ro, opt, float, range:[-90.00,270.00], step:0.001-->0.00
  </elevation>
  <azimuth>
    <!--ro, opt, float, range:[0,360.00], step:0.001-->0.00
  </azimuth>
  <absoluteZoom>
    <!--ro, opt, float, zooming ratio, range:[0,10000.00]-->0.00
  </absoluteZoom>
  <focus>
    <!--ro, opt, int, range of the focus, range:[1,100000], step:1-->1
  </focus>
</thermalAbsoluteHigh>
<deviceLocation>
  <!--ro, opt, object-->
  <longitudeType>
    <!--ro, req, enum, subType:string-->W
  </longitudeType>
  <latitudeType>
    <!--ro, req, enum, subType:string, desc:"S"--south, "N"--north-->S
  </latitudeType>
  <longitude>
    <!--ro, req, object-->
    <degree>
      <!--ro, req, int, degree(s), range:[0,180]-->1
    </degree>
    <minute>
      <!--ro, req, float, minute(s), range:[0,60]-->0.0
    </minute>
    <sec>
      <!--ro, req, float, range:[0,60]-->0.0
    </sec>
  </longitude>
  <latitude>
    <!--ro, req, object-->
    <degree>
      <!--ro, req, int, range:[0,90]-->1
    </degree>
    <minute>
      <!--ro, req, float, minute(s), range:[0,60]-->0.0
    </minute>
    <sec>
      <!--ro, req, float, range:[0,60]-->0.0
    </sec>
  </latitude>
</deviceLocation>
<laserRanging>
  <!--ro, opt, int, range:[1,10000], step:1, unit:m-->1
</laserRanging>
</EventNotificationAlert>

```


Parameter Name	Parameter Value	Parameter Type(Content-Type)	Content-ID	File Name	Description
regionEntrance	[Message content]	application/xml	--	--	--
visibleLightImage	[Binary picture data]	image/jpeg	visibleLightImage	visibleLightImage.jpg	--
thermallImage	[Binary picture data]	image/jpeg	thermallImage	thermallImage.jpg	--
targetImage	[Binary picture data]	image/jpeg	targetImage	targetImage.jpg	--
POSInfo	[Stream data]	application/octet-stream	POSInfo	POSInfo.dat	--

Note: The protocol is transmitted in form format. See Chapter 4.5.1.4 for form framework description, as shown in the instance below.

```
--<frontier>
Content-Disposition: form-data; name=Parameter Name;filename=File Name
Content-Type: Parameter Type
Content-Length: ****
Content-ID: Content ID
Parameter Value
```

- Parameter Name: the name property of Content-Disposition in the header of form unit; it refers to the form unit name.
- Parameter Type (Content-Type): the Content-Type property in the header of form unit.
- File Name (filename): the filename property of Content-Disposition of form unit Headers. It exists only when the transmitted data of form unit is file, and it refers to the file name of form unit body.
- Parameter Value: the body content of form unit.

14.7.4 Region Exiting Detection

14.7.4.1 Get arming schedules of all channels for region exiting detection

Request URL

GET /ISAPI/Event/schedules/regionExitings

Query Parameter

None

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<RegionExitingScheduleList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, List of arming schedules, attr:version{req, string, protocolVersion}-->
  <Schedule>
    <!--ro, opt, object-->
    <id>
      <!--ro, req, string, ID, desc:format: event type-channel No.-->test
    </id>
    <eventType>
      <!--ro, opt, string, event type-->regionExiting
    </eventType>
    <videoInputChannelID>
      <!--ro, opt, string, video input channel ID-->test
    </videoInputChannelID>
    <TimeBlockList size="8">
      <!--ro, req, object, List of arming schedules, attr:size{req, int}-->
      <TimeBlock>
        <!--ro, opt, object, arming schedules-->
        <dayOfWeek>
          <!--ro, opt, enum, day of a week, subType:int, desc:1 (Monday), 2 (Tuesday), 3 (Wednesday), 4 (Thursday), 5 (Friday), 6 (Saturday), 7 (Sunday)-->1
        </dayOfWeek>
        <TimeRange>
          <!--ro, req, object, time range-->
          <beginTime>
            <!--ro, req, time, start time-->00:00:00
          </beginTime>
          <endTime>
            <!--ro, req, time, end time-->00:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </TimeBlockList>
    <HolidayBlockList>
      <!--ro, opt, object, holiday arming schedule-->
      <TimeBlock>
        <!--ro, opt, object, arming schedules-->
        <TimeRange>
          <!--ro, req, object, time range-->
          <beginTime>
            <!--ro, req, time, start time-->00:00:00
          </beginTime>
          <endTime>
            <!--ro, req, time, end time-->00:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </HolidayBlockList>
  </Schedule>
</RegionExitingScheduleList>

```

14.7.4.2 Set region exiting detection arming schedules of all channels

Request URL

PUT /ISAPI/Event/schedules/regionExitings

Query Parameter

None

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<RegionExitingScheduleList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, refer to the message XML_Schedule for details, attr:version{req, string, protocolVersion}-->
  <Schedule>
    <!--opt, object-->
    <id>
      <!--req, string-->test
    </id>
    <eventType>
      <!--opt, string, event type-->regionExiting
    </eventType>
    <videoInputChannelID>
      <!--opt, string, video input channel ID-->test
    </videoInputChannelID>
    <TimeBlockList size="8">
      <!--req, object, arming time list, attr:size{req, int}-->
      <TimeBlock>
        <!--opt, object, arming time-->
        <dayOfWeek>
          <!--opt, enum, day of the week, subType:int, desc:1 (Monday), 2 (Tuesday), 3 (Wednesday), 4 (Thursday), 5 (Friday), 6 (Saturday), 7 (Sunday)-->1
        </dayOfWeek>
        <TimeRange>
          <!--req, object-->
          <beginTime>
            <!--req, time, start time-->00:00:00
          </beginTime>
          <endTime>
            <!--req, time, end time-->00:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </TimeBlockList>
    <HolidayBlockList>
      <!--opt, object, holiday arming time-->
      <TimeBlock>
        <!--opt, object, arming time-->
        <TimeRange>
          <!--req, object, time range-->
          <beginTime>
            <!--req, time, start time-->00:00:00
          </beginTime>
          <endTime>
            <!--req, time, end time-->00:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </HolidayBlockList>
  </Schedule>
</RegionExitingScheduleList>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code description-->OK
  </subStatusCode>
</ResponseStatus>
```

14.7.4.3 Get the arming schedule of region exiting detection for a specified channel

Request URL

GET /ISAPI/Event/schedules/regionExitings/regionExiting-<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<Schedule xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string-->test
  </id>
  <eventType>
    <!--ro, opt, string-->regionExiting
  </eventType>
  <videoInputChannelID>
    <!--ro, opt, string-->test
  </videoInputChannelID>
  <TimeBlockList size="8">
    <!--ro, req, object, attr:size{req, int}-->
    <TimeBlock>
      <!--ro, opt, object-->
      <dayOfWeek>
        <!--ro, opt, enum, subType:int-->1
      </dayOfWeek>
      <TimeRange>
        <!--ro, req, object-->
        <beginTime>
          <!--ro, req, time-->00:00:00
        </beginTime>
        <endTime>
          <!--ro, req, time-->00:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </TimeBlockList>
  <HolidayBlockList>
    <!--ro, opt, object-->
    <TimeBlock>
      <!--ro, opt, object-->
      <TimeRange>
        <!--ro, req, object-->
        <beginTime>
          <!--ro, req, time-->00:00:00
        </beginTime>
        <endTime>
          <!--ro, req, time-->00:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </HolidayBlockList>
</Schedule>
```

14.7.4.4 Set the arming schedule of region exiting detection for a specified channel

Request URL

PUT /ISAPI/Event/schedules/regionExitings/regionExiting-<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<Schedule xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string-->test
  </id>
  <eventType>
    <!--opt, string-->regionExiting
  </eventType>
  <videoInputChannelID>
    <!--opt, string-->test
  </videoInputChannelID>
  <TimeBlockList size="8">
    <!--req, object, attr:size{req, int}-->
    <TimeBlock>
      <!--opt, object-->
      <dayOfWeek>
        <!--opt, enum, subType:int-->1
      </dayOfWeek>
      <TimeRange>
        <!--req, object-->
        <beginTime>
          <!--req, time-->00:00:00
        </beginTime>
        <endTime>
          <!--req, time-->00:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </TimeBlockList>
  <HolidayBlockList>
    <!--opt, object-->
    <TimeBlock>
      <!--opt, object-->
      <TimeRange>
        <!--req, object-->
        <beginTime>
          <!--req, time-->00:00:00
        </beginTime>
        <endTime>
          <!--req, time-->00:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </HolidayBlockList>
</Schedule>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.7.4.5 Get the linkage triggering parameters of region exiting for a specified channel

Request URL

GET /ISAPI/Event/triggers/regionExiting-<channelID>/notifications

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<EventTriggerNotificationList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, array, subType:object, attr:version{req, string, protocolVersion}-->
  <EventTriggerNotification>
    <!--ro, opt, object-->
    <id>
      <!--ro, req, enum, subType:string-->regionExiting
    </id>
    <notificationMethod>
      <!--ro, req, enum, subType:string-->email
    </notificationMethod>
    <notificationRecurrence>
      <!--ro, opt, enum, subType:string-->beginning
    </notificationRecurrence>
    <notificationInterval>
      <!--ro, opt, int, unit:ms-->1
    </notificationInterval>
    <outputIOPortID>
      <!--ro, opt, string-->1
    </outputIOPortID>
    <dynOutputIOPortID>
      <!--ro, opt, string-->1
    </dynOutputIOPortID>
    <videoInputID>
      <!--ro, opt, string-->1
    </videoInputID>
    <dynVideoInputID>
      <!--ro, opt, string-->1
    </dynVideoInputID>
    <ptzAction>
      <!--ro, opt, object-->
      <ptzChannelID>
        <!--ro, req, string-->1
      </ptzChannelID>
      <actionName>
        <!--ro, req, enum, subType:string-->preset
      </actionName>
      <actionNum>
        <!--ro, opt, int-->1
      </actionNum>
    </ptzAction>
    <WhiteLightAction>
      <!--ro, opt, object-->
      <WhiteLightDurationTime>
        <!--ro, opt, int, range:[1,60], unit:s-->1
      </WhiteLightDurationTime>
    </WhiteLightAction>
    <SupplementLightAlarm>
      <!--ro, opt, object-->
      <durationTime>
        <!--ro, opt, int, range:[0,90], unit:s-->5
      </durationTime>
    </SupplementLightAlarm>
    <customOverHTTPList>
      <!--ro, opt, array, subType:object, dep:and,{$.EventTriggerNotificationList[*].EventTriggerNotification.notificationMethod,eq,customOverHTTP}-->
      <customOverHTTP>
        <!--ro, opt, object-->
        <id>
          <!--ro, req, int-->1
        </id>
        <enabled>
          <!--ro, req, bool-->true
        </enabled>
        <hostID>
          <!--ro, opt, int-->1
        </hostID>
        <customInfo>
          <!--ro, opt, string, range:[1,512]-->test
        </customInfo>
      </customOverHTTP>
    </customOverHTTPList>
  </EventTriggerNotification>
</EventTriggerNotificationList>
```

14.7.4.6 Set the linkage triggering parameters of region exiting for a specified channel

Request URL

PUT /ISAPI/Event/triggers/regionExiting-<channelID>/notifications

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<EventTriggerNotificationList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, array, subType:object, attr:version{req, string, protocolVersion}-->
  <EventTriggerNotification>
    <!--opt, object-->
    <id>
      <!--req, enum, subType:string-->regionExiting
    </id>
    <notificationMethod>
      <!--ro, req, enum, subType:string-->email
    </notificationMethod>
    <notificationRecurrence>
      <!--opt, enum, subType:string-->beginning
    </notificationRecurrence>
    <notificationInterval>
      <!--opt, int, unit:ms-->1
    </notificationInterval>
    <outputIOPortID>
      <!--opt, string-->1
    </outputIOPortID>
    <dynOutputIOPortID>
      <!--opt, string-->1
    </dynOutputIOPortID>
    <videoInputID>
      <!--opt, string-->1
    </videoInputID>
    <dynVideoInputID>
      <!--opt, string-->1
    </dynVideoInputID>
    <ptzAction>
      <!--opt, object-->
      <ptzChannelID>
        <!--req, string-->1
      </ptzChannelID>
      <actionName>
        <!--req, enum, subType:string-->preset
      </actionName>
      <actionNum>
        <!--opt, int-->1
      </actionNum>
    </ptzAction>
    <whiteLightAction>
      <!--opt, object-->
      <whiteLightDurationTime>
        <!--opt, int, range:[1,60], unit:s-->1
      </whiteLightDurationTime>
    </whiteLightAction>
    <SupplementLightAlarm>
      <!--opt, object-->
      <durationTime>
        <!--opt, int, range:[0,90], unit:s-->5
      </durationTime>
    </SupplementLightAlarm>
  </EventTriggerNotification>
</EventTriggerNotificationList>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.7.4.7 Set the linkage parameters of region exiting for a specified channel

Request URL

PUT /ISAPI/Event/triggers/regionExiting-<channelID>?triggersEnabledStatus= <triggersEnabledStatus>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--
triggersEnabledStatus	string	--

Request Message

VISION E INGENIO SOFTWARE SA DE CV (VIINSOFT)
dzambrano@vinsoft.com.mx

<?xml version="1.0" encoding="UTF-8"?>

```
<EventTrigger xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string-->1
  </id>
  <eventType>
    <!--req, string-->regionExiting
  </eventType>
  <eventDescription>
    <!--opt, string-->test
  </eventDescription>
  <inputIOPortID>
    <!--opt, string-->1
  </inputIOPortID>
  <dynInputIOPortID>
    <!--opt, string-->1
  </dynInputIOPortID>
  <videoInputChannelID>
    <!--opt, string-->1
  </videoInputChannelID>
  <dynVideoInputChannelID>
    <!--opt, string-->1
  </dynVideoInputChannelID>
  <intervalBetweenEvents>
    <!--opt, int, unit:s-->1
  </intervalBetweenEvents>
  <WLSensorID>
    <!--opt, string-->1
  </WLSensorID>
  <EventTriggerNotificationList>
    <!--opt, array, subType:object-->
    <EventTriggerNotification>
      <!--opt, object-->
      <id>
        <!--req, string-->test
      </id>
      <notificationMethod>
        <!--req, enum, subType:string-->email
      </notificationMethod>
      <notificationRecurrence>
        <!--opt, enum, subType:string-->beginning
      </notificationRecurrence>
      <notificationInterval>
        <!--opt, int, unit:ms-->1
      </notificationInterval>
      <outputIOPortID>
        <!--opt, string-->test
      </outputIOPortID>
      <dynOutputIOPortID>
        <!--opt, string-->test
      </dynOutputIOPortID>
      <videoInputID>
        <!--opt, string-->1
      </videoInputID>
      <dynVideoInputID>
        <!--opt, string-->1
      </dynVideoInputID>
      <ptzAction>
        <!--opt, object-->
        <ptzChannelID>
          <!--req, string-->1
        </ptzChannelID>
        <actionName>
          <!--req, enum, subType:string-->preset
        </actionName>
        <actionNum>
          <!--opt, int-->1
        </actionNum>
        <presetDurationTime>
          <!--opt, int, unit:s-->1
        </presetDurationTime>
        <ptzAction>
      </ptzAction>
      <cellphoneNumber>
        <!--opt, string, range:[0,11]-->test
      </cellphoneNumber>
      <LightAudioByIPAction>
        <!--opt, object-->
        <notificationType>
          <!--req, enum, subType:string-->audio
        </notificationType>
        <notificationName>
          <!--opt, string-->10.16.99.98:8000:光
        </notificationName>
      </LightAudioByIPAction>
    </EventTriggerNotification>
  </EventTriggerNotificationList>
</EventTrigger>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.7.4.8 Get the linkage parameters of region exiting for a specified channel

Request URL

GET /ISAPI/Event/triggers/regionExiting-<channelID>?triggersEnabledStatus=<triggersEnabledStatus>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.
triggersEnabledStatus	string	Linkage enabling status (if this node is included in the URL, the enabling and disabling of the linkage mode should be determined based on the triggerEnabled status in the linkage list). This node is supported if the value of isSupportTriggersEnabled in /ISAPI/Event/triggersCap contains is true.

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>
<EventTrigger xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string-->1
  </id>
  <eventType>
    <!--ro, req, string-->regionEntrance
  </eventType>
  <eventDescription>
    <!--ro, opt, string-->test
  </eventDescription>
  <videoInputChannelID>
    <!--ro, opt, string-->1
  </videoInputChannelID>
  <dynVideoInputChannelID>
    <!--ro, opt, string-->1
  </dynVideoInputChannelID>
  <EventTriggerNotificationList>
    <!--ro, opt, array, subType:object-->
    <EventTriggerNotification>
      <!--ro, opt, object-->
      <id>
        <!--ro, req, string-->test
      </id>
      <notificationMethod>
        <!--ro, req, enum, subType:string-->email
      </notificationMethod>
      <notificationRecurrence>
        <!--ro, opt, enum, subType:string-->beginning
      </notificationRecurrence>
      <videoInputID>
        <!--ro, opt, string-->1
      </videoInputID>
      <SupplementLightAlarm>
        <!--ro, opt, object-->
        <durationTime>
          <!--ro, opt, int, range:[0,90], unit:s-->5
        </durationTime>
      </SupplementLightAlarm>
    </EventTriggerNotification>
  </EventTriggerNotificationList>
</EventTrigger>

```

14.7.4.9 Get region exiting detection parameters of all channels

Request URL

GET /ISAPI/Smart/regionExiting

Query Parameter

None

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<RegionExitingList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, array, subType:object, attr:version{req, string, protocolVersion}-->
  <RegionExiting>
    <!--ro, opt, object, region exiting-->
    <id>
      <!--ro, req, string, channel No.-->1
    </id>
    <enabled>
      <!--ro, req, bool, whether to enable the function-->true
    </enabled>
    <normalizedScreenSize>
      <!--ro, opt, object, normalized size-->
      <normalizedScreenWidth>
        <!--ro, req, int, normalized width-->1
      </normalizedScreenWidth>
      <normalizedScreenHeight>
        <!--ro, req, int, normalized height-->1
      </normalizedScreenHeight>
    </normalizedScreenSize>
    <RegionExitingRegionList>
      <!--ro, opt, array, subType:object-->
      <RegionExitingRegion>
        <!--ro, opt, object, region exiting-->
        <id>
          <!--ro, req, string, detection area ID-->1
        </id>
        <sensitivityLevel>
          <!--ro, req, int, sensitivity, range:[0,100]-->1
        </sensitivityLevel>
        <RegionCoordinatesList>
          <!--ro, opt, array, region coordinates List, subType:object, range:[3,10]-->
          <RegionCoordinates>
            <!--ro, opt, object, area coordinates, desc:the origin is the Lower-Left corner of the screen-->
            <positionX>
              <!--ro, req, int, X-coordinate, range:[0,1000]-->1
            </positionX>
            <positionY>
              <!--ro, req, int, Y-coordinate, range:[0,1000]-->1
            </positionY>
          </RegionCoordinates>
        </RegionCoordinatesList>
        <detectionTarget>
          <!--ro, opt, enum, detection target, subType:string, desc:detection target-->all
        </detectionTarget>
        <humanMisinfoFilterEnabled>
          <!--ro, opt, bool, whether to enable false alarm filtering (human body)-->true
        </humanMisinfoFilterEnabled>
        <vehicleMisinfoFilterEnabled>
          <!--ro, opt, bool, whether to enable false alarm filtering (vehicle)-->true
        </vehicleMisinfoFilterEnabled>
        <priority>
          <!--ro, opt, enum, priority, subType:string, desc:priority-->low
        </priority>
        <alarmConfidence>
          <!--ro, opt, enum, subType:string-->low
        </alarmConfidence>
        <recordConfidence>
          <!--ro, opt, enum, subType:string-->low
        </recordConfidence>
      </RegionExitingRegion>
    </RegionExitingRegionList>
    <mutexAbility opt="PDC">
      <!--ro, opt, string, attr:opt{req, string}-->PDC
    </mutexAbility>
    <isSupportMultiScene>
      <!--ro, opt, bool, whether supports multiple scene detection-->true
    </isSupportMultiScene>
    <humanMisinfoFilterEnabled>
      <!--ro, opt, bool, whether to enable false alarm filtering (human body)-->true
    </humanMisinfoFilterEnabled>
    <vehicleMisinfoFilterEnabled>
      <!--ro, opt, bool, whether to enable false alarm filtering (vehicle)-->true
    </vehicleMisinfoFilterEnabled>
  </RegionExiting>
</RegionExitingList>

```

14.7.4.10 Set region exiting detection parameters of all channels

Request URL

PUT /ISAPI/Smart/regionExiting

Query Parameter

None

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<RegionExitingList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, array, subType:object, attr:version{req, string, protocolVersion}-->
  <RegionExiting>
    <!--opt, object-->
    <id>
      <!--req, string-->1
    </id>
    <enabled>
      <!--req, bool-->true
    </enabled>
    <normalizedScreenSize>
      <!--opt, object, normalized size-->
      <normalizedScreenWidth>
        <!--req, int, normalized width-->1
      </normalizedScreenWidth>
      <normalizedScreenHeight>
        <!--req, int, normalized height-->1
      </normalizedScreenHeight>
    </normalizedScreenSize>
    <RegionExitingRegionList>
      <!--opt, array, subType:object-->
      <RegionExitingRegion>
        <!--opt, object-->
        <id>
          <!--req, string-->1
        </id>
        <sensitivityLevel>
          <!--req, int, sensitivity, range:[0,100]-->1
        </sensitivityLevel>
        <RegionCoordinatesList>
          <!--opt, array, region coordinates list, subType:object, range:[3,10]-->
          <RegionCoordinates>
            <!--opt, object, area coordinates, desc:the origin is the Lower-Left corner of the screen-->
            <positionX>
              <!--req, int, x-coordinate, range:[0,1000]-->1
            </positionX>
            <positionY>
              <!--req, int, y-coordinate, range:[0,1000]-->1
            </positionY>
          </RegionCoordinates>
        </RegionCoordinatesList>
        <detectionTarget>
          <!--opt, enum, detection target, subType:string, desc:detection target-->all
        </detectionTarget>
        <humanMisinfoFilterEnabled>
          <!--opt, bool, whether to enable false alarm filtering (human body)-->true
        </humanMisinfoFilterEnabled>
        <vehicleMisinfoFilterEnabled>
          <!--opt, bool, whether to enable false alarm filtering (vehicle)-->true
        </vehicleMisinfoFilterEnabled>
        <priority>
          <!--opt, enum, priority, subType:string, desc:priority-->low
        </priority>
        <alarmConfidence>
          <!--opt, enum, subType:string-->low
        </alarmConfidence>
        <recordConfidence>
          <!--opt, enum, subType:string-->low
        </recordConfidence>
      </RegionExitingRegion>
    </RegionExitingRegionList>
    <mutexAbility opt="PDC">
      <!--opt, string, attr:opt{req, string}-->PDC
    </mutexAbility>
    <isSupportMultiScene>
      <!--opt, bool, whether supports multiple scene detection-->true
    </isSupportMultiScene>
    <humanMisinfoFilterEnabled>
      <!--opt, bool, whether to enable false alarm filtering (human body)-->true
    </humanMisinfoFilterEnabled>
    <vehicleMisinfoFilterEnabled>
      <!--opt, bool, whether to enable false alarm filtering (vehicle)-->true
    </vehicleMisinfoFilterEnabled>
  </RegionExiting>
</RegionExitingList>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code description-->OK
  </subStatusCode>
</ResponseStatus>
```

14.7.4.11 Set parameters of region exiting detection rule by channel

Request URL

PUT /ISAPI/Smart/regionExiting/<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```

<?xml version="1.0" encoding="UTF-8"?>

<RegionExiting xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, parameters of region exiting detection rule, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string, channel No.-->1
  </id>
  <enabled>
    <!--req, bool, whether to enable the function-->true
  </enabled>
  <normalizedScreenSize>
    <!--opt, object, normalized size-->
    <normalizedScreenWidth>
      <!--req, int, normalized width-->1
    </normalizedScreenWidth>
    <normalizedScreenHeight>
      <!--req, int, normalized height-->1
    </normalizedScreenHeight>
  </normalizedScreenSize>
  <RegionExitingRegionList>
    <!--opt, array, region list of region exiting detection, subType:object-->
    <RegionExitingRegion>
      <!--opt, object, region exiting detection region-->
      <id>
        <!--req, string, region ID-->1
      </id>
      <sensitivityLevel>
        <!--req, int, sensitivity, range:[0,100]-->1
      </sensitivityLevel>
      <RegionCoordinatesList>
        <!--opt, array, region coordinate list, subType:object, range:[3,10]-->
        <RegionCoordinates>
          <!--opt, object, area coordinates, desc:the origin is the lower-left corner of the screen-->
          <positionX>
            <!--req, int, X-coordinate, range:[0,1000]-->1
          </positionX>
          <positionY>
            <!--req, int, Y-coordinate, range:[0,1000]-->1
          </positionY>
        </RegionCoordinates>
      </RegionCoordinatesList>
      <detectionTarget>
        <!--opt, enum, detection target, subType:string, desc:"all", "human", "vehicle", "others" (targets except human bodies and vehicles). The value "all" is mutually exclusive with "others"-->all
      </detectionTarget>
      <humanMisinfoFilterEnabled>
        <!--opt, bool, whether to enable false alarm filtering of human body detection-->true
      </humanMisinfoFilterEnabled>
      <vehicleMisinfoFilterEnabled>
        <!--opt, bool, whether to enable false alarm filtering of vehicle detection-->true
      </vehicleMisinfoFilterEnabled>
      <priority>
        <!--opt, enum, priority, subType:string, desc:"low", "middle", "high"-->low
      </priority>
      <alarmConfidence>
        <!--opt, enum, alarm confidence, subType:string, desc:"low" (default value), "mediumLow", "mediumHigh", "high"-->low
      </alarmConfidence>
      <recordConfidence>
        <!--opt, enum, video confidence, subType:string, desc:"low" (default value), "mediumLow", "mediumHigh", "high"-->low
      </recordConfidence>
    </RegionExitingRegion>
  </RegionExitingRegionList>
  <muxAbility opt="PDC">
    <!--opt, string, mutually exclusive capability: "PDC" (people counting statistics, which is not supported during region entrance detection), attr:opt{req, string}-->PDC
  </muxAbility>
  <isSupportMultiScene>
    <!--opt, bool, whether supports multi-scene detection-->true
  </isSupportMultiScene>
  <humanMisinfoFilterEnabled>
    <!--opt, bool, whether to enable false alarm filtering of human body detection-->true
  </humanMisinfoFilterEnabled>
  <vehicleMisinfoFilterEnabled>
    <!--opt, bool, whether to enable false alarm filtering of vehicle detection-->true
  </vehicleMisinfoFilterEnabled>
</RegionExiting>

```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.7.4.12 Get parameters of region exiting detection rule by channel

Request URL

GET /ISAPI/Smart/regionExiting/<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<RegionExiting xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, read-only, "PDC"-people counting statistics, which is not supported during region exiting detection, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string, channel No.-->1
  </id>
  <enabled>
    <!--ro, req, bool, whether to enable the function-->true
  </enabled>
  <normalizedScreenSize>
    <!--ro, opt, object, normalized size-->
    <normalizedScreenWidth>
      <!--ro, req, int, normalized width-->1
    </normalizedScreenWidth>
    <normalizedScreenHeight>
      <!--ro, req, int, normalized height-->1
    </normalizedScreenHeight>
  </normalizedScreenSize>
  <RegionExitingRegionList>
    <!--ro, opt, array, List of region exiting, subType:object-->
    <RegionExitingRegion>
      <!--ro, opt, object, region exiting-->
      <id>
        <!--ro, req, string, region ID-->1
      </id>
      <sensitivityLevel>
        <!--ro, req, int, sensitivity, range:[0,100]-->1
      </sensitivityLevel>
      <RegionCoordinatesList>
        <!--ro, opt, array, region coordinate List, subType:object, range:[3,10]-->
        <RegionCoordinates>
          <!--ro, opt, object, region coordinates, desc:the origin is the Lower-Left corner of the screen-->
          <positionX>
            <!--ro, req, int, X-coordinate, range:[0,1000]-->1
          </positionX>
          <positionY>
            <!--ro, req, int, Y-coordinate, range:[0,1000]-->1
          </positionY>
        </RegionCoordinates>
      </RegionCoordinatesList>
      <DetectionTarget>
        <!--ro, opt, enum, detection target, subType:string, desc:"all", "human", "vehicle", "others" (targets except human bodies and vehicles). The value "all" is mutually exclusive with "others"-->all
      </DetectionTarget>
      <humanMisinfoFilterEnabled>
```



```

    <!--ro, opt, bool, whether to enable false alarm filtering of human body detection-->true
  </humanMisinfoFilterEnabled>
  <vehicleMisinfoFilterEnabled>
    <!--ro, opt, bool, whether to enable false alarm filtering of vehicle detection-->true
  </vehicleMisinfoFilterEnabled>
  <priority>
    <!--ro, opt, enum, priority, subType:string, desc:"Low", "middle", "high"-->low
  </priority>
  <alarmConfidence>
    <!--ro, opt, enum, alarm confidence, subType:string, desc:"Low" (default value), "mediumLow", "mediumHigh", "high"-->low
  </alarmConfidence>
  <recordConfidence>
    <!--ro, opt, enum, video confidence, subType:string, desc:"Low" (default value), "mediumLow", "mediumHigh", "high"-->low
  </recordConfidence>
  <ruleName>
    <!--ro, opt, string, range:[1,64]-->test
  </ruleName>
  <detectionTargetProperty>
    <!--ro, opt, object-->
    <human>
      <!--ro, opt, object, dep:or,{$.RegionExiting.RegionExitingRegionList.RegionExitingRegion.detectionTarget,eq,all},
      {$.RegionExiting.RegionExitingRegionList.RegionExitingRegion.detectionTarget,eq,human}-->
      <propertyList>
        <!--ro, opt, array, subType:object-->
        <property>
          <!--ro, opt, enum, subType:string-->nonMotor
        </property>
      </propertyList>
    </human>
    <animal>
      <!--ro, opt, object, dep:or,{$.RegionExiting.RegionExitingRegionList.RegionExitingRegion.detectionTarget,eq,all},
      {$.RegionExiting.RegionExitingRegionList.RegionExitingRegion.detectionTarget,eq,animal}-->
      <propertyList>
        <!--ro, opt, array, subType:object-->
        <property>
          <!--ro, opt, enum, subType:string-->large
        </property>
      </propertyList>
    </animal>
  </detectionTargetProperty>
</RegionExitingRegion>
</RegionExitingRegionList>
<mutexAbility opt="PDC">
  <!--ro, opt, string, attr:opt{req, string}-->PDC
</mutexAbility>
<isSupportMultiScene>
  <!--ro, opt, bool, whether supports multi-scene detection-->true
</isSupportMultiScene>
<humanMisinfoFilterEnabled>
  <!--ro, opt, bool, whether to enable false alarm filtering of human body detection-->true
</humanMisinfoFilterEnabled>
<vehicleMisinfoFilterEnabled>
  <!--ro, opt, bool, whether to enable false alarm filtering of vehicle detection-->true
</vehicleMisinfoFilterEnabled>
<stackTarget>
  <!--ro, opt, bool-->true
</stackTarget>
<targetSensitivityLevel>
  <!--ro, opt, int, range:[0,100]-->50
</targetSensitivityLevel>
</RegionExiting>

```

14.7.4.13 Get configuration capability of region exiting detection by channel

Request URL

GET /ISAPI/Smart/regionExiting/<channelID>/capabilities

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<RegionExiting xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, ro, mutex capability, it indicates that which function is mutually exclusive with the region exiting detection:
  "PDC, videoFrameRate50, videoFrameRate60, 19-1920*1080@50fps, 20-1920*1080@60fps, scheduled recording", attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string, channel No.-->test
  </id>

```

```

</id>
<enabled opt="true,false">
  <!--ro, req, bool, whether to enable, attr:opt{req, string}-->true
</enabled>
<normalizedScreenSize>
  <!--ro, opt, object, normalized screen size-->
  <normalizedScreenWidth>
    <!--ro, req, int, normalized screen width-->1
  </normalizedScreenWidth>
  <normalizedScreenHeight>
    <!--ro, req, int, normalized screen height-->1
  </normalizedScreenHeight>
</normalizedScreenSize>
<RegionExitingRegionList size="4">
  <!--ro, opt, array, subType:object, attr:size{req, int}-->
  <RegionExitingRegion>
    <!--ro, opt, object-->
    <id>
      <!--ro, req, string-->1
    </id>
    <sensitivityLevel min="1" max="100">
      <!--ro, req, int, sensitivity, attr:min{req, int},max{req, int}-->1
    </sensitivityLevel>
    <RegionCoordinatesList>
      <!--ro, opt, array, region coordinate list, subType:object, range:[3,10], desc:region coordinate list-->
      <RegionCoordinates>
        <!--ro, opt, object, region coordinates, desc:the origin is the Lower-Left corner of the screen-->
        <positionX>
          <!--ro, req, int, X-coordinate, range:[0,1000]-->1
        </positionX>
        <positionY>
          <!--ro, req, int, Y-coordinate, range:[0,1000]-->1
        </positionY>
      </RegionCoordinates>
    </RegionCoordinatesList>
    <maxRegionCoordinatesNum>
      <!--ro, opt, int-->1
    </maxRegionCoordinatesNum>
    <minRegionCoordinatesNum>
      <!--ro, opt, int-->1
    </minRegionCoordinatesNum>
    <detectionTarget opt="all,human,vehicle,animal,others">
      <!--ro, opt, enum, detection target, subType:string, attr:opt{req, string}, desc:detection target-->all
    </detectionTarget>
    <alarmConfidence opt="low,mediumLow,mediumHigh,high" def="low">
      <!--ro, opt, enum, subType:string, attr:opt{req, string},def{req, string}-->low
    </alarmConfidence>
    <recordConfidence opt="low,mediumLow,mediumHigh,high" def="low">
      <!--ro, opt, enum, subType:string, attr:opt{req, string},def{req, string}-->low
    </recordConfidence>
    <ruleName min="1" max="64">
      <!--ro, opt, string, attr:min{req, int},max{req, int}-->test
    </ruleName>
    <detectionTargetProperty>
      <!--ro, opt, object-->
      <human>
        <!--ro, opt, object-->
        <propertyList size="1">
          <!--ro, opt, object, attr:size{req, int}-->
          <property opt="nonMotor">
            <!--ro, opt, enum, subType:string, attr:opt{req, string}-->nonMotor
          </property>
        </propertyList>
      </human>
      <animal>
        <!--ro, opt, object-->
        <propertyList size="3">
          <!--ro, opt, object, attr:size{req, int}-->
          <property opt="large,small,poultry">
            <!--ro, opt, enum, subType:string, attr:opt{req, string}-->large
          </property>
        </propertyList>
      </animal>
    </detectionTargetProperty>
  </RegionExitingRegion>
</RegionExitingRegionList>
<mutexAbility opt="PDC">
  <!--ro, opt, string, attr:opt{req, string}-->PDC
</mutexAbility>
<isSupportMultiScene>
  <!--ro, req, bool, whether supports multiple scenes.-->true
</isSupportMultiScene>
<isSupportHumanMisinfoFilter>
  <!--ro, opt, bool, whether supports preventing false human body alarm, desc:if this function is supported, this node will be returned and its value is true; otherwise, this node will not be returned-->true
</isSupportHumanMisinfoFilter>
<isSupportVehicleMisinfoFilter>
  <!--ro, opt, bool, whether supports preventing false vehicle alarm, desc:if this function is supported, this node will be returned and its value is true; otherwise, this node will not be returned-->true
</isSupportVehicleMisinfoFilter>
<isSupportTargetMultiSelect>
  <!--ro, opt, bool, whether supports selecting multiple detection targets, desc:if this function is supported, this node will be returned and its value is true; otherwise, this node will not be returned-->true
</isSupportTargetMultiSelect>

```

```

</isSupportAllDayUpload>
<!--ro, opt, bool, whether supports uploading all-day event-->true
</isSupportAllDayUpload>
<isSupportOverlapParams>
<!--ro, opt, bool-->true
</isSupportOverlapParams>
<isSupportStackTarget>
<!--ro, opt, bool-->true
</isSupportStackTarget>
<isSupportAllTargetDetectionWebDisplay>
<!--ro, opt, bool-->false
</isSupportAllTargetDetectionWebDisplay>
<targetSensitivityLevel min="0" max="100">
<!--ro, opt, int, attr:min{req, int},max{req, int}-->50
</targetSensitivityLevel>
</RegionExiting>

```

14.7.4.14 Set parameters of all region exiting detection regions by channel

Request URL

PUT /ISAPI/Smart/regionExiting/<channelID>/regions

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```

<?xml version="1.0" encoding="UTF-8"?>

<RegionExitingRegionList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, array, parameter List of all region exiting detection regions, subType:object, attr:version{req, string, protocolVersion}-->
  <RegionExitingRegion>
    <!--opt, object, parameters of region exiting detection region-->
    <id>
      <!--req, string, region ID-->1
    </id>
    <sensitivityLevel>
      <!--req, int, sensitivity, range:[0,100]-->1
    </sensitivityLevel>
    <RegionCoordinatesList>
      <!--opt, array, region coordinate List, subType:object, range:[3,10]-->
      <RegionCoordinates>
        <!--opt, object, region coordinates, desc:the origin is the Lower-Left corner of the screen-->
        <positionX>
          <!--req, int, X-coordinate, range:[0,1000]-->1
        </positionX>
        <positionY>
          <!--req, int, Y-coordinate, range:[0,1000]-->1
        </positionY>
      </RegionCoordinates>
    </RegionCoordinatesList>
    <detectionTarget>
      <!--opt, enum, detection target, subType:string, desc:"all", "human", "vehicle", "others" (targets except human bodies and vehicles). The value "all" is mutually exclusive with "others"-->all
    </detectionTarget>
    <humanMisinfoFilterEnabled>
      <!--opt, bool, whether to enable false alarm filtering of human body detection-->true
    </humanMisinfoFilterEnabled>
    <vehicleMisinfoFilterEnabled>
      <!--opt, bool, whether to enable false alarm filtering of vehicle detection-->true
    </vehicleMisinfoFilterEnabled>
    <priority>
      <!--opt, enum, priority, subType:string, desc:"Low", "middle", "high"-->low
    </priority>
    <alarmConfidence>
      <!--opt, enum, alarm confidence, subType:string, desc:"Low" (default value), "mediumLow", "mediumHigh", "high"-->low
    </alarmConfidence>
    <recordConfidence>
      <!--opt, enum, video confidence, subType:string, desc:"Low" (default value), "mediumLow", "mediumHigh", "high"-->low
    </recordConfidence>
  </RegionExitingRegion>
</RegionExitingRegionList>

```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.7.4.15 Get parameters of all region exiting detection regions by channel

Request URL

GET /ISAPI/Smart/regionExiting/<channelID>/regions

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<RegionExitingRegionList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, array, subType:object, attr:version{req, string, protocolVersion}-->
  <RegionExitingRegion>
    <!--ro, opt, object-->
    <id>
      <!--ro, req, string-->1
    </id>
    <sensitivityLevel>
      <!--ro, req, int, range:[0,100]-->1
    </sensitivityLevel>
    <RegionCoordinatesList>
      <!--ro, opt, array, area coordinate list, subType:object, range:[3,10]-->
      <RegionCoordinates>
        <!--ro, opt, object, area coordinates, desc:the origin is the lower-left corner of the screen-->
        <positionX>
          <!--ro, req, int, x-coordinate, range:[0,1000]-->1
        </positionX>
        <positionY>
          <!--ro, req, int, range:[0,1000]-->1
        </positionY>
      </RegionCoordinates>
    </RegionCoordinatesList>
    <detectionTarget>
      <!--ro, opt, enum, detection target, subType:string, desc:detection target-->all
    </detectionTarget>
    <humanMisinfoFilterEnabled>
      <!--ro, opt, bool, whether to enable false alarm filtering (human body)-->true
    </humanMisinfoFilterEnabled>
    <vehicleMisinfoFilterEnabled>
      <!--ro, opt, bool, whether to enable false alarm filtering (vehicle)-->true
    </vehicleMisinfoFilterEnabled>
    <priority>
      <!--ro, opt, enum, priority, subType:string, desc:priority-->low
    </priority>
    <alarmConfidence>
      <!--ro, opt, enum, subType:string-->low
    </alarmConfidence>
    <recordConfidence>
      <!--ro, opt, enum, subType:string-->low
    </recordConfidence>
  </RegionExitingRegion>
</RegionExitingRegionList>
```

14.7.4.16 Get parameters of a region exiting detection region of a specific channel

Request URL

GET /ISAPI/Smart/regionExiting/<channelID>/regions/<regionID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.
regionID	string	Region No.

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<RegionExitingRegion xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string, region ID-->1
  </id>
  <sensitivityLevel>
    <!--ro, req, int, sensitivity, range:[0,100]-->1
  </sensitivityLevel>
  <RegionCoordinatesList>
    <!--ro, opt, array, List of area coordinates, subType:object, range:[3,10]-->
    <RegionCoordinates>
      <!--ro, opt, object, area coordinates, desc:the origin is the Lower-Left corner of the screen-->
      <positionX>
        <!--ro, req, int, X-coordinate, range:[0,1000]-->1
      </positionX>
      <positionY>
        <!--ro, req, int, Y-coordinate, range:[0,1000]-->1
      </positionY>
    </RegionCoordinates>
  </RegionCoordinatesList>
  <detectionTarget>
    <!--ro, opt, enum, detection target, subType:string, desc:"all", "human", "vehicle", "others"-->all
  </detectionTarget>
  <humanMisinfoFilterEnabled>
    <!--ro, opt, bool, whether to enable false alarm filtering (human)-->true
  </humanMisinfoFilterEnabled>
  <vehicleMisinfoFilterEnabled>
    <!--ro, opt, bool, whether to enable false alarm filtering (vehicle)-->true
  </vehicleMisinfoFilterEnabled>
  <priority>
    <!--ro, opt, enum, priority, subType:string, desc:"Low", "middle", "high"-->low
  </priority>
  <alarmConfidence>
    <!--ro, opt, enum, confidence of alarm notification, subType:string, desc:confidence of alarm notification: "Low", "mediumLow", "mediumHigh", "high", "Low"-->low
  </alarmConfidence>
  <recordConfidence>
    <!--ro, opt, enum, confidence of video recording, subType:string, desc:confidence of recording video: "Low", "mediumLow", "mediumHigh", "high", "Low"-->low
  </recordConfidence>
  <ruleName>
    <!--ro, opt, string, range:[1,64]-->test
  </ruleName>
  <detectionTargetProperty>
    <!--ro, opt, object-->
    <human>
      <!--ro, opt, object, dep:or,{$.RegionExitingRegion.detectionTarget,eq,all},{$.RegionExitingRegion.detectionTarget,eq,human}-->
      <propertyList>
        <!--ro, opt, array, subType:object-->
        <property>
          <!--ro, opt, enum, subType:string-->nonMotor
        </property>
      </propertyList>
    </human>
    <animal>
      <!--ro, opt, object, dep:or,{$.RegionExitingRegion.detectionTarget,eq,all},{$.RegionExitingRegion.detectionTarget,eq,animal}-->
      <propertyList>
        <!--ro, opt, array, subType:object-->
        <property>
          <!--ro, opt, enum, subType:string-->large
        </property>
      </propertyList>
    </animal>
  </detectionTargetProperty>
</RegionExitingRegion>
```

14.7.4.17 Set parameters of a region exiting detection region by channel

Request URL

PUT /ISAPI/Smart/regionExiting/<channelID>/regions/<regionID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--
regionID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<RegionExitingRegion xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, parameters of a region exiting detection region, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string, region ID-->1
  </id>
  <sensitivityLevel>
    <!--req, int, sensitivity, range:[0,100]-->1
  </sensitivityLevel>
  <RegionCoordinatesList>
    <!--opt, array, region coordinate List, subType:object, range:[3,10]-->
    <RegionCoordinates>
      <!--opt, object, region coordinates, desc:the origin is the Lower-Left corner of the screen-->
      <positionX>
        <!--req, int, X-coordinate, range:[0,1000]-->1
      </positionX>
      <positionY>
        <!--req, int, Y-coordinate, range:[0,1000]-->1
      </positionY>
    </RegionCoordinates>
  </RegionCoordinatesList>
  <detectionTarget>
    <!--opt, enum, detection target type, subType:string, desc:"all", "human", "vehicle", "others" (targets except human bodies and vehicles). The value "all" is mutually exclusive with "others"-->all
  </detectionTarget>
  <humanMisinfoFilterEnabled>
    <!--opt, bool, whether to enable false alarm filtering of human body detection-->>true
  </humanMisinfoFilterEnabled>
  <vehicleMisinfoFilterEnabled>
    <!--opt, bool, whether to enable false alarm filtering of vehicle detection-->>true
  </vehicleMisinfoFilterEnabled>
  <priority>
    <!--opt, enum, priority, subType:string, desc:"Low", "middle", "high"-->low
  </priority>
  <alarmConfidence>
    <!--opt, enum, alarm confidence, subType:string, desc:"Low" (default value), "mediumLow", "mediumHigh", "high"-->low
  </alarmConfidence>
  <recordConfidence>
    <!--opt, enum, video confidence, subType:string, desc:"Low" (default value), "mediumLow", "mediumHigh", "high"-->low
  </recordConfidence>
</RegionExitingRegion>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--no, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--no, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--no, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--no, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--no, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.7.4.18 Region exiting

EventType:regionExiting

```
<?xml version="1.0" encoding="UTF-8"?>

<EventNotificationAlert xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, event alarm, attr:version{opt, string, protocolVersion}-->
  <ipAddress>
    <!--ro, req, string, IPv4 address of the device that triggers the alarm-->172.6.64.7
  </ipAddress>
  <ipV6Address>
    <!--ro, opt, string, IPv6 address of the device that triggers the alarm-->1080:0:0:0:8:800:200C:417A
  </ipV6Address>
  <portNo>
    <!--ro, opt, int, communication port No. of the device that triggers the alarm-->80
  </portNo>
  <protocol>
    <!--ro, opt, enum, transmission communication protocol type, subType:string, desc:transmission communication protocol type: "HTTP", "HTTPS", "EHome".
    The value should be "HTTP" when ISAPI protocol is transmitted via EZ protocol. The value should be "EHome" when ISAPI protocol is transmitted via ISUP-->HTTP
  </protocol>
  <macAddress>
    <!--ro, opt, string, MAC address-->01:17:24:45:D9:F4
  </macAddress>
  <dynChannelID>
    <!--ro, opt, string, digital channel No.-->test
  </dynChannelID>
  <channelID>
    <!--ro, opt, int, channel No. of the device that triggers the alarm, desc:video channel No. that triggers the alarm-->1
  </channelID>
  <relatedChannelList>
    <!--ro, opt, string, List of alarm related channels, which are of the same camera with channelID, desc:this parameter is used for Live view or playback
    on the platform; multiple channel No.s are separated by commas-->1,2,3
  </relatedChannelList>
  <dateTime>
    <!--ro, req, datetime, alarm trigger time-->2004-05-03T17:30:08+08:00
  </dateTime>
  <activePostCount>
    <!--ro, opt, int, times that the same alarm has been uploaded, desc:event triggering frequency-->1
  </activePostCount>
  <eventType>
    <!--ro, req, enum, event type, subType:string, desc:"regionExiting" (region exiting)-->regionExiting
  </eventType>
  <eventState>
    <!--ro, req, enum, event status, subType:string, desc:for durative event: "active" (valid), "inactive" (invalid)-->active
  </eventState>
  <eventDescription>
    <!--ro, req, string, event description-->test
  </eventDescription>
  <deviceID>
    <!--ro, opt, string, device ID, desc:it should be returned for ISUP alarms, e.g., test0123 (Ehome2.0, Ehome4.0, and ISUP5.0)-->12345
  </deviceID>
  <DetectionRegionList>
    <!--ro, opt, array, detection area list, subType:object-->
    <DetectionRegionEntry>
      <!--ro, opt, object, detection area-->
      <regionID>
        <!--ro, req, string, area ID-->test
      </regionID>
      <sensitivityLevel>
        <!--ro, opt, int, sensitivity, range:[0,100]-->1
      </sensitivityLevel>
      <RegionCoordinatesList>
        <!--ro, opt, array, area coordinates, subType:object, range:[0,4], desc:rectangle-->
        <RegionCoordinates>
          <!--ro, opt, object, area point coordinates, desc:the origin is the upper-left corner of the screen-->
          <positionX>
            <!--ro, req, int, X-coordinate, range:[0,1000]-->50
          </positionX>
          <positionY>
            <!--ro, req, int, Y-coordinate, range:[0,1000]-->50
          </positionY>
        </RegionCoordinates>
      </RegionCoordinatesList>
      <detectionTarget>
        <!--ro, opt, enum, target type, subType:string, desc:"human", "vehicle", "others"-->human
      </detectionTarget>
      <TargetRect>
        <!--ro, opt, object, target area, desc:the origin is the upper-left corner of the screen-->
        <X>
          <!--ro, req, float, target X-coordinate, range:[0.000,1.000]-->0.000
        </X>
        <Y>
          <!--ro, req, float, target Y-coordinate, range:[0.000,1.000]-->0.000
        </Y>
        <width>
          <!--ro, req, float, target width, range:[0.000,1.000]-->1.000
        </width>
        <height>
          <!--ro, req, float, target height-->1.000
        </height>
      </TargetRect>
    </DetectionRegionEntry>
  </DetectionRegionList>
  <sceneID>
```

```

        <!--ro, opt, int, scene ID-->1
    </sceneID>
</DetectionRegionEntry>
</DetectionRegionList>
<channelName>
    <!--ro, opt, string, channel name, range:[1,64]-->test
</channelName>
<Extensions>
    <!--ro, opt, object, extended information-->
    <serialNumber>
        <!--ro, opt, string, serial No.-->test
    </serialNumber>
    <eventPush>
        <!--ro, opt, string, event notification-->test
    </eventPush>
</Extensions>
<DetectionPictureTransType>
    <!--ro, opt, enum, picture transmission mode, subType:string, desc:"url", "binary", "base64"-->url
</DetectionPictureTransType>
<DetectionPicturesNumber>
    <!--ro, opt, int, number of pictures contained in the alarm received in arming mode, desc:this field will not be returned when there is no picture
contained in the alarm-->1
</DetectionPicturesNumber>
<bkgUrl>
    <!--ro, opt, string, background picture URL, desc:background picture URL-->test
</bkgUrl>
<URLCertificationType>
    <!--ro, opt, enum, picture URL authentication method, subType:string, desc:authentication mode of picture URL: "no"-no authentication, "digest"-digest
authentication (it is used for local picture URL returned by NVR or DVR)-->no
</URLCertificationType>
<pId>
    <!--ro, opt, string, picture ID, desc:the field value is the picture Content-ID when the value of detectionPictureTransType is "binary"-->test
</pId>
<visibleLightURL>
    <!--ro, opt, string, visible light picture URL-->test
</visibleLightURL>
<thermalURL>
    <!--ro, opt, string, thermal imaging picture URL-->test
</thermalURL>
<targetAttrs>
    <!--ro, opt, object, transparent transmission field-->{ /*可选,透传字段,推荐使用以下三个字段*/ "deviceId": "1", /*可选,设备ID, string类型, 最大长度为
64*/ "deviceChannel": 1, /*可选,设备通道号, integer32类型*/ "deviceName": "shebei", /*可选,设备名称, string类型, 最大长度为128*/ }
</targetAttrs>
<TaskInfo>
    <!--ro, opt, object, task information submitted by data center products-->
    <taskID>
        <!--ro, req, string, task ID, range:[0,64]-->test
    </taskID>
    <algorithmType>
        <!--ro, opt, enum, algorithm type, subType:int, desc:1-"highQualityVehicle" (high-quality vehicle),2-"highPerformanceVehicle" (high-performance
vehicle),3-"personStructModel" (person structural modeling),4-"vehicleAndPersonStructModel" (person and vehicle structural modeling),5-"videoFaceDetect"
(video face detection),6-"videoFaceDetectModel" (video face detection and modeling),7-"smart" (face detection (output frame without recognizing
properties)+human body detection (output properties and frame)+behavior detection)-->1
    </algorithmType>
    <taskName>
        <!--ro, opt, string, task name-->test
    </taskName>
    <algorithmID>
        <!--ro, opt, string, algorithm package ID-->test
    </algorithmID>
    <monitorPointID>
        <!--ro, opt, string, camera No.-->test
    </monitorPointID>
    <monitorPointName>
        <!--ro, opt, string, camera name-->test
    </monitorPointName>
    <streamType>
        <!--ro, opt, enum, stream type, subType:string, desc:"realtime" (real-time stream), "historyvideo" (history stream), "localvideo" (local stream)--
>realtime
    </streamType>
    <ruleID>
        <!--ro, opt, string, rule ID, desc:it is used to distinguish different tasks with the same name, and the ruleID in the event uploading message
indicates that the event is related to this task-->test
    </ruleID>
    <ruleCustomName>
        <!--ro, req, string, user-defined event name, range:[0,128], desc:it is defined by the caller, and it is included in the message when the alarm is
uploaded. Up to 128 characters are allowed-->test
    </ruleCustomName>
    <algorithmInfo>
        <!--ro, opt, object, algorithm version information, desc:this field is required for secondary analysis-->
        <algorithmId>
            <!--ro, opt, string, algorithm package ID-->test
        </algorithmId>
        <algoVendorId>
            <!--ro, opt, string, manufacturer ID-->test
        </algoVendorId>
        <algoVersionId>
            <!--ro, opt, string, algorithm version No.-->test
        </algoVersionId>
        <algoChipType>
            <!--ro, opt, string, chip type-->test
        </algoChipType>
        <algoModelVersion>

```



```

    <!--ro, opt, string, model version-->test
  </algoModelVersion>
</algorithmInfo>
</TaskInfo>
<timeStamp>
  <!--ro, opt, string, timestamp of the frame, which triggers the alarm-->test
</timeStamp>
<uid>
  <!--ro, opt, string, the unique ID of event uploading, range:[0,64], desc:it can be composed of time (accurate to the millisecond) and random digits--
>test
</uid>
<isDataRetransmission>
  <!--ro, opt, bool, whether it is a resending data (if the real-time detection data upload fails due to the network condition, the data will be uploaded
again after the device recovers.)-->true
</isDataRetransmission>
<ruleID>
  <!--ro, opt, int, rule No., range:[0,7], desc:rule No.-->0
</ruleID>
<ruleName>
  <!--ro, opt, string, rule name, range:[0,32], desc:rule name-->test
</ruleName>
<visibleLightAbsoluteHigh>
  <!--ro, opt, object-->
  <elevation>
    <!--ro, opt, float, range:[-90.00,270.00], step:0.001-->0.00
  </elevation>
  <azimuth>
    <!--ro, opt, float, range:[0,360.00], step:0.001-->0.00
  </azimuth>
  <absoluteZoom>
    <!--ro, opt, float, zooming ratio, range:[0,10000.00]-->0.00
  </absoluteZoom>
  <focus>
    <!--ro, opt, int, range of the focus, range:[1,10000], step:1-->1
  </focus>
</visibleLightAbsoluteHigh>
<thermalAbsoluteHigh>
  <!--ro, opt, object-->
  <elevation>
    <!--ro, opt, float, range:[-90.00,270.00], step:0.001-->0.00
  </elevation>
  <azimuth>
    <!--ro, opt, float, range:[0,360.00], step:0.001-->0.00
  </azimuth>
  <absoluteZoom>
    <!--ro, opt, float, zooming ratio, range:[0,10000.00]-->0.00
  </absoluteZoom>
  <focus>
    <!--ro, opt, int, range of the focus, range:[1,10000], step:1-->1
  </focus>
</thermalAbsoluteHigh>
<deviceLocation>
  <!--ro, opt, object-->
  <longitudeType>
    <!--ro, req, enum, subType:string-->W
  </longitudeType>
  <latitudeType>
    <!--ro, req, enum, subType:string, desc:"S"-south, "N"-north-->S
  </latitudeType>
  <longitude>
    <!--ro, req, object-->
    <degree>
      <!--ro, req, int, degree(s), range:[0,180]-->1
    </degree>
    <minute>
      <!--ro, req, float, minute(s), range:[0,60]-->0.0
    </minute>
    <sec>
      <!--ro, req, float, range:[0,60]-->0.0
    </sec>
  </longitude>
  <latitude>
    <!--ro, req, object-->
    <degree>
      <!--ro, req, int, range:[0,90]-->1
    </degree>
    <minute>
      <!--ro, req, float, minute(s), range:[0,60]-->0.0
    </minute>
    <sec>
      <!--ro, req, float, range:[0,60]-->0.0
    </sec>
  </latitude>
</deviceLocation>
<laserRanging>
  <!--ro, opt, int, range:[1,10000], step:1, unit:m-->1
</laserRanging>
</EventNotificationAlert>

```

Parameter Name	Parameter Value	Parameter Type(Content-Type)	Content-ID	File Name	Description
regionExiting	[Message content]	application/xml	--	--	--
visibleLightImage	[Binary picture data]	image/jpeg	visibleLightImage	visibleLightImage.jpg	--
thermallImage	[Binary picture data]	image/jpeg	thermallImage	thermallImage.jpg	--
targetImage	[Binary picture data]	image/jpeg	targetImage	targetImage.jpg	--
POSInfo	[Stream data]	application/octet-stream	POSInfo	POSInfo.dat	--

Note: The protocol is transmitted in form format. See Chapter 4.5.1.4 for form framework description, as shown in the instance below.

```
--<frontier>
Content-Disposition: form-data; name=Parameter Name;filename=File Name
Content-Type: Parameter Type
Content-Length: ****
Content-ID: Content ID
Parameter Value
```

- Parameter Name: the name property of Content-Disposition in the header of form unit; it refers to the form unit name.
- Parameter Type (Content-Type): the Content-Type property in the header of form unit.
- File Name (filename): the filename property of Content-Disposition of form unit Headers. It exists only when the transmitted data of form unit is file, and it refers to the file name of form unit body.
- Parameter Value: the body content of form unit.

14.8 Algorithm Scheduling

14.8.1 Scheduling and Managing Local Smart Resources

14.8.1.1 Get parameters of intelligent resources switch

Request URL

GET /ISAPI/System/Video/inputs/channels/<channelID>/VCAResource

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<VCAResource xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, intelligent resources, attr:version{req, string, protocolVersion}-->
  <type>
    <!--ro, req, enum, "basicBehavior", subType:string, desc:"basicBehavior"-->basicBehavior
  </type>
</VCAResource>
```

14.8.1.2 Set parameters of intelligent resources switch

Request URL

PUT /ISAPI/System/Video/inputs/channels/<channelID>/VCAResource

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<VCAResource xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, VCA Resource, attr:version{req, string, protocolVersion}-->
  <type>
    <!--req, enum, type, subType:string,
    desc:"basicBehavior,fullBehavior,facesnapBehavior,facesnap,TFS,smartVehicleDetection,smartHVTDetection,smart,judicial,smart264AndRoadDetection,smart264AndFaceDetection,smart264AndHeatMap,smartIntelligentMonitor,smartTrafficDataCollection,roadDetection,humanRecognition,perimeterCapture,vehicleDetection,HVTDetection,mixedTargetDetection,trackingCaptureMode,nonTrackingCaptureMode,close,faceHumanModelingContrast,cityManagement,teacherBehavior,12MPLiveView,personQueueDetection,verticalPeopleCounting,safetyHelmet,faceCounting,personArming,AIOpenPlatform"-->basicBehavior
  </type>
</VCAResource>
```

Parameter Name	Parameter Value	Parameter Type(Content-Type)	Content-ID	File Name	Description
VCAResource	[Message content]	application/xml	--	--	--

Note: The protocol is transmitted in form format. See Chapter 4.5.1.4 for form framework description, as shown in the instance below.

```
--<frontier>
Content-Disposition: form-data; name=Parameter Name;filename=File Name
Content-Type: Parameter Type
Content-Length: ****
Content-ID: Content ID
Parameter Value
```

- Parameter Name: the name property of Content-Disposition in the header of form unit; it refers to the form unit name.
- Parameter Type (Content-Type): the Content-Type property in the header of form unit.
- File Name (filename): the filename property of Content-Disposition of form unit Headers. It exists only when the transmitted data of form unit is file, and it refers to the file name of form unit body.
- Parameter Value: the body content of form unit.

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL, range:[0,1024]-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
  <description>
    <!--ro, opt, string, range:[0,1024]-->badXmlFormat
  </description>
</ResponseStatus>
```

14.8.1.3 Get capability of switching intelligent resources

Request URL

GET /ISAPI/System/Video/inputs/channels/<channelID>/VCAResource/capabilities

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

VISION E INGENIO SOFTWARE SA DE CV (VIINSOFT)
dzambrano@vinsoft.com.mx

```

<?xml version="1.0" encoding="UTF-8"?>

<VCAResource xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, intelligent resources, attr:version{req, string, protocolVersion}-->
  <type
    opt="basicBehavior,fullBehavior,facesnapBehavior,facesnap,TFS,smartVehicleDetection,smarthVTDetection,smart,judicial,smart264AndRoadDetection,smart264AndFac
    eDetection,smart264AndHeatMap,smartVehicleIllegalParkingDetection,smartIntelligentMonitor,smartTrafficDataCollection, roadDetection,humanRecognition,
    perimeterCapture, vehicleDetection,HVTDetection,mixedTargetDetection, trackingCaptureMode,nonTrackingCaptureMode,close,
    faceHumanModelingContrast,cityManagement,teacherBehavior,12MPLiveView,personQueueDetection,verticalPeopleCounting,AIOpenPlatform,mixedTargetFaceHuman,mixedT
    argetAll,safetyHelmet,faceContrast,none,faceMonitor,vehicleMonitor,faceCounting,heelPDC,personDensity,behaviorMixedTargetAll,operationMonitor,fielddetection
    ,personArming,smokeDetectAlarm,smokeDetection,personDensityQueueLeavePosition,bannerDetection,ATMSurround,
    ATMPanel,ATMSafetyCabin,intelligentTraffic,heatmap,teacherBehaviorAndFaceContrast,mixedTargetAllCapture,riverwayGaugeReading,MixedTargetAllAuxiliaryCapture,
    radarHearNurse,smokeDetectionAndFlameCombustion,PackingSpaceRecognition" def="basicBehavior">
    <!--ro, req, enum, resource type, subType:string, attr:opt{req, string},def{opt, string}, desc:resource type-->basicBehavior
  </type>
  <PromptList>
    <!--ro, opt, array, prompt for switching intelligent resources, subType:object-->
    <Prompt>
      <!--ro, opt, object, List-->
      <resourceType opt="roadDetection">
        <!--ro, opt, string, currently,only "roadDetection" is supported, attr:opt{req, string}, desc:currently, only "roadDetection" is supported-->test
      </resourceType>
      <resourcePrompt opt="smartCode">
        <!--ro, opt, string, prompt contents, attr:opt{req, string}, desc:prompt contents-->test
      </resourcePrompt>
    </Prompt>
  </PromptList>
  <isSupportAPPWorking>
    <!--ro, opt, bool-->true
  </isSupportAPPWorking>
  <isSupportTest>
    <!--ro, opt, bool-->true
  </isSupportTest>
  <VCAResourcePrompt opt="streamingCodingPrompt">
    <!--ro, opt, string, attr:opt{req, string}-->streamingCodingPrompt
  </VCAResourcePrompt>
  <sceneRecommendationTypeList>
    <!--ro, opt, array, subType:object-->
    <sceneRecommendationType>
      <!--ro, opt, object-->
      <scene opt="Y,L,one,concentricBayonet">
        <!--ro, req, enum, subType:string, attr:opt{req, string}-->Y
      </scene>
    </sceneRecommendationType>
  </sceneRecommendationTypeList>
  <synergyRecommendationTypeList>
    <!--ro, opt, array, subType:object-->
    <synergyRecommendationType>
      <!--ro, opt, object-->
      <synergyMode opt="associationDeDuplication,trackAssociation,targetAssociation">
        <!--ro, req, enum, subType:string, attr:opt{req, string}-->associationDeDuplication
      </synergyMode>
      <priority min="1" max="3">
        <!--ro, opt, int, attr:min{req, int},max{req, int}-->0
      </priority>
    </synergyRecommendationType>
  </synergyRecommendationTypeList>
  </VCAResource>

```

14.9 VCA

14.9.1 VCA Abnormal Event Recognition

14.9.1.1 Get the intelligent capability

Request URL

GET /ISAPI/Intelligent/capabilities

Query Parameter

None

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>
<IntelliCap xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, attr:version{req, string, protocolVersion}-->
  <isFaceSupport>
    <!--ro, opt, bool, whether it supports face detection, desc:whether it supports face detection-->true
  </isFaceSupport>
  <isBehaviorSupport>
    <!--ro, opt, bool, whether it supports abnormal event detection, desc:whether it supports abnormal event detection-->true
  </isBehaviorSupport>
  <isLineDetectionSupport>
    <!--ro, opt, bool, whether it supports line crossing detection, desc:whether it supports line crossing detection-->true
  </isLineDetectionSupport>
  <isFieldDetectionSupport>
    <!--ro, opt, bool, whether it supports intrusion detection, desc:whether it supports intrusion detection-->true
  </isFieldDetectionSupport>
  <isRegionEntranceSupport>
    <!--ro, opt, bool, whether it supports region entrance detection, desc:whether it supports region entrance detection-->true
  </isRegionEntranceSupport>
  <isRegionExitingSupport>
    <!--ro, opt, bool, whether it supports region exiting detection, desc:whether it supports region exiting detection-->true
  </isRegionExitingSupport>
  <isLoiteringSupport>
    <!--ro, opt, bool, whether it supports loitering detection, desc:whether it supports loitering detection-->true
  </isLoiteringSupport>
  <isGroupSupport>
    <!--ro, opt, bool, whether it supports people gathering detection, desc:whether it supports people gathering detection-->true
  </isGroupSupport>
  <isRapidMoveSupport>
    <!--ro, opt, bool, whether it supports fast moving detection, desc:whether it supports fast moving detection-->true
  </isRapidMoveSupport>
  <isParkingSupport>
    <!--ro, opt, bool, whether it supports parking detection, desc:whether it supports parking detection-->true
  </isParkingSupport>
  <isUnattendedBaggageSupport>
    <!--ro, opt, bool, whether it supports unattended baggage detection, desc:whether it supports unattended baggage detection-->true
  </isUnattendedBaggageSupport>
  <isAttendedBaggageSupport>
    <!--ro, opt, bool, whether it supports object removal detection, desc:whether it supports object removal detection-->true
  </isAttendedBaggageSupport>
  <isTeacherSupport>
    <!--ro, opt, bool, whether it supports teachers' behavior detection, desc:whether it supports teacher's behavior detection-->true
  </isTeacherSupport>
  <isStudentSupport>
    <!--ro, opt, bool, whether it supports students' behavior detection, desc:whether it supports student's behavior detection-->true
  </isStudentSupport>
</IntelliCap>
```

14.9.1.2 Get the intelligent capability of device

Request URL

GET /ISAPI/Intelligent/channels/<channelID>/capabilities

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>
<IntelliCap xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{req, string, protocolVersion}-->
  <isFaceSupport>
    <!--ro, req, bool, whether it supports face detection, desc:whether it supports face detection-->true
  </isFaceSupport>
  <isBehaviorSupport>
    <!--ro, req, bool, whether it supports abnormal event detection, desc:whether it supports abnormal event detection-->true
  </isBehaviorSupport>
```

```

<!--ro, req, bool, whether it supports abnormal event detection, desc:whether it supports abnormal event detection-->true
</isBehaviorSupport>
<isLineDetectionSupport>
  <!--ro, req, bool, whether it supports Line crossing detection, desc:whether it supports Line crossing detection-->true
</isLineDetectionSupport>
<isFieldDetectionSupport>
  <!--ro, req, bool, whether it supports intrusion detection, desc:whether it supports intrusion detection-->true
</isFieldDetectionSupport>
<isRegionEntranceSupport>
  <!--ro, req, bool, whether it supports region entrance detection, desc:whether it supports region entrance detection-->true
</isRegionEntranceSupport>
<isRegionExitingSupport>
  <!--ro, req, bool, whether it supports region exiting detection, desc:whether it supports region exiting detection-->true
</isRegionExitingSupport>
<isLoiteringSupport>
  <!--ro, req, bool, whether it supports loitering detection, desc:whether it supports loitering detection-->true
</isLoiteringSupport>
<isGroupSupport>
  <!--ro, opt, bool, whether it supports people gathering detection, desc:whether it supports people gathering detection-->true
</isGroupSupport>
<isRapidMoveSupport>
  <!--ro, opt, bool, whether it supports fast moving detection, desc:whether it supports fast moving detection-->true
</isRapidMoveSupport>
<isParkingSupport>
  <!--ro, opt, bool, whether it supports parking detection, desc:whether it supports parking detection-->true
</isParkingSupport>
<isUnattendedBaggageSupport>
  <!--ro, opt, bool, whether it supports unattended baggage detection, desc:whether it supports unattended baggage detection-->true
</isUnattendedBaggageSupport>
<isAttendedBaggageSupport>
  <!--ro, opt, bool, whether it supports object removal detection, desc:whether it supports object removal detection-->true
</isAttendedBaggageSupport>
<isTeacherSupport>
  <!--ro, opt, bool, whether it supports teacher's behavior detection, desc:whether it supports teacher's behavior detection-->true
</isTeacherSupport>
<isStudentSupport>
  <!--ro, opt, bool, whether it supports student's behavior detection, desc:whether it supports student's behavior detection-->true
</isStudentSupport>
<isCombinedSupport>
  <!--ro, opt, bool-->true
</isCombinedSupport>
<isFaceCaptureStatisticsSupport>
  <!--ro, opt, bool, whether it supports face picture statistics, desc:whether it supports face picture statistics-->true
</isFaceCaptureStatisticsSupport>
<isSupportAlgLibParamKey>
  <!--ro, opt, bool-->true
</isSupportAlgLibParamKey>
<isStudentsStoodUpSupport>
  <!--ro, opt, bool-->true
</isStudentsStoodUpSupport>
<isFramesPeopleCountingSupport>
  <!--ro, opt, bool-->true
</isFramesPeopleCountingSupport>
<isSupportPersonQueueDetection>
  <!--ro, opt, bool, whether it supports queue management, desc:whether it supports queue management-->true
</isSupportPersonQueueDetection>
<isSupportModeling>
  <!--ro, opt, bool-->true
</isSupportModeling>
<RestoreAlgLibParam>
  <!--ro, opt, object, the capabilities of restoring algorithm Library parameters according to algorithm Library name, desc:the capabilities of restoring
algorithm Library parameters according to algorithm Library name-->
  <LibName opt="FaceSnap,HMS,behaviorAnalysis,shipsDetection">
    <!--ro, opt, string, attr:opt{req, string}-->test
  </LibName>
</RestoreAlgLibParam>
<isSupportAlarmInfoGet>
  <!--ro, opt, bool-->true
</isSupportAlarmInfoGet>
<isFaceSnapPicParamSupport>
  <!--ro, opt, bool-->true
</isFaceSnapPicParamSupport>
<isSupportCityManagement>
  <!--ro, opt, bool, whether it supports intelligent city management, desc:whether it supports intelligent city management. Refer to URI:
/ISAPI/Intelligent/channels/<ID>/cityManagement/capabilities?format=json-->true
</isSupportCityManagement>
<isSupportMixedTargetDetection>
  <!--ro, opt, bool, whether the device supports multi-target-type detection events, desc:whether the device supports multi-target-type detection events--
>true
</isSupportMixedTargetDetection>
<isSupportFaceContrastMode>
  <!--ro, opt, bool-->false
</isSupportFaceContrastMode>
<isSupportPictureCaptureComparision>
  <!--ro, opt, bool-->false
</isSupportPictureCaptureComparision>
<isFaceAttendanceSupport>
  <!--ro, opt, bool-->true
</isFaceAttendanceSupport>
<isTeacherBehaviorDetectSupport>
  <!--ro, opt, bool-->true
</isTeacherBehaviorDetectSupport>
<isSupportIntersectionAnalysis>
  <!--ro, opt, bool, whether it supports intersection analysis, desc:whether it supports intersection analysis-->true

```

```
</isSupportIntersectionAnalysis>
</IntelliCap>
```

14.9.1.3 Get the capability of picture overlay parameters of smart event

Request URL

GET /ISAPI/Intelligent/channels/<channelID>/picInfoOverlap/capabilities?format=json

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	Channel No.

Request Message

None

Response Message

```
{
  "PicInfoOverlapCap": {
    /*ro, req, object*/
    "enabled": [true, false],
    /*ro, req, array, subType:bool*/
    "overlapItemNum": {
      /*ro, req, object*/
      "@max": 5
      /*ro, opt, int*/
    },
    "overlapItemId": {
      /*ro, req, object*/
      "@min": 1,
      /*ro, opt, int*/
      "@max": 3
      /*ro, req, int*/
    },
    "itemType": ["positionInfo", "cameraNo", "captureTime", "sex", "age", "GPS", "ruleName", "count"],
    /*ro, req, array, subType:string*/
    "eventType": ["faceSnap", "behaviorAnalysis", "judiciary"]
    /*ro, req, array, subType:string*/
  }
}
```

14.9.1.4 Get the intelligent channel list

Request URL

GET /ISAPI/Intelligent/intelliChannelList

Query Parameter

None

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>
<IntelliChannelList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, array, intelligent channel list, subType:object, attr:version(req, string, protocolVersion)-->
  <IntelliChannel>
    <!--ro, opt, object, intelligent channel-->
    <id>
      <!--ro, req, string, channel ID-->test
    </id>
  </IntelliChannel>
</IntelliChannelList>
```

14.10 Two-Way Audio

14.10.1 Two-Way Audio

14.10.1.1 Get the parameters of all two-way audio channels

Request URL

GET /ISAPI/System/TwoWayAudio/channels

Query Parameter

None

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<TwoWayAudioChannelList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, array, parameters configuration of the two-way audio channel, subType:object, attr:version{opt, string, protocolVersion}-->
  <TwoWayAudioChannel>
    <!--ro, opt, object, configuration of the two-way audio channel-->
    <id>
      <!--ro, req, string, audio channel ID-->1
    </id>
    <enabled>
      <!--ro, req, bool, whether to enable or not-->true
    </enabled>
    <audioCompressionType>
      <!--ro, req, enum, encoding type of the audio output, subType:string, desc:"G.711aLaw", "G.711uLaw", "G.726", "G.729", "G.729a", "G.729b", "PCM", "MP3", "AC3", "AAC", "ADPCM", "MP2L2", "Opus"-->G.711aLaw
    </audioCompressionType>
    <audioInboundCompressionType>
      <!--ro, opt, enum, encoding type of the audio input, subType:string, desc:"G.711aLaw", "G.711uLaw", "G.726", "G.729", "G.729a", "G.729b", "PCM", "MP3", "AC3", "AAC", "ADPCM"-->G.711aLaw
    </audioInboundCompressionType>
    <speakerVolume>
      <!--ro, opt, int, input volume, range:[1,100]-->100
    </speakerVolume>
    <microphoneVolume>
      <!--ro, opt, int, output volume, range:[1,100]-->100
    </microphoneVolume>
    <noisereduce>
      <!--ro, opt, bool, whether to enable the environmental noise filter or not-->true
    </noisereduce>
    <audioBitRate>
      <!--ro, opt, int, audio frame rate, unit:kbs-->100
    </audioBitRate>
    <audioInputType>
      <!--ro, opt, enum, audio input type, subType:string, desc:"MicIn" (microphone-Level input), "LineIn" (Line-Level input), "selfAdaptive" (self-adaptive), "wirelessPickup" (wireless audio pickup)-->MicIn
    </audioInputType>
    <associateVideoInputs>
      <!--ro, opt, object, Linked video channel-->
      <enabled>
        <!--ro, req, bool, whether to enable the Linked video input channel or not-->true
      </enabled>
      <videoInputChannelList>
        <!--ro, req, array, List of Linked video channels, subType:object-->
        <videoInputChannelID>
          <!--ro, opt, string, Linked video channel-->1
        </videoInputChannelID>
      </videoInputChannelList>
    </associateVideoInputs>
    <audioSamplingRate>
      <!--ro, opt, float, audio sampling rate, unit:kHz-->48.00
    </audioSamplingRate>
    <lineOutForbidden>
      <!--ro, opt, bool, whether the audio output is not supported. If this node is not returned or its value is "false", audio output is supported; if the value is "true", audio output is not supported-->true
    </lineOutForbidden>
    <muteDuringPanTilt>
      <!--ro, opt, bool, whether to mute during motion-->true
    </muteDuringPanTilt>
    <audioOutputType>
      <!--ro, opt, enum, audio output type, subType:string, desc:"Close" (output closed), "LineOut" (Line-Level output), "Speaker" (speaker output), "selfAdaptive" (self-adaptive), "LineOut_Speaker" (both Line-Level output and speaker output)-->LineOut
    </audioOutputType>
    <matrixPickUp>
      <!--ro, opt, bool, whether to use the wired matrix pickup or not (this node will not be returned if the wired matrix pickup is not supported, and it is valid only when the audio input type is "LineIn")-->true
    </matrixPickUp>
  </TwoWayAudioChannel>
</TwoWayAudioChannelList>
```

14.10.1.2 Set audio parameters for all two-way audio channels

Request URL

PUT /ISAPI/System/TwoWayAudio/channels

Query Parameter

None

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<TwoWayAudioChannelList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, array, parameters configuration of the two-way audio channel, subType:object, attr:version{opt, string, protocolVersion}-->
  <TwoWayAudioChannel>
    <!--opt, object, configuration of the two-way audio channel-->
    <id>
      <!--req, string, audio channel ID-->1
    </id>
    <enabled>
      <!--req, bool, whether to enable the function or not-->true
    </enabled>
    <audioCompressionType>
      <!--req, enum, encoding type of the audio output, subType:string, desc:"G.711aLaw", "G.711uLaw", "G.726", "G.729", "G.729a", "G.729b", "PCM", "MP3", "AC3", "AAC", "ADPCM", "MP2L2", "Opus"-->G.711aLaw
    </audioCompressionType>
    <audioInboundCompressionType>
      <!--req, enum, encoding type of the audio input, subType:string, desc:"G.711aLaw", "G.711uLaw", "G.726", "G.729", "G.729a", "G.729b", "PCM", "MP3", "AC3", "AAC", "ADPCM"-->G.711aLaw
    </audioInboundCompressionType>
    <speakerVolume>
      <!--opt, int, input volume-->100
    </speakerVolume>
    <microphoneVolume>
      <!--opt, int, output volume-->100
    </microphoneVolume>
    <noisereduce>
      <!--opt, bool, whether to enable the environmental noise filter or not-->true
    </noisereduce>
    <audioBitRate>
      <!--opt, int, audio frame rate, unit:kbs-->100
    </audioBitRate>
    <audioInputType>
      <!--req, enum, audio input type, subType:string, desc:"MicIn" (microphone-level input), "LineIn" (line-level input), "selfAdaptive" (self-adaptive), "wirelessPickUp" (wireless audio pickup)-->MicIn
    </audioInputType>
    <associateVideoInputs>
      <!--opt, object, linked video channel-->
      <enabled>
        <!--req, bool, whether to enable the linked video input channel or not-->true
      </enabled>
      <videoInputChannelList>
        <!--req, array, list of linked video channels, subType:object-->
        <videoInputChannelID>
          <!--opt, string, linked video channel-->1
        </videoInputChannelID>
      </videoInputChannelList>
    </associateVideoInputs>
    <audioSamplingRate>
      <!--opt, float, audio sampling rate, unit:kHz-->48.00
    </audioSamplingRate>
    <lineOutForbidden>
      <!--opt, bool, whether the audio output is not supported. If this node is not returned or its value is "false", audio output is supported; if the value is "true", audio output is not supported-->true
    </lineOutForbidden>
    <muteDuringPanTilt>
      <!--opt, bool, whether to mute during motion-->true
    </muteDuringPanTilt>
    <audioOutputType>
      <!--opt, enum, audio output type, subType:string, desc:"Close" (output closed), "LineOut" (line-level output), "Speaker" (speaker output), "selfAdaptive" (self-adaptive), "LineOut_Speaker" (both line-level output and speaker output)-->LineOut
    </audioOutputType>
    <matrixPickUp>
      <!--opt, bool, whether to use the wired matrix pickup or not (this node is valid only when the audio input type is "LineIn")-->true
    </matrixPickUp>
  </TwoWayAudioChannel>
</TwoWayAudioChannelList>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>
```

14.10.1.3 Set audio parameters of a specified two-way audio channel

Request URL

PUT /ISAPI/System/TwoWayAudio/channels/<twoWayAudioChannelID>

Query Parameter

Parameter Name	Parameter Type	Description
twoWayAudioChannelID	string	--

Request Message

```

<?xml version="1.0" encoding="UTF-8"?>

<TwoWayAudioChannel xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, configuration of the two-way audio channel, attr:version{opt, string, protocolVersion}-->
  <id>
    <!--req, string, audio channel ID-->1
  </id>
  <enabled>
    <!--req, bool, whether to enable or not-->true
  </enabled>
  <audioCompressionType>
    <!--req, enum, encoding type of the audio output, subType:string, desc:"G.711aLaw", "G.711uLaw", "G.726", "G.729", "G.729a", "G.729b", "PCM", "MP3", "AC3", "AAC", "ADPCM", "MP2L2", "Opus"-->G.711aLaw
  </audioCompressionType>
  <audioInboundCompressionType>
    <!--opt, enum, encoding type of the audio input, subType:string, desc:"G.711aLaw", "G.711uLaw", "G.726", "G.729", "G.729a", "G.729b", "PCM", "MP3", "AC3", "AAC", "ADPCM"-->G.711aLaw
  </audioInboundCompressionType>
  <speakerVolume>
    <!--opt, int, input volume, range:[1,100]-->100
  </speakerVolume>
  <microphoneVolume>
    <!--opt, int, output volume, range:[1,100]-->100
  </microphoneVolume>
  <noisereduce>
    <!--opt, bool, whether to enable the environmental noise filter or not-->true
  </noisereduce>
  <audioBitRate>
    <!--opt, int, audio frame rate, unit:kbs-->100
  </audioBitRate>
  <audioInputType>
    <!--opt, enum, audio input type, subType:string, desc:"MicIn" (microphone-level input), "LineIn" (line-level input), "selfAdaptive" (self-adaptive), "wirelessPickup" (wireless audio pickup)-->MicIn
  </audioInputType>
  <associateVideoInputs>
    <!--opt, object, linked video channel-->
    <enabled>
      <!--req, bool, whether to enable the linked video input channel or not-->true
    </enabled>
    <videoInputChannelList>
      <!--req, array, list of linked video channels, subType:object-->
      <videoInputChannelID>
        <!--opt, string, linked video channel-->1
      </videoInputChannelID>
    </videoInputChannelList>
  </associateVideoInputs>
  <audioSamplingRate>
    <!--opt, float, audio sampling rate, unit:kHz-->48.00
  </audioSamplingRate>
  <lineOutForbidden>
    <!--opt, bool, whether the audio output is not supported. If this node is not returned or its value is "false", audio output is supported; if the value is "true", audio output is not supported-->true
  </lineOutForbidden>
  <micInForbidden>
    <!--opt, bool, whether the audio input is not supported. If this node is not returned or its value is "false", audio input is supported; if the value is "true", audio input is not supported-->true
  </micInForbidden>
  <muteDuringPanTilt>
    <!--opt, bool, whether to mute during motion-->true
  </muteDuringPanTilt>
  <audioOutputType>
    <!--opt, enum, audio output type, subType:string, desc:"Close" (output closed), "LineOut" (line-level output), "Speaker" (speaker output), "selfAdaptive" (self-adaptive), "LineOut_Speaker" (both line-level output and speaker output)-->LineOut
  </audioOutputType>
  <timeOut>
    <!--opt, int, timeout during two-way audio, range:[10,600], unit:s, desc:when the Web Client initiates the two-way audio actively towards the radar device, the noise data will be transmitted to the radar device although the person on the Web Client does not speak, because there is always some noise. When this node is configured, the device will stop the two-way audio after a specific time period, regardless of whether the person on the Web Client stops speaking or not.-->10
  </timeOut>
  <matrixPickup>
    <!--opt, bool, whether to use the wired matrix pickup or not (this node is valid only when the audio input type is "LineIn")-->true
  </matrixPickup>
</TwoWayAudioChannel>

```

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6
    (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format",
    "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
</ResponseStatus>

```

14.10.1.4 Get the capability of configuring audio parameters for a specified two-way audio channel

Request URL

GET /ISAPI/System/TwoWayAudio/channels/<twoWayAudioChannelID>/capabilities?audioInputType=
<audioInputType>

Query Parameter

Parameter Name	Parameter Type	Description
twoWayAudioChannelID	string	Two-way audio channel No.
audioInputType	string	Audio input type, corresponding to the "audioInputType" in the message. This parameter is mainly used to obtain the parameters corresponding to the specified audio input type.

Request Message

None

Response Message

<?xml version="1.0" encoding="UTF-8"?>

<TwoWayAudioChannel xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">

<!--ro, opt, object, capability of configuring audios for the two-way audio channel, attr:version{opt, string, protocolVersion}-->

<id>

<!--ro, req, string, audio channel ID-->1

</id>

<enabled>

<!--ro, req, bool, whether to enable or not-->true

</enabled>

<audioCompressionType opt="G.711alaw,G.711ulaw,G.726,G.729,G.729a,G.729b,PCM,MP3,AC3,AAC,ADPCM,MP2L2,Opus,G.722.1">

<!--ro, req, enum, encoding type of the audio output, subType:string, attr:opt{opt, string}, desc:"G.711alaw", "G.711ulaw", "G.726", "G.729", "G.729a", "G.729b", "PCM", "MP3", "AC3", "AAC", "ADPCM", "MP2L2", "Opus", "G.722.1"-->G.711alaw

</audioCompressionType>

<audioInboundCompressionType opt="G.711alaw,G.711ulaw,G.726,G.729,G.729a,G.729b,PCM,MP3,AC3,AAC,ADPCM,G.722.1">

<!--ro, opt, enum, encoding type of the audio input, subType:string, attr:opt{opt, string}, desc:"G.711alaw", "G.711ulaw", "G.726", "G.729", "G.729a", "G.729b", "PCM", "MP3", "AC3", "AAC", "ADPCM"-->G.711alaw

</audioInboundCompressionType>

<speakerVolume min="0" max="100">

<!--ro, opt, int, input volume, attr:min{opt, int},max{opt, int}-->100

</speakerVolume>

<microphoneVolume min="0" max="100">

<!--ro, opt, int, output volume, attr:min{opt, int},max{opt, int}-->100

</microphoneVolume>

<noisereduce opt="true,false">

<!--ro, opt, bool, whether to enable the environmental noise filter or not, attr:opt{opt, string}-->true

</noisereduce>

<audioBitRate min="1" max="100">

<!--ro, opt, int, audio frame rate, unit:kbs, attr:min{opt, int},max{opt, int}-->100

</audioBitRate>

<audioInputType opt="MicIn,LineIn,selfAdaptive,wirelessPickup,doubleMic,networkPickup">

<!--ro, opt, enum, audio input type, subType:string, attr:opt{opt, string}, desc:"MicIn" (microphone-level input), "LineIn" (line-level input), "selfAdaptive" (self-adaptive), "wirelessPickup" (wireless audio pickup)-->MicIn

</audioInputType>

<associateVideoInputs>

<!--ro, opt, object, linked video channel-->

<enabled opt="true,false">

<!--ro, req, bool, whether to enable the linked video input channel or not, attr:opt{opt, string}-->true

</enabled>

<videoInputChannelList>

<!--ro, req, array, list of linked video channels, subType:object-->

<videoInputChannelID min="1" max="2048">

<!--ro, opt, string, linked video channel, attr:min{opt, string},max{opt, string}-->1

</videoInputChannelID>

</videoInputChannelList>

</associateVideoInputs>

<audioSamplingRate min="1.00" max="48.00">

<!--ro, opt, float, audio sampling rate, unit:kHz, attr:min{opt, float},max{opt, float}-->48.00

</audioSamplingRate>

<lineOutForbidden opt="true,false">

<!--ro, opt, bool, whether the audio output is not supported. If this node is not returned or its value is "false", audio output is supported; if the value is "true", audio output is not supported, attr:opt{opt, string}-->true

</lineOutForbidden>

<muteDuringPanTilt opt="true,false">

<!--ro, opt, bool, whether to mute during motion, attr:opt{opt, string}-->true

</muteDuringPanTilt>

<audioOutputType opt="Close,LineOut,Speaker,selfAdaptive,LineOut_Speaker,HDMI" def="LineOut">

<!--ro, opt, enum, audio output type, subType:string, attr:opt{opt, string},def{opt, string}, desc:"Close" (output closed), "LineOut" (line-level output), "Speaker" (speaker output), "selfAdaptive" (self-adaptive), "LineOut_Speaker" (both line-level output and speaker output)-->LineOut

</audioOutputType>

<isSupportEchoCancellation>

<!--ro, opt, bool, whether the device supports echo cancellation-->true

</isSupportEchoCancellation>

<timeOut min="10" max="600">

<!--ro, opt, int, timeout during two-way audio, attr:min{req, int},max{req, int}, desc:when the Web Client initiates the two-way audio actively towards the radar device, the noise data will be transmitted to the radar device although the person on the Web Client does not speak, because there is always some noise. When this node is configured, the device will stop the two-way audio after a specific time period, regardless of whether the person on the Web Client stops speaking or not.-->300

</timeOut>

<matrixPickUp opt="true,false">

<!--ro, opt, bool, whether to use the wired matrix pickup or not (this node will not be returned if the wired matrix pickup is not supported, and it is valid only when the audio input type is "LineIn"), attr:opt{opt, string}-->>false

</matrixPickUp>

<isSupportRestore>

<!--ro, opt, bool, whether the device supports restoring audio parameters of the two-way audio channel, desc:corresponding API:

/ISAPI/System/TwoWayAudio/channels/<twoWayAudioChannelID>/restore?format=json-->true

</isSupportRestore>

<networkPickUpStatus opt="online,offline">

<!--ro, opt, enum, network pick-up status, subType:string, dep:and,{\$.TwoWayAudioChannel.audioInputType,eq,networkPickUp}, attr:opt{opt, string}, desc:network status of the network pickup linked with the audio channel: "online", "offline"-->online

</networkPickUpStatus>

<noisereduceType opt="normal,smart">

<!--ro, opt, enum, subType:string, attr:opt{req, string}-->normal

</noisereduceType>

</TwoWayAudioChannel>

14.10.1.5 Stop two-way audio

Request URL

PUT /ISAPI/System/TwoWayAudio/channels/<twoWayAudioChannelID>/close?sessionId= <audioSessionID>

Query Parameter

Parameter Name	Parameter Type	Description
twoWayAudioChannelID	string	Two-Way Audio Channel ID
audioSessionID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL, range:[0,1024]-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, which describes the error in details, desc:sub status code, which describes the error in details-->OK
  </subStatusCode>
  <description>
    <!--ro, opt, string, Custom Error Information Description, range:[0,1024], desc:Custom detailed error information returned by device application, used for quick positioning and diagnosis.-->badXmlFormat
  </description>
</ResponseStatus>
```

14.10.1.6 Start two-way audio

Request URL

PUT /ISAPI/System/TwoWayAudio/channels/<twoWayAudioChannelID>/open?type= <type>

Query Parameter

Parameter Name	Parameter Type	Description
twoWayAudioChannelID	string	Two-way audio channel No.
type	enum	If this field does not exist, it indicates two-way audio via channel, and the audioID is the channel ID. When the type is childDevID, it indicates two-way audio with a single sub device, and the audioID is the gateway intercom resource index (obtained from /ISAPI/System/DynamicResource/SearchResources?format=json); when the type is childDevList, it indicates broadcasting to multiple sub devices, with multiple childDevID values specified in the message, and the audioID in the URL is invalid.

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<TwoWayAudio xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, object, parameters for this two-way audio, attr:version{req, string, protocolVersion}-->
  <audioLevel>
    <!--opt, int, audio level, range:[0,15], desc:range: [0,15]-->0
  </audioLevel>
  <microphoneVolume>
    <!--opt, int, output volume-->100
  </microphoneVolume>
  <audioCompressionType>
    <!--opt, enum, encoding type of the audio output, subType:string, desc:"G.711aLaw", "G.711uLaw", "G.726", "G.729", "G.729a", "G.729b", "PCM", "MP3", "AC3", "AAC", "ADPCM", "MP2L2", "Opus", "G.722.1"-->G.711aLaw
  </audioCompressionType>
  <audioSamplingRate>
    <!--opt, float, audio sampling rate, unit:Hz-->48.00
  </audioSamplingRate>
  <isBroadcast>
    <!--opt, bool-->true
  </isBroadcast>
  <broadcastType>
    <!--opt, enum, subType:string-->alarm
  </broadcastType>
  <childList>
    <!--opt, array, subType:object, range:[0,8], dep:and,{$.TwoWayAudio.isBroadCast,eq,true}-->
    <childDevID>
      <!--opt, string, range:[9,32]-->test
    </childDevID>
    <voiceTalkIndex>
      <!--opt, int, range:[1,256]-->test
    </voiceTalkIndex>
  </childList>
</TwoWayAudio>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<TwoWayAudioSession xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, result returned when starting two-way audio succeeds, attr:version{opt, string, protocolVersion}-->
  <sessionId>
    <!--ro, req, string, two-way audio session ID-->1
  </sessionId>
</TwoWayAudioSession>
```

14.10.1.7 Restore audio parameters of the two-way audio channel

Request URL

PUT /ISAPI/System/TwoWayAudio/channels/<twoWayAudioChannelID>/restore?format=json

Query Parameter

Parameter Name	Parameter Type	Description
twoWayAudioChannelID	string	--

Request Message

None

Response Message

```
{
  "statusCode": 1,
  /*ro, opt, int, status code, desc:1 (succeeded). It is required when an error occurred*/
  "statusString": "OK",
  /*ro, opt, string, status description, range:[1,64], desc:"ok" (succeeded). It is required when an error occurred*/
  "subStatusCode": "ok",
  /*ro, opt, string, sub status code, range:[1,64], desc:"ok" (succeeded). It is required when an error occurred*/
  "errorCode": 1,
  /*ro, opt, int, error code, desc:it is required when the value of statusCode is not 1, and it corresponds to subStatusCode*/
  "errorMsg": "ok",
  /*ro, opt, string, error information, desc:this node is required when the value of statusCode is not 1*/
  "MErrCode": "0x00000000",
  /*ro, opt, string*/
  "MErrDevSelfEx": "0x00000000"
  /*ro, opt, string*/
}
```


14.10.1.8 Get the audio parameters of a specified two-way audio channel

Request URL

GET /ISAPI/System/TwoWayAudio/channels/<twoWayAudioChannelID>?audioInputType= <audioInputType>

Query Parameter

Parameter Name	Parameter Type	Description
twoWayAudioChannelID	string	Two-way audio channel No.
audioInputType	string	Audio input type, corresponding to the "audioInputType" in the message. This parameter is mainly used to obtain the parameters corresponding to the specified audio input type.

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<TwoWayAudioChannel xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, configuration of the two-way audio channel, attr:version{opt, string, protocolVersion}-->
  <id>
    <!--ro, req, string, audio channel ID-->1
  </id>
  <enabled>
    <!--ro, req, bool, whether to enable or not-->true
  </enabled>
  <audioCompressionType>
    <!--ro, req, enum, encoding type of the audio output, subType:string, desc:"G.711aLaw", "G.711uLaw", "G.726", "G.729", "G.729a", "G.729b", "PCM", "MP3", "AC3", "AAC", "ADPCM", "MP2L2", "Opus", "G.722.1"-->G.711aLaw
  </audioCompressionType>
  <audioInboundCompressionType>
    <!--ro, opt, enum, encoding type of the audio input, subType:string, desc:"G.711aLaw", "G.711uLaw", "G.726", "G.729", "G.729a", "G.729b", "PCM", "MP3", "AC3", "AAC", "ADPCM"-->G.711aLaw
  </audioInboundCompressionType>
  <speakerVolume>
    <!--ro, opt, int, input volume, range:[1,100]-->100
  </speakerVolume>
  <microphoneVolume>
    <!--ro, opt, int, output volume, range:[1,100]-->100
  </microphoneVolume>
  <noisereduce>
    <!--ro, opt, bool, whether to enable the environmental noise filter or not-->true
  </noisereduce>
  <audioBitRate>
    <!--ro, opt, int, audio frame rate, unit:kbs-->100
  </audioBitRate>
  <audioInputType>
    <!--ro, opt, enum, audio input type, subType:string, desc:"MicIn" (microphone-level input), "LineIn" (line-level input), "selfAdaptive" (self-adaptive), "wirelessPickUp" (wireless audio pickup)-->MicIn
  </audioInputType>
  <associateVideoInputs>
    <!--ro, opt, object, linked video channel-->
    <enabled>
      <!--ro, req, bool, whether to enable the linked video input channel or not-->true
    </enabled>
    <videoInputChannelList>
      <!--ro, req, array, list of linked video channels, subType:object-->
      <videoInputChannelID>
        <!--ro, opt, string, linked video channel-->1
      </videoInputChannelID>
    </videoInputChannelList>
  </associateVideoInputs>
  <audioSamplingRate>
    <!--ro, opt, float, audio sampling rate, unit:kHz-->48.00
  </audioSamplingRate>
  <lineOutForbidden>
    <!--ro, opt, bool, whether the audio output is not supported. If this node is not returned or its value is "false", audio output is supported; if the value is "true", audio output is not supported-->true
  </lineOutForbidden>
  <micInForbidden>
    <!--ro, opt, bool, whether the audio input is not supported. If this node is not returned or its value is "false", audio input is supported; if the value is "true", audio input is not supported-->true
  </micInForbidden>
  <muteDuringPanTilt>
    <!--ro, opt, bool, whether to mute during motion-->true
  </muteDuringPanTilt>
  <audioOutputType>
    <!--ro, opt, enum, audio output type, subType:string, desc:"Close" (output closed), "LineOut" (line-level output), "Speaker" (speaker output), "selfAdaptive" (self-adaptive), "LineOut_Speaker" (both line-level output and speaker output)-->LineOut
  </audioOutputType>
  <timeOut>
    <!--ro, opt, int, timeout during two-way audio, range:[10,600], unit:s, desc:when the Web Client initiates the two-way audio actively towards the radar device, the noise data will be transmitted to the radar device through the person on the Web Client does not speak, because there is always some noise. When this node is configured, the device will stop the two-way audio after a specific time period, regardless of whether the person on the Web Client stops speaking or not.-->10
  </timeOut>
  <matrixPickUp>
    <!--ro, opt, bool, whether to use the wired matrix pickup or not (this node is valid only when the audio input type is "LineIn")-->true
  </matrixPickUp>
  <networkPickUpStatus>
    <!--ro, opt, enum, subType:string, dep:and,{$.TwoWayAudioChannel.audioInputType,eq,networkPickUp}-->online
  </networkPickUpStatus>
  <noisereduceType>
    <!--ro, opt, enum, subType:string-->normal
  </noisereduceType>
</TwoWayAudioChannel>

```

14.10.1.9 Get the capability of configuring parameters for all two-way audio channels

Request URL

GET /ISAPI/System/TwoWayAudio/channels/capabilities

Query Parameter

None

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<TwoWayAudioChannelList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, capability of configuring audios for all two-way audio channels, attr:version{opt, string, protocolVersion}-->
  <TwoWayAudioChannel>
    <!--ro, opt, object, capability of configuring audios for the two-way audio channel-->
    <id>
      <!--ro, req, string, audio channel ID-->1
    </id>
    <enabled>
      <!--ro, req, bool, whether to enable or not-->true
    </enabled>
    <audioCompressionType opt="G.711aLaw,G.711uLaw,G.726,G.729,G.729a,G.729b,PCM,MP3,AC3,AAC,ADPCM,MP2L2,Opus">
      <!--ro, req, enum, encoding type of the audio output, subType:string, attr:opt{opt, string}, desc:"G.711aLaw", "G.711uLaw", "G.726", "G.729", "G.729a", "G.729b", "PCM", "MP3", "AC3", "AAC", "ADPCM", "MP2L2", "Opus"-->G.711aLaw
    </audioCompressionType>
    <audioInboundCompressionType opt="G.711aLaw,G.711uLaw,G.726,G.729,G.729a,G.729b,PCM,MP3,AC3,AAC,ADPCM">
      <!--ro, opt, enum, encoding type of the audio input, subType:string, attr:opt{opt, string}, desc:"G.711aLaw", "G.711uLaw", "G.726", "G.729", "G.729a", "G.729b", "PCM", "MP3", "AC3", "AAC", "ADPCM"-->G.711aLaw
    </audioInboundCompressionType>
    <speakerVolume min="0" max="100">
      <!--ro, opt, int, input volume, attr:min{opt, int},max{opt, int}-->100
    </speakerVolume>
    <microphoneVolume min="0" max="100">
      <!--ro, opt, int, output volume, attr:min{opt, int},max{opt, int}-->100
    </microphoneVolume>
    <noisereduce opt="true,false">
      <!--ro, opt, bool, whether to enable the environmental noise filter or not, attr:opt{opt, string}-->true
    </noisereduce>
    <audioBitRate min="1" max="100">
      <!--ro, opt, int, audio frame rate, unit:kbs, attr:min{opt, string},max{opt, string}-->100
    </audioBitRate>
    <audioInputType opt="MicIn,LineIn,selfAdaptive,wirelessPickUp">
      <!--ro, opt, enum, audio input type, subType:string, attr:opt{opt, string}, desc:"MicIn" (microphone-level input), "LineIn" (Line-level input), "selfAdaptive" (self-adaptive), "wirelessPickUp" (wireless audio pickup)-->MicIn
    </audioInputType>
    <associateVideoInputs>
      <!--ro, opt, object, Linked video channel-->
      <enabled opt="true,false">
        <!--ro, req, bool, whether to enable the Linked video input channel or not, attr:opt{opt, string}-->true
      </enabled>
      <videoInputChannelList>
        <!--ro, req, array, List of Linked video channels, subType:object-->
        <videoInputChannelID min="1" max="2048">
          <!--ro, opt, string, Linked video channel, attr:min{opt, string},max{opt, string}-->1
        </videoInputChannelID>
      </videoInputChannelList>
    </associateVideoInputs>
    <audioSamplingRate min="1.00" max="48.00">
      <!--ro, opt, float, audio sampling rate, unit:kHz, attr:min{opt, float},max{opt, float}-->48.00
    </audioSamplingRate>
    <lineOutForbidden opt="true,false">
      <!--ro, opt, bool, whether the audio output is not supported. If this node is not returned or its value is "false", audio output is supported; if the value is "true", audio output is not supported, attr:opt{opt, string}-->true
    </lineOutForbidden>
    <muteDuringPanTilt opt="true,false">
      <!--ro, opt, bool, whether to mute during motion, attr:opt{opt, string}-->true
    </muteDuringPanTilt>
    <audioOutputType opt="Close,LineOut,Speaker,selfAdaptive,LineOut_Speaker" def="LineOut">
      <!--ro, opt, enum, audio output type, subType:string, attr:opt{opt, string},def{opt, string}, desc:"Close" (output closed), "LineOut" (Line-level output), "Speaker" (speaker output), "selfAdaptive" (self-adaptive), "LineOut_Speaker" (both Line-level output and speaker output)-->LineOut
    </audioOutputType>
    <isSupportEchoCancellation>
      <!--ro, opt, bool, whether the device supports echo cancellation-->true
    </isSupportEchoCancellation>
    <matrixPickUp opt="true,false">
      <!--ro, opt, bool, whether to use the wired matrix pickup or not (this node will not be returned if the wired matrix pickup is not supported, and it is valid only when the audio input type is "LineIn"), attr:opt{opt, string}-->false
    </matrixPickUp>
    <isSupportRestore>
      <!--ro, opt, bool, whether the device supports restoring audio parameters of the two-way audio channel, desc:corresponding API: /ISAPI/System/TwoWayAudio/channels/<twoWayAudioChannelID>/restore?format=json-->true
    </isSupportRestore>
  </TwoWayAudioChannel>
</TwoWayAudioChannelList>
```

14.11 Audio Recognition

14.11.1 Audio Exception Detection

14.11.1.1 Get the arming schedule of audio detection for all channels

Request URL

GET /ISAPI/Event/schedules/audioDetections

Query Parameter

None

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<AudioDetectionScheduleList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, array, subType:object, attr:version{req, string, protocolVersion}-->
  <Schedule>
    <!--ro, opt, object-->
    <id>
      <!--ro, req, string-->audioDetections-1
    </id>
    <eventType>
      <!--ro, opt, string-->audioDetections
    </eventType>
    <videoInputChannelID>
      <!--ro, opt, string-->1
    </videoInputChannelID>
    <TimeBlockList size="8">
      <!--ro, req, array, subType:object, attr:size{opt, int}-->
      <TimeBlock>
        <!--ro, opt, object-->
        <dayOfWeek>
          <!--ro, opt, enum, subType:int-->1
        </dayOfWeek>
        <TimeRange>
          <!--ro, req, object-->
          <beginTime>
            <!--ro, req, time-->10:00:00
          </beginTime>
          <endTime>
            <!--ro, req, time-->10:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </TimeBlockList>
    <HolidayBlockList>
      <!--ro, opt, array, subType:object-->
      <TimeBlock>
        <!--ro, opt, object-->
        <TimeRange>
          <!--ro, req, object-->
          <beginTime>
            <!--ro, req, time-->10:00:00
          </beginTime>
          <endTime>
            <!--ro, req, time-->10:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </HolidayBlockList>
  </Schedule>
</AudioDetectionScheduleList>
```

14.11.1.2 Set the arming schedule of audio detection for all channels

Request URL

PUT /ISAPI/Event/schedules/audioDetections

Query Parameter

None

Request Message

```

<?xml version="1.0" encoding="UTF-8"?>

<AudioDetectionScheduleList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, array, subType:object, attr:version{req, string, protocolVersion}-->
  <Schedule>
    <!--opt, object-->
    <id>
      <!--req, string-->audioDetections-1
    </id>
    <eventType>
      <!--opt, string-->audioDetections
    </eventType>
    <videoInputChannelID>
      <!--opt, string-->1
    </videoInputChannelID>
    <TimeBlockList size="8">
      <!--req, array, subType:object, attr:size{opt, int}-->
      <TimeBlock>
        <!--opt, object-->
        <dayOfWeek>
          <!--opt, enum, subType:int-->1
        </dayOfWeek>
        <TimeRange>
          <!--req, object-->
          <beginTime>
            <!--req, time-->10:00:00
          </beginTime>
          <endTime>
            <!--req, time-->10:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </TimeBlockList>
    <HolidayBlockList>
      <!--opt, array, subType:object-->
      <TimeBlock>
        <!--opt, object-->
        <TimeRange>
          <!--req, object-->
          <beginTime>
            <!--req, time-->10:00:00
          </beginTime>
          <endTime>
            <!--req, time-->10:00:00
          </endTime>
        </TimeRange>
      </TimeBlock>
    </HolidayBlockList>
  </Schedule>
</AudioDetectionScheduleList>

```

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>

```

14.11.1.3 Set the arming schedule of audio detection for a specified channel

Request URL

PUT /ISAPI/Event/schedules/audioDetections/audioDetection-<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<Schedule xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string-->audioDetections-1
  </id>
  <eventType>
    <!--opt, string-->audioDetections
  </eventType>
  <videoInputChannelID>
    <!--opt, string-->1
  </videoInputChannelID>
  <TimeBlockList size="8">
    <!--req, array, subType:object, attr:size{opt, int}-->
    <TimeBlock>
      <!--opt, object-->
      <dayOfWeek>
        <!--opt, enum, subType:int-->1
      </dayOfWeek>
      <TimeRange>
        <!--req, object-->
        <beginTime>
          <!--req, time-->10:00:00
        </beginTime>
        <endTime>
          <!--req, time-->10:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </TimeBlockList>
  <HolidayBlockList>
    <!--opt, array, subType:object-->
    <TimeBlock>
      <!--opt, object-->
      <TimeRange>
        <!--req, object-->
        <beginTime>
          <!--req, time-->10:00:00
        </beginTime>
        <endTime>
          <!--req, time-->10:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </HolidayBlockList>
</Schedule>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, subType:int-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, subType:string-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string-->OK
  </subStatusCode>
</ResponseStatus>
```

14.11.1.4 Get the arming schedule of audio detection for a specified channel

Request URL

GET /ISAPI/Event/schedules/audioDetections/audioDetection-<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<Schedule xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string-->audioDetections-1
  </id>
  <eventType>
    <!--ro, opt, string-->audioDetections
  </eventType>
  <videoInputChannelID>
    <!--ro, opt, string-->1
  </videoInputChannelID>
  <TimeBlockList size="8">
    <!--ro, req, array, subType:object, attr:size{opt, int}-->
    <TimeBlock>
      <!--ro, opt, object-->
      <dayOfWeek>
        <!--ro, opt, enum, subType:int-->1
      </dayOfWeek>
      <TimeRange>
        <!--ro, req, object-->
        <beginTime>
          <!--ro, req, time-->10:00:00
        </beginTime>
        <endTime>
          <!--ro, req, time-->10:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </TimeBlockList>
  <HolidayBlockList>
    <!--ro, opt, array, subType:object-->
    <TimeBlock>
      <!--ro, opt, object-->
      <TimeRange>
        <!--ro, req, object-->
        <beginTime>
          <!--ro, req, time-->10:00:00
        </beginTime>
        <endTime>
          <!--ro, req, time-->10:00:00
        </endTime>
      </TimeRange>
    </TimeBlock>
  </HolidayBlockList>
</Schedule>
```

14.11.1.5 Set the audio detection parameters of all channels

Request URL

PUT /ISAPI/Smart/AudioDetection/channels

Query Parameter

None

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<AudioDetectionList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--opt, array, list of audio detection parameters, subType:object, attr:version{req, string, protocolVersion}-->
  <AudioDetection>
    <!--opt, object-->
    <id>
      <!--req, string, ID-->test
    </id>
    <audioInputException>
      <!--opt, object, audio input exception detection-->
      <enabled>
        <!--req, bool, whether to enable-->true
      </enabled>
    </audioInputException>
    <soundIntensityMutation>
      <!--opt, object, sudden change of sound intensity detection-->
      <enabled>
        <!--req, bool, whether to enable-->true
      </enabled>
      <sensitivityLevel>
        <!--req, int, sensitivity level, range:[1,100]-->0
      </sensitivityLevel>
      <mutationThreshold>
        <!--req, int, 100, range:[1,100]-->0
      </mutationThreshold>
    </soundIntensityMutation>
    <SteepFall>
      <!--opt, object, sudden decrease of sound intensity-->
      <enabled>
        <!--req, bool, whether to enable the function-->true
      </enabled>
      <sensitivityLevel>
        <!--req, int, sensitivity level, range:[1,100]-->0
      </sensitivityLevel>
    </SteepFall>
    <AudioLoss>
      <!--opt, object, audio loss detection-->
      <enabled>
        <!--req, bool, whether to enable the function-->true
      </enabled>
      <sensitivityLevel>
        <!--opt, int, sensitivity level, range:[0,100]-->0
      </sensitivityLevel>
    </AudioLoss>
    <audioMode>
      <!--opt, enum, subType:int-->0
    </audioMode>
  </AudioDetection>
</AudioDetectionList>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, req, string, request URL-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code description-->OK
  </subStatusCode>
</ResponseStatus>
```

14.11.1.6 Get the audio detection parameters of all channels

Request URL

GET /ISAPI/Smart/AudioDetection/channels

Query Parameter

None

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<AudioDetectionList xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, array, list of audio detection parameters, subType:object, attr:version(req, string, protocolVersion)-->
  <AudioDetection>
    <!--ro, opt, object, audio detection parameters-->
    <id>
      <!--ro, req, string, ID-->test
    </id>
    <audioInputException>
      <!--ro, opt, object, audio input exception detection-->
      <enabled>
        <!--ro, req, bool, whether to enable-->true
      </enabled>
    </audioInputException>
    <soundIntensityMutation>
      <!--ro, opt, object, sudden change of sound intensity detection-->
      <enabled>
        <!--ro, req, bool, whether to enable-->true
      </enabled>
      <sensitivityLevel>
        <!--ro, req, int, sensitivity Level, range:[1,100]-->0
      </sensitivityLevel>
      <mutationThreshold>
        <!--ro, req, int, 100], range:[1,100]-->0
      </mutationThreshold>
    </soundIntensityMutation>
    <SteepFall>
      <!--ro, opt, object, sudden decrease of sound intensity-->
      <enabled>
        <!--ro, req, bool, whether to enable-->true
      </enabled>
      <sensitivityLevel>
        <!--ro, req, int, sensitivity Level, range:[1,100]-->0
      </sensitivityLevel>
    </SteepFall>
    <AudioLoss>
      <!--ro, opt, object, audio Loss detection-->
      <enabled>
        <!--ro, req, bool, whether to enable-->true
      </enabled>
      <sensitivityLevel>
        <!--ro, opt, int, sensitivity Level, range:[0,100]-->0
      </sensitivityLevel>
    </AudioLoss>
    <audioMode>
      <!--ro, opt, enum, audio detection mode, subType:int, desc:audio detection mode-->0
    </audioMode>
  </AudioDetection>
</AudioDetectionList>
```

14.11.1.7 Get audio detection parameters of a specified channel

Request URL

GET /ISAPI/Smart/AudioDetection/channels/<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```

<?xml version="1.0" encoding="UTF-8"?>

<AudioDetection xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, audio detection parameters, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string, ID-->test
  </id>
  <audioInputException>
    <!--ro, opt, object, audio input exception detection-->
    <enabled>
      <!--ro, req, bool, whether to enable-->true
    </enabled>
    <minVolumeThreshold>
      <!--ro, opt, int, minimum volume threshold, range:[0,99], unit:dB, desc:Check whether this parameter is supported by devices via the field minVolumeThreshold (related API: /ISAPI/Smart/AudioDetection/channels/<channelID>/capabilities). 1. When devices support this parameter, they can check whether the inputted audio is normal by comparing the inputted audio decibel value and the threshold. 2. When devices do not support this parameter, they can check whether the inputted audio is normal by the background noise change.-->1
    </minVolumeThreshold>
  </audioInputException>
  <soundIntensityMutation>
    <!--ro, opt, object, sudden change of sound intensity detection-->
    <enabled>
      <!--ro, req, bool, whether to enable-->true
    </enabled>
    <sensitivityLevel>
      <!--ro, req, int, sensitivity Level, range:[1,100]-->0
    </sensitivityLevel>
    <mutationThreshold>
      <!--ro, req, int, intensity threshold, range:[1,100]-->0
    </mutationThreshold>
    <decibel>
      <!--ro, opt, int, sound intensity, range:[0,65535], unit:dB-->1
    </decibel>
  </soundIntensityMutation>
  <SteepFall>
    <!--ro, opt, object, sudden decrease of sound intensity-->
    <enabled>
      <!--ro, req, bool, whether to enable-->true
    </enabled>
    <sensitivityLevel>
      <!--ro, req, int, sensitivity Level, range:[1,100]-->0
    </sensitivityLevel>
  </SteepFall>
  <AudioLoss>
    <!--ro, opt, object, audio Loss detection-->
    <enabled>
      <!--ro, req, bool, whether to enable-->true
    </enabled>
    <sensitivityLevel>
      <!--ro, opt, int, sensitivity Level, range:[0,100]-->0
    </sensitivityLevel>
  </AudioLoss>
  <audioMode>
    <!--ro, opt, enum, audio detection mode, subtype:int, desc:0 (sensitivity detection mode), 1 (threshold detection mode), 2 (sensitivity detection and threshold detection modes), 3 (both sensitivity and threshold detection are disabled)-->0
  </audioMode>
  <decibelThreshold>
    <!--ro, opt, int, decibel threshold, range:[-200,10000], step:1, unit:dB-->0
  </decibelThreshold>
  <decibelThresholdDuration>
    <!--ro, opt, float, decibel threshold duration, range:[0,10000], step:0.01, unit:dB-->0
  </decibelThresholdDuration>
  <frequencyThresholdDetectionParams>
    <!--ro, opt, object, frequency threshold detection parameters-->
    <enabled>
      <!--ro, req, bool, whether to enable frequency threshold detection-->true
    </enabled>
    <frequencyThreshold>
      <!--ro, opt, int, frequency threshold, range:[0,96000], step:1, unit:dB-->0
    </frequencyThreshold>
    <frequencyThresholdDuration>
      <!--ro, opt, float, frequency threshold duration, range:[0,10000], step:0.01, unit:dB-->0
    </frequencyThresholdDuration>
  </frequencyThresholdDetectionParams>
</AudioDetection>

```

14.11.1.8 Set audio detection parameters of a channel

Request URL

PUT /ISAPI/Smart/AudioDetection/channels/<channelID>

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

```
<?xml version="1.0" encoding="UTF-8"?>

<AudioDetection xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--req, object, audio detection parameter, attr:version{req, string, protocolVersion}-->
  <id>
    <!--req, string, ID-->test
  </id>
  <audioInputException>
    <!--opt, object, audio input exception detection-->
    <enabled>
      <!--req, bool, whether to enable-->true
    </enabled>
    <minVolumeThreshold>
      <!--opt, int, minimum volume threshold, range:[0,99], unit:dB, desc:Check whether this parameter is supported by devices via the field minVolumeThreshold (related API: /ISAPI/Smart/AudioDetection/channels/cchannelID/capabilities). 1. When devices support this parameter, they can check whether the inputted audio is normal by comparing the inputted audio decibel value and the threshold. 2. When devices do not support this parameter, they can check whether the inputted audio is normal by the background noise change.-->1
    </minVolumeThreshold>
  </audioInputException>
  <soundIntensityMutation>
    <!--opt, object, sudden change of sound intensity detection-->
    <enabled>
      <!--req, bool, whether to enable-->true
    </enabled>
    <sensitivityLevel>
      <!--req, int, sensitivity level, range:[1,100]-->0
    </sensitivityLevel>
    <mutationThreshold>
      <!--req, int, intensity threshold, range:[1,100]-->0
    </mutationThreshold>
    <decibel>
      <!--opt, int, sound intensity, range:[0,65535], unit:dB-->1
    </decibel>
  </soundIntensityMutation>
  <steepFall>
    <!--opt, object, sudden decrease of sound intensity-->
    <enabled>
      <!--req, bool, whether to enable-->true
    </enabled>
    <sensitivityLevel>
      <!--req, int, sensitivity level, range:[1,100]-->0
    </sensitivityLevel>
  </steepFall>
  <audioLoss>
    <!--opt, object, audio loss detection-->
    <enabled>
      <!--req, bool, whether to enable-->true
    </enabled>
    <sensitivityLevel>
      <!--opt, int, sensitivity level, range:[0,100]-->0
    </sensitivityLevel>
  </audioLoss>
  <audioMode>
    <!--opt, enum, sound detection mode, subType:int, desc:sound detection mode-->0
  </audioMode>
  <decibelThreshold>
    <!--opt, int, decibel threshold, range:[-200,10000], step:1, unit:dB-->0
  </decibelThreshold>
  <decibelThresholdDuration>
    <!--opt, float, decibel threshold duration, range:[0,10000], step:0.01, unit:dB-->0
  </decibelThresholdDuration>
  <frequencyThresholdDetectionParams>
    <!--opt, object, frequency threshold detection parameters-->
    <enabled>
      <!--req, bool, whether to enable frequency threshold detection-->true
    </enabled>
    <frequencyThreshold>
      <!--opt, int, frequency threshold, range:[0,96000], step:1, unit:Hz-->0
    </frequencyThreshold>
    <frequencyThresholdDuration>
      <!--opt, float, frequency threshold duration, range:[0,10000], step:0.01, unit:dB-->0
    </frequencyThresholdDuration>
  </frequencyThresholdDetectionParams>
</AudioDetection>
```

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<ResponseStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, req, object, response message, attr:version{ro, req, string, protocolVersion}-->
  <requestURL>
    <!--ro, opt, string, request URL, range:[0,1024]-->null
  </requestURL>
  <statusCode>
    <!--ro, req, enum, status code, subType:int, desc:0 (OK), 1 (OK), 2 (Device Busy), 3 (Device Error), 4 (Invalid Operation), 5 (Invalid XML Format), 6 (Invalid XML Content), 7 (Reboot Required)-->0
  </statusCode>
  <statusString>
    <!--ro, req, enum, status information, subType:string, desc:"OK" (succeeded), "Device Busy", "Device Error", "Invalid Operation", "Invalid XML Format", "Invalid XML Content", "Reboot" (reboot device)-->OK
  </statusString>
  <subStatusCode>
    <!--ro, req, string, sub status code, desc:sub status code-->OK
  </subStatusCode>
  <description>
    <!--ro, opt, string, custom error message description, range:[0,1024], desc:the custom error message description returned by the application is used to quickly identify and evaluate issues-->badXmlFormat
  </description>
  <MErrCode>
    <!--ro, opt, string, error codes categorized by functional modules, desc:all general error codes are in the range of this field-->0x00000000
  </MErrCode>
  <MErrDevSelfEx>
    <!--ro, opt, string, error codes categorized by functional modules, desc:N/A-->0x00000000
  </MErrDevSelfEx>
</ResponseStatus>
```

14.11.1.9 Get the capability of audio detection parameters of a specified channel

Request URL

GET /ISAPI/Smart/AudioDetection/channels/<channelID>/capabilities

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<AudioDetection xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, audio detection parameters, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string, ID-->test
  </id>
  <audioInputException>
    <!--ro, opt, object, audio input exception detection-->
    <enabled opt="true,false">
      <!--ro, req, bool, whether to enable the function, attr:opt{req, string}-->true
    </enabled>
    <minVolumeThreshold min="0" max="99">
      <!--ro, opt, int, minimum volume threshold, range:[0,99], unit:dB, attr:min{req, int},max{req, int}, desc:1. When devices support this parameter, they can check whether the inputted audio is normal by comparing the inputted audio decibel value and the threshold. 2. When devices do not support this parameter, they can check whether the inputted audio is normal by the background noise change.-->1
    </minVolumeThreshold>
  </audioInputException>
  <soundIntensityMutation>
    <!--ro, opt, object, sudden change of sound intensity detection-->
    <enabled opt="true,false">
      <!--ro, req, bool, whether to enable the function, attr:opt{req, string}-->true
    </enabled>
    <sensitivityLevel min="1" max="100">
      <!--ro, req, int, sensitivity level, range:[1,100], attr:min{req, int},max{req, int}-->0
    </sensitivityLevel>
    <mutationThreshold min="1" max="100">
      <!--ro, opt, int, sound intensity threshold, range:[1,100], attr:min{req, int},max{req, int}-->0
    </mutationThreshold>
    <decibel min="0" max="65535">
      <!--ro, opt, int, sound intensity, range:[0,65535], unit:dB, attr:min{req, int},max{req, int}-->1
    </decibel>
  </soundIntensityMutation>
  <SteepFall>
    <!--ro, opt, object, sudden decrease of sound intensity-->
    <enabled opt="true,false">
      <!--ro, req, bool, whether to enable the function, attr:opt{req, string}-->true
    </enabled>
```

```

</enabled>
<sensitivityLevel min="1" max="100">
  <!--ro, req, int, sensitivity level, range:[1,100], attr:min{req, int},max{req, int}-->0
</sensitivityLevel>
</SteepFall>
<mutexAbility opt="PDC">
  <!--ro, opt, enum, mutual exclusion ability, subType:string, attr:opt{req, string}, desc:"PDC" (people counting)-->PDC
</mutexAbility>
<isSupportMultiScene>
  <!--ro, opt, bool, whether supports multiple scene detection-->true
</isSupportMultiScene>
<AudioLoss>
  <!--ro, opt, object, audio loss detection-->
  <enabled opt="true,false">
    <!--ro, req, bool, whether to enable the function, attr:opt{req, string}-->true
  </enabled>
  <sensitivityLevel min="0" max="100" def="50">
    <!--ro, opt, int, sensitivity level, range:[0,100], attr:min{req, int},max{req, int},def{req, int}-->0
  </sensitivityLevel>
</AudioLoss>
<audioMode opt="1">
  <!--ro, opt, enum, audio detection mode, subType:int, attr:opt{req, int}, desc:0 (sensitivity detection mode), 1 (threshold detection mode), 2
(sensitivity detection and threshold detection modes), 3 (both sensitivity and threshold detection are disabled)-->0
</audioMode>
<decibelThreshold min="-200" max="10000">
  <!--ro, opt, int, decibel threshold, range:[-200,10000], step:1, unit:dB, attr:min{req, int},max{req, int}-->0
</decibelThreshold>
<decibelThresholdDuration min="0" max="10000">
  <!--ro, opt, float, decibel threshold duration, range:[0,10000], step:0.01, unit:dB, attr:min{req, int},max{req, int}-->0
</decibelThresholdDuration>
<frequencyThresholdDetectionParams>
  <!--ro, opt, object, frequency threshold detection parameters-->
  <enabled opt="true,false">
    <!--ro, req, bool, whether to enable frequency threshold detection, attr:opt{req, string}-->true
  </enabled>
  <frequencyThreshold min="0" max="96000">
    <!--ro, opt, int, frequency threshold, range:[0,96000], step:1, unit:Hz, attr:min{req, int},max{req, int}-->0
  </frequencyThreshold>
  <frequencyThresholdDuration min="0" max="10000">
    <!--ro, opt, float, frequency threshold duration, range:[0,10000], step:0.01, unit:Hz, attr:min{req, int},max{req, int}-->0
  </frequencyThresholdDuration>
</frequencyThresholdDetectionParams>
<cryDetectionParams>
  <!--ro, opt, object, cry detection parameters-->
  <enabled opt="true,false">
    <!--ro, req, bool, whether to enable cry detection, attr:opt{req, string}-->false
  </enabled>
  <sensitivityLevel min="0" max="100" def="50">
    <!--ro, opt, int, sensitivity level, range:[0,100], attr:min{req, int},max{req, int},def{req, int}-->50
  </sensitivityLevel>
</cryDetectionParams>
<audioDetectionMode opt="lowFalsePositive,highDetection">
  <!--ro, opt, enum, audio detection mode, subType:string, attr:opt{req, string}, desc:"LowFalsePositive" (Low false alarm mode, the default value),
"highDetection" (high detection mode)-->lowFalsePositive
</audioDetectionMode>
</AudioDetection>

```

14.11.1.10 Get the audio strength

Request URL

GET /ISAPI/Smart/AudioDetection/channels/<channelID>/status

Query Parameter

Parameter Name	Parameter Type	Description
channelID	string	--

Request Message

None

Response Message

```
<?xml version="1.0" encoding="UTF-8"?>

<AudioStrengthStatus xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, attr:version{req, string, protocolVersion}-->
  <id>
    <!--ro, req, string, index-->test
  </id>
  <audioStrength>
    <!--ro, req, int, sound intensity-->0
  </audioStrength>
</AudioStrengthStatus>
```

14.11.1.11 Audio exception

EventType:audioexception

```
<?xml version="1.0" encoding="UTF-8"?>

<EventNotificationAlert xmlns="http://www.isapi.org/ver20/XMLSchema" version="2.0">
  <!--ro, opt, object, event uploading, attr:version{opt, string, protocolVersion}-->
  <ipAddress>
    <!--ro, req, string, IPv4 address of the device that triggers an alarm-->172.6.64.7
  </ipAddress>
  <ipv6Address>
    <!--ro, opt, string, IPv6 address of the device that triggers an alarm-->1080:0:0:8:800:200C:417A
  </ipv6Address>
  <portNo>
    <!--ro, opt, int, port No. of the device that triggers an alarm-->80
  </portNo>
  <protocol>
    <!--ro, opt, string, transmission communication protocol type, range:[0,64], desc:when ISAPI protocol is transmitted via HCNetsDK, the channel No. is the video channel No. of private protocol. When ISAPI protocol is transmitted via EZ protocol, the channel No. is the video channel No. of EZ protocol. When ISAPI protocol is transmitted via ISUP, the channel No. is the video channel No. of ISUP-->HTTP
  </protocol>
  <macAddress>
    <!--ro, opt, string, MAC address-->01:17:24:45:D9:F4
  </macAddress>
  <dynChannelID>
    <!--ro, opt, string, digital channel No.-->test
  </dynChannelID>
  <channelID>
    <!--ro, opt, int, channel No. of the device that triggers the alarm, desc:video channel No. that triggers the alarm-->1
  </channelID>
  <audioInID>
    <!--ro, opt, int-->1
  </audioInID>
  <relatedChannelList>
    <!--ro, opt, string, List of alarm related channels, which are of the same camera with channelID, desc:this parameter is used for Live view or playback on the platform; multiple channel No.s are separated by commas-->1,2,3
  </relatedChannelList>
  <dateTime>
    <!--ro, req, datetime, alarm time-->2004-05-03T17:30:08+08:00
  </dateTime>
  <activePostCount>
    <!--ro, opt, int, times that the same alarm has been uploaded, desc:event triggering frequency-->1
  </activePostCount>
  <eventType>
    <!--ro, req, enum, event type, subType:string, desc:"audioexception" (audio exception)-->audioexception
  </eventType>
  <eventState>
    <!--ro, req, enum, event status, subType:string, desc:for durative event: "active" (valid), "inactive" (invalid)-->active
  </eventState>
  <eventDescription>
    <!--ro, req, string, event description-->test
  </eventDescription>
  <channelName>
    <!--ro, opt, string, channel name, range:[1,64]-->test
  </channelName>
  <deviceID>
    <!--ro, opt, string, device ID, desc:it should be returned for ISUP alarms, e.g., test0123 (Ehome2.0, Ehome4.0, and ISUP5.0)-->12345
  </deviceID>
  <Extensions>
    <!--ro, opt, object, extended information-->
    <serialNumber>
      <!--ro, opt, string, serial No.-->test
    </serialNumber>
    <eventPush>
      <!--ro, opt, string, event notification-->test
    </eventPush>
  </Extensions>
  <AudioExceptionDetection>
    <!--ro, opt, object, information about audio exception-->
    <alarmType>
      <!--ro, req, enum, alarm type, subType:string, desc:"audioLost" (audio loss), "decrease" (sudden decrease of sound intensity), "increase" (sudden increase of sound intensity), "audioDecibel" (decibel is higher than the threshold), "frequency" (frequency is higher than the threshold), "SoundSourceLocation" (sound source location), "realAudio" (real-time audio), "gasLeakageDetection" (gas leakage detection event), "dischargeDetection" (discharge detection event)-->audioLost
    </alarmType>
```

```

<audioDecibel>
  <!--ro, opt, int, audio decibel, range:[0,100], desc:it is valid when alarmType is "decrease" or "increase"-->0
</audioDecibel>
<frequency>
  <!--ro, opt, int, audio frequency, range:[0,100], step:0.001, unit:kHz-->0
</frequency>
<gasLeakageDetectionInfo>
  <!--ro, opt, object, information about gas Leakage detection event, dep:and,
  {$.EventNotificationAlert.AudioExceptionDetection.alarmType,eq,gasLeakageDetection}-->
  <leakageLevel>
    <!--ro, opt, int, Leakage Level, range:[1,10], desc:the higher the grade the more severe the Leakage-->1
  </leakageLevel>
  <leakMode>
    <!--ro, opt, enum, Leakage mode, subType:string, desc:"filling" (filling gas), "compressed" (compressed gas)-->filling
  </leakMode>
  <gasLeakage>
    <!--ro, opt, float, gas Leakage rate, range:[0,9999999], desc:the gas Leakage rate unit is configured via the field volumUnit in the URL of
    configuring gas Leakage rules (PUT /ISAPI/System/AcousticLeakDetection/AudioIn/<AudioInID>/GasLeakageRuleParams?format=json)-->0.000
  </gasLeakage>
  <leakageLoss>
    <!--ro, opt, float, Leakage Loss, range:[0,9999999], desc:Leakage Loss = Leakage rate * unit price * Leakage time duration. The configurations for
    Leakage rate, unit price, and Leakage time unit correspond to fields: "volumUnit" under "LeakageUnit", "gasUnitPrice" under "fillingParam", and "timeUnit"
    under "LeakageUnit". The relative URL is (PUT /ISAPI/System/AcousticLeakDetection/AudioIn/<AudioInID>/GasLeakageRuleParams?format=json)-->0.000
  </leakageLoss>
  <CO2Emissions>
    <!--ro, opt, float, carbon dioxide emission, range:[0.0001,99.9999], desc:unit: kg/Leakage time. The configuration for Leakage time unit corresponds
    to the field "timeUnit" under "LeakageUnit" in the URL (PUT /ISAPI/System/AcousticLeakDetection/AudioIn/<AudioInID>/GasLeakageRuleParams?format=json)--
    >0.0001
  </CO2Emissions>
</gasLeakageDetectionInfo>
<dischargeDetectionInfo>
  <!--ro, opt, object, discharge detection event information, dep:and,
  {$.EventNotificationAlert.AudioExceptionDetection.alarmType,eq,dischargeDetection}-->
  <dischargeType>
    <!--ro, opt, enum, discharge detection type, subType:string, desc:"freeMetalParticle" (free metal particle discharge), "suspendedPotentiometer"
    (suspended potential discharge), "internalAirGapOfInsulatingParts" (insulating part internal air-gap discharge), "metalTip" (metal tip discharge), "noise"
    (noise)-->freeMetalParticle
  </dischargeType>
  <dischargeProbability>
    <!--ro, opt, float, discharge probability, range:[0,1], desc:it is analyzed by device's algorithm-->1
  </dischargeProbability>
</dischargeDetectionInfo>
</AudioExceptionDetection>
<ResourceName>
  <!--ro, opt, object, resource transmission module, desc:when the returned alarm message contains extra resource (e.g., picture), this node should be
  returned. ResourceName is the specific name of the resource, which has no limitation. For example, it is FaceCaptureBackGroundImage for face capture
  background picture. When this node is absent, it defaults to uploading pictures via form submission-->
  <resourcesContentType>
    <!--ro, opt, enum, resource transmission type, subType:string, desc:when the returned alarm message contains additional resource (e.g., pictures),
    this field should be returned. Authentication is required when the URL is used to download files from device, and the method is the same with that in device
    Login. Direct request is allowed if the URL parameter contains token(?token=). For other ways, the authentication method is the same with that in device
    Login. If the returned URL contains the IP and port, the device is only accessible under a direct network connection, the platform should replace the IP and
    port in the URL based on the device's network configuration. If the prefix of the returned URL is "/pic", it represents cloud storage. The custom URL of
    device does not contain this prefix. "url" (the resource is transmitted via URL), "binary" (the resource is transmitted in binary format)-->url
  </resourcesContentType>
  <resourcesContent>
    <!--ro, opt, string, resource ID, desc:when the returned alarm message contains extra resource (e.g., picture), this node should be returned. If
    resourcesContentType=url, this node is the specific picture URL-->test
  </resourcesContent>
  <resourcesFormatType>
    <!--ro, opt, enum, resource file format, subType:string, desc:"JPG", "PNG". When the returned alarm message contains binary or URL resources, this
    field should be returned to specify the resource file format type-->JPG
  </resourcesFormatType>
  <pictureResolution>
    <!--ro, opt, object, picture resource resolution, desc:it is valid only when the resource type is picture-->
    <height>
      <!--ro, req, int, resolution height, range:[1,65535], unit:px-->1
    </height>
    <width>
      <!--ro, req, int, resolution (width), range:[1,65535], unit:px-->1
    </width>
  </pictureResolution>
</ResourceName>
</EventNotificationAlert>

```

Parameter Name	Parameter Value	Parameter Type(Content-Type)	Content-ID	File Name	Description
AudioException.xml	[Message content]	application/xml	--	--	--
audioExceptionPic	[Binary picture data]	image/jpeg			--

Note: The protocol is transmitted in form format. See Chapter 4.5.1.4 for form framework description, as shown in the instance below.

```
--<frontier>  
Content-Disposition: form-data; name=Parameter Name;filename=File Name  
Content-Type: Parameter Type  
Content-Length: ****  
Content-ID: Content ID  
Parameter Value
```

- Parameter Name: the name property of Content-Disposition in the header of form unit; it refers to the form unit name.
- Parameter Type (Content-Type): the Content-Type property in the header of form unit.
- File Name (filename): the filename property of Content-Disposition of form unit Headers. It exists only when the transmitted data of form unit is file, and it refers to the file name of form unit body.
- Parameter Value: the body content of form unit.

15 How-To Video Guidance

If you need access to corresponding video guidance for device integration, please register on <https://tpp.hikvision.com> and visit our Training Center: <https://tpp.hikvision.com/tpp/Training>. The Training Center is specifically designed to provide technical training and guidance resources for our partners. On this platform, you can find integration video tutorials for various devices, enabling better understanding and learning of the integration process. To offer more personalized service, our Training Center also supports filtering by integration protocols, devices, and applications.