← Project review - SQL1 Bootcamp. Day03

Type of project

Ouration



ssn://git@repos-ssn.zi-scnoot.ru:zzxy/students/5QL_peginner._uayu3.iu_5/4uyu/sonj...

Copy link

Open

Student



sonjadav@student.21-school.ru

level 7

About

Introduction

The methodology of School 21 makes sense only if peer-to-peer reviews are done seriously. Please read all guidelines carefully before starting the review.

- Please, stay courteous, polite, respectful and constructive in all communications during t his review.

- Highlight possible malfunctions of the work done by the person and take the time to disc uss and debate it.

- Keep in mind that sometimes there can be differences in interpretation of the tasks and t he scope of features. Please, stay open-minded to the vision of the other.
- If you have not finished the project yet, it is compulsory to read the entire instruction bef ore starting the review.

Guidelines

- Evaluate only the files that are in src folder on the GIT repository of the student or group.
- Ensure to start reviewing a group project only when the team is present in full.
- Use special flags in the checklist to report, for example, an "empty work" if repository do es not contain the work of the student (or group) in the src folder of the develop branch, or "cheat" in case of cheating or if the student (or group) are unable to explain their work at a ny time during review as well as if one of the points below is not met. However, except for cheating cases, you are encouraged to continue reviewing the project to identify the probl ems that caused the situation in order to avoid them at the next review.
- Doublecheck that the GIT repository is the one corresponding to the student or the group.
- Meticulously check that nothing malicious has been used to mislead you.
- In controversial cases, remember that the checklist determines only the general order of the check. The final decision on project evaluation remains with the reviewer.

Main part

Exercise 00

Checks for the file day03_ex00.sql

- The SQL script looks like below.

select pizza_name, price, p.name as pizzeria_name, pv.visit_date from menu inner join pizzeria p on p.id = menu.pizzeria_id inner join person_visits pv on p.id = pv.pizzeria_id inner join person p2 on p2.id = pv.person_id where price between 800 and 1000 and p2.name = 'Kate' order by 1,2,3

- The result is below (raw ordering should be the same like on a screen below)

```
"cheese pizza" "950" "DinoPizza" "2022-01-04"

"pepperoni pizza" "800" "Best Pizza" "2022-01-03"

"pepperoni pizza" "800" "DinoPizza" "2022-01-04"

"sausage pizza" "1000" "DinoPizza" "2022-01-04"

"supreme pizza" "850" "Best Pizza" "2022-01-03"
```



Exercise 01

Checks for the file day03_ex01.sql

- The SQL script looks like below.

```
select id as menu_id
from menu
except
select menu_id
from person_order
order by 1
```

- The result is below (raw ordering should be the same like below)

```
"5"
"10"
"11"
"12"
"15"
```





Exercise 02

Checks for the file day03_ex02.sql

- The SQL script looks like below.

```
select pizza_name, price, p.name
from (
select id as menu_id
from menu
except
select menu_id
from person_order) as t1 inner join menu on t1.menu_id = menu.id
inner join pizzeria p on p.id = menu.pizzeria_id
order by 1,2
```

- The result is below (raw ordering should be the same like below)

```
"cheese pizza" "700" "Papa Johns"
"cheese pizza" "780" "DoDo Pizza"
"cheese pizza" "950" "DinoPizza"
"sausage pizza" "950" "Papa Johns"
"supreme pizza" "850" "DoDo Pizza"
```

No



Checks for the file day03_ex03.sql - The SQL script looks like below.

Exercise 03

```
(select p2.name as pizzeria_name
from person p inner join person_visits pv on p.id = pv.person_id
  inner join pizzeria p2 on p2.id = pv.pizzeria id
where p.gender = 'female'
except all
select p2.name
from person p inner join person visits pv on p.id = pv.person id
  inner join pizzeria p2 on p2.id = pv.pizzeria_id
where p.gender = 'male')
union all
(select p2.name
from person p inner join person_visits pv on p.id = pv.person_id
  inner join pizzeria p2 on p2.id = pv.pizzeria_id
where p.gender = 'male'
except all
select p2.name
from person p inner join person_visits pv on p.id = pv.person_id
  inner join pizzeria p2 on p2.id = pv.pizzeria_id
where p.gender = 'female')
order by 1
```

- The result is below (raw ordering should be the same like below)

```
"Best Pizza"
```

No



Exercise 04

Checks for the file day03_ex04.sql

- The SQL script looks like below.

```
(select p2.name as pizzeria_name
from person p inner join person_order pv on p.id = pv.person_id
   inner join menu on menu.id = pv.menu_id
   inner join pizzeria p2 on p2.id = menu.pizzeria_id
   where p.gender = 'female'
   except
   select p2.name
from person p inner join person_order pv on p.id = pv.person_id
   inner join menu on menu.id = pv.menu_id
   inner join pizzeria p2 on p2.id = menu.pizzeria_id
   where p.gender = 'male')
   union
   (select p2.name
from person p inner join person order pv on p.id = pv.person id
```

[&]quot;Dominos"

[&]quot;Papa Johns"

```
inner join menu on menu.id = pv.menu_id
inner join pizzeria p2 on p2.id = menu.pizzeria_id
where p.gender = 'male'
except
select p2.name
from person p inner join person_order pv on p.id = pv.person_id
inner join menu on menu.id = pv.menu_id
inner join pizzeria p2 on p2.id = menu.pizzeria_id
where p.gender = 'female')
order by 1
```

- The result is below (raw ordering should be the same like below)

"Papa Johns"

No



Exercise 05

Checks for the file day03_ex05.sql

- The SQL script looks like below.

```
select p2.name
from person_visits inner join person p on p.id = person_visits.person_id
  inner join pizzeria p2 on p2.id = person_visits.pizzeria_id
where p.name = 'Andrey'
except
select p2.name
from person_order inner join person p on p.id = person_order.person_id
  inner join menu m on m.id = person_order.menu_id
  inner join pizzeria p2 on p2.id = m.pizzeria_id
where p.name = 'Andrey'
order by 1
```

- The result is below (raw ordering should be the same like below)

"Pizza Hut"

No



Exercise 06

Checks for the file day03_ex06.sql

- The SQL script looks like below.

select m1.pizza_name, p1.name as pizzeria_name_1, p2.name as pizzeria_name_2, m1.pri ce

from menu m1 inner join menu m2 on m1.id <> m2.id and m1.price = m2.price and m

1.pizzeria_id > m2.pizzeria_id and

m1.pizza_name = m2.pizza_name inner join pizzeria p1 on m1.pizzeria_id = p1.id inner join pizzeria p2 on m2.pizzeria_id = p2.id order by 1

- The result is below (raw ordering should be the same like below)

cheese pizza Best Pizza Papa Johns 700 pepperoni pizza DinoPizza Best Pizza 800 supreme pizza Best Pizza DoDo Pizza 850

No



Exercise 07

Checks for the file day03_ex07.sql

- The SQL script looks like below.

insert into menu(id,pizzeria_id,pizza_name,price) values (19,2, 'greek pizza', '800')

- The check script is below.

```
select count(*)=1 as check
from menu
where id = 19 and pizzeria_id=2 and pizza_name = 'greek pizza' and price=800
```

- The result is below

true

No



Exercise 08

Checks for the file day03_ex08.sql

- The SQL script looks like below.

insert into menu(id,pizzeria_id,pizza_name,price) values
 ((select max(id)+1 from menu),(select id from pizzeria where name = 'Dominos'), 'sicilia
n pizza' ,900)

- The check script is below.

```
select count(*)=1 as check
from menu
where id = 20 and pizzeria_id=2 and pizza_name = 'sicilian pizza' and price=900
```

- The result is below

true





Exercise 09

Checks for the file day03_ex09.sql

- The SQL script looks like below.

insert into person_visits(id, person_id, pizzeria_id, visit_date) values ((select max(id)+1 from person_visits), (select id from person where name = 'Denis'), (select id from pizzeria where name = 'Dominos'), '2022-02-24') insert into person_visits(id, person_id, pizzeria_id, visit_date) values ((select max(id)+1 from person_visits), (select id from person where name = 'Irina'), (select id from pizzeria where name = 'Dominos'), '2022-02-24')

- The check script is below.

```
select count(*)=2 as check
from person_visits
where visit_date = '2022-02-24' and person_id in (6,4) and pizzeria_id=2;
```

- The result is below

true





Exercise 10

Checks for the file day03_ex10.sql

- The SQL script looks like below.

insert into person_order(id, person_id, menu_id, order_date) values
((select max(id)+1 from person_order), (select id from person where name = 'Denis'),
(select id from menu where pizza_name = 'sicilian pizza'), '2022-02-24')

insert into person_order(id, person_id, menu_id, order_date) values
((select max(id)+1 from person_order), (select id from person where name = 'Irina'),
(select id from menu where pizza_name = 'sicilian pizza'), '2022-02-24')

- The check script is below.

```
select count(*)=2 as check
from person_order
where order_date = '2022-02-24' and person_id in (6,4) and menu_id=(select id from me
nu where pizza_name = 'sicilian pizza')
```

- The result is below

true





Exercise 11

Checks for the file day03_ex11.sql

- The SQL script looks like below.

```
update menu
set price = price-price*0.1
where pizza_name = 'greek pizza'
```

- The check script is below.

```
select (800-800*0.1) = price as check
from menu
where pizza_name ='greek pizza'
```

- The result is below (raw ordering should be the same like below)

true





Exercise 12

Checks for the file day03_ex12.sql

- The SQL script looks like below.

```
insert into person_order(id,person_id,menu_id,order_date)
select
   g+(select max(id) from person_order) as id,
   id as person_id,
   (select id from menu where pizza_name = 'greek pizza') as menu_id,
   '2022-02-25' as order_date
from person inner join
generate_series(1,(select count(*) from person)) as g on g= person.id
```

- The check script is below.

```
select count(*)=9 as check
from person_order
where order_date='2022-02-25' and menu_id = (select id from menu where pizza_name =
'greek pizza')
```

- The result is below

true





Exercise 13

Checks for the file day03_ex13.sql

- The SQL script looks like below.

```
delete from person_order where order_date = '2022-02-25';
delete from menu where pizza_name = 'greek pizza';
```

- The check script is below.

```
select count(*)=0 as check
from person_order
where order_date='2022-02-25' and menu_id = (select id from menu where pizza_name =
'greek pizza')
```

- The result is below

true

- The check script is below.

```
select count(*)=0 as check
from menu
where pizza_name = 'greek pizza'
```


- The result is below

true

No



Feedback

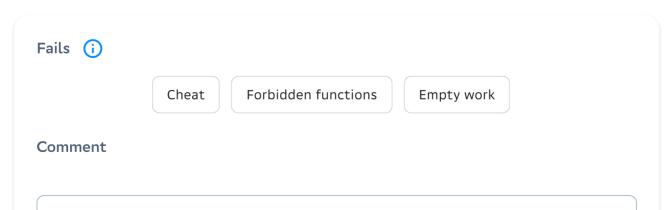

2/12/23, 2:21 PM IIIкола 21

Leave a Commenc...

✓ Review