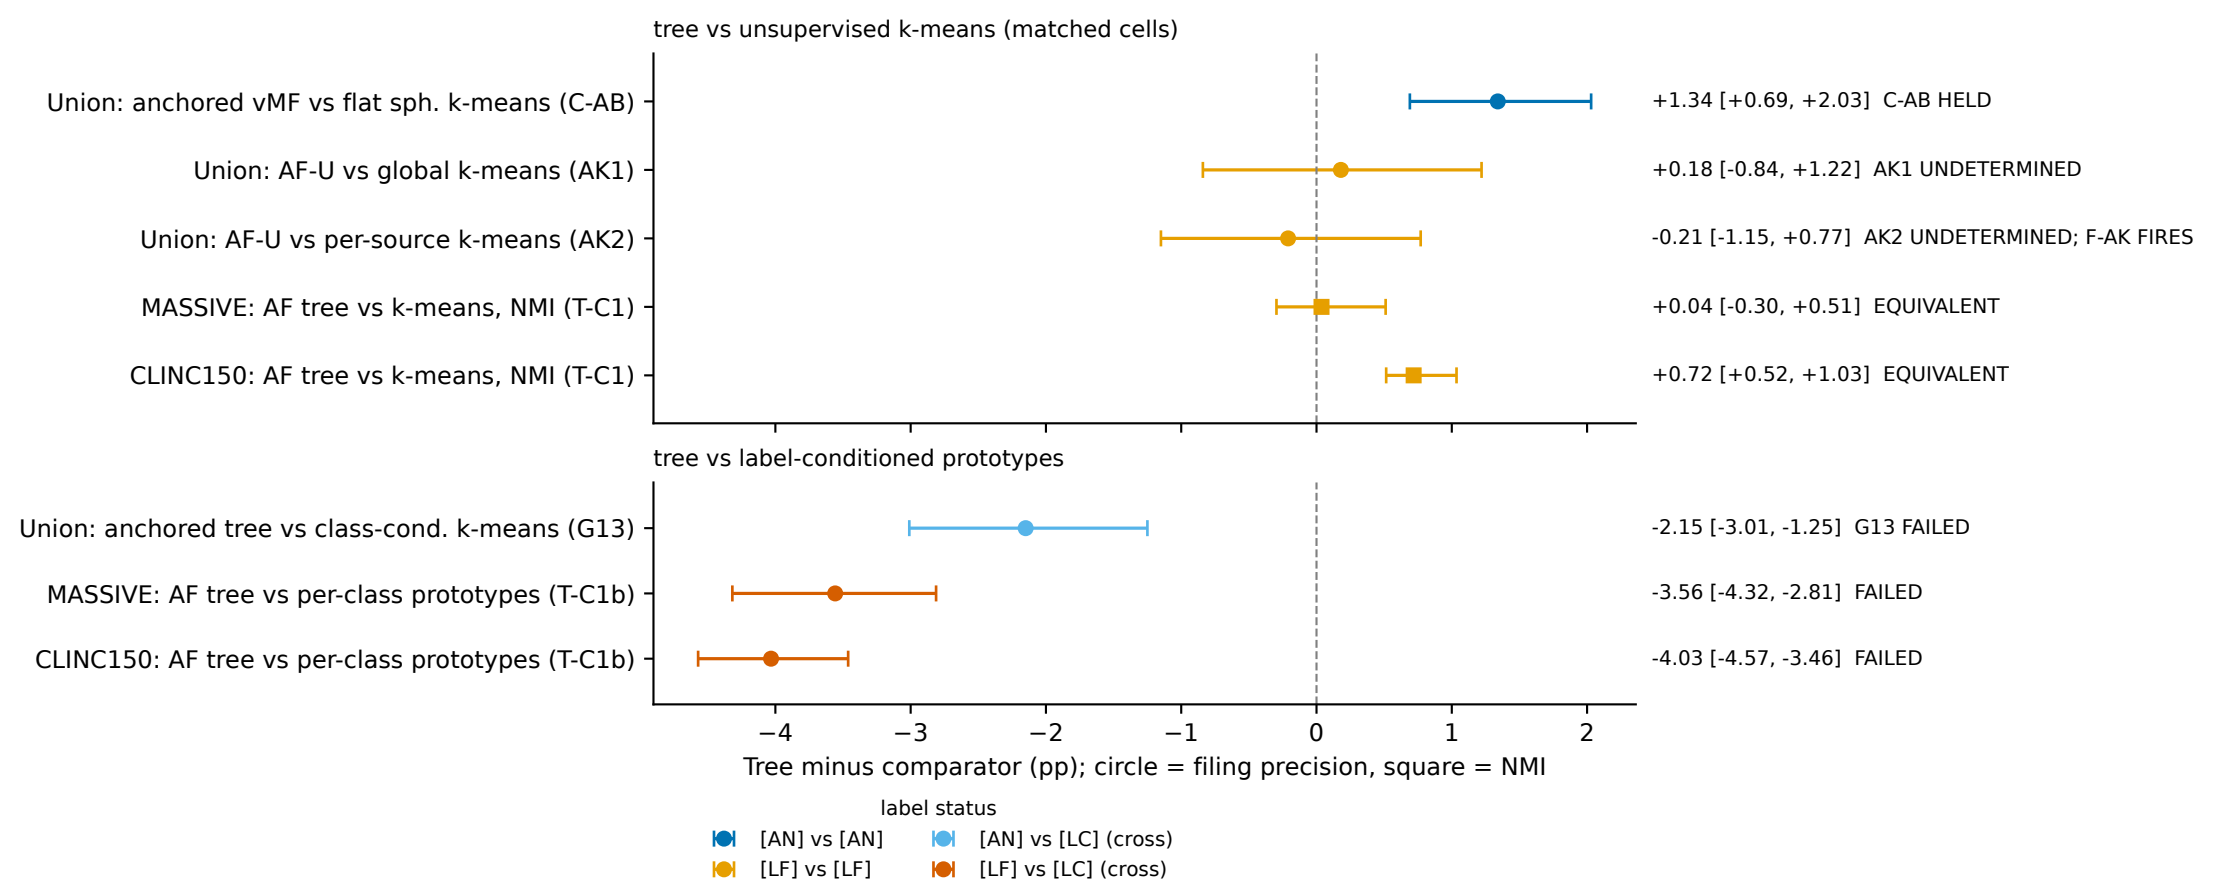
tree vs unsupervised k-means (matched cells)
Union: anchored vMF vs flat sph. k-means (C-AB)
Union: AF-U vs global k-means (AK1)
Union: AF-U vs per-source k-means (AK2)
MASSIVE: AF tree vs k-means, NMI (T-C1)
CLINC150: AF tree vs k-means, NMI (T-C1)
+1.34 [+0.69, +2.03] C-AB HELD
+0.18 [-0.84, +1.22] AK1 UNDETERMINED
-0.21 [-1.15, +0.77] AK2 UNDETERMINED; F-AK FIRES
+0.04 [-0.30, +0.51] EQUIVALENT
+0.72 [+0.52, +1.03] EQUIVALENT
tree vs label-conditioned prototypes
Union: anchored tree vs class-cond. k-means (G13)
MASSIVE: AF tree vs per-class prototypes (T-C1b)
CLINC150: AF tree vs per-class prototypes (T-C1b)
-2.15 [-3.01, -1.25] G13 FAILED
-3.56 [-4.32, -2.81] FAILED
-4.03 [-4.57, -3.46] FAILED
−4
−3
−2
−1
0
1
2
Tree minus comparator (pp); circle = filing precision, square = NMI
label status
[AN] vs [AN]
[AN] vs [LC] (cross)
[LF] vs [LF]
[LF] vs [LC] (cross)