

Bandit Level 0

Step 1: Find the IP of bandit.labs.overthewire.org

```
nslookup bandit.labs.overthewire.org
```

```
(kali㉿kali)-[~]
└─$ nslookup bandit.labs.overthewire.org
Server:      100.127.255.165
Address:     100.127.255.165#53

Non-authoritative answer:
Name:   bandit.labs.overthewire.org
Address: 13.53.215.123
```

Looking for IP of bandit.labs.overthewire.org

Step 2: Establish the SSH Session

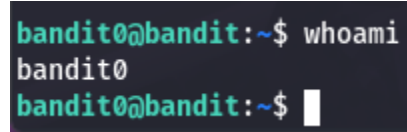
```
ssh -p 2220 bandit0@13.53.215.123
```

[illegible]

ssh connection establishment.

Step 3: Check who you are logged in

whoami

A terminal window with a dark background. The prompt 'bandit0@bandit:~\$' is shown in green. The command 'whoami' is entered in white. The output 'bandit0' is displayed in white on the next line. The prompt 'bandit0@bandit:~\$' is shown again in green on the following line, followed by a white cursor bar.

```
bandit0@bandit:~$ whoami
bandit0
bandit0@bandit:~$
```

This is to check whether you are logged in or not.