


```

SELECT EVENTPLAN.PLANNO, EVENTPLAN.EVENTNO,EVENTREQUEST.DATEHELD,
EVENTPLAN.ACTIVITY
FROM EVENTPLAN INNER JOIN EVENTREQUEST ON EVENTPLAN.EVENTNO=EVENTREQUEST.EVENTNO
INNER JOIN FACILITY ON EVENTREQUEST.FACNO=FACILITY.FACNO
WHERE EVENTPLAN.WORKDATE BETWEEN '01/12/2013' AND '31/12/2013'
AND FACILITY.FACNAME='Basketball arena';

```

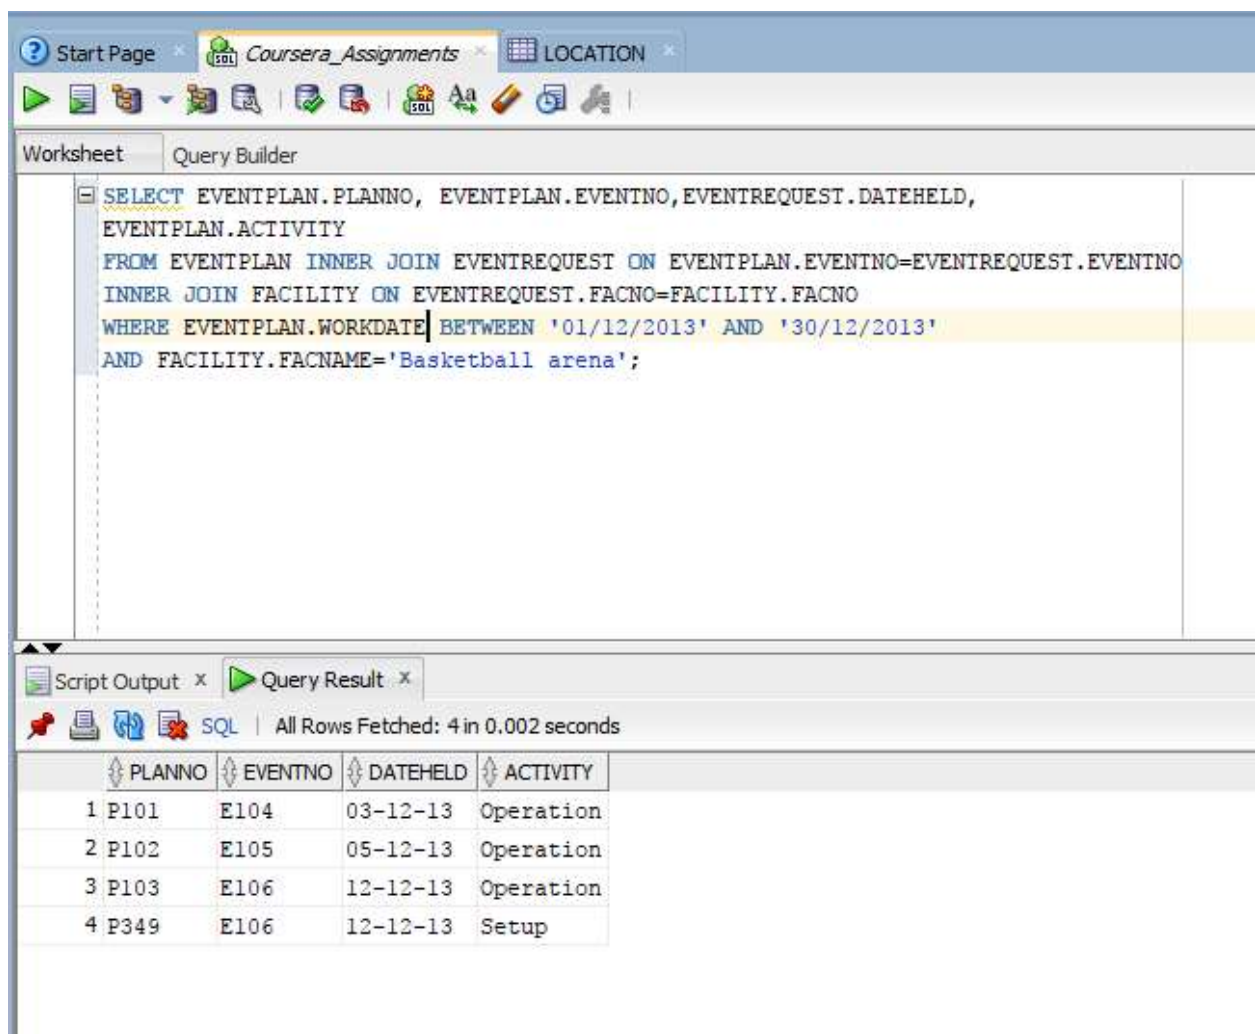

The screenshot shows a SQL query editor window with the following query:

```

SELECT EVENTPLAN.PLANNO, EVENTPLAN.EVENTNO,EVENTREQUEST.DATEHELD,
EVENTPLAN.ACTIVITY
FROM EVENTPLAN INNER JOIN EVENTREQUEST ON EVENTPLAN.EVENTNO=EVENTREQUEST.EVENTNO
INNER JOIN FACILITY ON EVENTREQUEST.FACNO=FACILITY.FACNO
WHERE EVENTPLAN.WORKDATE BETWEEN '01/12/2013' AND '30/12/2013'
AND FACILITY.FACNAME='Basketball arena';

```

The query results are displayed in a table with the following columns: PLANNO, EVENTNO, DATEHELD, and ACTIVITY. The results show 4 rows of data.

	PLANNO	EVENTNO	DATEHELD	ACTIVITY
1	P101	E104	03-12-13	Operation
2	P102	E105	05-12-13	Operation
3	P103	E106	12-12-13	Operation
4	P349	E106	12-12-13	Setup