


NAME - SPANDAN SWARUP NADA  
REGD NO- 2341014022  
SEC-23412K1  
DATE- 19/02/26

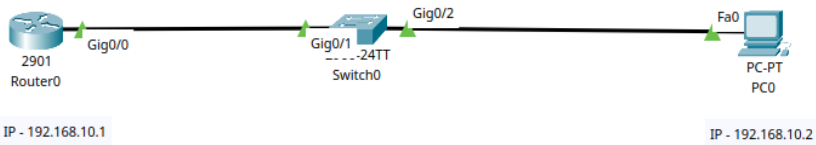

Router0

Physical Config CLI Attributes

IOS Command Line Interface

```
Router>en
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface gig0/0
Router(config-if)#ip address 192.168.10.1 255.255.255.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state to up

Router(config-if)#exit
Router(config)#username SPANDAN privilege 15 password spandan
Router(config)#line vty 0 4
Router(config-line)#login local
Router(config-line)#transport input telnet
Router(config-line)#exit
Router(config)#service password-encryption
Router(config)#enable secret class
```

PC0

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>telnet 192.168.10.1
Trying 192.168.10.1 ...Open

User Access Verification

Username: SPANDAN
Password:
Router>
```

PC0

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>telnet 192.168.10.1
Trying 192.168.10.1 ...Open

User Access Verification

Username: SPANDAN
Password:
Router>ssh -l SPANDAN 192.168.10.1

Password:

R1>
```

```
Router(config)#hostname R1
R1(config)#ip domain-name spandan.com
R1(config)#crypto key generate rsa
The name for the keys will be: R1.spandan.com
Choose the size of the key modulus in the range of 360 to 2048 for your
General Purpose Keys. Choosing a key modulus greater than 512 may take
a few minutes.

How many bits in the modulus [512]: 1024
% Generating 1024 bit RSA keys, keys will be non-exportable...[OK]

R1(config)#ip ssh version 2
*Mar 1 0:7:49.506: %SSH-5-ENABLED: SSH 1.99 has been enabled
R1(config)#line vty 0 4
R1(config-line)#transport input ssh
R1(config-line)#login local
R1(config-line)#exit
R1(config)#
```