


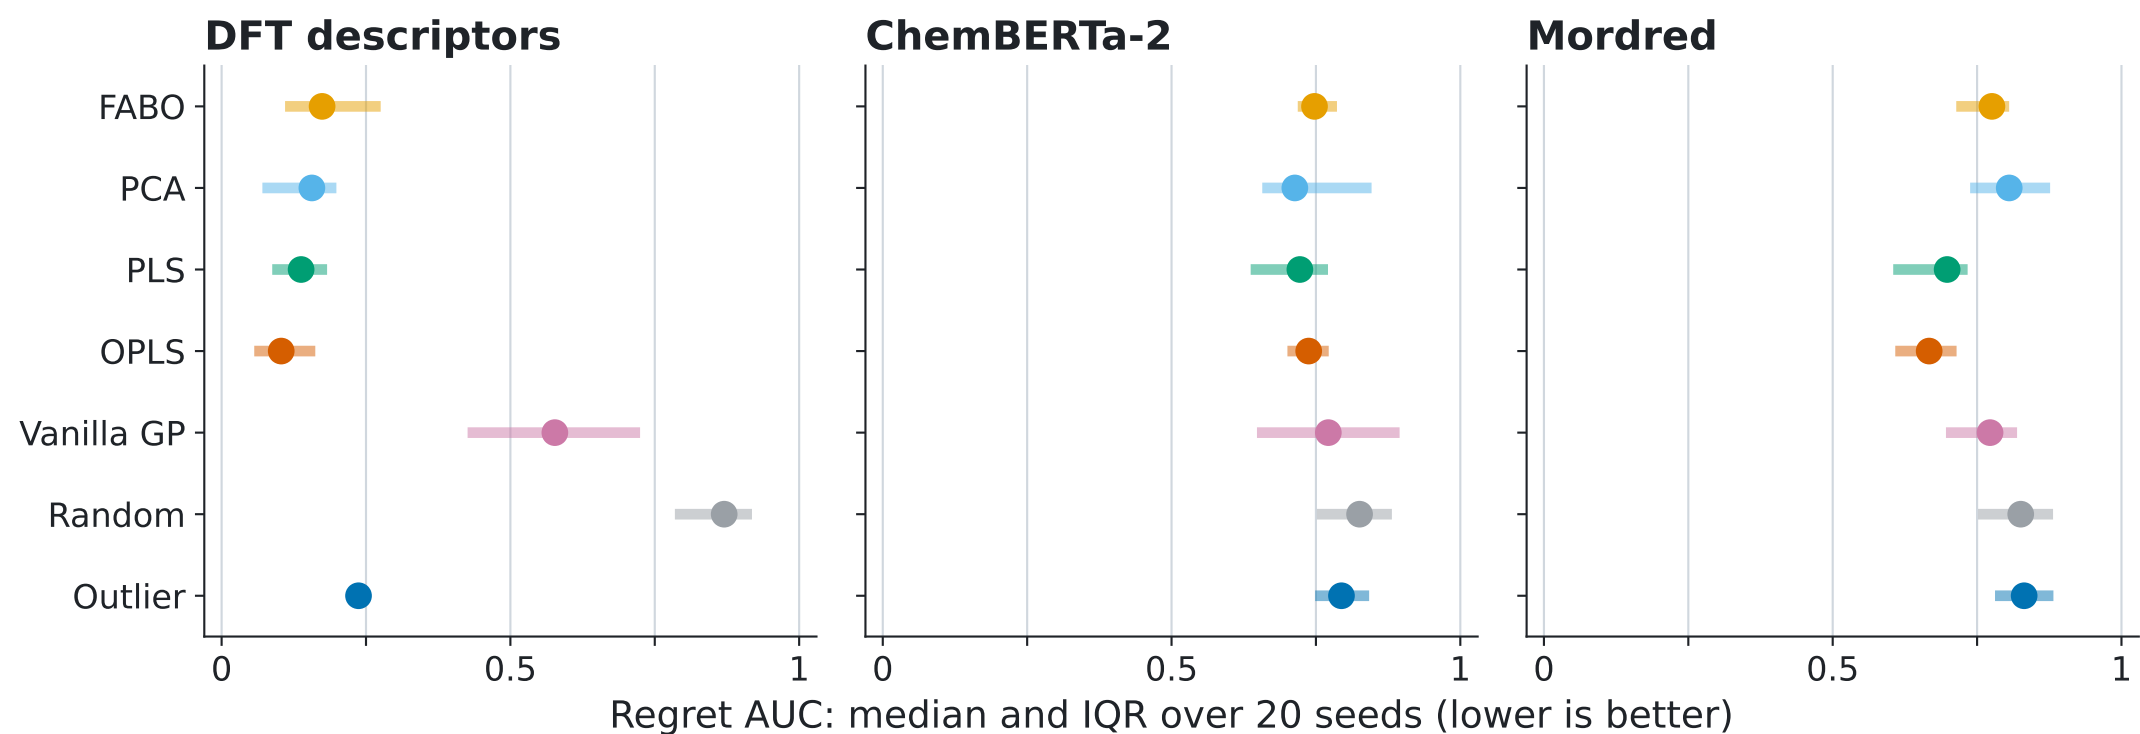

	BO method vs outlier heuristic			BO method vs random search		
	DFT descriptors	ChemBERTa-2	Mordred	DFT descriptors	ChemBERTa-2	Mordred
FABO	-0.48	-0.77*	-0.88*	-1.00*	-0.44	-0.35
PCA	-0.77*	-0.87*	-0.24	-1.00*	-0.55	+0.12
PLS	-0.79*	-0.97*	-0.91*	-1.00*	-0.65	-0.63
OPLS	-0.96*	-0.86*	-0.98*	-1.00*	-0.59	-0.73*
Vanilla GP	+0.89*	-0.17	-0.73*	-0.85*	-0.04	-0.27
	DFT descriptors	ChemBERTa-2	Mordred	DFT descriptors	ChemBERTa-2	Mordred

Paired rank-biserial r on regret AUC (negative = BO method better; * Holm $p < 0.05$)