
Back-of-the-envelope+: what can a fixed qubit budget buy?

One week · p = 10^{-3} · ε = 0.001 (1% relative at D* = 0.1) · 10 ns gates / 240 ns code cycles

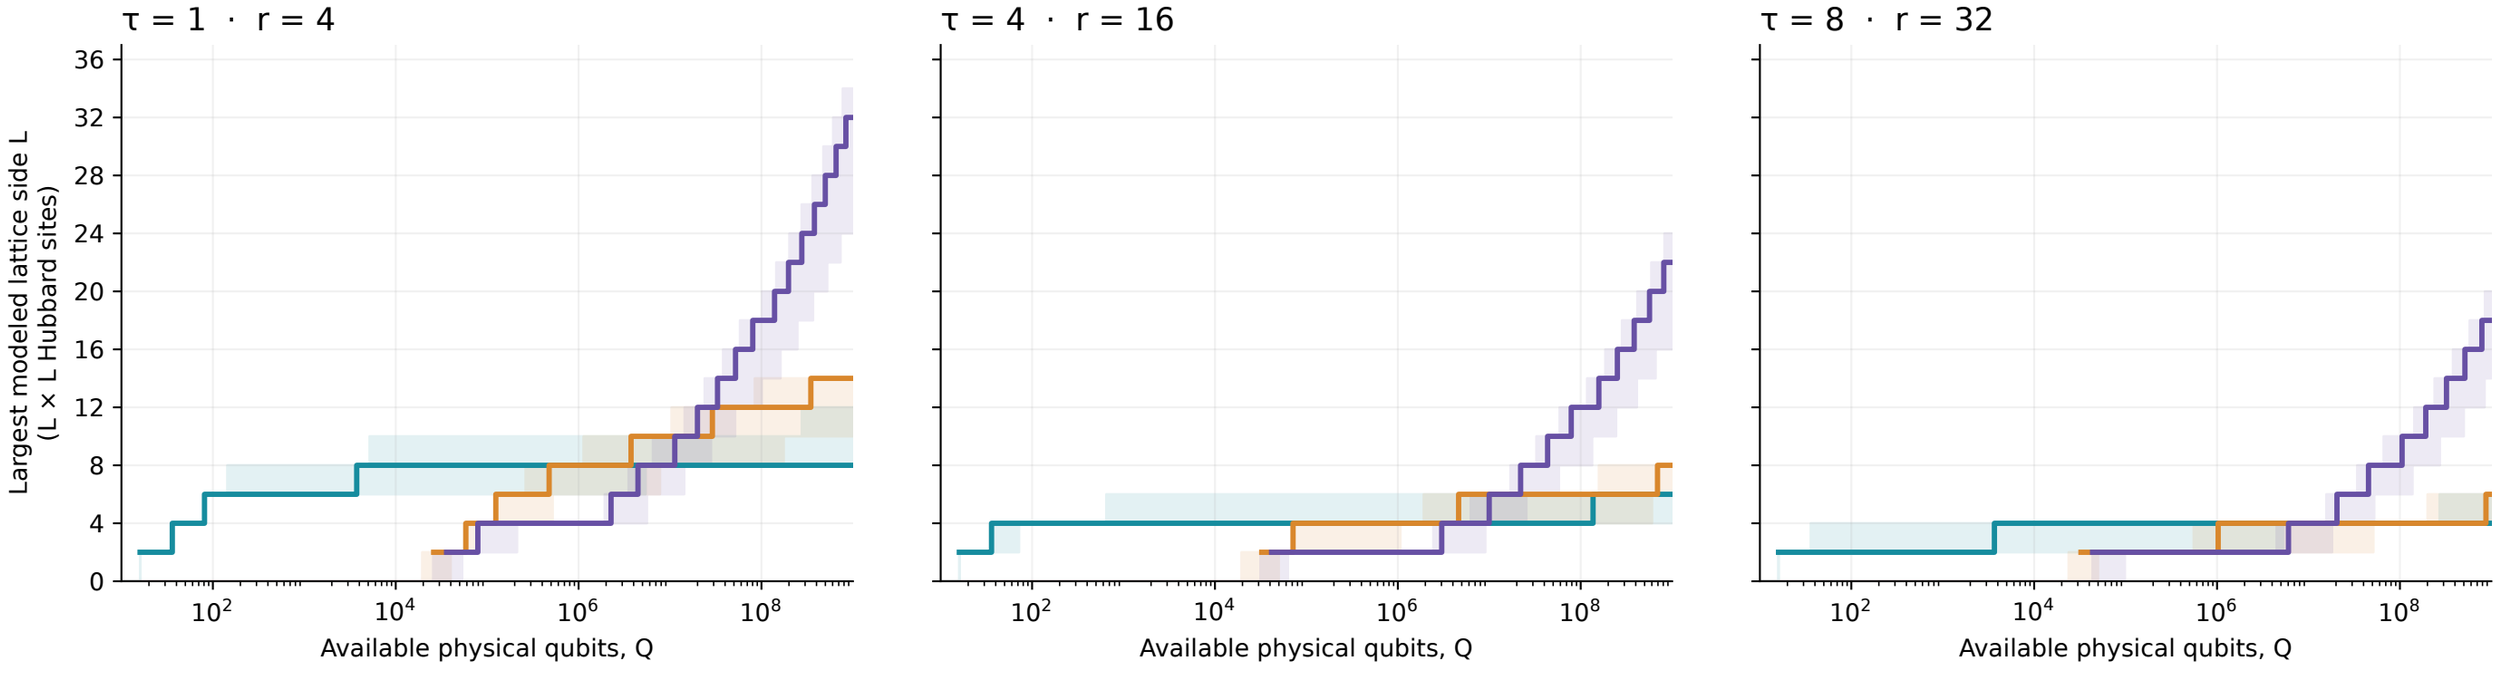

Bands: declared scenarios, not confidence intervals. Effective NISQ overhead is assumed; Trotter and mitigation biases are assumed affordable.
STAR uses termwise Strang; FTQC uses plaquettes; NISQ uses a Willow-anchored proxy. Even L only; full-lattice costs, without physical-cone truncation.