Locality and postselection constrain different parts of the calculation

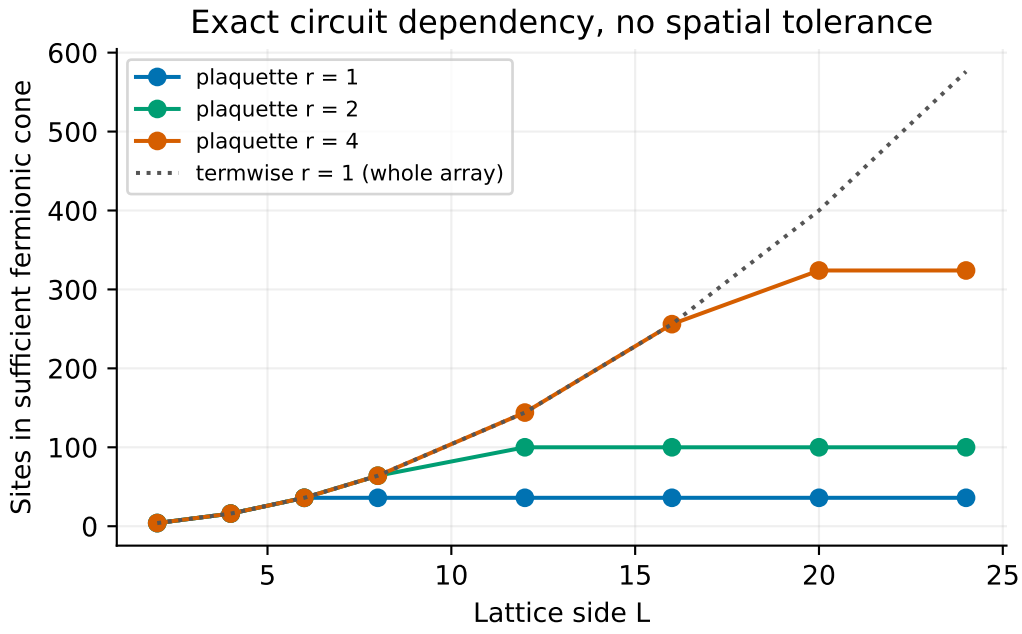

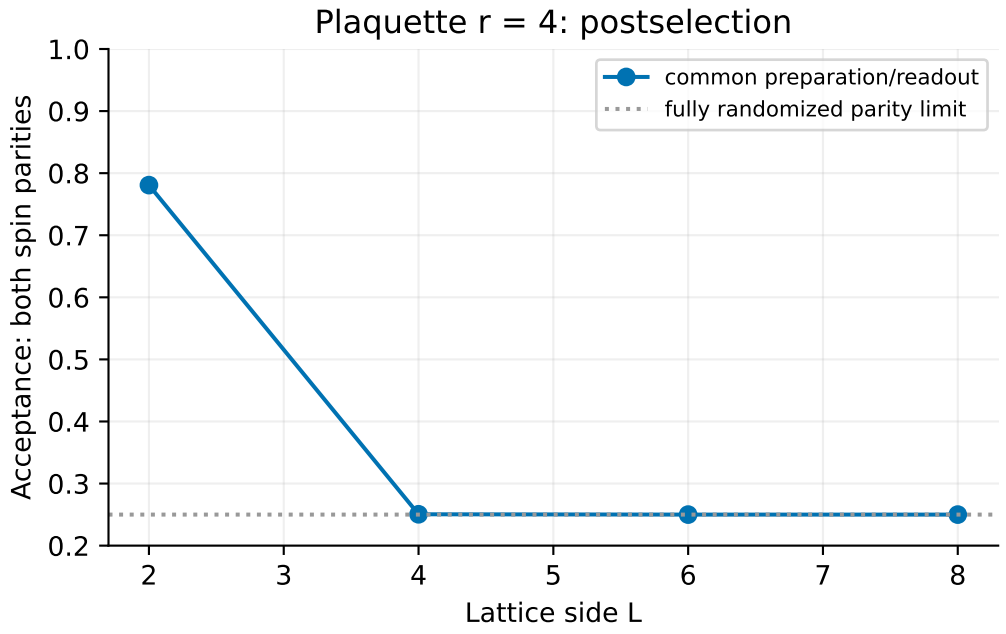

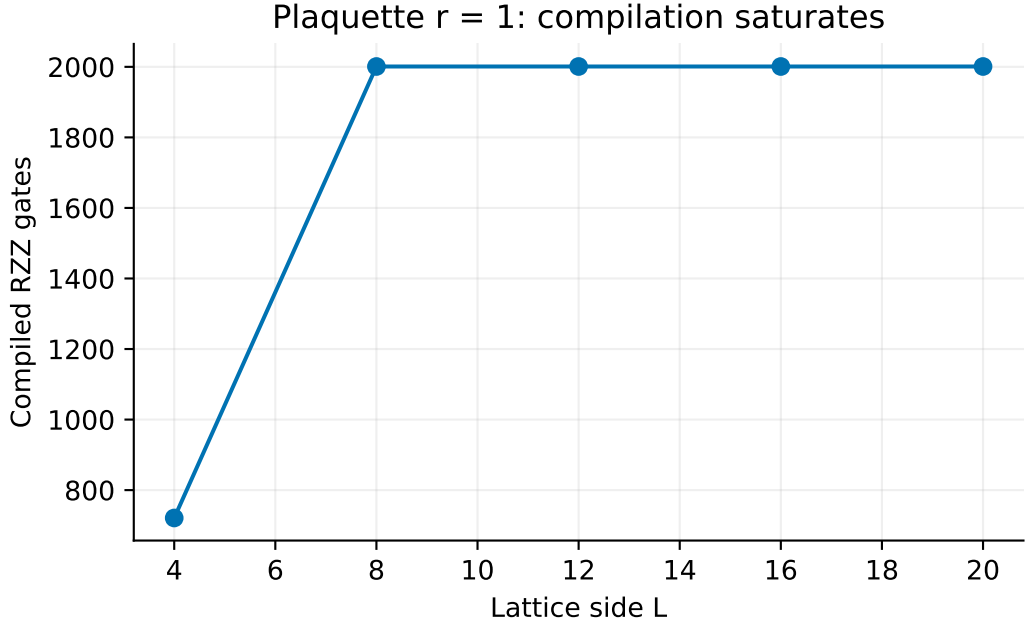

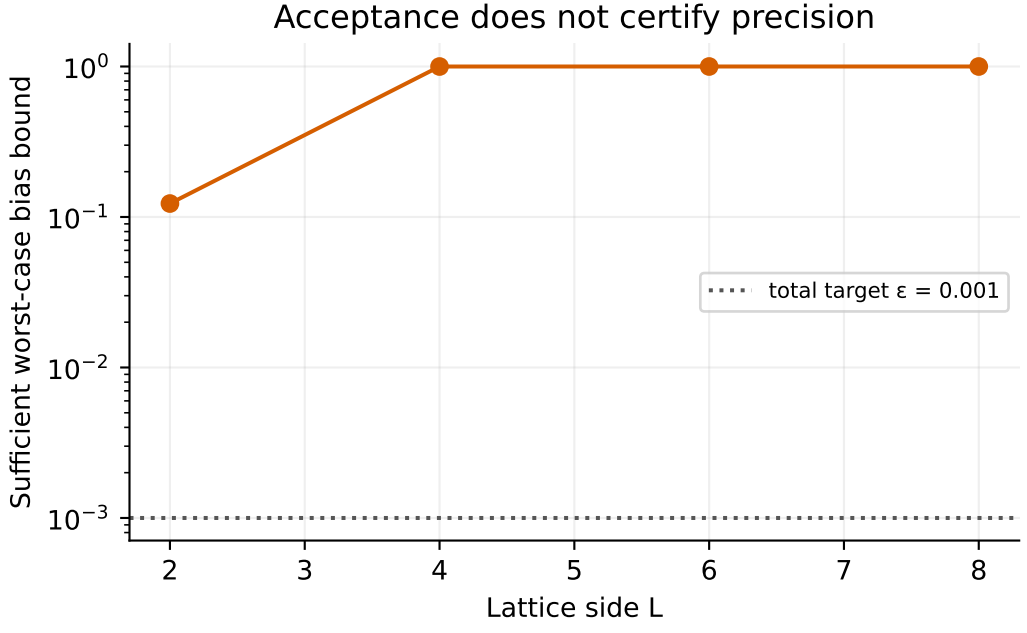

Bounds are sufficient, not measured biases. Cone restriction applies to all architectures; r is not Trotter-calibrated.