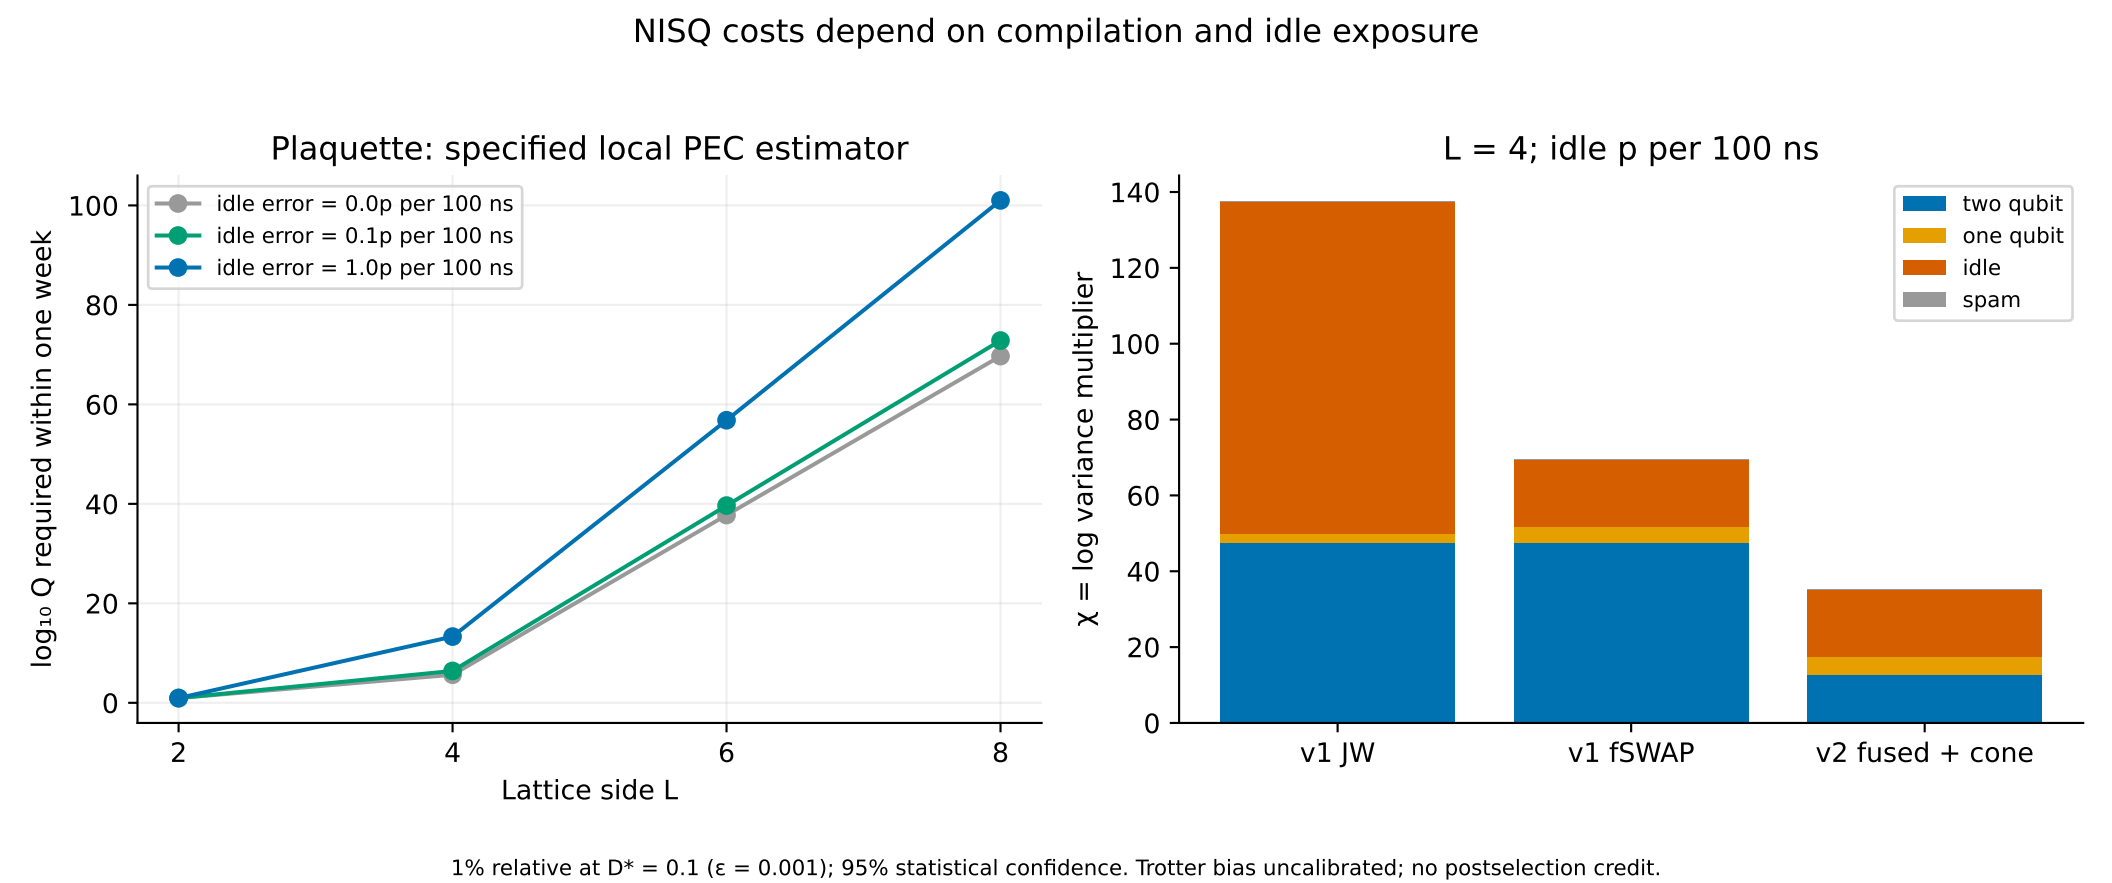
NISQ costs depend on compilation and idle exposure
Plaquette: specified local PEC estimator
idle error = 0.0p per 100 ns
idle error = 0.1p per 100 ns
idle error = 1.0p per 100 ns
log₁₀ Q required within one week
Lattice side L
L = 4; idle p per 100 ns
two qubit
one qubit
idle
spam
χ = log variance multiplier
v1 JW
v1 fSWAP
v2 fused + cone
1% relative at D* = 0.1 (ε = 0.001); 95% statistical confidence. Trotter bias uncalibrated; no postselection credit.