


KV Block Lifecycle


Local metadata controls visibility; ModelRunner owns the physical K/V tensor.

Local allocation and prefix reuse

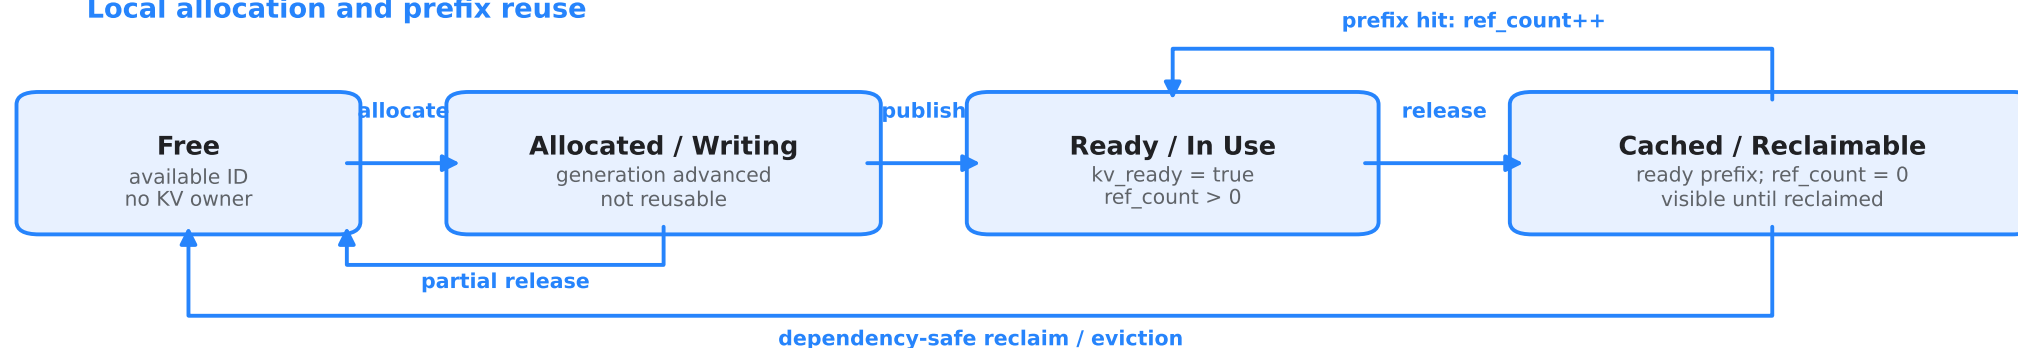

Transactional cross-GPU transfer

entry: ready source + reserved target

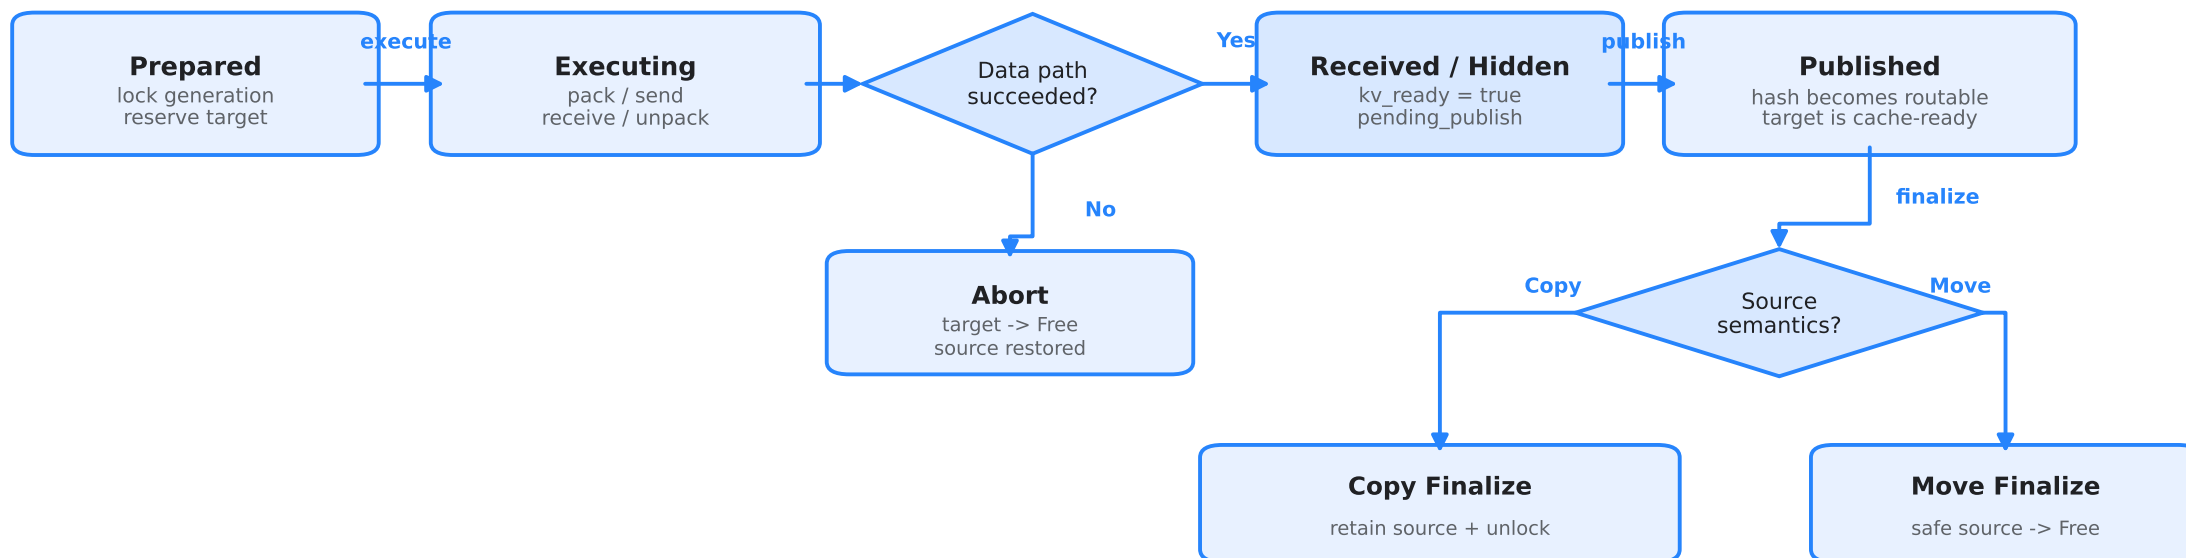

Only published ready blocks are routable; reserved and received-but-hidden blocks remain invisible.