



त्रिभुवन विश्वविद्यालय
Tribhuvan University

Patan Multiple Campus

Bachelor in Information Technology (BIT)

Practical file

Subject : Introduction to Information Technology
Course No : BIT101
Batch : 2083
Semester : 1st

Submitted To:
Deo N. Yadav
(Associate Professor)

Submitted by:
Name: Saroj Regmi
Roll No: 06

1. What are the boot files of DOS operating system. Explain the function of each.

2. Write the function of following commands and their syntax in the lab sheet. Run and test each command in Lab.

2.1. **cls**

cls command is used to clear the screen.

syntax:

```
cls
```

```
C:\Users\saroj\test>dir
Volume in drive C has no label.
Volume Serial Number is 00DE-FB98

Directory of C:\Users\saroj\test

10/05/2026  10:52 AM    <DIR>          .
10/05/2026  10:52 AM    <DIR>          ..
               0 File(s)                0 bytes
               2 Dir(s)  11,950,551,040 bytes free

C:\Users\saroj\test>cls
```

Figure 1: Before using the `cls` command

```
C:\Users\saroj\test>
```

Figure 2: After using the cls command

2.2. **time**

time command is used to display or set the system time. If used without parameters, it displays the current system time and prompts you to enter a new time.

syntax:

```
time [/t | [<HH>[:<MM>[:<SS>]] [am|pm]]]
```

```
C:\Users\saroj\test>time
The current time is: 11:01:39.01
Enter the new time: 
```

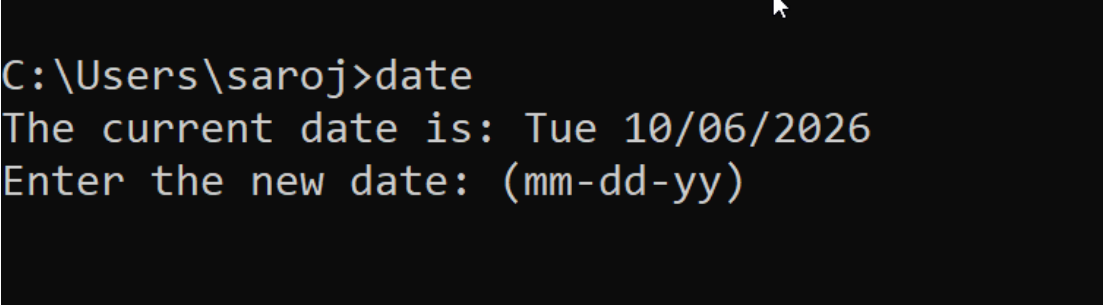
Figure 3: An example of time command.

2.3. date

date command is used to display or set the system date. If used without parameters, it displays the current system date and prompts you to enter a new date. It is very similar to the time command above.

syntax:

```
date [/t | <month-day-year>]
```

A screenshot of a Windows command prompt window. The prompt is 'C:\Users\saroj>'. The user has entered 'date'. The output is 'The current date is: Tue 10/06/2026' followed by 'Enter the new date: (mm-dd-yy)'.

```
C:\Users\saroj>date
The current date is: Tue 10/06/2026
Enter the new date: (mm-dd-yy)
```

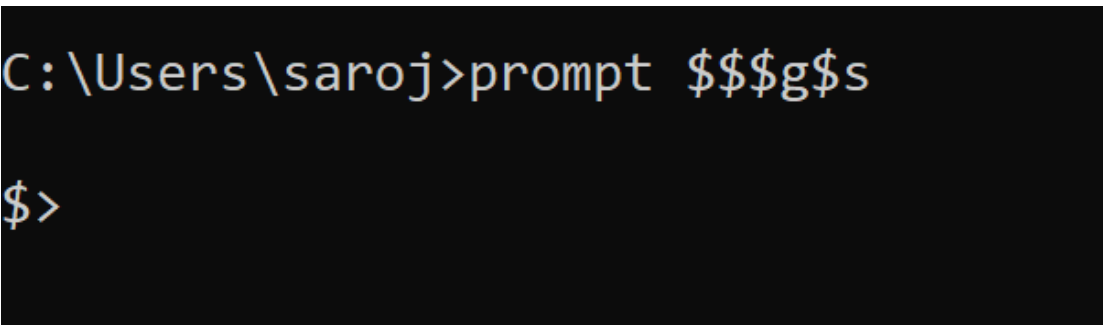
Figure 4: An example of date command.

2.4. prompt

prompt command is used to set the current prompt syntax, which will get expanded when the user is using the cmd. The line of text that is present before the user types the command in cmd is called prompt. It is generally in the format of %p\$g which expands to current directory and a greater than symbol ">". as shown in the figure below. This prompt can be changed into anything you like be it current directory and = symbol to only your name. we can explore the available prompt options using the command prompt /?

syntax:

```
prompt [<text>]
```

A screenshot of a Windows command prompt window. The prompt is 'C:\Users\saroj>'. The user has entered 'prompt \$\$\$g\$s'. The output is '\$>'.

```
C:\Users\saroj>prompt $$$g$s
$>
```

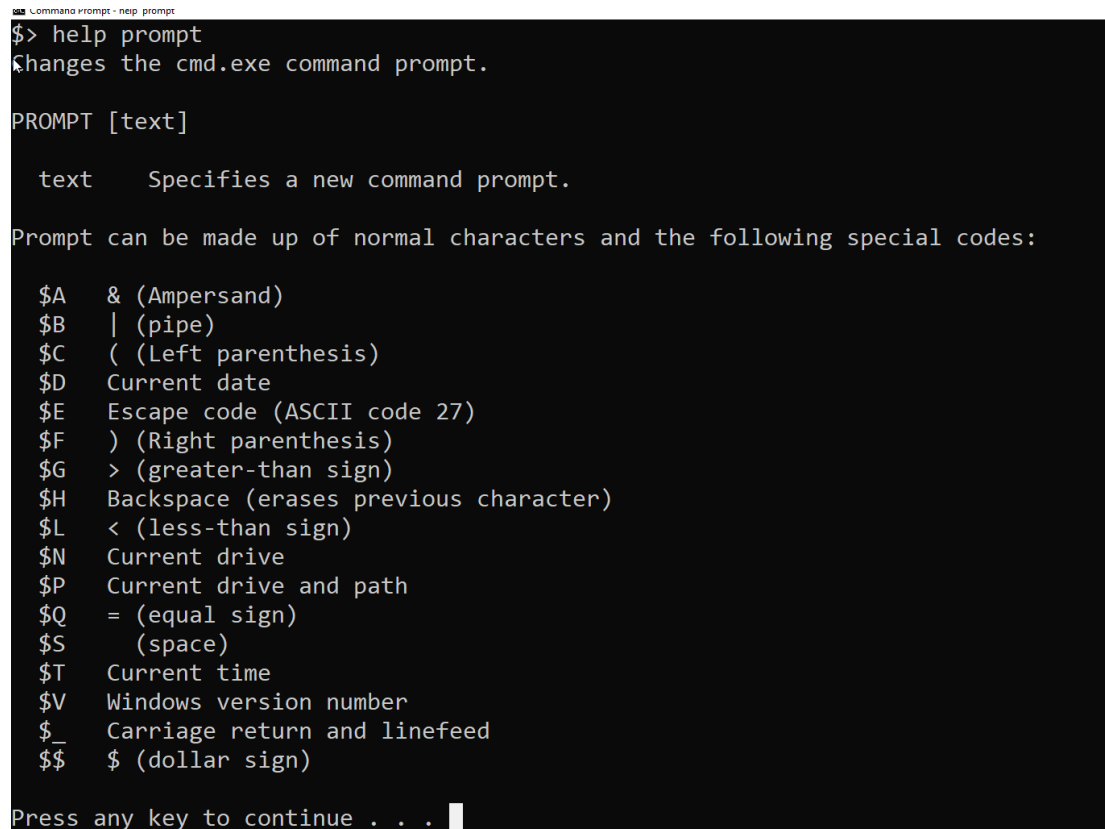
Figure 5: An example of setting prompt very minimal popular unix prompt \$> .

2.5. help

help command displays a list of the available commands or detailed help information on a specified command. If used without parameters, help lists and briefly describes every system command.

syntax:

```
help [<command>]
```



```
Windows Command Prompt - help prompt
$> help prompt
Changes the cmd.exe command prompt.

PROMPT [text]

text    Specifies a new command prompt.

Prompt can be made up of normal characters and the following special codes:

$A    & (Ampersand)
$B    | (pipe)
$C    ( (Left parenthesis)
$D    Current date
$E    Escape code (ASCII code 27)
$F    ) (Right parenthesis)
$G    > (greater-than sign)
$H    Backspace (erases previous character)
$L    < (less-than sign)
$N    Current drive
$P    Current drive and path
$Q    = (equal sign)
$S    (space)
$T    Current time
$V    Windows version number
$_    Carriage return and linefeed
$$    $ (dollar sign)

Press any key to continue . . .
```

Figure 6: An example of using help command to see help info about prompt command.

3. What is wildcard? What are two wildcard characters. Explain with example.