
7. Upload scan data flow

Chat files in nextjsapp never go straight to a public bucket. The browser uploads into quarantine. ClamAV on the existing VPS decides whether a copy may exist in the clean bucket. A second EC2 instance is not created.

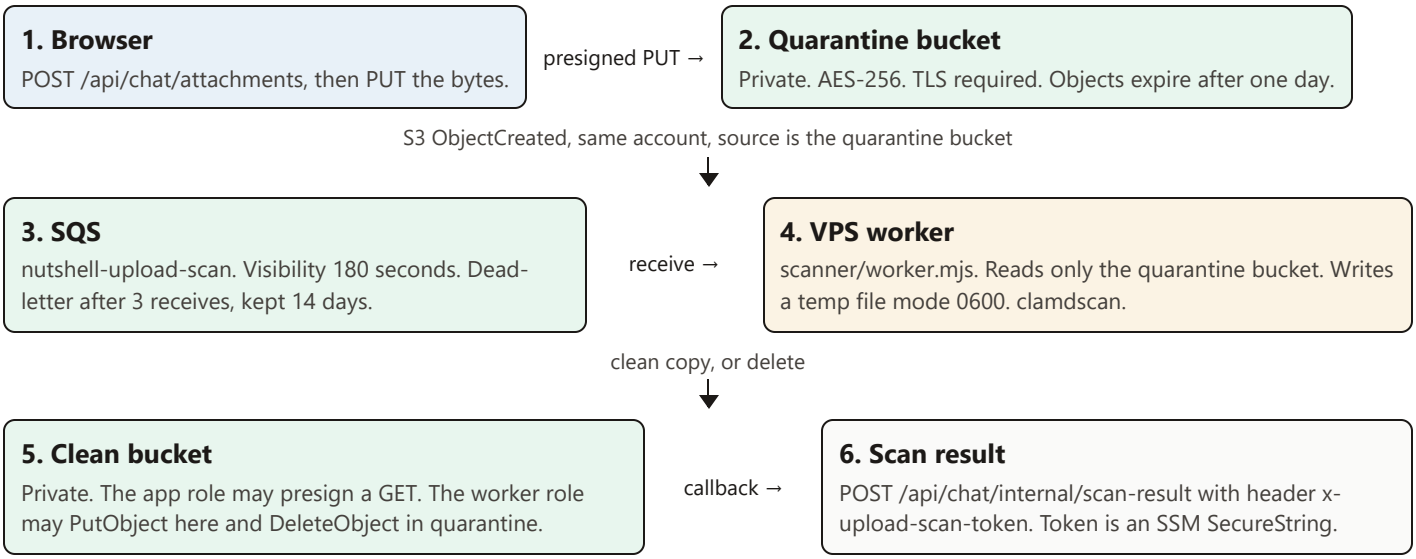

- The app role, `nutshell-upload-app`, may presign a quarantine PUT and a clean GET. It cannot read quarantine or delete objects.
- The VPS role may get and delete quarantine objects, put clean objects, and consume the scan queue.
- An object larger than the limit is deleted from quarantine and reported, not copied.
- A clean decision that did not land in the clean bucket is a failure and stays on the queue.
- If `upload_app_base_url` is empty, Terraform still installs the unit and leaves the worker stopped. The callback URL must be https.

The worker source installed on the VPS is taken from the local nextjsapp checkout at apply time. hackohio-2026's Nutty route does not perform this scan.