8. buck-track data flow

buck-track is the git changelog. The ticket API does not call it. A card change becomes a new version file. When the board directory is its own git root, that version is also one commit.

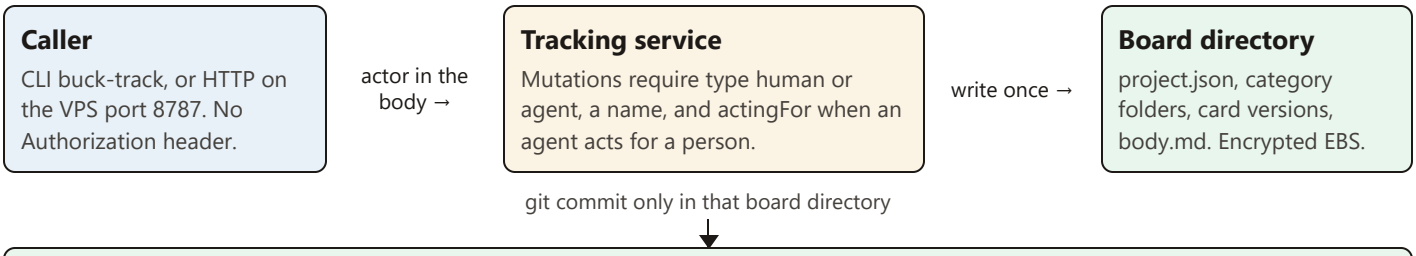

Call	What is written
Create project	project.json and git init on that directory only.
Add category	A column folder. No commit by itself.
Create card	Next id, version v1 kind create, then a commit.
Edit or move	Next main version. A move renames the folder and keeps older version files unchanged.
Open draft	A side version such as v2b. The card head stays on the main version. A second open draft returns draft_conflict.
Discard draft	A new version kind discard. The draft file is not rewritten.
Link commits	Version kind link_commits. Each commit has sha, summary, additions, and deletions.
Review	approve or request_changes. Sets needsHumanApproval.
History, compare, events, CSV	Reads. No actor. Newest first. since is an ISO timestamp.

This actor is a name, not a bearer. The ticket API actor is an id plus a token. A linked commit on a ticket is sha, message, added, and removed. Those two records are not the same write.