[Guide] ML-Ivy_Bridge-HD4000-7_series-hdmi_audio_dsdt_edits

Mountain Lion HDMI Audio
Ivy Bridge –
HD4000 Graphics/7 Series Motherboards w/AMI EFI/DSDT

A simple HDMI Audio dsdt editing tool for OS X HDMI audio on 7 Series motherboards with HD4000 graphics. Based on the MaciASL built by SJ_UnderWater, the Apply button automatically makes the HDMI audio dsdt edits.

Verify AMI dsdt (1st line)
DefinitionBlock ("./dsdt.aml", "DSDT", 2, "ALASKA", "A M I", 0x000000..)

Benefits
1. Automated HDMI audio dsdt editing
2. Installs HD4000 integrated graphics HDMI audio dsdt edits
3. Installs AMD/Nvidia discrete graphics card HDMI audio dsdt edits
4. No copy, no paste, no finding the right place to paste….

Before You Start:
1. OS X does not provide HDMI audio controls (No volume, no mute, no balance, etc.)
2. The connected HDMI device (TV, receiver, etc.) provides any and all audio controls
3. Delete any audio enablers (S/L/E/HDAEnabler1.kext)
4. Remove any property-type injection (Extra/org.chameleon.Boot.plist)

Requirements
1. Intel
1a. Ivy Bridge 7 Series motherboards - Z77, H77, B75, Q77
1b. Not supported - X79
2. OS X
2a. Mountain Lion - 10.8.2 and newer
3. dsdt - no compile errors
3a. No dsdt, extract dsdt, see **I. Preparation**

4. Motherboard onboard audio codec
4a. Realtek supported audio codecs (8xy): 885, 887, 888, 889, 892, 898
4b. Unsupported audio codecs: ML HDMI audio works with any unsupported audio codec/no onboard audio
5. AppleHDA.kext (one of the following)
5a. ML: MultiBeast 5.2.1 or newer/Audio/Realtek ALC8xx/With DSDT/ALC...
5b. ML: Native AppleHDA.kext (unsupported audio codecs)

More Information
Special HDMI Audio Considerations
Detailed Instructions
See **Mountain Lion HDMI Audio - AMI DSDT**

Tools
1. MaciASL MaciASL | Free Development software downloads at SourceForge.net
2. IORegistryExplorer see [Guide] How to Make a Copy of IOReg
3. CarbonCopyCloner or SuperDuper
4. Download/ZIP: https://github.com/toleda/audio_hdmi_hd4000

Mountain Lion Audio IDs (10.8.2 AppleHDA.kext_v2.3.1 or newer)
1. Audio ID 1/A1: AMD/Nvidia HDMI audio with 3/5/6 port onboard audio
2. Audio ID 3/A3: HD4000 HDMI audio with 3/5/6 port onboard audio

Patches - github.com/toleda/audio_hdmi_hd4000/tree/master/Patches
IB1. AMI-EFI/Clean Compile - fix native dsdt compiler errors for successful dsdt edits
IB2. AMI-AMD-Nvidia-7_Series-A1 - AMD/Nvidia HDMI audio dsdt edits
IB3. AMI-HD4000-7_Series-A3 - HD4000 HDMI audio dsdt edits
IB4. AMI-HD4000-on-6_Series_MB - HD4000 MEI dsdt edit (apply only with IB2 or IB3)
IB5. Award-HD4000-AMD-Nvidia-6_Series-A1 - HD4000/AMD/Nvidia HDMI audio dsdt edits
Note: for A3, Find: 0x01, 0x00, 0x00, 0x00/Replace: 0x03, 0x00, 0x00, 0x00
IB6. AMI-HD4000-Laptop-FB-01-A3 - Laptop HD4000 HDMI audio dsdt edits
IB7. AMI-HD4000-Laptop-FB-03-A3 - Laptop HD4000 HDMI audio dsdt edits
IB8. Intel-HD4000-NUC - NUC HDMI audio edits (2xHDMI and TB)

Attachments
N/A HDMI audio dsdt edits are available in MaciASL/Patch

Patch File Edits
1. If the Patch file requires edits,
1a. Edit the Patch file in MaciASL Patch window or
1b. Download the Patch from:
github.com/toleda/audio_hdmi_hd4000/tree/master/Patches
Select Folder/Select Patch/Raw/Copy/Save to Desktop
edit with TextEdit and save to desktop.

Start of Procedure
HD4000/7 Series Motherboards - Mountain Lion HDMI audio edits

I. Preparation

1. Make bootable backup of system (CarbonCopyCloner or SuperDuper)
2. Make a copy of IOReg, see **Tools**/2.
3. Verify no audio enablers (S/L/E/HDAEnabler1.kext, HDAEnabler8xx.kext, etc.)
4. MultiBeast 5.2.1 or newer - Select/Drivers & Bootloaders/Drivers/Audio/Realtek ALC8xx/With DSDT/ALC8--, if Realtek ALC8xx audio,
5. Download MaciASL and install/Applications, see **Tools**/1.
6. Applications/MaciASL
7. MaciASL/Preferences/Sources/+/https://raw.github.com/toleda/audio_hdmi_hd4000/master

7a. URL: https://raw.github.com/toleda/audio_hdmi_hd4000/master

7b. Screenshot

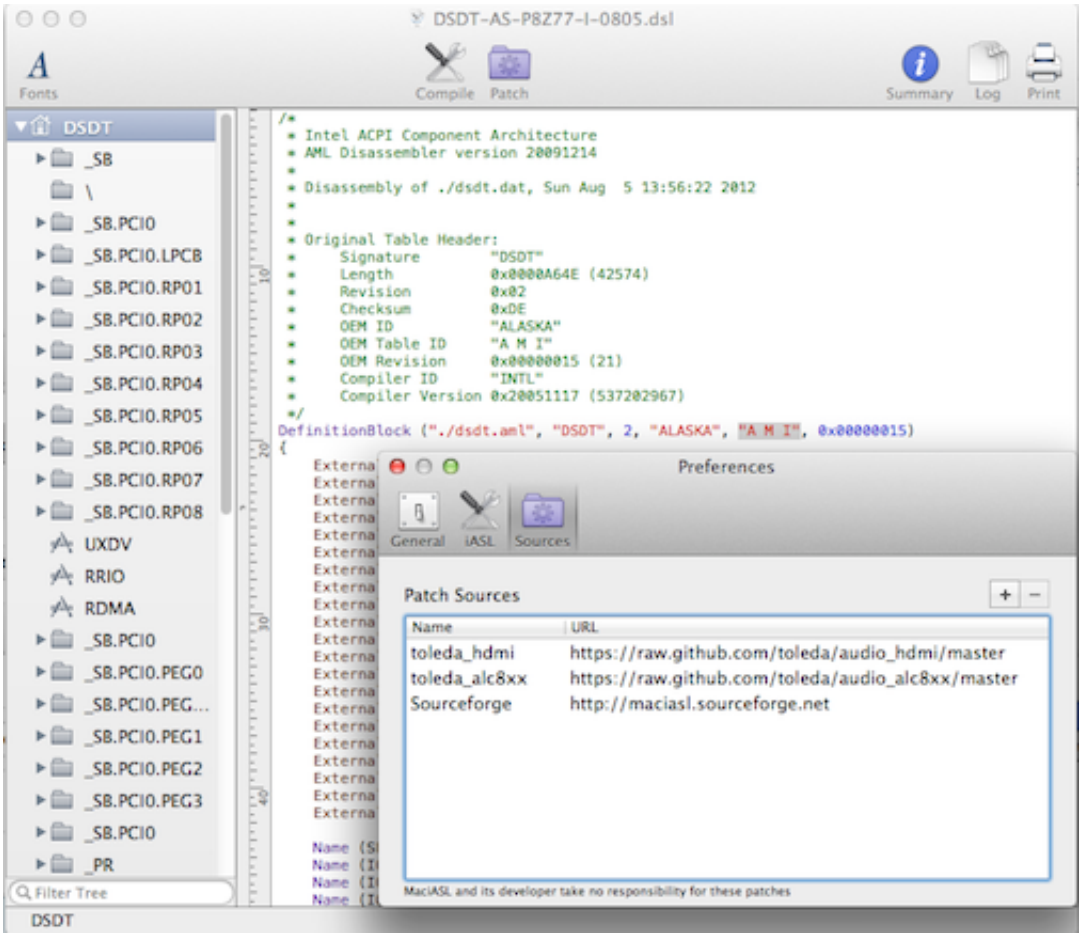

8. With dsdt,

8a. Copy Extra/dsdt.aml to Desktop

8b. MaciASL/File/Open/Desktop/dsdt.aml

8c. jump to **II. Native Compile**

9. If no dsdt,

9a. MaciASL/File/New from ACPI/DSDT

9b. MaciASL/File/Save As../Desktop/dsdt-motherboard-native.dsl

II. Native Compile

10. Verify AMI dsdt (1st line)

10a. DefinitionBlock ("./dsdt.aml", "DSDT", 2, "ALASKA", "A M I", 0x000000..)

10b. See Screenshot at 7b.
10c. If dsdt is not AMI, this method will not work. Full Stop.
11. MaciASL/Patch/Select AMI/Clean Compile
11a. Screenshot

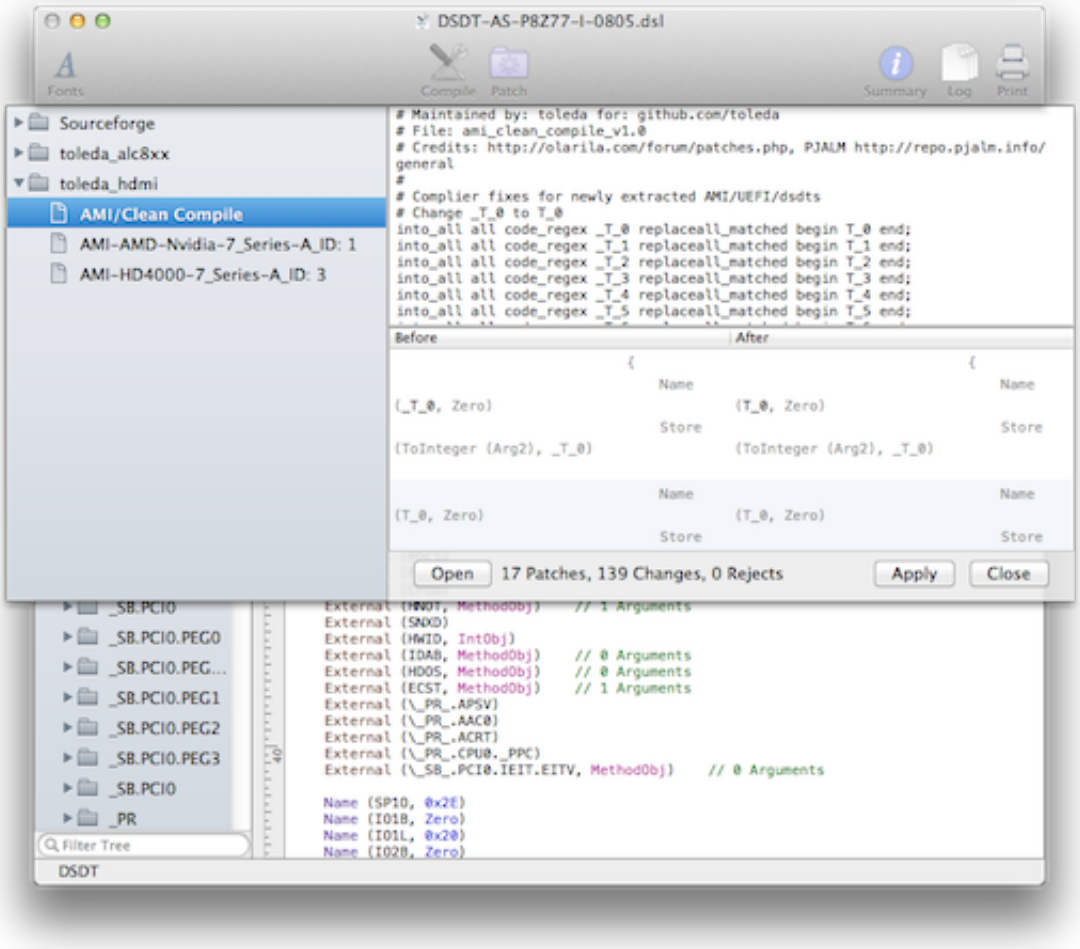

12. MaciASL/Patch/Apply
13. MaciASL/Patch/Close
14. MaciASL/Compile
14a. See Screenshot at 19a
15. If no errors, jump to **III. Apply Patch file - MaciASL**
15a. Errors, see Troubleshooting/Problem Reporting/4.

III. Apply Patch file - MaciASL
16.Patch/toleda_hdmi_hd4000/Select appropriate Patch file/make any edits
16a. Screenshot

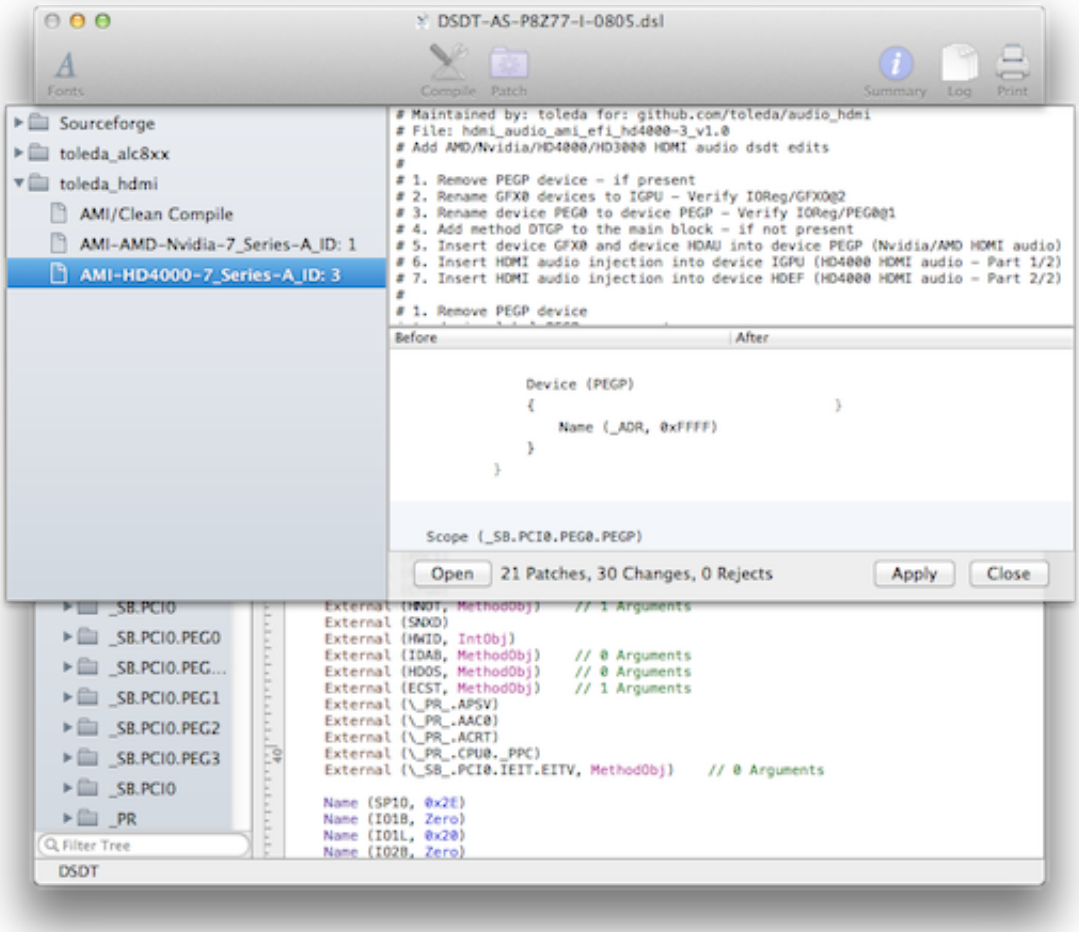

17. MaciASL/Patch/Apply
18. MaciASL/Patch/Close
19. MaciASL/Compile
19a. Screenshot

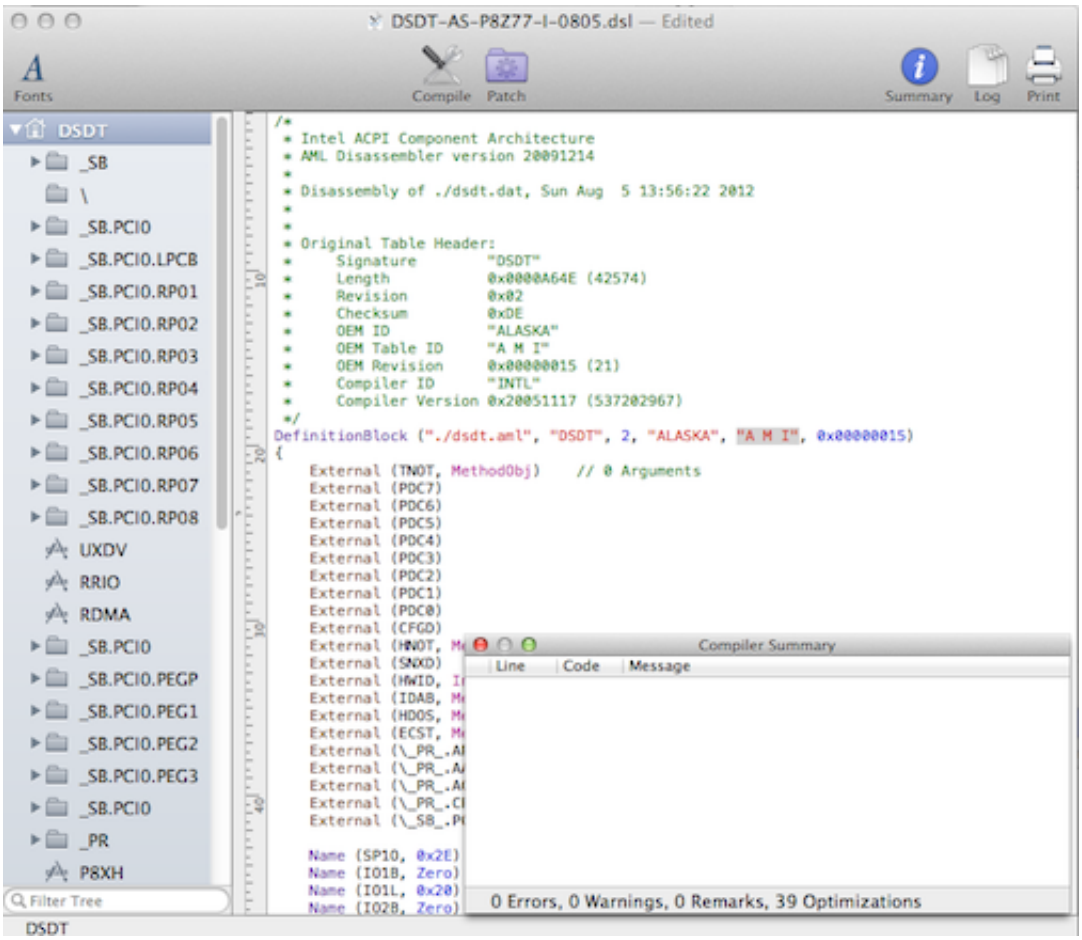

20. If no errors, jump to **IV. Save dsdt.aml - MaciASL**
20a. Errors, see Troubleshooting/Problem Reporting/4.

IV. Save dsdt.aml - MaciASL

21. MaciASL/File/Save As… /ACPI Machine Language Binary/Desktop/dsdt.aml (add extension)
21a. Screenshot

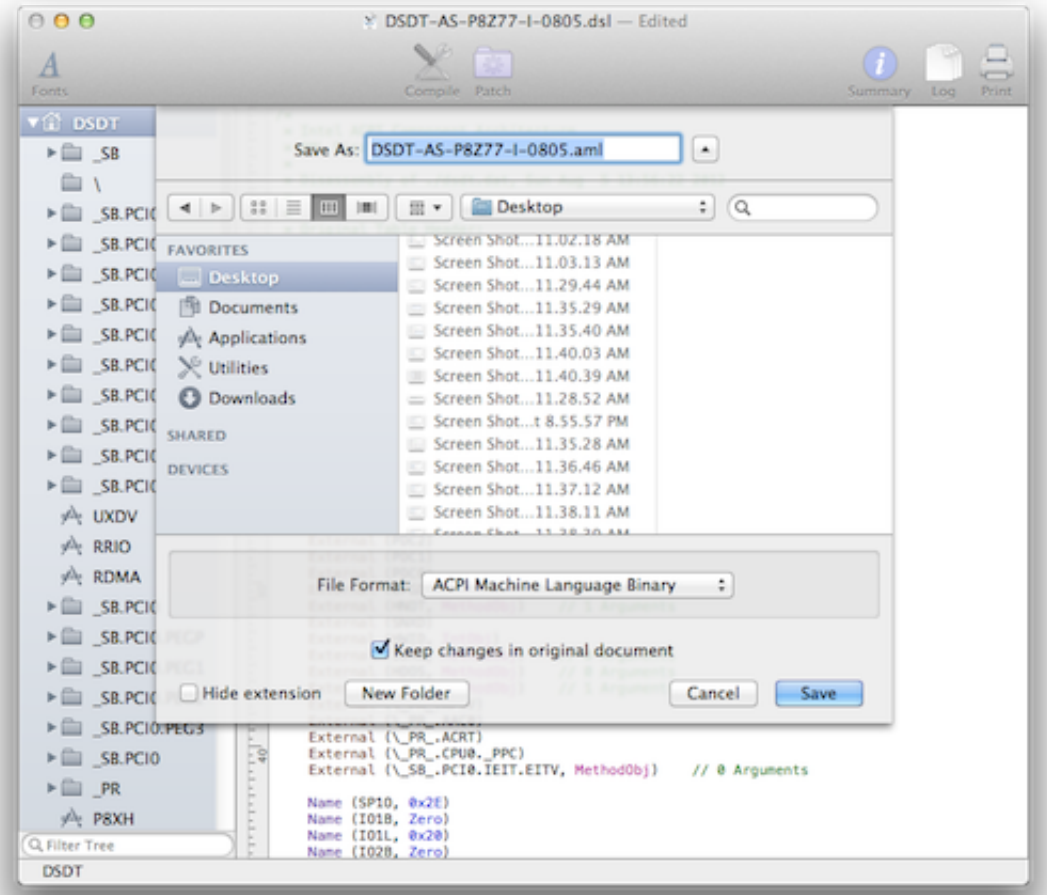

V. Install dsdt.aml - MaciASL

22. MaciASL/File/Save As… /ACPI Machine Language Binary/Extra/dsdt.aml (add extension)

VI. Restart

23. Repair permissions and cache (Ex., Disk Utility, Kext Beast, Kext Utility, Kext Wizard, etc.)
24. Restart

VII. Verify HDMI Audio

P8Z77 I Deluxe/i7-3770K/HD4000 DP audio/NVidia HDMI audio/AirPlay Mirroring

25. System Preferences/Sound/Outputs/Select HDMI

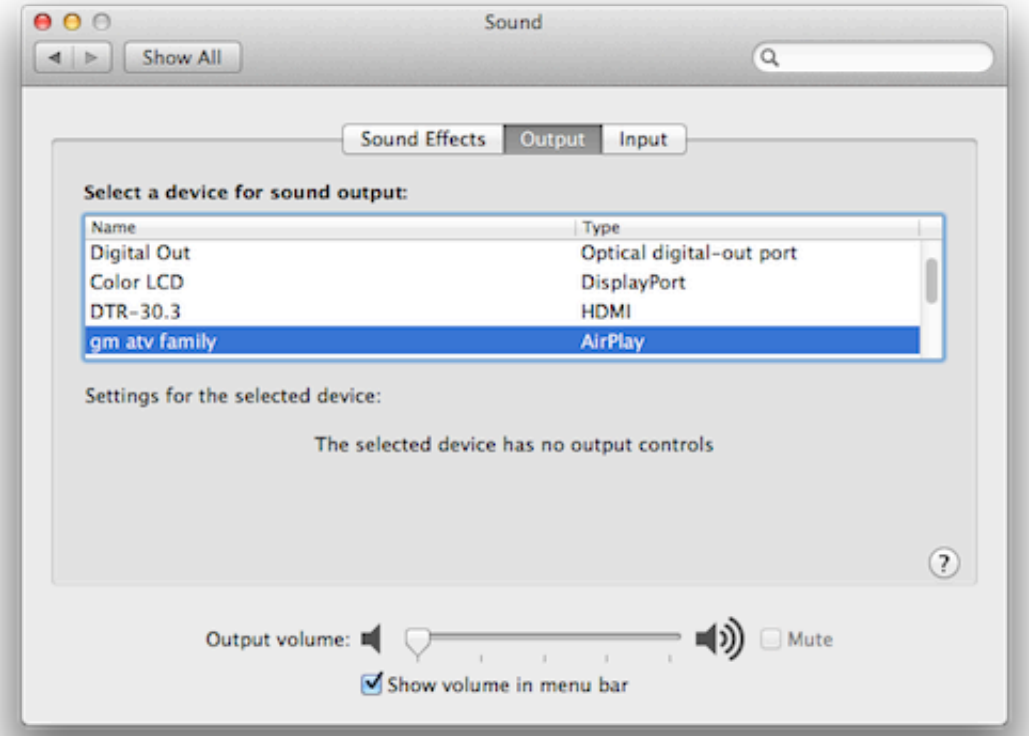
Sound
Show All
Sound Effects
Output
Input
Select a device for sound output:
Name
Type
Digital Out
Optical digital-out port
Color LCD
DisplayPort
DTR-30.3
HDMI
gm atv family
AirPlay
Settings for the selected device:
The selected device has no output controls
Output volume:
Mute
Show volume in menu bar

About This Mac
Overview
Displays
Storage
Memory
Support
Service
Mac mini
Late 2012
Processor 3.51 GHz Intel Core i7
Memory 8 GB 1333 MHz DDR3
Graphics Intel HD Graphics 4000 512 MB
Serial Number C07JF8Z4DWYL
Software OS X 10.8.2 (12C60)
System Report...
Software Update...

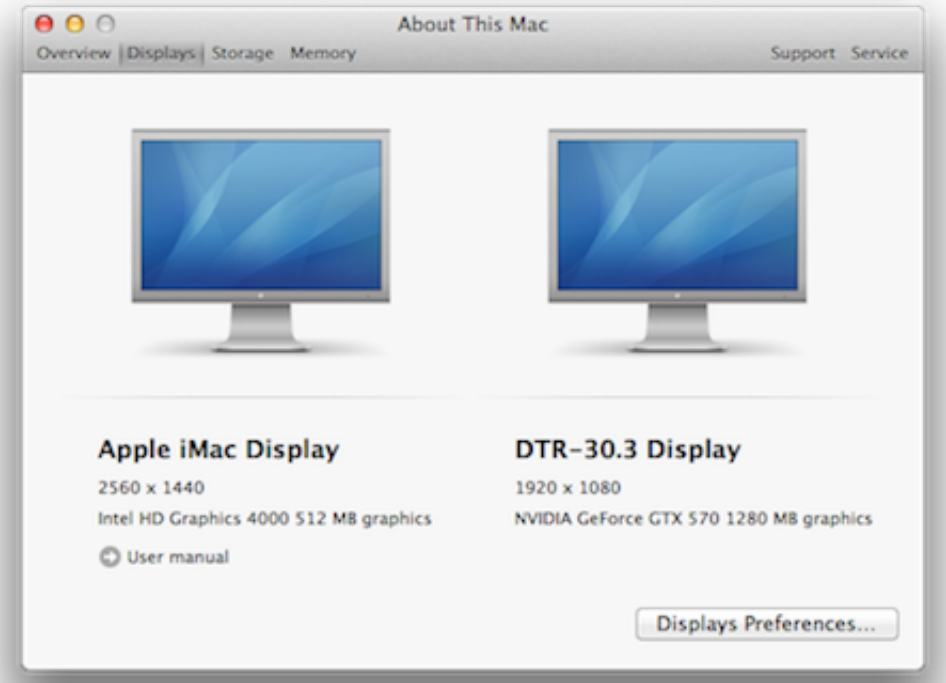
About This Mac
Overview
Displays
Storage
Memory
Support
Service
Apple iMac Display
2560 x 1440
Intel HD Graphics 4000 512 MB graphics
User manual
DTR-30.3 Display
1920 x 1080
NVIDIA GeForce GTX 570 1280 MB graphics
Displays Preferences...

iMac
Show All
Display
Arrangement
Color
Resolution:
Best for display
Best for AirPlay
Scaled
Rotation:
Standard
AirPlay Mirroring:
gm atv family
Overscan correction
Show mirroring options in the menu bar when available
Gather Windows

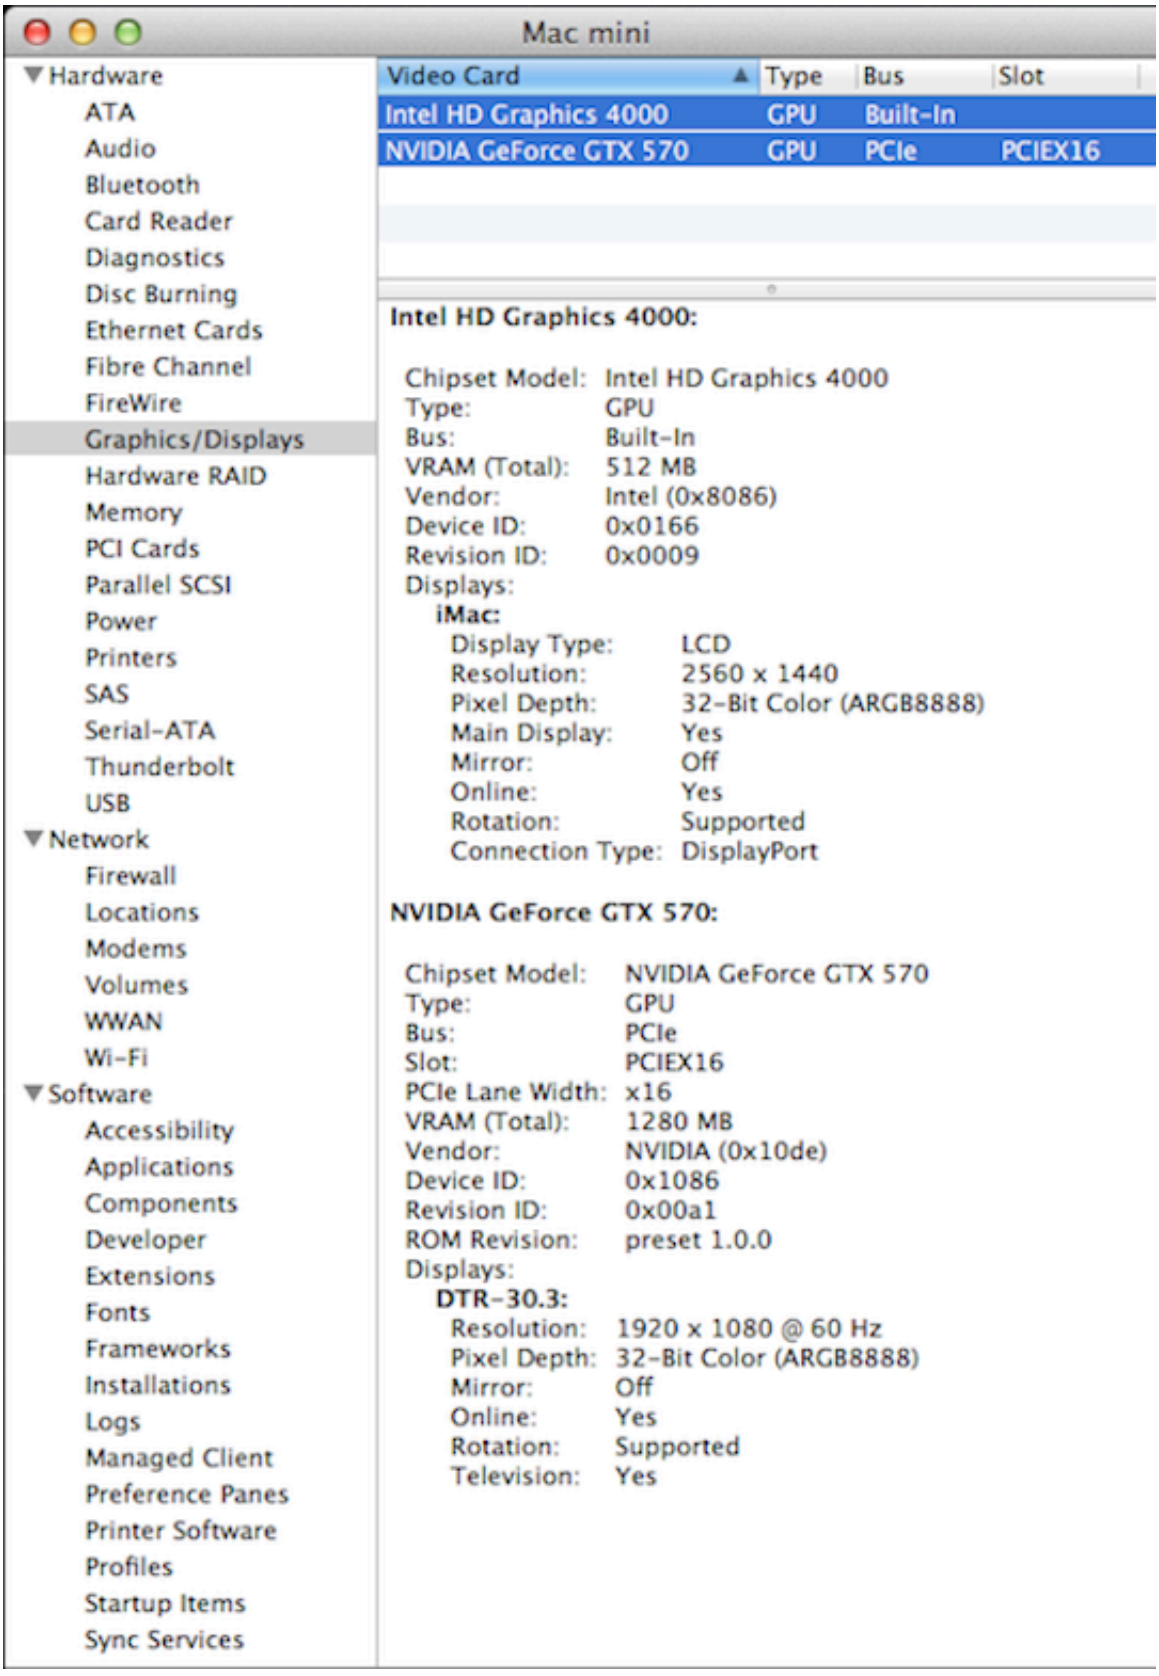
Mac mini
Hardware
ATA
Audio
Bluetooth
Card Reader
Diagnostics
Disc Burning
Ethernet Cards
Fibre Channel
FireWire
Graphics/Displays
Hardware RAID
Memory
PCI Cards
Parallel SCSI
Power
Printers
SAS
Serial-ATA
Thunderbolt
USB
Network
Firewall
Locations
Modems
Volumes
WWAN
Wi-Fi
Software
Accessibility
Applications
Components
Developer
Extensions
Fonts
Frameworks
Installations
Logs
Managed Client
Preference Panes
Printer Software
Profiles
Startup Items
Sync Services
Video Card
Type
Bus
Slot
Intel HD Graphics 4000
GPU
Built-In
NVIDIA GeForce GTX 570
GPU
PCIe
PCIEX16
Intel HD Graphics 4000:
Chipset Model: Intel HD Graphics 4000
Type: GPU
Bus: Built-In
VRAM (Total): 512 MB
Vendor: Intel (0x8086)
Device ID: 0x0166
Revision ID: 0x0009
Displays:
iMac:
Display Type: LCD
Resolution: 2560 x 1440
Pixel Depth: 32-Bit Color (ARGB8888)
Main Display: Yes
Mirror: Off
Online: Yes
Rotation: Supported
Connection Type: DisplayPort
NVIDIA GeForce GTX 570:
Chipset Model: NVIDIA GeForce GTX 570
Type: GPU
Bus: PCIe
Slot: PCIEX16
PCIe Lane Width: x16
VRAM (Total): 1280 MB
Vendor: NVIDIA (0x10de)
Device ID: 0x1086
Revision ID: 0x00a1
ROM Revision: preset 1.0.0
Displays:
DTR-30.3:
Resolution: 1920 x 1080 @ 60 Hz
Pixel Depth: 32-Bit Color (ARGB8888)
Mirror: Off
Online: Yes
Rotation: Supported
Television: Yes

Troubleshooting
1. Verify HDMI device connected
1a. System Information/Graphics/Display/HDMI device name/Television/Yes
2. Verify Extra/dsdt.aml is
2a. .aml file
2b. edited
3. Run IOReg/Verify Devices (PEGP, GFX0, HDAU, HDEF and IGPU)
3a. Device (IGPU) may not be present if HD4000 Graphics is not enabled
3b. Device (GFX0) and Device (HDAU) may not be present if no discrete graphics
4. Problem Reporting/Post to [Easy Guide] ML: HDMI Audio/HD4000/7 Series MB
4a. Motherboard/BIOS version/processor/graphics/OS and version
4b. dsdt
4c. copy of IOReg

References
[Easy Guide] ML: HDMI Audio/HD4000/7 Series MB
Mountain Lion HDMI Audio - AMI DSDT
toleda/audio_hdmi_hd4000 · GitHub

Credits:
VCH888: ALC889A, Gigabyte (Intel): now having a working front mic - Page 38 - Sound - InsanelyMac Forum
SJ_UnderWater: Native DSDT/AML IDE & Compiler: MaciASL Open Beta

[Guide] ML-HD4000-7_series-hdmi_audio_dsdt_edits_v1.2