
Operational notes

Document updated on **August 23, 2022**.

The following colors are **not** part of the final product, but serve as highlights in the editing/review process:




- text that needs attention from the Subject Matter Experts: Mirco, Anna,& Jan
- terms that have not yet been defined in the book
- things that need to be checked only at the very final typesetting stage (and it doesn't make sense to do them before)
- text that needs advice from the communications/marketing team: Aaron & Shane
- text that needs to be completed or otherwise edited (by Sylvia)

11 Todo list

12	 Clarinet	5
13	 zero-knowledge proofs	5
14	 played with	6
15	 Update reference when content is finalized	6
16	 methatical	6
17	 numerical	6
18	 a list of additional exercises	6
19	 think about them	6
20	 Pluralize chapter title	13
21	 check if this is already introduced in intro	13
22	 Move content on binary representation	14
23	 simplify Sage ex.	14
24	 a bit overused in the text?	16
25	 Add explanation	18
26	 unify with example 4	19
27	 check additional explanation	19
28	 SB: let's separate these two steps in the equivalence below	23
29	 check reference	24
30	 check algorithm floating	25
31	 add more explanation	26
32	 type	27
33	 modulo/ modulus/ modular? unify throughout	28
34	 expand on this	29
35	 add explanation on why this is important	32
36	 why is this ref here?	32
37	 what does this imply?	32
38	 check reference	33
39	 why is this ref here?	33
40	 is this right?	34
41	 check reference	34
42	 the task could be defined more clearly	35
43	 subtrahend	35
44	 minuend	35
45	 algorithm-floating	37
46	 add reference	37
47	 check algorithm floating	40
48	 revise the counter for definitions, current one too long	43
49	 unify title of Alg with text	46
50	 move 3.4 here	46

51	check algorithm floating	46
52	should be 2?	47
53	images	48
54	b	50
55	we say that	50
56	mention a few examples	51
57	check footnote	53
58	should be $H_3(s_1)$ and $H_3(s_2)$?	53
59	a few examples?	55
60	pseudorandom function family	56
61	seed	57
62	instantiate	57
63	what are the gs here? copy+paste error from 4.1.0.1?	58
64	So,	59
65	add example	60
66	agree	61
67	put subsection title here	61
68	put subsection title here	63
69	Check change of wording	65
70	check reference	70
71	do we still need the explanation of projective planes from the previous chapter? or	
72	can they be moved to this one?	76
73	should \mathcal{O} also be shown as a point?	78
74	jubjub	79
75	insert reference	79
76	security level	80
77	check reference	89
78	S: move that section here?	90
79	Check if following Alg is floated too far	92
80	same example twice	94
81	check reference	96
82	add reference	103
83	add reference	104
84	TODO:Rewrite intro together with Sven	104
85	check floating of algorithm	110
86	add references	110
87	check if the algorithm is floated properly	113
88	circuit	115
89	signature schemes	115
90	add reference	115
91	add references	115
92	add reference	117
93	algebraic closures	117
94	check reference	117
95	check reference	117
96	disambiguate	118
97	check reference	121
98	add reference	122

99	check reference	122
100	check reference	122
101	check reference	123
102	add reference	124
103	check reference	124
104	check reference	124
105	check reference	125
106	what does this mean? Maybe just delete it	126
107	write up this part	127
108	add reference	127
109	check reference	127
110	cyclotomic polynomial	127
111	Pholaard-rho attack	127
112	todo	127
113	check reference	128
114	check reference	128
115	what does this mean?	128
116	add reference	128
117	add reference	128
118	check reference	128
119	check reference	128
120	add reference	129
121	add exercise	130
122	check reference	130
123	add reference	130
124	add reference	131
125	add reference	131
126	check reference	131
127	check reference	131
128	add reference	132
129	add reference	132
130	add reference	133
131	check reference	133
132	add reference	133
133	add reference	133
134	finish writing this up	133
135	add reference	133
136	correct computations	134
137	fill in missing parts	134
138	add reference	134
139	check equation	135
140	Chapter 1?	136
141	add reference	138
142	add reference	139
143	jubjub	139
144	add reference	141
145	Schur/Hadamard product	144
146	add reference	144

147	 add references to these languages?	168
148	 can we rotate this by 90° ? Good question. IDK	183
149	 check reference	198

150

MoonMath manual

151

TechnoBob and the Least Scruples crew

152

August 23, 2022

Contents

154	1 Introduction	5
155	1.1 Aims and target audience	5
156	1.2 The Zoo of Zero-Knowledge Proofs	7
157	1.2.0.0.1 To Do List	9
158	1.2.0.0.2 Points to cover while writing	9
159	2 Preliminaries	10
160	2.1 Preface and Acknowledgements	10
161	2.2 Purpose of the book	10
162	2.3 How to read this book	11
163	2.4 Cryptological Systems	11
164	2.5 SNARKS	11
165	2.6 complexity theory	11
166	2.6.1 Runtime complexity	11
167	2.7 Software Used in This Book	12
168	2.7.1 Sagemath	12
169	3 Arithmetics	13
170	3.1 Introduction	13
171	3.2 Integer arithmetic	13
172	3.2.1 Integers, natural numbers and rational numbers	13
173	3.2.2 Euclidean Division	16
174	3.2.3 The Extended Euclidean Algorithm	19
175	3.2.4 Coprime Integers	21
176	3.3 Modular arithmetic	21
177	3.3.1 Congruence	21
178	3.3.2 Computational Rules	22
179	3.3.3 The Chinese Remainder Theorem	25
180	3.3.4 Remainder Class Representation	26
181	3.3.5 Modular Inverses	28
182	3.4 Polynomial arithmetic	31
183	3.4.1 Polynomial arithmetic	35
184	3.4.2 Euclidean Division with polynomials	36
185	3.4.3 Prime Factors	39
186	3.4.4 Lagrange Interpolation	40

187	4 Algebra	43
188	4.1 Commutative Groups	43
189	4.1.1 Finite groups	45
190	4.1.2 Generators	45
191	4.1.3 The exponential map	46
192	4.1.4 Factor Groups	48
193	4.1.5 Pairings	49
194	4.1.6 Cryptographic Groups	50
195	4.1.6.1 The Discrete Logarithm Problem	51
196	4.1.6.2 The decisional Diffie–Hellman assumption	51
197	4.1.6.3 The Computational Diffie–Hellman Assumption	52
198	4.1.7 Hashing to Groups	52
199	4.1.7.1 Hash functions	52
200	4.1.7.2 Hashing to cyclic groups	55
201	4.1.7.3 Pedersen Hashes	56
202	4.1.7.4 Pseudorandom Function Families in DDH-secure groups	57
203	4.2 Commutative Rings	57
204	4.2.1 Hashing into Modular Arithmetic	61
205	4.2.1.1 The “try-and-increment” method	64
206	4.3 Fields	65
207	4.3.1 Prime fields	66
208	4.3.2 Square Roots	68
209	4.3.2.1 Hashing into prime fields	69
210	4.3.3 Prime Field Extensions	69
211	4.4 Projective Planes	73
212	5 Elliptic Curves	76
213	5.1 Short Weierstrass Curves	76
214	5.1.1 Affine Short Weierstrass form	77
215	5.1.1.1 Isomorphic affine Short Weierstrass curves	81
216	5.1.1.2 Affine compressed representation	82
217	5.1.2 Affine Group Law	83
218	5.1.2.1 Scalar multiplication	87
219	5.1.2.2 Logarithmic Ordering	87
220	5.1.3 Projective Short Weierstrass form	90
221	5.1.3.1 Projective Group law	92
222	5.1.3.2 Coordinate Transformations	94
223	5.2 Montgomery Curves	94
224	5.2.1 Affine Montgomery coordinate transformation	97
225	5.2.2 Montgomery group law	98
226	5.3 Twisted Edwards Curves	99
227	5.3.1 Twisted Edwards group law	101
228	5.4 Elliptic Curve Pairings	102
229	5.4.1 Embedding Degrees	102
230	5.4.1.1 Elliptic Curves over extension fields	104
231	5.4.2 Full torsion groups	105
232	5.4.3 Pairing groups	108
233	5.4.4 The Weil pairing	110

234	5.5	Hashing to Curves	112
235	5.5.1	Try-and-increment hash functions	113
236	5.6	Constructing elliptic curves	115
237	5.6.1	The Trace of Frobenius	116
238	5.6.2	The j -invariant	117
239	5.6.3	The Complex Multiplication Method	118
240	5.6.4	The <i>BLS6_6</i> pen-and-paper curve	126
241	5.6.5	Hashing to pairing groups	133
242	6	Statements	136
243	6.1	Formal Languages	136
244	6.1.0.0.1	Decision Functions	137
245	6.1.0.0.2	Instance and Witness	140
246	6.1.0.0.3	Modularity	143
247	6.2	Statement Representations	144
248	6.2.1	Rank-1 Quadratic Constraint Systems	144
249	6.2.1.0.1	R1CS representation	144
250	6.2.1.0.2	R1CS Satisfiability	147
251	6.2.1.0.3	Modularity	148
252	6.2.2	Algebraic Circuits	148
253	6.2.2.0.1	Algebraic circuit representation	149
254	6.2.2.0.2	Circuit Execution	154
255	6.2.2.0.3	Circuit Satisfiability	155
256	6.2.2.0.4	Associated Constraint Systems	156
257	6.2.3	Quadratic Arithmetic Programs	161
258	6.2.3.0.1	QAP representation	162
259	6.2.3.0.2	QAP Satisfiability	164
260	7	Circuit Compilers	168
261	7.1	A Pen-and-Paper Language	168
262	7.1.1	The Grammar	168
263	7.1.2	The Execution Phases	170
264	7.1.2.0.1	The Setup Phase	170
265	7.1.2.0.2	The Prover Phase	172
266	7.2	Common Programing concepts	172
267	7.2.1	Primitive Types	172
268	7.2.1.1	The base-field type	173
269	7.2.1.1.1	The Subtraction Constraint System	176
270	7.2.1.1.2	The Inversion Constraint System	177
271	7.2.1.1.3	The Division Constraint System	178
272	7.2.1.2	The boolean Type	179
273	7.2.1.2.1	The boolean Constraint System	179
274	7.2.1.2.2	The AND operator constraint system	180
275	7.2.1.2.3	The OR operator constraint system	181
276	7.2.1.2.4	The NOT operator constraint system	182
277	7.2.1.2.5	Modularity	182
278	7.2.1.3	Arrays	185
279	7.2.1.4	The Unsigned Integer Type	186

280	7.2.1.4.1	The uN Constraint System	186
281	7.2.1.4.2	The Unsigned Integer Operators	187
282	7.2.2	Control Flow	188
283	7.2.2.1	The Conditional Assignment	188
284	7.2.2.2	Loops	191
285	7.2.3	Binary Field Representations	192
286	7.2.4	Cryptographic Primitives	193
287	7.2.4.1	Twisted Edwards curves	193
288	7.2.4.1.1	Twisted Edwards curve constraints	193
289	7.2.4.1.2	Twisted Edwards curve addition	194
290	8	Zero Knowledge Protocols	196
291	8.1	Proof Systems	196
292	8.2	The “Groth16” Protocol	198
293	8.2.0.0.1	The Setup Phase	199
294	8.2.0.0.2	The Prover Phase	204
295	8.2.0.0.3	The Verification Phase	207
296	8.2.0.0.4	Proof Simulation	209
297	9	Exercises and Solutions	213

Chapter 1

Introduction

This is dump from other papers as inspiration for the intro:

Zero knowledge proofs are a class of cryptographic protocols in which one can prove honest computation without revealing the inputs to that computation. A simple high-level example of a zero-knowledge proof is the ability to prove one is of legal voting age without revealing the respective age. In a typical zero knowledge proof system, there are two participants: a prover and a verifier. A prover will present a mathematical proof of computation to a verifier to prove honest computation. The verifier will then confirm whether the prover has performed honest computation based on predefined methods. Zero knowledge proofs are of particular interest to public blockchain activities as the verifier can be codified in smart contracts as opposed to trusted parties or third-party intermediaries.

Zero-knowledge proofs (ZKPs) are an important privacy-enhancing tool from cryptography. They allow proving the veracity of a statement, related to confidential data, without revealing any information beyond the validity of the statement. ZKPs were initially developed by the academic community in the 1980s, and have seen tremendous improvements since then. They are now of practical feasibility in multiple domains of interest to the industry, and to a large community of developers and researchers. ZKPs can have a positive impact in industries, agencies, and for personal use, by allowing privacy-preserving applications where designated private data can be made useful to third parties, despite not being disclosed to them.

ZKP systems involve at least two parties: a prover and a verifier. The goal of the prover is to convince the verifier that a statement is true, without revealing any additional information. For example, suppose the prover holds a birth certificate digitally signed by an authority. In order to access some service, the prover may have to prove being at least 18 years old, that is, that there exists a birth certificate, tied to the identity of the prover and digitally signed by a trusted certification authority, stating a birthdate consistent with the age claim. A ZKP allows this, without the prover having to reveal the birthdate.

1.1 Aims and target audience

This book is accessible for both beginners and experienced developers alike. Concepts are gradually introduced in a logical and steady pace. Nonetheless, the chapters lend themselves rather well to being read in a different order. More experienced developers might get the most benefit by jumping to the chapters that interest them most. If you like to learn by example, then you should go straight to the chapter on Using **Clarinet**.

How much mathematical knowledge do you need to understand **zero-knowledge proofs**? The answer, of course, depends on the level of understanding you aim for. It is possible to de-

Clarinet

zero-knowledge proofs

scribe zero-knowledge proofs without using mathematics at all; however, to read a foundational paper like Groth [2016], some knowledge of mathematics is needed to be able to follow the discussion.

Without a solid grounding in mathematics, someone who is interested in learning the concepts of zero-knowledge proofs, but who has never seen or played with, say, a **finite field**, or an **elliptic curve**, may quickly become overwhelmed. This is not so much due to the complexity of the mathematics needed, rather because of the vast amount of technical jargon, unknown terms, and obscure symbols that quickly makes a text unreadable, even though the concepts themselves are not actually that hard. As a result, the reader might either lose interest, or pick up some incoherent bits and pieces of knowledge that, in the worst case scenario, result in immature code.

This is why we dedicated this book to explaining the mathematical foundations needed to understand the basic concepts underlying SNARK development. We encourage the reader who is not familiar with basic number theory and elliptic curves to take the time and read this and the following chapters, until they are able to solve at least a few exercises in each chapter.

If, on the other hand, you are already skilled in elliptic curve cryptography, feel free to skip this chapter and only come back to it for reference and comparison. Maybe the most interesting parts are XXX .

We start our explanations at a very basic level, and only assume pre-existing knowledge of fundamental concepts like integer arithmetics. At the same time, we'll attempt to teach you to "think mathematically", and to show you that there are numbers and methatical structures out there that appear to be very different from the things you learned about in high school, but on a deeper level, they are actually quite similar.

We want to stress, however, that this introduction is informal, incomplete and optimized to enable the reader to understand zero-knowledge concepts as efficiently as possible. Our focus and design choices are to include as little theory as necessary, focusing on the wealth of numerical examples. We believe that such an informal, example-driven approach to learning mathematics may make it easier for beginners to digest the material in the initial stages.

For instance, as a beginner, you would probably find it more beneficial to first compute a simple toy **SNARK** with pen and paper all the way through, before actually developing real-world production-ready systems. In addition, it's useful to have a few simple examples in your head before getting started with reading actual academic papers.

However, in order to be able to derive these toy examples, some mathematical groundwork is needed. This book, therefore, will help you focus on what is important, accompanied by exercises that you are encouraged to recompute yourself. Every section usually ends with a list of additional exercises in increasing order of difficulty, to help the reader memorize and apply the concepts.

We start our mathematics refresher with discussing basic arithmetics concepts like division and modular arithmetics (chapter 3). After this practical warm up, we introduce some basic algebraic terms like groups and fields, because those terms are used very frequently in academic papers relating to zero-knowledge proofs. The beginner is advised to memorize those terms and think about them. We define these terms in the general abstract way of mathematics, hoping that the non-mathematically trained reader will gradually learn to become comfortable with this style. We then give basic examples and do basic computations with these examples to get familiar with the concepts.

In what follows, we use many mathematical notations, which we summarized in the following table 1.1:

played with

Update reference when content is finalized

methatical

numerical

a list of additional exercises

think about them

Notations used in this book

Symbol	Meaning of Symbol	Example	Explanation
$=$	equals	$a = r$	a and r have the same value
$:=$	defining the symbol on the right	$M := \{a, b, c\}$	M is a set containing a, b, c
\in	element from a set	$a \in M$	a is an element from M
\Leftrightarrow	logical equivalence	$P \Leftrightarrow Q$	P if and only if Q
$\sum_{j=n}^k a_j$	summation	$\sum_{j=0}^1 a_j = a_0 + a_1$	sum of a_0 and a_1

1.2 The Zoo of Zero-Knowledge Proofs

First, a list of zero-knowledge proof systems:

1. Pinocchio (2013): Paper

– Notes: trusted setup

2. BCGTV (2013): Paper

– Notes: trusted setup, implementation

3. BCTV (2013): Paper

– Notes: trusted setup, implementation

4. Groth16 (2016): Paper

– Notes: trusted setup

– Other resources: Talk in 2019 by Georgios Konstantopoulos

5. GM17 (2017): Paper

– Notes: trusted setup

– Other resources: later Simulation extractability in ROM, 2018

6. Bulletproofs (2017): Paper

– Notes: no trusted setup

– Other resources: Polynomial Commitment Scheme on DL, 2016 and KZG10, Polynomial Commitment Scheme on Pairings, 2010

7. Ligero (2017): Paper

– Notes: no trusted setup

– Other resources:

8. Hyrax (2017): Paper

– Notes: no trusted setup

– Other resources:

9. STARKs (2018): Paper

– Notes: no trusted setup

– Other resources:

10. Aurora (2018): Paper

– Notes: transparent SNARK

– Other resources:

11. Sonic (2019): Paper

– Notes: SNORK - SNARK with universal and updateable trusted setup, PCS-based

– Other resources: Blog post by Mary Maller from 2019 and work on updateable and universal setup from 2018

12. Libra (2019): Paper

– Notes: trusted setup

– Other resources:

13. Spartan (2019): Paper

– Notes: transparent SNARK

– Other resources:

14. PLONK (2019): Paper

– Notes: SNORK, PCS-based

– Other resources: Discussion on Plonk systems and Awesome Plonk list

15. Halo (2019): Paper

– Notes: no trusted setup, PCS-based, recursive

– Other resources:

16. Marlin (2019): Paper

– Notes: SNORK, PCS-based

– Other resources: Rust Github

17. Fractal (2019): Paper

– Notes: Recursive, transparent SNARK

– Other resources:

18. SuperSonic (2019): Paper

– Notes: transparent SNARK, PCS-based

- Other resources: Attack on DARK compiler in 2021

19. Redshift (2019): Paper

- Notes: SNORK, PCS-based

- Other resources:

Other resources on the zoo: Awesome ZKP list on Github, ZKP community with the reference document

1.2.0.0.1 To Do List

- Make table for prover time, verifier time, and proof size
- Think of categories - *Achieved Goals*: Trusted setup or not, Post-quantum or not, ...
- Think of categories - *Mathematical background*: Polynomial commitment scheme, ...
- ... while we discuss the points above, we should also discuss a common notation/language for all these things. (E.g. transparent SNARK/no trusted setup/STARK)

1.2.0.0.2 Points to cover while writing

- Make a historical overview over the "discovery" of the different ZKP systems
- Make reader understand what paper is build on what result etc. - the tree of publications!
- Make reader understand the different terminology, e.g. SNARK/SNORK/STARK, PCS, R1CS, updateable, universal, ...
- Make reader understand the mathematical assumptions - and what this means for the zoo.
- Where will the development/evolution go? What are bottlenecks?

Other topics I fell into while compiling this list

- Vector commitments: <https://eprint.iacr.org/2020/527.pdf>
- Snarkl: <http://ace.cs.ohio.edu/~gstewart/papers/snaarkl.pdf>
- Virgo?: https://people.eecs.berkeley.edu/~kubitron/courses/cs262a-F19/projects/reports/project5_report_ver2.pdf

Chapter 2

Preliminaries

2.1 Preface and Acknowledgements

This book began as a set of lecture and notes accompanying the zk-Summit 0x and 0xx It arose from the desire to collect the scattered information of snarks [] and present them to an audience that does not have a strong background in cryptography []

2.2 Purpose of the book

The first version of this book is written by security auditors at Least Authority where we audited quite a few snark based systems. Its included "what we have learned" destilate of the time we spend on various audits.

We intend to let illustrative examples drive the discussion and present the key concepts of pairing computation with as little machinery as possible. For those that are fresh to pairing-based cryptography, it is our hope that this chapter might be particularly useful as a first read and prelude to more complete or advanced expositions (e.g. the related chapters in [Gal12]).

On the other hand, we also hope our beginner-friendly intentions do not leave any sophisticated readers dissatisfied by a lack of formality or generality, so in cases where our discussion does sacrifice completeness, we will at least endeavour to point to where a more thorough exposition can be found.

One advantage of writing a survey on pairing computation in 2012 is that, after more than a decade of intense and fast-paced research by mathematicians and cryptographers around the globe, the field is now racing towards full maturity. Therefore, an understanding of this text will equip the reader with most of what they need to know in order to tackle any of the vast literature in this remarkable field, at least for a while yet.

Since we are aiming the discussion at active readers, we have matched every example with a corresponding snippet of (hyperlinked) Magma [BCP97] code 1 , where we take inspiration from the helpful Magma pairing tutorial by Dominguez Perez et al. [DKS09].

Early in the book we will develop examples that we then later extend with most of the things we learn in each chapter. This way we incrementally build a few real world snarks but over full fledged cryptographic systems that are nevertheless simple enough to be computed by pen and paper to illustrate all steps in great detail.

2.3 How to read this book

Books and papers to read: XXXXXXXXXXXX

Software to try: XXXXXXXXXXXXXXXXXXXX

Correctly prescribing the best reading route for a beginner naturally requires individual diagnosis that depends on their prior knowledge and technical preparation.

2.4 Cryptological Systems

The science of information security is referred to as *cryptology*. In the broadest sense, it deals with encryption and decryption processes, with digital signatures, identification protocols, cryptographic hash functions, secrets sharing, electronic voting procedures and electronic money.
EXPAND

2.5 SNARKS

2.6 complexity theory

Before we deal with the mathematics behind zero knowledge proof systems, we must first clarify what is meant by the runtime of an algorithm or the time complexity of an entire mathematical problem. This is particularly important for us when we analyze the various snark systems...

For the reader who is interested in complexity theory, we recommend, or example or , as well as the references contained therein.

2.6.1 Runtime complexity

The runtime complexity of an algorithm describes, roughly speaking, the amount of elementary computation steps that this algorithm requires in order to solve a problem, depending on the size of the input data.

Of course, the exact amount of arithmetic operations required depends on many factors such as the implementation, the operating system used, the CPU and many more. However, such accuracy is seldom required and is mostly meaningful to consider only the asymptotic computational effort.

In computer science, the runtime of an algorithm is therefore not specified in individual calculation steps, but instead looks for an upper limit which approximates the runtime as soon as the input quantity becomes very large. This can be done using the so-called *Landau notation* (also called big - \mathcal{O} -notation) A precise definition would, however, go beyond the scope of this work and we therefore refer the reader to .

For us, only a rough understanding of transit times is important in order to be able to talk about the security of cryptographic systems. For example, $\mathcal{O}(n)$ means that the running time of the algorithm to be considered is linearly dependent on the size of the input set n , $\mathcal{O}(n^k)$ means that the running time is polynomial and $\mathcal{O}(2^n)$ stands for an exponential running time (chapter 2.4).

An algorithm which has a running time that is greater than a polynomial is often simply referred to as *slow*.

A generalization of the runtime complexity of an algorithm is the so-called *time complexity of a mathematical problem*, which is defined as the runtime of the fastest possible algorithm that can still solve this problem (chapter 3.1).

Since the time complexity of a mathematical problem is concerned with the runtime analysis of all possible (and thus possibly still undiscovered) algorithms, this is often a very difficult and deep-seated question .

For us, the time complexity of the so-called discrete logarithm problem will be important. This is a problem for which we only know slow algorithms on classical computers at the moment, but for which at the same time we cannot rule out that faster algorithms also exist.

STUFF ON CRYPTOGRAPHIC HASH FUNCTIOND

2.7 Software Used in This Book

2.7.1 Sagemath

It order to provide an interactive learning experience, and to allow getting hands-on with the concepts described in this book, we give examples for how to program them in the Sage programming language. Sage is a dialect of the learning-friendly programming language Python, which was extended and optimized for computing with, in and over algebraic objects. Therefore, we recommend installing Sage before diving into the following chapters.

The installation steps for various system configurations are described on the sage websit ¹. Note however that we use Sage version 9, so if you are using Linux and your package manager only contains version 8, you may need to choose a different installation path, such as using prebuilt binaries.

We recommend the interested reader, who is not familiar with sagemath to read on the many tutorial before starting this book. For example

¹<https://doc.sagemath.org/html/en/installation/index.html>

Chapter 3

Arithmetics

S: This chapter talks about different types of arithmetic, so I suggest using “Arithmetics” as the chapter title.

Pluralize chapter title

3.1 Introduction

The goal of this chapter is to bring a reader with only basic school-level algebra up to speed in arithmetics. We start with a brief recapitulation of basic integer arithmetics, discussing long division, the greatest common divisor and Euclidean Division. After that, we introduce modular arithmetics as **the most important** skill to compute our **pen-and-paper examples**. We then introduce polynomials, compute their analogs to integer arithmetics and introduce the important concept of Lagrange Interpolation.

check if this is already introduced in intro

3.2 Integer arithmetic

In a sense, integer arithmetic is at the heart of large parts of modern cryptography. Fortunately, most readers will probably remember integer arithmetic from school. It is, however, important that you can confidently apply those concepts to understand and execute computations in the many pen-and-paper examples that form an integral part of the MoonMath Manual. We will therefore recapitulate basic arithmetic concepts to refresh your memory and fill any knowledge gaps.

Even though the terms and concepts in this chapter might not appear in the literature on zero-knowledge proofs directly, understanding them is necessary to follow subsequent chapters and beyond: terms like **groups** or **fields** also crop up very frequently in academic papers on zero-knowledge cryptography.

3.2.1 Integers, natural numbers and rational numbers

Integers are also known as **whole numbers**, that is, numbers that can be written without fractional parts. Examples of numbers that are **not** integers are $\frac{2}{3}$, 1.2 and -1280.006 .

Throughout this book, we use the symbol \mathbb{Z} as a shorthand for the set of all **integers**:

$$\mathbb{Z} := \{\dots, -3, -2, -1, 0, 1, 2, 3, \dots\} \quad (3.1)$$

If $a \in \mathbb{Z}$ is an integer, then we write $|a|$ for the **absolute value** of a , that is, the non-negative value of a without regard to its sign:

$$|4| = 4 \quad (3.2)$$

$$|-4| = 4 \quad (3.3)$$

We use the symbol \mathbb{N} for the set of all positive integers, usually called the set of **natural numbers**. Furthermore, we use \mathbb{N}_0 for the set of all non-negative integers. This means that \mathbb{N} does not contain the number 0, while \mathbb{N}_0 does:

$$\mathbb{N} := \{1, 2, 3, \dots\} \quad \mathbb{N}_0 := \{0, 1, 2, 3, \dots\}$$

SB: Talking about the binary representation seems way to complex at this stage, and the concepts introduced here are not used for several chapters. Let $n \in \mathbb{N}_0$ be a non-negative integer and (b_0, b_1, \dots, b_k) a string of **bits** $b_j \in \{0, 1\} \subset \mathbb{N}_0$ for some non negative integer $k \in \mathbb{N}$, such that the following equation holds:

$$n = \sum_{j=0}^k b_j \cdot 2^j \quad (3.4)$$

In this case, we call $\text{Bits}(n) := \langle b_0, b_1, \dots, b_k \rangle$ the **binary representation** of n , say that n is a k -bit number and call $k := |n|_2$ the **bit length** of n . It can be shown, that the binary representation of any non negative integer is unique. We call b_0 the **least significant bit** and b_k the **most significant bit** and define the **Hamming weight** of an integer as the number of 1s in its binary representation.

In addition, we use the symbol \mathbb{Q} for the set of all **rational numbers**, which can be represented as the set of all fractions $\frac{n}{m}$, where $n \in \mathbb{Z}$ is an integer and $m \in \mathbb{N}$ is a natural number, such that there is no other fraction $\frac{n'}{m'}$ and natural number $k \in \mathbb{N}$ with $k \neq 1$ and

$$\frac{n}{m} = \frac{k \cdot n'}{k \cdot m'} \quad (3.5)$$

The sets \mathbb{N} , \mathbb{Z} and \mathbb{Q} have a notion of addition and use multiplication defined on them. Most of us are probably able to do many integer computations in our head, but this gets more and more difficult as these increase in complexity. We will frequently use the SageMath system (2.7.1) for more complicated computations (we define rings and fields later in this book): **SB:** I would delete lines 12-18 from the Sage example below, unnecessarily confusing at this point

```
sage: ZZ # Sage notation for the set of integers
Integer Ring
sage: NN # Sage notation for the set of natural numbers
Non negative integer semiring
sage: QQ # Sage notation for the set of rational numbers
Rational Field
sage: ZZ(5) # Get an element from the set of integers
5
sage: ZZ(5) + ZZ(3)
8
sage: ZZ(5) * NN(3)
```

Move
content
on binary
representation

simplify
Sage ex.

```

606 15 12
607 sage: ZZ.random_element(10**50) 13
608 15195620986317746891403959092965159994172969068056 14
609 sage: ZZ(27713).str(2) # Binary string representation 15
610 110110001000001 16
611 sage: NN(27713).str(2) # Binary string representation 17
612 110110001000001 18
613 sage: ZZ(27713).str(16) # Hexadecimal string representation 19
614 6c41 20

```

A set of numbers of particular interest to us is the set of **prime numbers**. A prime number is a natural number $p \in \mathbb{N}$ with $p \geq 2$ that is only divisible by itself and by 1. All prime numbers apart from the number 2 are called **odd** prime numbers. We use \mathbb{P} for the set of all prime numbers and $\mathbb{P}_{\geq 3}$ for the set of all odd prime numbers.

The set of prime numbers \mathbb{P} is an infinite set, and it can be ordered according to size. This means that, for any prime number $p \in \mathbb{P}$, one can always find another prime number $p' \in \mathbb{P}$ with $p < p'$. As a result, there is no largest prime number. Since prime numbers can be ordered by size, we can write them as follows:

$$2, 3, 5, 7, 11, 13, 17, 19, 23, 29, 31, 37, 41, 43, 47, 53, 59, 61, 67, \dots \quad (3.6)$$

As the **fundamental theorem of arithmetic** tells us, prime numbers are, in a certain sense, the basic building blocks from which all other natural numbers are composed: every natural number can be derived by multiplying prime numbers with each other. To see that, let $n \in \mathbb{N}$ be any natural number with $n > 1$. Then there are always prime numbers $p_1, p_2, \dots, p_k \in \mathbb{P}$, such that the following equation holds:

$$n = p_1 \cdot p_2 \cdot \dots \cdot p_k \quad (3.7)$$

This representation is unique for each natural number (except for the order of the **factors** p_1, p_2, \dots, p_k) and is called the **prime factorization** of n .

Example 1 (Prime Factorization). To see what we mean by the prime factorization of a number, let's look at the number $504 \in \mathbb{N}$. To get its prime factors, we can successively divide it by all prime numbers in ascending order starting with 2:

$$504 = 2 \cdot 2 \cdot 2 \cdot 3 \cdot 3 \cdot 7$$

We can double check our findings invoking Sage, which provides an algorithm for factoring natural numbers:

```

632 sage: n = NN(504) 21
633 sage: factor(n) 22
634 2^3 * 3^2 * 7 23

```

The computation from the previous example reveals an important observation: computing the factorization of an integer is computationally expensive, because we have to divide repeatedly by all prime numbers smaller than the number itself until all factors are prime numbers themselves. From this, an important question arises: how fast can we compute the prime factorization of a natural number? This question is the famous **integer factorization problem** and, as far as we know, there is currently no known method that can factor integers much faster than the naive approach of just dividing the given number by all prime numbers in ascending order.

On the other hand, computing the product of a given set of prime numbers is fast: you just multiply all factors. This simple observation implies that the two processes, “prime number multiplication” on the one side and its inverse process “natural number factorization” have very different computational costs. The factorization problem is therefore an example of a **so-called one-way function**: an invertible function that is easy to compute in one direction, but hard to compute in the other direction (see this description of time complexity and polynomial time).¹

a bit overused in the text?

Exercise 1. What is the absolute value of the integers -123 , 27 and 0 ?

Exercise 2. Compute the factorization of 30030 and double check your results using Sage.

Exercise 3. Consider the following equation:

$$4 \cdot x + 21 = 5.$$

Compute the set of all solutions for x under the following alternative assumptions:

1. The equation is defined over the set of natural numbers.
2. The equation is defined over the set of integers.

Exercise 4. Consider the following equation:

$$2x^3 - x^2 - 2x = -1.$$

Compute the set of all solutions x under the following assumptions:

1. The equation is defined over the set of natural numbers.
2. The equation is defined over the set of integers.
3. The equation is defined over the set of rational numbers.

3.2.2 Euclidean Division

As we know from high school mathematics, integers can be added, subtracted and multiplied, and the result of these operations is guaranteed to always be an integer as well. On the contrary, division (in the commonly understood sense) is not defined for integers, as, for example, 7 divided by 3 will not result in an integer. However, it is always possible to divide any two integers if we consider **division with a remainder**. For example, 7 divided by 3 is equal to 2 with a remainder of 1 , since $7 = 2 \cdot 3 + 1$.

This section introduces division with a remainder for integers, usually called **Euclidean Division**. It is an essential technique underlying many concepts in this book. The precise definition is as follows:

Let $a \in \mathbb{Z}$ and $b \in \mathbb{Z}$ be two integers with $b \neq 0$. Then there is always another integer $m \in \mathbb{Z}$ and a natural number $r \in \mathbb{N}$, with $0 \leq r < |b|$ such that the following holds:

$$a = m \cdot b + r \tag{3.8}$$

¹It should be noted that what is “easy” and “hard” to compute depends on the computational power available to us. Currently available computers cannot easily compute the prime factorization of natural numbers (in formal terms, the cannot compute it in polynomial time). However, the American mathematician Peter W. Shor developed an algorithm in 1994 which can calculate the prime factorization of a natural number in polynomial time on a quantum computer. The consequence of this is that cryptosystems, which are based on the prime factor problem being computationally hard on currently available computers, become unsafe as soon as practically usable quantum computers become available.

This decomposition of a given b is called **Euclidean Division**, where a is called the **dividend**, b is called the **divisor**, m is called the **quotient** and r is called the **remainder**. It can be shown that both the quotient and the remainder always exist and are unique, as long as the divisor is different from 0.

Notation and Symbols 1. Suppose that the numbers a , b , m and r satisfy equation (3.8). We can then describe the quotient and the remainder of the Euclidean Division as follows:

$$a \operatorname{div} b := m, \quad a \operatorname{mod} b := r \quad (3.9)$$

We also say that an integer a is **divisible** by another integer b if $a \operatorname{mod} b = 0$ holds. In this case, we write $b|a$, and call the integer $a \operatorname{div} b$ the **cofactor** of b in a .

So, in a nutshell, Euclidean Division is the process of dividing one integer by another in a way that produces a quotient and a non-negative remainder, the latter of which is smaller than the absolute value of the divisor.

Example 2. Applying Euclidean Division and the notation defined in 3.9 to the dividend -17 and the divisor 4, we get the following:

$$-17 \operatorname{div} 4 = -5, \quad -17 \operatorname{mod} 4 = 3 \quad (3.10)$$

$-17 = -5 \cdot 4 + 3$ is the Euclidean Division of -17 by 4. The remainder, by definition, is a non-negative number. In this case, 4 does not divide -17 , as the remainder is not zero. The truth value of the expression $4|-17$ therefore is FALSE. On the other hand, the truth value of $4|12$ is TRUE, since 4 divides 12, as $12 \operatorname{mod} 4 = 0$. If we use Sage to do the computation for us, we get the following:

```
sage: ZZ(-17) // ZZ(4) # Integer quotient      24
-5                                              25
sage: ZZ(-17) % ZZ(4) # remainder              26
3                                              27
sage: ZZ(4).divides(ZZ(-17)) # self divides other 28
False                                          29
sage: ZZ(4).divides(ZZ(12))                    30
True                                          31
```

Remark 1. In 3.9, we defined the notation of $a \operatorname{div} b$ and $a \operatorname{mod} b$ in terms of Euclidean Division. It should be noted, however, that many programming languages (like Python and Sage) implement both the operator ($/$) and the operator ($\%$) differently. Programmers should be aware of this, as the discrepancy between the mathematical notation and the implementation in programming languages might become the source of subtle bugs in implementations of cryptographic primitives.

To give an example, consider the the dividend -17 and the divisor -4 . Note that, in contrast to the previous example 2, we now have a negative divisor. According to our definition we have the following:

$$-17 \operatorname{div} -4 = 5, \quad -17 \operatorname{mod} -4 = 3 \quad (3.11)$$

$-17 = 5 \cdot (-4) + 3$ is the Euclidean Division of -17 by -4 (the remainder is, by definition, a non-negative number). However, using the operators ($/$) and ($\%$) in Sage, we get a different result:

```
sage: ZZ(-17) // ZZ(-4) # Integer quotient      32
```

```

708 4 33
709 sage: ZZ(-17) % ZZ(-4) # remainder 34
710 -1 35
711 sage: ZZ(-17).quo_rem(ZZ(-4)) # not Euclidean Division 36
712 (4, -1) 37

```

Methods to compute Euclidean Division for integers are called **integer division algorithms**. Probably the best known algorithm is the so-called **long division**, which most of us might have learned in school.

In a nutshell, the long division algorithm loops through the digits of the dividend from the left to right, subtracting the largest possible multiple of the divisor (at the digit level) at each stage. The multiples then become the digits of the quotient, and the remainder is the first digit of the dividend.

As long division is the standard method used for pen-and-paper division of multi-digit numbers expressed in decimal notation, we use it throughout this book when we do simple pen-and-paper computations, so readers should become familiar with it. However, instead of defining the algorithm formally, we provide some examples instead, as this will hopefully make the process more clear.

Example 3 (Integer Long Division). To give an example of integer long division algorithm, let's divide the integer $a = 143785$ by the number $b = 17$. Our goal is therefore to find solutions to equation 3.8, that is, we need to find the quotient $m \in \mathbb{Z}$ and the remainder $r \in \mathbb{N}$ such that $143785 = m \cdot 17 + r$. Using a notation that is mostly used in English-speaking countries, we compute as follows: **SB: I think a more detailed explanation is needed for those unfamiliar with this notation/algorithm**

$$\begin{array}{r}
 8457 \\
 17 \overline{) 143785} \\
 \underline{136} \\
 77 \\
 \underline{68} \\
 98 \\
 \underline{85} \\
 135 \\
 \underline{119} \\
 16
 \end{array}
 \tag{3.12}$$

Add explanation

We calculated $m = 8457$ and $r = 16$, and, indeed, the equation $143785 = 8457 \cdot 17 + 16$ holds. We can double check this invoking Sage:

```

733 sage: ZZ(143785).quo_rem(ZZ(17)) 38
734 (8457, 16) 39
735 sage: ZZ(143785) == ZZ(8457)*ZZ(17) + ZZ(16) # check 40
736 True 41

```

Exercise 5 (Integer Long Division). Find an $m \in \mathbb{Z}$ and an $r \in \mathbb{N}$ with $0 \leq r < |b|$ such that $a = m \cdot b + r$ holds for the following pairs:

- 739 • $(a, b) = (27, 5)$
- 740 • $(a, b) = (27, -5)$
- 741 • $(a, b) = (127, 0)$

$$\bullet (a, b) = (-1687, 11)$$

$$\bullet (a, b) = (0, 7)$$

In which cases are your solutions unique?

Exercise 6 (Long Division Algorithm). Using the programming language of your choice, write an algorithm that computes integer long division and handles all edge cases properly.

Exercise 7 (Binary Representation). Using the programming language of your choice, write an algorithm that computes the binary representation 3.4 of any non-negative integer.

3.2.3 The Extended Euclidean Algorithm

One of the most critical parts of this book is the modular arithmetic, defined in section 3.3, and its application in the computations of **prime fields**, defined in section 4.3.1. To be able to do computations in modular arithmetic, we have to get familiar with the so-called **Extended Euclidean Algorithm**, used to calculate the **greatest common divisor** (GCD) of integers.

The greatest common divisor of two non-zero integers a and b is defined as the largest non-zero natural number d such that d divides both a and b , that is, $d|a$ as well as $d|b$ are true. We use the notation $\gcd(a, b) := d$ for this number. Since the natural number 1 divides any other integer, 1 is always a common divisor of any two non-zero integers, but it is not necessarily the greatest.

A common method for computing the greatest common divisor is the so-called Euclidean Algorithm. However, since we don't need that algorithm in this book, we will introduce the Extended Euclidean Algorithm, which is a method for calculating the greatest common divisor of two natural numbers a and $b \in \mathbb{N}$, as well as two additional integers $s, t \in \mathbb{Z}$, such that the following equation holds:

$$\gcd(a, b) = s \cdot a + t \cdot b \quad (3.13)$$

The pseudocode in algorithm 1 shows in detail how to calculate the greatest common divisor and the numbers s and t with the Extended Euclidean Algorithm: **In example 4, the computation stops when $r_k = 0$ (at k_4), not when $r_{k-1} = 0$ (which would be k_5). Also the GCD is $r_3 = r_{k-1} = 1$, not r_{k-2} . Same for s and t .**

The algorithm is simple enough to be used effectively in pen-and-paper examples. It is commonly written as a table where the rows represent the while-loop and the columns represent the values of the the array r , s and t with index k . The following example provides a simple execution.

Example 4. To illustrate algorithm 1, we apply it to the numbers $a = 12$ and $b = 5$. Since $12, 5 \in \mathbb{N}$ and $12 \geq 5$, all requirements are met, and we compute as follows:

k	r_k	s_k	t_k
0	12	1	0
1	5	0	1
2	2	1	-2
3	1	-2	5
4	0		

unify with
example 4

check ad-
ditional
explana-
tion

Algorithm 1 Extended Euclidean Algorithm**Require:** $a, b \in \mathbb{N}$ with $a \geq b$ **procedure** EXT-EUCLID(a, b) $r_0 \leftarrow a$ and $r_1 \leftarrow b$ $s_0 \leftarrow 1$ and $s_1 \leftarrow 0$ $t_0 \leftarrow 0$ and $t_1 \leftarrow 1$ $k \leftarrow 2$ **while** $r_{k-1} \neq 0$ **do** $q_k \leftarrow r_{k-2} \text{ div } r_{k-1}$ $r_k \leftarrow r_{k-2} \bmod r_{k-1}$ $s_k \leftarrow s_{k-2} - q_k \cdot s_{k-1}$ $t_k \leftarrow t_{k-2} - q_k \cdot t_{k-1}$ $k \leftarrow k + 1$ **end while****return** $\text{gcd}(a, b) \leftarrow r_{k-2}$, $s \leftarrow s_{k-2}$ and $t \leftarrow t_{k-2}$ **end procedure****Ensure:** $\text{gcd}(a, b) = s \cdot a + t \cdot b$

k	r_k	s_k	t_k	q_k			
0	12	1	0	–	$r_0 \leftarrow a = 12$	$s_0 \leftarrow 1$	$t_0 \leftarrow 0$
1	5	0	1	–	$r_1 \leftarrow b = 5$	$s_1 \leftarrow 0$	$t_1 \leftarrow 1$
2	2	1	-2	2	$r_2 \leftarrow r_0 \bmod r_1 =$ $12 \bmod 5 = 2$	$s_2 \leftarrow s_0 - q_2 \cdot s_1 =$ $1 - 2 \cdot 0 = 1$	$t_2 \leftarrow t_0 - q_2 \cdot t_1 =$ $0 - 2 \cdot 1 = -2$ $q_2 \leftarrow r_0 \text{ div } r_1 =$ $12 \text{ div } 5 = 2$
3	1	-2	5	2	$r_3 \leftarrow r_1 \bmod r_2 =$ $5 \bmod 2 = 1$	$s_3 \leftarrow s_1 - q_3 \cdot s_2 =$ $0 - 2 \cdot 1 = -2$	$t_3 \leftarrow t_1 - q_3 \cdot t_2 =$ $1 - 2 \cdot (-2) = 5$ $q_3 \leftarrow r_1 \text{ div } r_2 =$ $5 \text{ div } 2 = 2$
4	0				$r_4 \leftarrow r_2 \bmod r_3 =$ $2 \bmod 1 = 0$		

From this we can see that the greatest common divisor of 12 and 5 is $\text{gcd}(12, 5) = 1$ and that the equation $1 = (-2) \cdot 12 + 5 \cdot 5$ holds. We can also use Sage to double check our findings:

```
sage: ZZ(12).xgcd(ZZ(5)) # (gcd(a,b), s, t) 42
(1, -2, 5) 43
```

Exercise 8 (Extended Euclidean Algorithm). Find integers $s, t \in \mathbb{Z}$ such that $\text{gcd}(a, b) = s \cdot a + t \cdot b$ holds for the following pairs:

• $(a, b) = (45, 10)$

• $(a, b) = (13, 11)$

• $(a, b) = (13, 12)$

Exercise 9 (Towards Prime fields). Let $n \in \mathbb{N}$ be a natural number and p a prime number, such that $n < p$. What is the greatest common divisor $\text{gcd}(p, n)$?

Exercise 10. Find all numbers $k \in \mathbb{N}$ with $0 \leq k \leq 100$ such that $\gcd(100, k) = 5$.

Exercise 11. Show that $\gcd(n, m) = \gcd(n + m, m)$ for all $n, m \in \mathbb{N}$.

3.2.4 Coprime Integers

Coprime integers are integers that do not share a prime number as a factor. As we will see in 3.3, coprime integers are important for our purposes, because, in modular arithmetic, computations that involve coprime numbers are substantially different from computations on non-coprime numbers 3.3.2.

The naive way to decide if two integers are coprime would be to divide both numbers successively by all prime numbers smaller than those numbers, to see if they share a common prime factor. However, two integers are coprime if and only if their greatest common divisor is 1, which is why computing the \gcd is the preferred method.

Example 5. Consider example 4 again. As we have seen, the greatest common divisor of 12 and 5 is 1. This implies that the integers 12 and 5 are coprime, since they share no divisor other than 1, which is not a prime number.

Exercise 12. Consider exercise 8 again. Which pairs (a, b) from that exercise are coprime?

3.3 Modular arithmetic

Modular arithmetic is a system of integer arithmetic where numbers “wrap around” when reaching a certain value, much like calculations on a clock wrap around whenever the value exceeds the number 12. For example, if the clock shows that it is 11 o’clock, then 20 hours later it will be 7 o’clock, not 31 o’clock. The number 31 has no meaning on a normal clock that shows hours.

The number at which the wrap occurs is called the **modulus**. Modular arithmetic generalizes the clock example to arbitrary moduli, and studies equations and phenomena that arise in this new kind of arithmetic. It is of central importance for understanding most modern cryptographic systems, in large parts because modular arithmetic provides the computational infrastructure for algebraic types that have cryptographically useful examples of one-way functions.

Although modular arithmetic appears very different from ordinary integer arithmetic that we are all familiar with, we encourage you to work through the examples and discover that, once they get used to the idea that this is a new kind of calculation, it will seem much less daunting.

3.3.1 Congruence

In what follows, let $n \in \mathbb{N}$ with $n \geq 2$ be a fixed natural number that we will call the **modulus** of our modular arithmetic system. With such an n given, we can then group integers into classes: two integers are in the same class whenever their Euclidean Division (3.2.2) by n will give the same remainder. We two numbers that are in the same class are called **congruent**.

Example 6. If we choose $n = 12$ as in our clock example, then the integers $-7, 5, 17$ and 29 are all congruent with respect to 12, since all of them have the remainder 5 if we perform Euclidean Division on them by 12. Imagining the picture of an analog 12-hour clock, starting at 5 o’clock and adding 12 hours, we are at 5 o’clock again, representing the number 17. Indeed, in many countries, 5:00 in the afternoon is written as 17:00. On the other hand, when we subtract 12 hours, we are at 5 o’clock again, representing the number -7 .

We can formalize this intuition of what congruence should be into a proper definition utilizing Euclidean Division (as explained previously in 3.2). Let $a, b \in \mathbb{Z}$ be two integers, and $n \in \mathbb{N}$ be a natural number such that $n \geq 2$. The integers a and b are said to be **congruent with respect to the modulus n** if and only if the following equation holds:

$$a \bmod n = b \bmod n \quad (3.14)$$

If, on the other hand, two numbers are not congruent with respect to a given modulus n , we call them **incongruent** w.r.t. n .

In other words, **congruence** is an equation “up to congruence”, which means that the equation only needs to hold if we take the modulus of both sides. This is expressed with the following notation:

$$a \equiv b \pmod{n} \quad (3.15)$$

Exercise 13. Which of the following pairs of numbers are congruent with respect to the modulus 13:

- (5, 19)
- (13, 0)
- (-4, 9)
- (0, 0)

Exercise 14. Find all integers x , such that the congruence $x \equiv 4 \pmod{6}$ is satisfied.

3.3.2 Computational Rules

Having defined the notion of a congruence as an equation “up to a modulus”, a follow-up question is if we can manipulate a congruence similarly to an equation. Indeed, we can almost apply the same substitution rules to a congruency as to an equation, with the main difference being that, for some non-zero integer $k \in \mathbb{Z}$, the congruence $a \equiv b \pmod{n}$ is equivalent to the congruence $k \cdot a \equiv k \cdot b \pmod{n}$ only if k and the modulus n are coprime (see 3.2.4).

Suppose that integers $a_1, a_2, b_1, b_2, k \in \mathbb{Z}$ are given. Then the following arithmetic rules hold for congruences:

- $a_1 \equiv b_1 \pmod{n} \Leftrightarrow a_1 + k \equiv b_1 + k \pmod{n}$ (compatibility with translation)
- $a_1 \equiv b_1 \pmod{n} \Rightarrow k \cdot a_1 \equiv k \cdot b_1 \pmod{n}$ (compatibility with scaling)
- $\gcd(k, n) = 1$ and $k \cdot a_1 \equiv k \cdot b_1 \pmod{n} \Rightarrow a_1 \equiv b_1 \pmod{n}$
- $k \cdot a_1 \equiv k \cdot b_1 \pmod{k \cdot n} \Rightarrow a_1 \equiv b_1 \pmod{n}$
- $a_1 \equiv b_1 \pmod{n}$ and $a_2 \equiv b_2 \pmod{n} \Rightarrow a_1 + a_2 \equiv b_1 + b_2 \pmod{n}$ (compatibility with addition)
- $a_1 \equiv b_1 \pmod{n}$ and $a_2 \equiv b_2 \pmod{n} \Rightarrow a_1 \cdot a_2 \equiv b_1 \cdot b_2 \pmod{n}$ (compatibility with multiplication)

Other rules, such as compatibility with subtraction, follow from the rules above. For example, compatibility with subtraction follows from compatibility with scaling by $k = -1$ and compatibility with addition.

Another property of congruences not found in the traditional arithmetic of integers is **Fermat's Little Theorem**. Simply put, it states that, in modular arithmetic, every number raised to the power of a prime number modulus is congruent to the number itself. Or, to be more precise, if $p \in \mathbb{P}$ is a prime number and $k \in \mathbb{Z}$ is an integer, then the following holds:

$$k^p \equiv k \pmod{p} \quad (3.16)$$

If k is coprime to p , then we can divide both sides of this congruence by k and rewrite the expression into the following equivalent form:

$$k^{p-1} \equiv 1 \pmod{p} \quad (3.17)$$

The Sage code below computes examples of Fermat's Little Theorem and highlights the effects of the exponent k being coprime to p (as in the case of 137 and 64) and not coprime to p (as in the case of 1918 and 137):

```
sage: ZZ(137).gcd(ZZ(64))      44
1                                45
sage: ZZ(64)^ZZ(137)%ZZ(137) == ZZ(64)%ZZ(137)  46
True                             47
sage: ZZ(64)^ZZ(137-1)%ZZ(137) == ZZ(1)%ZZ(137)  48
True                             49
sage: ZZ(1918).gcd(ZZ(137))    50
137                             51
sage: ZZ(1918)^ZZ(137)%ZZ(137) == ZZ(1918)%ZZ(137)  52
True                             53
sage: ZZ(1918)^ZZ(137-1)%ZZ(137) == ZZ(1)%ZZ(137)  54
False                            55
```

The following example contains most of the concepts described in this section.

Example 7. Let us solve the following congruence for $x \in \mathbb{Z}$ in modular 6 arithmetic:

$$7 \cdot (2x + 21) + 11 \equiv x - 102 \pmod{6}$$

As many rules for congruences are more or less same as for equations, we can proceed in a similar way as we would if we had an equation to solve. Since both sides of a congruence contain ordinary integers, we can rewrite the left side as follows:

$$7 \cdot (2x + 21) + 11 = 14x + 147 + 11 = 14x + 158$$

We can therefore rewrite the congruence into the equivalent form:

$$14x + 158 \equiv x - 102 \pmod{6}$$

In the next step, we want to shift all instances of x to the left and every other term to the right. So we apply the “compatibility with translation” rules twice. In the first step, we choose $k = -x$, and in a second step, we choose $k = -158$. separate steps 1 and 2 Since “compatibility with

SB: let's separate these two steps in the equivalence below

translation” transforms a congruence into an equivalent form, the solution set will not change, and we get the following:

$$\begin{aligned} 14x + 158 &\equiv x - 102 \pmod{6} \Leftrightarrow \\ 14x - x + 158 - 158 &\equiv x - x - 102 - 158 \pmod{6} \Leftrightarrow \\ 13x &\equiv -260 \pmod{6} \end{aligned}$$

If our congruence was just a regular integer equation, we would divide both sides by 13 to get $x = -20$ as our solution. However, in case of a congruence, we need to make sure that the modulus and the number we want to divide by are coprime to ensure that get an equivalent expression (see rule 3.17). This means that we need to find the greatest common divisor $\gcd(13, 6)$. Since 13 is prime and 6 is not a multiple of 13, we know that $\gcd(13, 6) = 1$, so these numbers are indeed coprime. We therefore compute as follows:

$$13x \equiv -260 \pmod{6} \Leftrightarrow x \equiv -20 \pmod{6}$$

Our task now is to find all integers x such that x is congruent to -20 with respect to the modulus 6. In other words, we have to find all x such that the following equation holds:

$$x \bmod 6 = -20 \bmod 6$$

Since $-4 \cdot 6 + 4 = -20$, we know that $-20 \bmod 6 = 4$, and hence we know that $x = 4$ is a solution to this congruence. However, 22 is another solution, since $22 \bmod 6 = 4$ as well. Another solution is -20 . In fact, there are infinitely many solutions given by the following set:

$$\{\dots, -8, -2, 4, 10, 16, \dots\} = \{4 + k \cdot 6 \mid k \in \mathbb{Z}\}$$

check
reference

Putting all this together, we have shown that every x from the set $\{x = 4 + k \cdot 6 \mid k \in \mathbb{Z}\}$ is a solution to the congruence $7 \cdot (2x + 21) + 11 \equiv x - 102 \pmod{6}$. We double check for two arbitrary numbers from this set, $x = 4$ and $x = 4 + 12 \cdot 6 = 76$ using Sage:

```

888 sage: (ZZ(7) * (ZZ(2) * ZZ(4) + ZZ(21)) + ZZ(11)) % ZZ(6) == (ZZ(7) *
889 (4) - ZZ(102)) % ZZ(6)
890
891 True
892
893 sage: (ZZ(7) * (ZZ(2) * ZZ(76) + ZZ(21)) + ZZ(11)) % ZZ(6) == (
894 ZZ(76) - ZZ(102)) % ZZ(6)
895
896 True

```

If you had not been familiar with modular arithmetic until now and who might be discouraged by how complicated modular arithmetic seems at this point, you should keep two things in mind. First, computing congruences in modular arithmetic is not really more complicated than computations in more familiar number systems (e.g. rational numbers), it is just a matter of getting used to it. Second, once we introduce the idea of remainder class representations in 3.3.4, computations become conceptually cleaner and easier to handle.

Exercise 15. Consider the modulus 13 and find all solutions $x \in \mathbb{Z}$ to the following congruence:

$$5x + 4 \equiv 28 + 2x \pmod{13}$$

Exercise 16. Consider the modulus 23 and find all solutions $x \in \mathbb{Z}$ to the following congruence:

$$69x \equiv 5 \pmod{23}$$

Exercise 17. Consider the modulus 23 and find all solutions $x \in \mathbb{Z}$ to the following congruence:

$$69x \equiv 46 \pmod{23}$$

Exercise 18. Let a, b, k be integers, such that $a \equiv b \pmod{n}$ holds. Show $a^k \equiv b^k \pmod{n}$.

Exercise 19. Let a, n be integers, such that a and n are not coprime. For which $b \in \mathbb{Z}$ does the congruence $a \cdot x \equiv b \pmod{n}$ have a solution x and how does the solution set look in that case?

3.3.3 The Chinese Remainder Theorem

We have seen how to solve congruences in modular arithmetic. In this section, we look at how to solve systems of congruences with different moduli using the **Chinese Remainder Theorem**. This states that, for any $k \in \mathbb{N}$ and coprime natural numbers $n_1, \dots, n_k \in \mathbb{N}$, as well as integers $a_1, \dots, a_k \in \mathbb{Z}$, the so-called **simultaneous congruences** (in 3.18 below) have a solution, and all possible solutions of this congruence system are congruent modulo the product $N = n_1 \cdot \dots \cdot n_k$.²

$$\begin{aligned} x &\equiv a_1 \pmod{n_1} \\ x &\equiv a_2 \pmod{n_2} \\ &\dots \\ x &\equiv a_k \pmod{n_k} \end{aligned} \tag{3.18}$$

The following algorithm computes the solution set:

check
algorithm
floating

Algorithm 2 Chinese Remainder Theorem

Require: $k \in \mathbb{Z}$, $j \in \mathbb{N}_0$ and $n_0, \dots, n_{k-1} \in \mathbb{N}$ coprime

procedure CONGRUENCE-SYSTEMS-SOLVER(a_0, \dots, a_{k-1})

$N \leftarrow n_0 \cdot \dots \cdot n_{k-1}$

while $j < k$ **do**

$N_j \leftarrow N / n_j$

$(_, s_j, t_j) \leftarrow \text{EXT-EUCLID}(N_j, n_j)$

$$\triangleright 1 = s_j \cdot N_j + t_j \cdot n_j$$

end while

$x' \leftarrow \sum_{j=0}^{k-1} a_j \cdot s_j \cdot N_j$

$x \leftarrow x' \bmod N$

return $\{x + m \cdot N \mid m \in \mathbb{Z}\}$

end procedure

Ensure: $\{x + m \cdot N \mid m \in \mathbb{Z}\}$ is the complete solution set to 3.18.

Example 8. To illustrate how to solve simultaneous congruences using the Chinese Remainder Theorem, let's look at the following system of congruences:

$$\begin{aligned} x &\equiv 4 \pmod{7} \\ x &\equiv 1 \pmod{3} \\ x &\equiv 3 \pmod{5} \\ x &\equiv 0 \pmod{11} \end{aligned}$$

²This is the classical Chinese Remainder Theorem as it was already known in ancient China. Under certain circumstances, the theorem can be extended to non-coprime moduli n_1, \dots, n_k but this is beyond the scope of this book. Interested readers should consult XXX [add references](#)

Clearly, all moduli are coprime (since they are all prime numbers). Now we calculate as follows:

$$\begin{aligned} N &= 7 \cdot 3 \cdot 5 \cdot 11 = 1155 \\ N_1 &= 1155/7 = 165 \\ N_2 &= 1155/3 = 385 \\ N_3 &= 1155/5 = 231 \\ N_4 &= 1155/11 = 105 \end{aligned}$$

From this, we calculate with the Extended Euclidean Algorithm:

$$\begin{aligned} 1 &= 2 \cdot 165 + -47 \cdot 7 \\ 1 &= 1 \cdot 385 + -128 \cdot 3 \\ 1 &= 1 \cdot 231 + -46 \cdot 5 \\ 1 &= 2 \cdot 105 + -19 \cdot 11 \end{aligned}$$

add more
explanation

As a result, we get $x = 4 \cdot 2 \cdot 165 + 1 \cdot 1 \cdot 385 + 3 \cdot 1 \cdot 231 + 0 \cdot 2 \cdot 105 = 2398$ as one solution. Because $2398 \bmod 1155 = 88$, the set of all solutions is $\{\dots, -2222, -1067, 88, 1243, 2398, \dots\}$. We can use Sage's computation of the Chinese Remainder Theorem (CRT) to double check our findings:

```
sage: CRT_list([4,1,3,0], [7,3,5,11])
88
```

60
61

3.3.4 Remainder Class Representation

As we have seen in various examples before, computing congruences can be cumbersome, and solution sets are large in general. It is therefore advantageous to find some kind of simplification for modular arithmetic.

Fortunately, this is possible and relatively straightforward once we identify each set of numbers that have equal remainders with that remainder itself, and call this set the **remainder class** or **residue class** representation in modulo n arithmetic.

It then follows from the properties of Euclidean Division that there are exactly n different remainder classes for every modulus n , and that integer addition and multiplication can be projected to a new kind of addition and multiplication on those classes.

Informally speaking, the new rules for addition and multiplication are then computed by taking any element of the first remainder class and some element of the second remainder class, then add or multiply them in the usual way and see which remainder class the result is contained in. The following example makes this abstract description more concrete.

Example 9 (Arithmetic modulo 6). Choosing the modulus $n = 6$, we have six remainder classes of integers which are congruent modulo 6, that is, they have the same remainder when divided by 6. When we identify each of those remainder classes with the remainder, we get the following identification:

$$\begin{aligned} 0 &:= \{\dots, -6, 0, 6, 12, \dots\} \\ 1 &:= \{\dots, -5, 1, 7, 13, \dots\} \\ 2 &:= \{\dots, -4, 2, 8, 14, \dots\} \\ 3 &:= \{\dots, -3, 3, 9, 15, \dots\} \\ 4 &:= \{\dots, -2, 4, 10, 16, \dots\} \\ 5 &:= \{\dots, -1, 5, 11, 17, \dots\} \end{aligned}$$

To compute the new addition law of those remainder class representatives, say $2 + 5$, we choose an arbitrary element from each class, say 14 and -1 , adds those numbers in the usual way, and then looks at the remainder class of the result.

Adding 14 and (-1) , we get 13, and 13 is in the remainder class (of) 1. Hence, we find that $2 + 5 = 1$ in modular 6 arithmetic, which is a more readable way to write the congruence $2 + 5 \equiv 1 \pmod{6}$.

Applying the same reasoning to all remainder classes, addition and multiplication can be transferred to the representatives of the remainder classes. The results for modulus 6 arithmetic are summarized in the following addition and multiplication tables:

$$\begin{array}{c|cccccc} + & 0 & 1 & 2 & 3 & 4 & 5 \\ \hline 0 & 0 & 1 & 2 & 3 & 4 & 5 \\ 1 & 1 & 2 & 3 & 4 & 5 & 0 \\ 2 & 2 & 3 & 4 & 5 & 0 & 1 \\ 3 & 3 & 4 & 5 & 0 & 1 & 2 \\ 4 & 4 & 5 & 0 & 1 & 2 & 3 \\ 5 & 5 & 0 & 1 & 2 & 3 & 4 \end{array} \quad \begin{array}{c|cccccc} \cdot & 0 & 1 & 2 & 3 & 4 & 5 \\ \hline 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 1 & 2 & 3 & 4 & 5 \\ 2 & 0 & 2 & 4 & 0 & 2 & 4 \\ 3 & 0 & 3 & 0 & 3 & 0 & 3 \\ 4 & 0 & 4 & 2 & 0 & 4 & 2 \\ 5 & 0 & 5 & 4 & 3 & 2 & 1 \end{array} \quad (3.19)$$

This way, we have defined a new arithmetic system that contains just 6 numbers and comes with its own definition of addition and multiplication. We call it **modular 6 arithmetic** and write the associated **type** as \mathbb{Z}_6 .

To see why identifying a remainder class with its remainder is useful and actually simplifies congruence computations significantly, let's go back to the congruence from example 7:

$$7 \cdot (2x + 21) + 11 \equiv x - 102 \pmod{6} \quad (3.20)$$

As shown in example 7, the arithmetic of congruences can deviate from ordinary arithmetic: for example, division needs to check whether the modulus and the dividend are coprimes, and solutions are not unique in general.

We can rewrite the congruence in (3.20) as an **equation** over our new arithmetic type \mathbb{Z}_6 by **projecting onto the remainder classes**: since $7 \bmod 6 = 1$, $21 \bmod 6 = 3$, $11 \bmod 6 = 5$ and $102 \bmod 6 = 0$, we get the following:

$$\begin{aligned} 7 \cdot (2x + 21) + 11 &\equiv x - 102 \pmod{6} \text{ over } \mathbb{Z} \\ &\Leftrightarrow 1 \cdot (2x + 3) + 5 = x \text{ over } \mathbb{Z}_6 \end{aligned}$$

We can use the multiplication and addition table in (3.19) above to solve the equation on the right like we would solve normal integer equations:

$$\begin{array}{ll} 1 \cdot (2x + 3) + 5 = x & \\ 2x + 3 + 5 = x & \# \text{ addition table: } 3 + 5 = 2 \\ 2x + 2 = x & \# \text{ add 4 and } -x \text{ on both sides} \\ 2x + 2 + 4 - x = x + 4 - x & \# \text{ addition table: } 2 + 4 = 0 \\ x = 4 & \end{array}$$

As we can see, despite the somewhat unfamiliar rules of addition and multiplication, solving congruences this way is very similar to solving normal equations. And, indeed, the solution set is identical to the solution set of the original congruence, since 4 is identified with the set $\{4 + 6 \cdot k \mid k \in \mathbb{Z}\}$.

We can use Sage to do computations in our modular 6 arithmetic type. This is particularly useful to double-check our computations:

```
sage: Z6 = Integers(6)
sage: Z6(2) + Z6(5)
1
sage: Z6(7) * (Z6(2) * Z6(4) + Z6(21)) + Z6(11) == Z6(4) - Z6(102)
True
```

Remark 2 (k -bit modulus). In cryptographic papers, we sometimes read phrases like “[...] using a 4096-bit modulus”. This means that the underlying modulus n of the modular arithmetic used in the system has a binary representation with a length of 4096 bits. In contrast, the number 6 has the binary representation 110 and hence our example 9 describes a 3-bit modulus arithmetic system.

Exercise 20. Define \mathbb{Z}_{13} as the the arithmetic modulo 13 analogously to example 9. Then consider the congruence from exercise 15 and rewrite it into an equation in \mathbb{Z}_{13} .

modulo/
modulus/
modu-
lar? unify
through-
out

3.3.5 Modular Inverses

As we know, integers can be added, subtracted and multiplied so that the result is also an integer, but this is not true for the division of integers in general: for example, $3/2$ is not an integer. To see why this is so from a more theoretical perspective, let us consider the definition of a multiplicative inverse first. When we have a set that has some kind of multiplication defined on it, and we have a distinguished element of that set that behaves neutrally with respect to that multiplication (doesn't change anything when multiplied with any other element), then we can define **multiplicative inverses** in the following way:

Definition 3.3.5.1. Let S be our set that has some notion $a \cdot b$ of multiplication and a **neutral element** $1 \in S$, such that $1 \cdot a = a$ for all elements $a \in S$. Then a **multiplicative inverse** a^{-1} of an element $a \in S$ is defined as follows:

$$a \cdot a^{-1} = 1 \quad (3.21)$$

Informally speaking, the definition of a multiplicative inverse means that it “cancels” the original element, so that multiplying the two results in 1.

Numbers that have multiplicative inverses are of particular interest, because they immediately lead to the definition of division by those numbers. In fact, if a is number such that the multiplicative inverse a^{-1} exists, then we define **division** by a simply as multiplication by the inverse:

$$\frac{b}{a} := b \cdot a^{-1} \quad (3.22)$$

Example 10. Consider the set of rational numbers, also known as fractions, \mathbb{Q} . For this set, the neutral element of multiplication is 1, since $1 \cdot a = a$ for all rational numbers. For example, $1 \cdot 4 = 4$, $1 \cdot \frac{1}{4} = \frac{1}{4}$, or $1 \cdot 0 = 0$ and so on.

Every rational number $a \neq 0$ has a multiplicative inverse, given by $\frac{1}{a}$. For example, the multiplicative inverse of 3 is $\frac{1}{3}$, since $3 \cdot \frac{1}{3} = 1$, the multiplicative inverse of $\frac{5}{7}$ is $\frac{7}{5}$, since $\frac{5}{7} \cdot \frac{7}{5} = 1$, and so on.

Example 11. Looking at the set \mathbb{Z} of integers, we see that the neutral element of multiplication is the number 1. We can also see that no integer other than 1 or -1 has a multiplicative inverse, since the equation $a \cdot x = 1$ has no integer solutions for $a \neq 1$ or $a \neq -1$.

The definition of multiplicative inverse has a parallel for addition called the **additive inverse**. In the case of integers, the neutral element with respect to addition is 0, since $a + 0 = 0$ for all integers $a \in \mathbb{Z}$. The additive inverse always exists, and is given by the negative number $-a$, since $a + (-a) = 0$.

Example 12. Looking at the set \mathbb{Z}_6 of residue classes modulo 6 from example 9, we can use the multiplication table in (3.19) to find multiplicative inverses. To do so, we look at the row of the element and find the entry equal to 1. If such an entry exists, the element of that column is the multiplicative inverse. If, on the other hand, the row has no entry equal to 1, we know that the element has no multiplicative inverse.

For example in, \mathbb{Z}_6 , the multiplicative inverse of 5 is 5 itself, since $5 \cdot 5 = 1$. We can also see that 5 and 1 are the only elements that have multiplicative inverses in \mathbb{Z}_6 .

Now, since 5 has a multiplicative inverse in modulo 6 arithmetic, we can divide by 5 in \mathbb{Z}_6 , since we have a notation of multiplicative inverse and division is nothing but multiplication by the multiplicative inverse:

$$\frac{4}{5} = 4 \cdot 5^{-1} = 4 \cdot 5 = 2$$

From the last example, we can make the interesting observation that, while 5 has no multiplicative inverse as an integer, it has a multiplicative inverse in modular 6 arithmetic.

This raises the question of which numbers have multiplicative inverses in modular arithmetic. The answer is that, in modular n arithmetic, a number r has a multiplicative inverse if and only if n and r are coprime. Since $\gcd(n, r) = 1$ in that case, we know from the Extended Euclidean Algorithm that there are numbers s and t , such that the following equation holds:

$$1 = s \cdot n + t \cdot r \quad (3.23)$$

If we take the modulus n on both sides, the term $s \cdot n$ vanishes, which tells us that $t \bmod n$ is the multiplicative inverse of r in modular n arithmetic.

Example 13 (Multiplicative inverses in \mathbb{Z}_6). In the previous example, we looked up multiplicative inverses in \mathbb{Z}_6 from the lookup table in (3.19). In real-world examples, it is usually impossible to write down those lookup tables, as the modulus is too large, and the sets occasionally contain more elements than there are atoms in the observable universe.

Now, trying to determine that $2 \in \mathbb{Z}_6$ has no multiplicative inverse in \mathbb{Z}_6 without using the lookup table, we immediately observe that 2 and 6 are not coprime, since their greatest common divisor is 2. It follows that equation 3.23 has no solutions s and t , which means that 2 has no multiplicative inverse in \mathbb{Z}_6 .

The same reasoning works for 3 and 4, as neither of these are coprime with 6. The case of 5 is different, since $\gcd(6, 5) = 1$. To compute the multiplicative inverse of 5, we use the Extended Euclidean Algorithm and compute the following:

k	r_k	s_k	$t_k = (r_k - s_k \cdot a) \bmod b$
0	6	1	0
1	5	0	1
2	1	1	-1
3	0	.	.

We get $s = 1$ as well as $t = -1$ and have $1 = 1 \cdot 6 - 1 \cdot 5$. From this, it follows that $-1 \bmod 6 = 5$ is the multiplicative inverse of 5 in modular 6 arithmetic. We can double check using Sage:

```
sage: ZZ(6).xgcd(ZZ(5))
```

expand on this

1031 (1, 1, -1)

68

At this point, the attentive reader might notice that the situation where the modulus is a prime number is of particular interest, because we know from exercise 9 that, in these cases, all remainder classes must have modular inverses, since $\gcd(r, n) = 1$ for prime n and any $r < n$. In fact, Fermat's Little Theorem (3.16) provides a way to compute multiplicative inverses in this situation, since, in case of a prime modulus p and $r < p$, we get the following:

$$\begin{aligned} r^p &\equiv r \pmod{p} \Leftrightarrow \\ r^{p-1} &\equiv 1 \pmod{p} \Leftrightarrow \\ r \cdot r^{p-2} &\equiv 1 \pmod{p} \end{aligned}$$

1032 This tells us that the multiplicative inverse of a residue class r in modular p arithmetic is pre-
1033 cisely r^{p-2} .

Example 14 (Modular 5 arithmetic). To see the unique properties of modular arithmetic when the modulus is a prime number, we will replicate our findings from example 9, but this time for the prime modulus 5. For $p = 5$ we have five equivalence classes of integers which are congruent modulo 5. We write this as follows:

$$\begin{aligned} 0 &:= \{\dots, -5, 0, 5, 10, \dots\} \\ 1 &:= \{\dots, -4, 1, 6, 11, \dots\} \\ 2 &:= \{\dots, -3, 2, 7, 12, \dots\} \\ 3 &:= \{\dots, -2, 3, 8, 13, \dots\} \\ 4 &:= \{\dots, -1, 4, 9, 14, \dots\} \end{aligned}$$

1034 Addition and multiplication can be transferred to the equivalence classes, in a way exactly
1035 parallel to example 9. This results in the following addition and multiplication tables:

+	0	1	2	3	4	·	0	1	2	3	4	(3.24)
0	0	1	2	3	4	0	0	0	0	0	0	
1	1	2	3	4	0	1	0	1	2	3	4	
2	2	3	4	0	1	2	0	2	4	1	3	
3	3	4	0	1	2	3	0	3	1	4	2	
4	4	0	1	2	3	4	0	4	3	2	1	

1036 Calling the set of remainder classes in modular 5 arithmetic with this addition and multiplication
1037 \mathbb{Z}_5 , we see some subtle but important differences to the situation in \mathbb{Z}_6 . In particular, we see
1038 that in the multiplication table, every remainder $r \neq 0$ has the entry 1 in its row and therefore
1039 has a multiplicative inverse. In addition, there are no non-zero elements such that their product
1040 is zero.

1041 To use Fermat's Little Theorem in \mathbb{Z}_5 for computing multiplicative inverses (instead of using
1042 the multiplication table), let's consider $3 \in \mathbb{Z}_5$. We know that the multiplicative inverse is given
1043 by the remainder class that contains $3^{5-2} = 3^3 = 3 \cdot 3 \cdot 3 = 4 \cdot 3 = 2$. And indeed $3^{-1} = 2$, since
1044 $3 \cdot 2 = 1$ in \mathbb{Z}_5 .

1045 We can use Sage to do computations in our modular 5 arithmetic type to double-check our
1046 computations:

1047 **sage:** `Z5 = Integers(5)`
1048 **sage:** `Z5(3) ** (5-2)`

69

70

1049	2	71
1050	sage: Z5 (3) ** (-1)	72
1051	2	73
1052	sage: Z5 (3) ** (5-2) == Z5 (3) ** (-1)	74
1053	True	75

Example 15. To understand one of the principal differences between prime number modular arithmetic and non-prime number modular arithmetic, consider the linear equation $a \cdot x + b = 0$ defined over both types \mathbb{Z}_5 and \mathbb{Z}_6 . Since every non-zero element has a multiplicative inverse in \mathbb{Z}_5 , we can always solve these equations in \mathbb{Z}_5 , which is not true in \mathbb{Z}_6 . To see that, consider the equation $3x + 3 = 0$. In \mathbb{Z}_5 we have the following:

$$\begin{array}{ll}
 3x + 3 = 0 & \# \text{ add 2 and on both sides} \\
 3x + 3 + 2 = 2 & \# \text{ addition-table: } 2 + 3 = 0 \\
 3x = 2 & \# \text{ divide by 3 (which equals multiplication by 2)} \\
 2 \cdot (3x) = 2 \cdot 2 & \# \text{ multiplication-table: } 2 \cdot 2 = 4 \\
 x = 4 &
 \end{array}$$

So in the case of our prime number modular arithmetic, we get the unique solution $x = 4$. Now consider \mathbb{Z}_6 :

$$\begin{array}{ll}
 3x + 3 = 0 & \# \text{ add 3 and on both sides} \\
 3x + 3 + 3 = 3 & \# \text{ addition-table: } 3 + 3 = 0 \\
 3x = 3 & \# \text{ division not possible (no multiplicative inverse of 3 exists)}
 \end{array}$$

1054 So, in this case, we cannot solve the equation for x by dividing by 3. And, indeed, when we look
 1055 at the multiplication table of \mathbb{Z}_6 (example 9), we find that there are three solutions $x \in \{1, 3, 5\}$,
 1056 such that $3x + 3 = 0$ holds true for all of them.

1057 *Exercise 21.* Consider the modulus $n = 24$. Which of the integers 7, 1, 0, 805, -4255 have
 1058 multiplicative inverses in modular 24 arithmetic? Compute the inverses, in case they exist.

1059 *Exercise 22.* Find the set of all solutions to the congruence $17(2x + 5) - 4 \equiv 2x + 4 \pmod{5}$.
 1060 Then project the congruence into \mathbb{Z}_5 and solve the resulting equation in \mathbb{Z}_5 . Compare the results.

1061 *Exercise 23.* Find the set of all solutions to the congruence $17(2x + 5) - 4 \equiv 2x + 4 \pmod{6}$.
 1062 Then project the congruence into \mathbb{Z}_6 and try to solve the resulting equation in \mathbb{Z}_6 .

1063 3.4 Polynomial arithmetic

1064 A polynomial is an expression consisting of variables (also-called indeterminates) and coeffi-
 1065 cients that involves only the operations of addition, subtraction and multiplication. All coeffi-
 1066 cients of a polynomial must have the same type, e.g. they must all be integers or they must all
 1067 be rational numbers, etc.

1068 To be more precise, an **univariate³ polynomial** is an expression as shown below:

$$P(x) := \sum_{j=0}^m a_j x^j = a_m x^m + a_{m-1} x^{m-1} + \cdots + a_1 x + a_0, \quad (3.25)$$

³In our context, the term univariate means that the polynomial contains a single variable only.

In (3.25) x is called the **variable**, and each a is called a **coefficient**. If R is the type of the coefficients, then the set of all **univariate polynomials with coefficients in R** is written as $R[x]$. Univariate polynomials are often simply called polynomials, and written as $P(x) \in R[x]$. The constant term a_0 as is also written as $P(0)$.

A polynomial is called the **zero polynomial** if all its coefficients are zero. A polynomial is called the **one polynomial** if the constant term is 1 and all other coefficients are zero.

Given a univariate polynomial $P(x) = \sum_{j=0}^m a_j x^j$ that is not the zero polynomial, we call the non-negative integer $\deg(P) := m$ the *degree* of P , and define the degree of the zero polynomial to be $-\infty$, where $-\infty$ (negative infinity) is a symbol with the properties that $-\infty + m = -\infty$ and $-\infty < m$ for all non-negative integers $m \in \mathbb{N}_0$.

In addition, we denote the coefficient of the term with the highest degree, called **leading coefficient**, of the polynomial P as follows:

$$Lc(P) := a_m \quad (3.26)$$

add explanation on why this is important

We can restrict the set $R[x]$ of **all** polynomials with coefficients in R to the set of all such polynomials that have a degree that does not exceed a certain value. If m is the maximum degree allowed, we write $R_{\leq m}[x]$ for the set of all polynomials with a degree less than or equal to m .

Example 16 (Integer Polynomials). The coefficients of a polynomial must all have the same type. The set of polynomials with integer coefficients is written as $\mathbb{Z}[x]$. Some examples of such polynomials are listed below:

$P_1(x) = 2x^2 - 4x + 17$	# with $\deg(P_1) = 2$ and $Lc(P_1) = 2$
$P_2(x) = x^{23}$	# with $\deg(P_2) = 23$ and $Lc(P_2) = 1$
$P_3(x) = x$	# with $\deg(P_3) = 1$ and $Lc(P_3) = 1$
$P_4(x) = 174$	# with $\deg(P_4) = 0$ and $Lc(P_4) = 174$
$P_5(x) = 1$	# with $\deg(P_5) = 0$ and $Lc(P_5) = 1$
$P_6(x) = 0$	# with $\deg(P_6) = -\infty$ and $Lc(P_6) = 0$
$P_7(x) = (x-2)(x+3)(x-5)$	

Every integer can be seen as an integer polynomial of degree zero. P_7 is a polynomial, because we can expand its definition into $P_7(x) = x^3 - 4x^2 - 11x + 30$, which is a polynomial of degree 3 and leading coefficient 1.

The following expressions are not integer polynomials:

$$\begin{aligned} Q_1(x) &= 2x^2 + 4 + 3x^{-2} \\ Q_2(x) &= 0.5x^4 - 2x \\ Q_3(x) &= 2^x \end{aligned}$$

Q_1 is not an integer polynomial because the expression x^{-2} has a negative exponent. Q_2 is not an integer polynomial because the coefficient 0.5 is not an integer. Q_3 is not an integer polynomial because the variable appears in the exponent of a coefficient.

We can use Sage to do computations with polynomials. To do so, we have to specify the symbol for the variable and the type for the coefficients. (For the definition of rings see 4.2.) Note, however, that Sage defines the degree of the zero polynomial to be -1 .

```
sage: Zx = ZZ['x'] # integer polynomials with variable x
sage: Zt.<t> = ZZ[] # integer polynomials with variable t
```

why is this ref here?

what does this imply?

1095	sage: Zx	78
1096	Univariate Polynomial Ring in x over Integer Ring	79
1097	sage: Zt	80
1098	Univariate Polynomial Ring in t over Integer Ring	81
1099	sage: p1 = Zx([17,-4,2])	82
1100	sage: p1	83
1101	2*x^2 - 4*x + 17	84
1102	sage: p1.degree()	85
1103	2	86
1104	sage: p1.leading_coefficient()	87
1105	2	88
1106	sage: p2 = Zt(t^23)	89
1107	sage: p2	90
1108	t^23	91
1109	sage: p6 = Zx([0])	92
1110	sage: p6.degree()	93
1111	-1	94

Example 17 (Polynomials over \mathbb{Z}_6). Recall the definition of modular 6 arithmetics \mathbb{Z}_6 from example 9. The set of all polynomials with variable x and coefficients in \mathbb{Z}_6 is symbolized as $\mathbb{Z}_6[x]$. Some examples of polynomials from $\mathbb{Z}_6[x]$ are given below:

$$\begin{aligned}
 P_1(x) &= 2x^2 - 4x + 5 & \# \text{ with } \deg(P_1) = 2 \text{ and } Lc(P_1) = 2 \\
 P_2(x) &= x^{23} & \# \text{ with } \deg(P_2) = 23 \text{ and } Lc(P_2) = 1 \\
 P_3(x) &= x & \# \text{ with } \deg(P_3) = 1 \text{ and } Lc(P_3) = 1 \\
 P_4(x) &= 3 & \# \text{ with } \deg(P_4) = 0 \text{ and } Lc(P_4) = 3 \\
 P_5(x) &= 1 & \# \text{ with } \deg(P_5) = 0 \text{ and } Lc(P_5) = 1 \\
 P_6(x) &= 0 & \# \text{ with } \deg(P_6) = -\infty \text{ and } Lc(P_6) = 0 \\
 P_7(x) &= (x-2)(x+3)(x-5)
 \end{aligned}$$

Just like in the previous example, P_7 is a polynomial. However, since we are working with coefficients from \mathbb{Z}_6 now, the expansion of P_7 is computed differently, as we have to use addition and multiplication in \mathbb{Z}_6 as defined in (3.19). We get the following:

$$\begin{aligned}
 (x-2)(x+3)(x-5) &= (x+4)(x+3)(x+1) & \# \text{ additive inverses in } \mathbb{Z}_6 \\
 &= (x^2 + 4x + 3x + 3 \cdot 4)(x+1) & \# \text{ bracket expansion} \\
 &= (x^2 + 1x + 0)(x+1) & \# \text{ computation in } \mathbb{Z}_6 \\
 &= x^3 + x^2 + x^2 + x & \# \text{ bracket expansion} \\
 &= x^3 + 2x^2 + x
 \end{aligned}$$

check
reference

Again, we can use Sage to do computations with polynomials that have their coefficients in \mathbb{Z}_6 . (For the definition of rings see 4.2.) To do so, we have to specify the symbol for the variable and the type for the coefficients:

1115	sage: Z6 = Integers(6)	95
1116	sage: Z6x = Z6['x']	96
1117	sage: Z6x	97

why is
this ref
here?


```

1118 Univariate Polynomial Ring in x over Ring of integers modulo 6 98
1119 sage: p1 = Z6x([5,-4,2]) 99
1120 sage: p1 100
1121 2*x^2 + 2*x + 5 101
1122 sage: p1 = Z6x([17,-4,2]) 102
1123 sage: p1 103
1124 2*x^2 + 2*x + 5 104
1125 sage: Z6x(x-2)*Z6x(x+3)*Z6x(x-5) == Z6x(x^3 + 2*x^2 + x) 105
1126 True 106

```

1127 Given some element from the same type as the coefficients of a polynomial, the polynomial can be evaluated at that element, which means that we insert the given element for every occurrence of the variable x in the polynomial expression.

1130 To be more precise, let $P \in R[x]$, with $P(x) = \sum_{j=0}^m a_j x^j$ be a polynomial with a coefficient of type R and let $b \in R$ be an element of that type. Then the **evaluation** of P at b is given as follows:

$$P(b) = \sum_{j=0}^m a_j b^j \quad (3.27)$$

Example 18. Consider the integer polynomials from example 16 again. To evaluate them at given points, we have to insert the point for all occurrences of x in the polynomial expression. Inserting arbitrary values from \mathbb{Z} , we get the following:

$$P_1(2) = 2 \cdot 2^2 - 4 \cdot 2 + 17 = 17$$

$$P_2(3) = 3^{23} = 94143178827$$

$$P_3(-4) = -4 = -4$$

$$P_4(15) = 174$$

$$P_5(0) = 1$$

$$P_6(1274) = 0$$

$$P_7(-6) = (-6-2)(-6+3)(-6-5) = -264$$

is this
right?

1133 Note, however, that it is not possible to evaluate any of those polynomial on values of different
 1134 type. For example, it is not strictly correct to write $P_1(0.5)$, since 0.5 is not an integer. We can
 1135 verify our computations using Sage:

```

1136 sage: Zx = ZZ['x'] 107
1137 sage: p1 = Zx([17,-4,2]) 108
1138 sage: p7 = Zx(x-2)*Zx(x+3)*Zx(x-5) 109
1139 sage: p1(ZZ(2)) 110
1140 17 111
1141 sage: p7(ZZ(-6)) == ZZ(-264) 112
1142 True 113

```

Example 19. Consider the polynomials with coefficients in \mathbb{Z}_6 from example 17 again. To evaluate them at given values from \mathbb{Z}_6 , we have to insert the point for all occurrences of x in the

check
reference

polynomial expression. We get the following:

$$P_1(2) = 2 \cdot 2^2 - 4 \cdot 2 + 5 = 2 - 2 + 5 = 5$$

$$P_2(3) = 3^{23} = 3$$

$$P_3(-4) = P_3(2) = 2$$

$$P_5(0) = 1$$

$$P_6(4) = 0$$

1143

```
1144 sage: Z6 = Integers(6)
```

114

```
1145 sage: Z6x = Z6['x']
```

115

```
1146 sage: p1 = Z6x([5, -4, 2])
```

116

```
1147 sage: p1(Z6(2)) == Z6(5)
```

117

```
1148 True
```

118

1149 *Exercise 24.* Compare both expansions of P_7 from $\mathbb{Z}[x]$ in example 16 and from $\mathbb{Z}_6[x]$ in
 1150 example 17, and consider the definition of \mathbb{Z}_6 as given in example 9. Can you see how the
 1151 definition of P_7 over \mathbb{Z} projects to the definition over \mathbb{Z}_6 if you consider the residue classes of
 1152 \mathbb{Z}_6 ?

the task
could be
defined
more
clearly

1153 3.4.1 Polynomial arithmetic

1154 Polynomials behave like integers in many ways. In particular, they can be added, subtracted and
 1155 multiplied. In addition, they have their own notion of Euclidean Division. Informally speaking,
 1156 we can add two polynomials by simply adding the coefficients of the same index, and we can
 1157 multiply them by applying the distributive property, that is, by multiplying every term of the
 1158 left factor with every term of the right factor and adding the results together.

1159 To be more precise, let $\sum_{n=0}^{m_1} a_n x^n$ and $\sum_{n=0}^{m_2} b_n x^n$ be two polynomials from $R[x]$. Then the
 1160 **sum** and the **product** of these polynomials is defined as follows:

$$\sum_{n=0}^{m_1} a_n x^n + \sum_{n=0}^{m_2} b_n x^n = \sum_{n=0}^{\max\{m_1, m_2\}} (a_n + b_n) x^n \quad (3.28)$$

1161

$$\left(\sum_{n=0}^{m_1} a_n x^n \right) \cdot \left(\sum_{n=0}^{m_2} b_n x^n \right) = \sum_{n=0}^{m_1+m_2} \sum_{i=0}^n a_i b_{n-i} x^n \quad (3.29)$$

1162 A rule for polynomial subtraction can be deduced from these two rules by first multiplying the
 1163 **subtrahend** with (the polynomial) -1 and then add the result to the **minuend**.

subtrahend

1164 Regarding the definition of the degree of a polynomial, we see that the degree of the sum is
 1165 always the maximum of the degrees of both summands, and the degree of the product is always
 1166 the degree of the sum of the factors, since we defined $-\infty + m = -\infty$ for every integer $m \in \mathbb{Z}$.

minuend

Example 20. To give an example of how polynomial arithmetic works, consider the following
 two integer polynomials $P, Q \in \mathbb{Z}[x]$ with $P(x) = 5x^2 - 4x + 2$ and $Q(x) = x^3 - 2x^2 + 5$. The
 sum of these two polynomials is computed by adding the coefficients of each term with equal
 exponent in x . This gives the following:

$$\begin{aligned} (P + Q)(x) &= (0 + 1)x^3 + (5 - 2)x^2 + (-4 + 0)x + (2 + 5) \\ &= x^3 + 3x^2 - 4x + 7 \end{aligned}$$

The product of these two polynomials is computed by multiplying each term in the first factor with each term in the second factor. We get the following:

$$\begin{aligned}
 (P \cdot Q)(x) &= (5x^2 - 4x + 2) \cdot (x^3 - 2x^2 + 5) \\
 &= (5x^5 - 10x^4 + 25x^2) + (-4x^4 + 8x^3 - 20x) + (2x^3 - 4x^2 + 10) \\
 &= 5x^5 - 14x^4 + 10x^3 + 21x^2 - 20x + 10
 \end{aligned}$$

1167

```

1168 sage: Zx = ZZ['x']                                     119
1169 sage: P = Zx([2, -4, 5])                                120
1170 sage: Q = Zx([5, 0, -2, 1])                              121
1171 sage: P+Q == Zx(x^3 +3*x^2 -4*x +7)                     122
1172 True                                                    123
1173 sage: P*Q == Zx(5*x^5 -14*x^4 +10*x^3+21*x^2-20*x +10)  124
1174 True                                                    125

```

Example 21. Let us consider the polynomials of the previous example 20, but interpreted in modular 6 arithmetic. So we consider $P, Q \in \mathbb{Z}_6[x]$ again with $P(x) = 5x^2 - 4x + 2$ and $Q(x) = x^3 - 2x^2 + 5$. This time we get the following:

$$\begin{aligned}
 (P + Q)(x) &= (0 + 1)x^3 + (5 - 2)x^2 + (-4 + 0)x + (2 + 5) \\
 &= (0 + 1)x^3 + (5 + 4)x^2 + (2 + 0)x + (2 + 5) \\
 &= x^3 + 3x^2 + 2x + 1
 \end{aligned}$$

$$\begin{aligned}
 (P \cdot Q)(x) &= (5x^2 - 4x + 2) \cdot (x^3 - 2x^2 + 5) \\
 &= (5x^2 + 2x + 2) \cdot (x^3 + 4x^2 + 5) \\
 &= (5x^5 + 2x^4 + 1x^2) + (2x^4 + 2x^3 + 4x) + (2x^3 + 2x^2 + 4) \\
 &= 5x^5 + 4x^4 + 4x^3 + 3x^2 + 4x + 4
 \end{aligned}$$

1175

```

1176 sage: Z6x = Integers(6)['x']                           126
1177 sage: P = Z6x([2, -4, 5])                                127
1178 sage: Q = Z6x([5, 0, -2, 1])                              128
1179 sage: P+Q == Z6x(x^3 +3*x^2 +2*x +1)                     129
1180 True                                                    130
1181 sage: P*Q == Z6x(5*x^5 +4*x^4 +4*x^3+3*x^2+4*x +4)      131
1182 True                                                    132

```

Exercise 25. Compare the sum $P + Q$ and the product $P \cdot Q$ from the previous two examples 20 and 21, and consider the definition of \mathbb{Z}_6 as given in example 9. How can we derive the computations in $\mathbb{Z}_6[x]$ from the computations in $\mathbb{Z}[x]$?

3.4.2 Euclidean Division with polynomials

The arithmetic of polynomials shares a lot of properties with the arithmetic of integers. As a consequence, the concept of Euclidean Division and the algorithm of long division is also

defined for polynomials. Recalling the Euclidean Division of integers 3.2.2, we know that, given two integers a and $b \neq 0$, there is always another integer m and a natural number r with $r < |b|$ such that $a = m \cdot b + r$ holds.

We can generalize this to polynomials whenever the leading coefficient of the dividend polynomial has a notion of multiplicative inverse. In fact, given two polynomials A and $B \neq 0$ from $R[x]$ such that $Lc(B)^{-1}$ exists in R , there exist two polynomials Q (the quotient) and P (the remainder), such that the following equation holds and $\deg(P) < \deg(B)$:

$$A = Q \cdot B + P \quad (3.30)$$

Similarly to integer Euclidean Division, both Q and P are uniquely defined by these relations.

Notation and Symbols 2. Suppose that the polynomials A, B, Q and P satisfy equation 3.30. We often use the following notation to describe the quotient and the remainder polynomials of the Euclidean Division:

$$A \operatorname{div} B := Q, \quad A \operatorname{mod} B := P \quad (3.31)$$

We also say that a polynomial A is divisible by another polynomial B if $A \operatorname{mod} B = 0$ holds. In this case, we also write $B|A$ and call B a *factor* of A .

Analogously to integers, methods to compute Euclidean Division for polynomials are called **polynomial division algorithms**. Probably the best known algorithm is the so-called **polynomial long division**.

algorithm-floating

Algorithm 3 Polynomial Euclidean Algorithm

Require: $A, B \in R[x]$ with $B \neq 0$, such that $Lc(B)^{-1}$ exists in R

procedure POLY-LONG-DIVISION(A, B)

$Q \leftarrow 0$

$P \leftarrow A$

$d \leftarrow \deg(B)$

$c \leftarrow Lc(B)$

while $\deg(P) \geq d$ **do**

$S := Lc(P) \cdot c^{-1} \cdot x^{\deg(P)-d}$

$Q \leftarrow Q + S$

$P \leftarrow P - S \cdot B$

end while

return (Q, P)

end procedure

Ensure: $A = Q \cdot B + P$

This algorithm works only when there is a notion of division by the leading coefficient of B . It can be generalized, but we will only need this somewhat simpler method in what follows.

Example 22 (Polynomial Long Division). To give an example of how the previous algorithm works, let us divide the integer polynomial $A(x) = x^5 + 2x^3 - 9 \in \mathbb{Z}[x]$ by the integer polynomial $B(x) = x^2 + 4x - 1 \in \mathbb{Z}[x]$. Since B is not the zero polynomial, and the leading coefficient of B is 1, which is invertible as an integer, we can apply algorithm 1. Our goal is to find solutions to equation XXX, that is, we need to find the quotient polynomial $Q \in \mathbb{Z}[x]$ and the remainder polynomial $P \in \mathbb{Z}[x]$ such that $x^5 + 2x^3 - 9 = Q(x) \cdot (x^2 + 4x - 1) + P(x)$. Using a the long

add reference

1214 division notation that is mostly used in anglophone countries, we compute as follows:

$$\begin{array}{r}
 X^3 - 4X^2 + 19X - 80 \\
 X^2 + 4X - 1 \overline{) } \\
 \underline{X^3 + 2X^3 } \\
 -X^5 - 4X^4 \\
 \underline{-4X^4 + 3X^3} \\
 4X^4 + 16X^3 - 4X^2 \\
 \underline{19X^3 - 4X^2} \\
 -19X^3 - 76X^2 + 19X \\
 \underline{-80X^2 + 19X - 9} \\
 80X^2 + 320X - 80 \\
 \underline{339X - 89}
 \end{array} \tag{3.32}$$

1215 We therefore get $Q(x) = x^3 - 4x^2 + 19x - 80$ and $P(x) = 339x - 89$, and indeed, the equation
 1216 $A = Q \cdot B + P$ is true with these values, since $x^5 + 2x^3 - 9 = (x^3 - 4x^2 + 19x - 80) \cdot (x^2 + 4x -$
 1217 $1) + (339x - 89)$. We can double check this invoking Sage:

```

1218 sage: Zx = ZZ['x']                                     133
1219 sage: A = Zx([-9, 0, 0, 2, 0, 1])                       134
1220 sage: B = Zx([-1, 4, 1])                               135
1221 sage: Q = Zx([-80, 19, -4, 1])                         136
1222 sage: P = Zx([-89, 339])                               137
1223 sage: A == Q*B + P                                     138
1224 True                                                  139

```

1225 *Example 23.* In the previous example, polynomial division gave a non-trivial (non-vanishing,
 1226 i.e non-zero) remainder. Divisions that don't give a remainder are of special interest. In these
 1227 cases, divisors are called **factors of the dividend**.

1228 For example, consider the integer polynomial P_7 from example 16 again. As we have shown,
 1229 it can be written both as $x^3 - 4x^2 - 11x + 30$ and as $(x - 2)(x + 3)(x - 5)$. From this, we can
 1230 see that the polynomials $F_1(x) = (x - 2)$, $F_2(x) = (x + 3)$ and $F_3(x) = (x - 5)$ are all factors of
 1231 $x^3 - 4x^2 - 11x + 30$, since division of P_7 by any of these factors will result in a zero remainder.

1232 *Exercise 26.* Consider the polynomial expressions $A(x) := -3x^4 + 4x^3 + 2x^2 + 4$ and $B(x) =$
 1233 $x^2 - 4x + 2$. Compute the Euclidean Division of A by B in the following types:

- 1234 1. $A, B \in \mathbb{Z}[x]$
- 1235 2. $A, B \in \mathbb{Z}_6[x]$
- 1236 3. $A, B \in \mathbb{Z}_5[x]$

1237 Now consider the result in $\mathbb{Z}[x]$ and in $\mathbb{Z}_6[x]$. How can we compute the result in $\mathbb{Z}_6[x]$ from the
 1238 result in $\mathbb{Z}[x]$?

1239 *Exercise 27.* Show that the polynomial $B(x) = 2x^4 - 3x + 4 \in \mathbb{Z}_5[x]$ is a factor of the polynomial
 1240 $A(x) = x^7 + 4x^6 + 4x^5 + x^3 + 2x^2 + 2x + 3 \in \mathbb{Z}_5[x]$, that is, show that $B|A$. What is $B \text{ div } A$?

3.4.3 Prime Factors

Recall that the fundamental theorem of arithmetic 3.7 tells us that every natural number is the product of prime numbers. In this chapter, we will see that something similar holds for univariate polynomials $R[x]$, too.⁴

The polynomial analog to a prime number is a so-called **irreducible polynomial**, which is defined as a polynomial that cannot be factored into the product of two non-constant polynomials using Euclidean Division. Irreducible polynomials are to polynomials what prime numbers are to integers: they are the basic building blocks from which all other polynomials can be constructed.

To be more precise, let $P \in R[x]$ be any polynomial. Then there always exist irreducible polynomials $F_1, F_2, \dots, F_k \in R[x]$, such that the following holds:

$$P = F_1 \cdot F_2 \cdot \dots \cdot F_k. \quad (3.33)$$

This representation is unique (except for permutations in the factors) and is called the **prime factorization** of P . Moreover, each factor F_i is called a **prime factor** of P .

Example 24. Consider the polynomial expression $P = x^2 - 3$. When we interpret P as an integer polynomial $P \in \mathbb{Z}[x]$, we find that this polynomial is irreducible, since any factorization other than $1 \cdot (x^2 - 3)$, must look like $(x - a)(x + a)$ for some integer a , but there is no integers a with $a^2 = 3$.

```

sage: Zx = ZZ['x']
sage: p = Zx(x^2-3)
sage: p.factor()
x^2 - 3

```

On the other hand, interpreting P as a polynomial $P \in \mathbb{Z}_6[x]$ in modulo 6 arithmetic, we see that P has two factors $F_1 = (x - 3)$ and $F_2 = (x + 3)$, since $(x - 3)(x + 3) = x^2 - 3x + 3x - 3 \cdot 3 = x^2 - 3$.

Points where a polynomial evaluates to zero are called **roots** of the polynomial. To be more precise, let $P \in R[x]$ be a polynomial. Then a root is a point $x_0 \in R$ with $P(x_0) = 0$ and the set of all roots of P is defined as follows:

$$R_0(P) := \{x_0 \in R \mid P(x_0) = 0\} \quad (3.34)$$

The roots of a polynomial are of special interest with respect to its prime factorization, since it can be shown that, for any given root x_0 of P , the polynomial $F(x) = (x - x_0)$ is a prime factor of P .

Finding the roots of a polynomial is sometimes called **solving the polynomial**. It is a difficult problem that has been the subject of much research throughout history.

It can be shown that if m is the degree of a polynomial P , then P cannot have more than m roots. However, in general, polynomials can have less than m roots.

Example 25. Consider the integer polynomial $P_7(x) = x^3 - 4x^2 - 11x + 30$ from example 16 again. We know that its set of roots is given by $R_0(P_7) = \{-3, 2, 5\}$.

On the other hand, we know from example 24 that the integer polynomial $x^2 - 3$ is irreducible. It follows that it has no roots, since every root defines a prime factor.

⁴Strictly speaking, this is not true for polynomials over arbitrary types R . However, in this book, we assume R to be a so-called unique factorization domain for which the content of this section holds.

1279 *Example 26.* To give another example, consider the integer polynomial $P = x^7 + 3x^6 + 3x^5 +$
 1280 $x^4 - x^3 - 3x^2 - 3x - 1$. We can use Sage to compute the roots and prime factors of P :

```
1281 sage: Zx = ZZ['x'] 144
1282 sage: p = Zx(x^7 + 3*x^6 + 3*x^5 + x^4 - x^3 - 3*x^2 - 3*x - 1) 145
1283 )
1284 sage: p.roots() 146
1285 [(1, 1), (-1, 4)] 147
1286 sage: p.factor() 148
1287 (x - 1) * (x + 1)^4 * (x^2 + 1) 149
```

We see that P has the root 1, and that the associated prime factor $(x - 1)$ occurs once in P . We can also see that P has the root -1 , where the associated prime factor $(x + 1)$ occurs 4 times in P . This gives the following prime factorization:

$$P = (x - 1)(x + 1)^4(x^2 + 1)$$

1288 *Exercise 28.* Show that if a polynomial $P \in R[x]$ of degree $\deg(P) = m$ has less than m roots, it
 1289 must have a prime factor F of degree $\deg(F) > 1$.

1290 *Exercise 29.* Consider the polynomial $P = x^7 + 3x^6 + 3x^5 + x^4 - x^3 - 3x^2 - 3x - 1 \in \mathbb{Z}_6[x]$.
 1291 Compute the set of all roots of $R_0(P)$ and then compute the prime factorization of P .

1292 3.4.4 Lagrange Interpolation

1293 One particularly useful property of polynomials is that a polynomial of degree m is completely
 1294 determined on $m + 1$ evaluation points, which implies that we can uniquely derive a polynomial
 1295 of degree m from a set S :

$$S = \{(x_0, y_0), (x_1, y_1), \dots, (x_m, y_m) \mid x_i \neq x_j \text{ for all indices } i \text{ and } j\} \quad (3.35)$$

1296 Polynomials therefore have the property that $m + 1$ pairs of points (x_i, y_i) for $x_i \neq x_j$ are enough
 1297 to determine the set of pairs $(x, P(x))$ for all $x \in R$. This “few too many” property of polynomials
 1298 is widely used, including in SNARKs. Therefore, we need to understand the method to actually
 1299 compute a polynomial from a set of points.

1300 If the coefficients of the polynomial we want to find have a notion of multiplicative inverse,
 1301 it is always possible to find such a polynomial using a method called **Lagrange Interpolation**,
 1302 which works as follows. Given a set like 3.35, a polynomial P of degree m with $P(x_i) = y_i$ for
 1303 all pairs (x_i, y_i) from S is given by the following algorithm:

Example 27. Let us consider the set $S = \{(0, 4), (-2, 1), (2, 3)\}$. Our task is to compute a polynomial of degree 2 in $\mathbb{Q}[x]$ with coefficients from the set of rational numbers \mathbb{Q} . Since \mathbb{Q} has multiplicative inverses, we can use method of Lagrange Interpolation from Algorithm 4 to

check
algorithm
floating

Algorithm 4 Lagrange Interpolation**Require:** R must have multiplicative inverses**Require:** $S = \{(x_0, y_0), (x_1, y_1), \dots, (x_m, y_m) \mid x_i, y_i \in R, x_i \neq x_j \text{ for all indices } i \text{ and } j\}$ **procedure** LAGRANGE-INTERPOLATION(S) **for** $j \in (0 \dots m)$ **do**

$$l_j(x) \leftarrow \prod_{i=0; i \neq j}^m \frac{x - x_i}{x_j - x_i} = \frac{(x - x_0)}{(x_j - x_0)} \cdots \frac{(x - x_{j-1})}{(x_j - x_{j-1})} \frac{(x - x_{j+1})}{(x_j - x_{j+1})} \cdots \frac{(x - x_m)}{(x_j - x_m)}$$

end for

$$P \leftarrow \sum_{j=0}^m y_j \cdot l_j$$

return P **end procedure****Ensure:** $P \in R[x]$ with $\deg(P) = m$ **Ensure:** $P(x_j) = y_j$ for all pairs $(x_j, y_j) \in S$

compute the polynomial:

$$\begin{aligned} l_0(x) &= \frac{x - x_1}{x_0 - x_1} \cdot \frac{x - x_2}{x_0 - x_2} = \frac{x + 2}{0 + 2} \cdot \frac{x - 2}{0 - 2} = -\frac{(x + 2)(x - 2)}{4} \\ &= -\frac{1}{4}(x^2 - 4) \\ l_1(x) &= \frac{x - x_0}{x_1 - x_0} \cdot \frac{x - x_2}{x_1 - x_2} = \frac{x - 0}{-2 - 0} \cdot \frac{x - 2}{-2 - 2} = \frac{x(x - 2)}{8} \\ &= \frac{1}{8}(x^2 - 2x) \\ l_2(x) &= \frac{x - x_0}{x_2 - x_0} \cdot \frac{x - x_1}{x_2 - x_1} = \frac{x - 0}{2 - 0} \cdot \frac{x + 2}{2 + 2} = \frac{x(x + 2)}{8} \\ &= \frac{1}{8}(x^2 + 2x) \\ P(x) &= 4 \cdot \left(-\frac{1}{4}(x^2 - 4)\right) + 1 \cdot \frac{1}{8}(x^2 - 2x) + 3 \cdot \frac{1}{8}(x^2 + 2x) \\ &= -x^2 + 4 + \frac{1}{8}x^2 - \frac{1}{4}x + \frac{3}{8}x^2 + \frac{3}{4}x \\ &= -\frac{1}{2}x^2 + \frac{1}{2}x + 4 \end{aligned}$$

1304 And, indeed, evaluation of P on the x -values of S gives the correct points, since $P(0) = 4$,
 1305 $P(-2) = 1$ and $P(2) = 3$. Sage confirms this result:

```

1306 sage: Qx = QQ['x']                                     150
1307 sage: S=[(0,4), (-2,1), (2,3)]                         151
1308 sage: Qx.lagrange_polynomial(S)                       152
1309 -1/2*x^2 + 1/2*x + 4                                   153

```

Example 28. To give another example more relevant to the topics of this book, let us consider the same set as in the previous example, $S = \{(0, 4), (-2, 1), (2, 3)\}$. This time, the task is to compute a polynomial $P \in \mathbb{Z}_5[x]$ from this data. Since we know from example 14 that multiplicative inverses exist in \mathbb{Z}_5 , algorithm 4 is applicable and we can compute a unique polynomial of degree 2 in $\mathbb{Z}_5[x]$ from S . We can use the lookup tables from (3.24) for computations in \mathbb{Z}_5

and get the following:

$$\begin{aligned}
 l_0(x) &= \frac{x-x_1}{x_0-x_1} \cdot \frac{x-x_2}{x_0-x_2} = \frac{x+2}{0+2} \cdot \frac{x-2}{0-2} = \frac{(x+2)(x-2)}{-4} = \frac{(x+2)(x+3)}{1} \\
 &= x^2 + 1 \\
 l_1(x) &= \frac{x-x_0}{x_1-x_0} \cdot \frac{x-x_2}{x_1-x_2} = \frac{x-0}{-2-0} \cdot \frac{x-2}{-2-2} = \frac{x}{3} \cdot \frac{x+3}{1} = 2(x^2 + 3x) \\
 &= 2x^2 + x \\
 l_2(x) &= \frac{x-x_0}{x_2-x_0} \cdot \frac{x-x_1}{x_2-x_1} = \frac{x-0}{2-0} \cdot \frac{x+2}{2+2} = \frac{x(x+2)}{3} = 2(x^2 + 2x) \\
 &= 2x^2 + 4x \\
 P(x) &= 4 \cdot (x^2 + 1) + 1 \cdot (2x^2 + x) + 3 \cdot (2x^2 + 4x) \\
 &= 4x^2 + 4 + 2x^2 + x + x^2 + 2x \\
 &= 2x^2 + 3x + 4
 \end{aligned}$$

1310 And, indeed, evaluation of P on the x -values of S gives the correct points, since $P(0) = 4$,
 1311 $P(-2) = 1$ and $P(2) = 3$. We can double check our findings using Sage:

```

1312 sage: F5 = GF(5)                                     154
1313 sage: F5x = F5['x']                                   155
1314 sage: S=[(0,4), (-2,1), (2,3)]                       156
1315 sage: F5x.lagrange_polynomial(S)                     157
1316 2*x^2 + 3*x + 4                                       158

```

1317 *Exercise 30.* Consider modular 5 arithmetic from example 14, and the set $S = \{(0,0), (1,1), (2,2), (3,2)\}$.
 1318 Find a polynomial $P \in \mathbb{Z}_5[x]$ such that $P(x_i) = y_i$ for all $(x_i, y_i) \in S$.

1319 *Exercise 31.* Consider the set S from the previous example. Why is it not possible to apply
 1320 algorithm 4 to construct a polynomial $P \in \mathbb{Z}_6[x]$ such that $P(x_i) = y_i$ for all $(x_i, y_i) \in S$?

Chapter 4

Algebra

In the previous chapter, we gave an introduction to the basic computational tools needed for a pen-and-paper approach to SNARKs. In this chapter, we provide a more abstract clarification of relevant mathematical terminology such as **groups**, **rings** and **fields**.

Scientific literature on cryptography frequently contains such terms, and it is necessary to get at least some understanding of these terms to be able to follow the literature.

4.1 Commutative Groups

Commutative groups are abstractions that capture the essence of mathematical phenomena, like addition and subtraction, or multiplication and division.

To understand commutative groups, let us think back to when we learned about the addition and subtraction of integers in school. We have learned that, whenever we add two integers, the result is guaranteed to be an integer as well. We have also learned that adding zero to any integer means that “nothing happens” since the result of the addition is the same integer we started with. Furthermore, we have learned that the order in which we add two (or more) integers does not matter, that brackets have no influence on the result of addition, and that, for every integer, there is always another integer (the negative) such that we get zero when we add them together.

These conditions are the defining properties of a commutative group, and mathematicians have realized that the exact same set of rules can be found in very different mathematical structures. It therefore makes sense to give an abstract, formal definition of what a group should be, detached from any concrete examples such as integers. This lets us handle entities of very different mathematical origins in a flexible way, while retaining essential structural aspects of many objects in abstract algebra and beyond.

Distilling these rules to the smallest independent list of properties and making them abstract, we arrive at the following definition of a commutative group:

revise the counter for definitions, current one too long

Definition 4.1.0.1. A **commutative group** (\mathbb{G}, \cdot) consists of a set \mathbb{G} and a **map** $\cdot : \mathbb{G} \times \mathbb{G} \rightarrow \mathbb{G}$. The map is called the **group law**, and it combines two elements of the set \mathbb{G} into a third one such that the following properties hold:

- **Commutativity:** For all $g_1, g_2 \in \mathbb{G}$, the equation $g_1 \cdot g_2 = g_2 \cdot g_1$ holds.
- **Associativity:** For every $g_1, g_2, g_3 \in \mathbb{G}$ the equation $g_1 \cdot (g_2 \cdot g_3) = (g_1 \cdot g_2) \cdot g_3$ holds.
- **Existence of a neutral element:** For every $g \in \mathbb{G}$, there is an $e \in \mathbb{G}$ such that $e \cdot g = g$.

revise the counter for definitions, current one too long

- **Existence of an inverse:** For every $g \in \mathbb{G}$, there is a $g^{-1} \in \mathbb{G}$ such that $g \cdot g^{-1} = e$.

If (\mathbb{G}, \cdot) is a group, and $\mathbb{G}' \subset \mathbb{G}$ is a subset of \mathbb{G} such that the **restriction** of the group law $\cdot : \mathbb{G}' \times \mathbb{G}' \rightarrow \mathbb{G}'$ is a group law on \mathbb{G}' , then (\mathbb{G}', \cdot) is called a **subgroup** of (\mathbb{G}, \cdot) .

Rephrasing the abstract definition in layman's terms, a group is something where we can do computations in a way that resembles the behavior of the addition of integers. Specifically, this means we can combine some element with another element into a new element in a way that is reversible and where the order of combining elements doesn't matter.

Notation and Symbols 3. Since we are exclusively concerned with commutative groups in this book, we often just call them groups, keeping the notation of commutativity implicit.¹

If there is no risk of ambiguity (about what the group law of a group is), we frequently drop the symbol \cdot and simply write \mathbb{G} as notation for the group, keeping the group law implicit. In this case we also say that \mathbb{G} is of group type, indicating that \mathbb{G} is not simply a set but a set together with a group law.

Notation and Symbols 4 (Additive notation). For commutative groups (\mathbb{G}, \cdot) , we sometimes use the so-called **additive notation** $(\mathbb{G}, +)$, that is, we write $+$ instead of \cdot for the group law, 0 for the neutral element and $-g := g^{-1}$ for the inverse of an element $g \in \mathbb{G}$.

As we will see in the following chapters, groups are heavily used in cryptography and in SNARKs. But let us look at some more familiar examples first.

Example 29 (Integer Addition and Subtraction). The set $(\mathbb{Z}, +)$ of integers with integer addition is the archetypical example of a commutative group, where the group law is traditionally written in additive notation (notation 4).

To compare integer addition against the abstract axioms of a commutative group, we first note that integer addition is **commutative and associative**, since $a + b = b + a$ as well as $(a + b) + c = a + (b + c)$ for all integers $a, b, c \in \mathbb{Z}$. The **neutral element** e is the number 0 , since $a + 0 = a$ for all integers $a \in \mathbb{Z}$. Furthermore, the **inverse** of a number is its negative counterpart, since $a + (-a) = 0$ for all $a \in \mathbb{Z}$. This implies that integers with addition are indeed a commutative group in the abstract sense.

To give an example of a subgroup of the group of integers, consider the set of even numbers, including 0 .

$$\mathbb{Z}_{\text{even}} := \{\dots, -4, -2, 0, 2, 4, \dots\}$$

We can see that this set is a subgroup of $(\mathbb{Z}, +)$, since the sum of two even numbers is always an even number again, since the neutral element 0 is a member of \mathbb{Z}_{even} and since the negative of an even number is itself an even number.

Example 30 (The trivial group). The most basic example of a commutative group is the group with just one element $\{\bullet\}$ and the group law $\bullet \cdot \bullet = \bullet$. We call it the **trivial group**.

The trivial group is a subgroup of any group. To see that, let (\mathbb{G}, \cdot) be a group with the neutral element $e \in \mathbb{G}$. Then $e \cdot e = e$ as well as $e^{-1} = e$ both hold. Consequently, the set $\{e\}$ is a subgroup of \mathbb{G} . In particular, $\{0\}$ is a subgroup of $(\mathbb{Z}, +)$, since $0 + 0 = 0$.

Example 31. Consider addition in modulo 6 arithmetics $(\mathbb{Z}_6, +)$, as defined in in example 9. As we see, the remainder 0 is the neutral element in modulo 6 addition, and the inverse of a remainder r is given by $6 - r$, because $r + (6 - r) = 6$. 6 is congruent to 0 since $6 \bmod 6 = 0$. Moreover, $r_1 + r_2 = r_2 + r_1$ as well as $(r_1 + r_2) + r_3 = r_1 + (r_2 + r_3)$ are inherited from integer addition. We therefore see that $(\mathbb{Z}_6, +)$ is a group.

¹Commutative groups are also called **Abelian groups**. A set \mathbb{G} with a map \cdot that satisfies all previously mentioned rules except for the commutativity law is called a **non-commutative group**.

The previous example of a commutative group is a very important one for this book. Abstracting from this example and considering residue classes $(\mathbb{Z}_n, +)$ for arbitrary moduli n , it can be shown that $(\mathbb{Z}_n, +)$ is a commutative group with the neutral element 0 and the additive inverse $n - r$ for any element $r \in \mathbb{Z}_n$. We call such a group the **remainder class group** of modulus n .

Exercise 32. Consider example 14 again, and let \mathbb{Z}_5^* be the set of all remainder classes from \mathbb{Z}_5 without the class 0. Then $\mathbb{Z}_5^* = \{1, 2, 3, 4\}$. Show that (\mathbb{Z}_5^*, \cdot) is a commutative group.

Exercise 33. Generalizing the previous exercise, consider the general modulus n , and let \mathbb{Z}_n^* be the set of all remainder classes from \mathbb{Z}_n without the class 0. Then $\mathbb{Z}_n^* = \{1, 2, \dots, n-1\}$. Provide a counter-example to show that (\mathbb{Z}_n^*, \cdot) is not a group in general.

Find a condition such that (\mathbb{Z}_n^*, \cdot) is a commutative group, compute the neutral element, give a closed form for the inverse of any element and prove the commutative group axioms.

4.1.1 Finite groups

As we have seen in the previous examples, groups can either contain infinitely many elements (such as integers) or finitely many elements (as for example the remainder class groups $(\mathbb{Z}_n, +)$). To capture this distinction, a group is called a **finite group** if the underlying set of elements is finite. In that case, the number of elements of that group is called its **order**.

Notation and Symbols 5. Let \mathbb{G} be a finite group. We write $\text{ord}(\mathbb{G})$ or $|\mathbb{G}|$ for the order of \mathbb{G} .

Example 32. Consider the remainder class groups $(\mathbb{Z}_6, +)$ from example 9, the group $(\mathbb{Z}_5, +)$ from example 14, and the group (\mathbb{Z}_5^*, \cdot) from exercise 32. We can easily see that the order of $(\mathbb{Z}_6, +)$ is 6, the order of $(\mathbb{Z}_5, +)$ is 5 and the order of (\mathbb{Z}_5^*, \cdot) is 4.

Exercise 34. Let $n \in \mathbb{N}$ with $n \geq 2$ be some modulus. What is the order of the remainder class group $(\mathbb{Z}_n, +)$?

4.1.2 Generators

Listing the set of elements of a group can be complicated, and it is not always obvious how to actually compute elements of a given group. From a practical point of view, it is therefore desirable to have groups with a **generator set**. This is a small subset of elements from which all other elements can be generated by applying the group law repeatedly to only the elements of the generator set and/or their inverses.

Of course, every group \mathbb{G} has a trivial set of generators, when we just consider every element of the group to be in the generator set. The more interesting question is to find smallest possible generator set for a given group. Of particular interest in this regard are groups that have a generator set that contains a single element only. In this case, there exists a (not necessarily unique) element $g \in \mathbb{G}$ such that every other element from \mathbb{G} can be computed by the repeated combination of g and its inverse g^{-1} only.

Definition 4.1.2.1 (Cyclic groups). Groups with single, not necessarily unique, generators are called **cyclic groups** and any element $g \in \mathbb{G}$ that is able to generate \mathbb{G} is called a **generator**.

Example 33. The most basic example of a cyclic group is the group of integers with integer addition $(\mathbb{Z}, +)$. In this case, the number 1 is a generator of \mathbb{Z} , since every integer can be obtained by repeatedly adding either 1 or its inverse -1 to itself. For example, -4 is generated by 1, since $-4 = -1 + (-1) + (-1) + (-1)$. Another generator of \mathbb{Z} is the number -1 .

Example 34. Consider the group (\mathbb{Z}_5^*, \cdot) from exercise 32. Since $2^1 = 2$, $2^2 = 4$, $2^3 = 3$ and $2^4 = 1$, the element 2 is a generator of (\mathbb{Z}_5^*, \cdot) . Moreover, since $3^1 = 3$, $3^2 = 4$, $3^3 = 2$ and $3^4 = 1$, the element 3 is another generator of (\mathbb{Z}_5^*, \cdot) . Cyclic groups can therefore have more than one generator. However since $4^1 = 4$, $4^2 = 1$, $4^3 = 4$ and in general $4^k = 4$ for k odd and $4^k = 1$ for k even the element 4 is not a generator of (\mathbb{Z}_5^*, \cdot) . It follows that in general not every element of a finite cyclic group is a generator.

Example 35. Consider a modulus n and the remainder class groups $(\mathbb{Z}_n, +)$ from exercise 34. These groups are cyclic, with generator 1, since every other element of that group can be constructed by repeatedly adding the remainder class 1 to itself. Since \mathbb{Z}_n is also finite, we know that $(\mathbb{Z}_n, +)$ is a finite cyclic group of order n .

Exercise 35. Consider the group $(\mathbb{Z}_6, +)$ of modular 6 addition from example 9. Show that $5 \in \mathbb{Z}_6$ is a generator, and then show that $2 \in \mathbb{Z}_6$ is not a generator.

Exercise 36. Let $p \in \mathbb{P}$ be prime number and (\mathbb{Z}_p^*, \cdot) the finite group from exercise 33. Show that (\mathbb{Z}_p^*, \cdot) is cyclic.

4.1.3 The exponential map

Observe that, when \mathbb{G} is a cyclic group of order n and $g \in \mathbb{G}$ is a generator of \mathbb{G} , then there exists a so-called **exponential map**, which maps the additive group law of the remainder class group $(\mathbb{Z}_n, +)$ onto the group law of \mathbb{G} in a one-to-one correspondence. The exponential map can be formalized as in (4.1) below (where g^x means “multiply g by itself x times” and $g^0 = e_{\mathbb{G}}$).

$$g^{(\cdot)} : \mathbb{Z}_n \rightarrow \mathbb{G} \quad x \mapsto g^x \quad (4.1)$$

To see how the exponential map works, first observe that, since $g^0 := e_{\mathbb{G}}$ by definition, the neutral element of \mathbb{Z}_n is mapped to the neutral element of \mathbb{G} . Furthermore, since $g^{x+y} = g^x \cdot g^y$, the map respects the group law.

Notation and Symbols 6 (Scalar multiplication). If a group $(\mathbb{G}, +)$ is written in additive notation (notation 4), then the exponential map is often called **scalar multiplication**, and written as follows:

$$(\cdot) \cdot g : \mathbb{Z}_n \rightarrow \mathbb{G} \quad ; \quad x \mapsto x \cdot g \quad (4.2)$$

In this notation, the symbol $x \cdot g$ is defined as “add the generator g to itself x times” and the symbol $0 \cdot g$ is defined to be the neutral element in \mathbb{G} .

Cryptographic applications often utilize finite cyclic groups of a very large order n , which means that computing the exponential map by repeated multiplication of the generator with itself is infeasible for very large remainder classes. Algorithm 5, called **square and multiply**, solves this problem by computing the exponential map in approximately k steps, where k is the bit length of the exponent (3.4):

Because the exponential map respects the group law, it doesn’t matter if we do our computation in \mathbb{Z}_n before we write the result into the exponent of g or afterwards: the result will be the same in both cases. The latter method is usually referred to as doing computations “in the exponent”. In cryptography in general, and in SNARK development in particular, we often perform computations “in the exponent” of a generator.

unify title
of Alg
with text

move 3.4
here

check
algorithm
floating

Algorithm 5 Cyclic Group Exponentiation**Require:** g group generator of order n **Require:** $x \in \mathbb{Z}_n$ **procedure** EXPONENTIATION(g, x)Let (b_0, \dots, b_k) be a binary representation of x

▷ see example XXX

 $h \leftarrow g$ $y \leftarrow e_{\mathbb{G}}$ **for** $0 \leq j < k$ **do** **if** $b_j = 1$ **then** $y \leftarrow y \cdot h$

▷ multiply

end if $h \leftarrow h \cdot h$

▷ square

end for**return** y **end procedure****Ensure:** $y = g^x$

Example 36. Consider the multiplicative group (\mathbb{Z}_5^*, \cdot) from exercise 32. We know from 36 that \mathbb{Z}_5^* is a cyclic group of order 4, and that the element $3 \in \mathbb{Z}_5^*$ is a generator. This means that we also know that the following map respects the group law of addition in \mathbb{Z}_4 and the group law of multiplication in \mathbb{Z}_5^* :

$$3^{(\cdot)} : \mathbb{Z}_4 \rightarrow \mathbb{Z}_5^* ; x \mapsto 3^x$$

To do an example computation “in the exponent” of 3, let’s perform the calculation $1 + 3 + 2$ in the exponent of the generator 3:

$$3^{1+3+2} = 3^2 \tag{4.3}$$

$$= 4 \tag{4.4}$$

1475 In (4.3) above, we first performed the computation $1 + 3 + 2 = 1$ in the remainder class group
 1476 $(\mathbb{Z}_4, +)$ and then applied the exponential map $3^{(\cdot)}$ to the result in (4.4).

should be
2?

1477 However, since the exponential map (4.1) respects the group law, we also could map each
 1478 summand into (\mathbb{Z}_5^*, \cdot) first and then apply the group law of (\mathbb{Z}_5^*, \cdot) . The result is guaranteed to be
 1479 the same:

$$\begin{aligned} 3^1 \cdot 3^3 \cdot 3^2 &= 3 \cdot 2 \cdot 4 \\ &= 1 \cdot 4 \\ &= 4 \end{aligned}$$

1480 Since the exponential map (4.1) is a one-to-one correspondence that respects the group law,
 1481 it can be shown that this map has an inverse with respect to the base g , called the **base g discrete**
 1482 **logarithm map**:

$$\log_g(\cdot) : \mathbb{G} \rightarrow \mathbb{Z}_n \ x \mapsto \log_g(x) \tag{4.5}$$

1483 Discrete logarithms are highly important in cryptography, because there are finite cyclic groups
 1484 where the exponential map and its inverse, the discrete logarithm map, are believed to be one-
 1485 way functions, which informally means that computing the exponential map is fast, while com-
 1486 puting the logarithm map is slow (We will look into a more precise definition in 4.1.6).

Example 37. Consider the exponential map $3^{(\cdot)}$ from example 36. Its inverse is the discrete logarithm to the base 3, given by the map below:

$$\log_3(\cdot) : \mathbb{Z}_5^* \rightarrow \mathbb{Z}_4 \quad x \mapsto \log_3(x)$$

In contrast to the exponential map $3^{(\cdot)}$, we have no way to actually compute this map, other than by trying all elements of the group until we find the correct one. For example, in order to compute $\log_3(4)$, we have to find some $x \in \mathbb{Z}_4$ such that $3^x = 4$, and all we can do is repeatedly insert elements x into the exponent of 3 until the result is 4. To do this, let's write down all the images of $3^{(\cdot)}$:

$$3^0 = 1, \quad 3^1 = 3, \quad 3^2 = 4, \quad 3^3 = 2$$

Since the discrete logarithm $\log_3(\cdot)$ is defined as the inverse to this function, we can use those images to compute the discrete logarithm:

$$\log_3(1) = 0, \quad \log_3(2) = 3, \quad \log_3(3) = 1, \quad \log_3(4) = 2$$

Note that this computation was only possible because we were able to write down all images of the exponential map. However, in real world applications the groups in consideration are too large to write down the images of the exponential map.

Exercise 37 (Efficient Scalar Multiplication). Let $(\mathbb{G}, +)$ be a finite cyclic group of order n . Consider algorithm 5 and define its analog for groups in additive notation.

4.1.4 Factor Groups

As we know from the fundamental theorem of arithmetic (3.7), every natural number n is a product of factors, the most basic of which are prime numbers. This parallels subgroups of finite cyclic groups in an interesting way.

Definition 4.1.4.1 (The fundamental theorem of finite cyclic groups). If \mathbb{G} is a finite cyclic group of order n , then every subgroup \mathbb{G}' of \mathbb{G} is finite and cyclic, and the order $|\mathbb{G}'|$ is a factor of n . Moreover for each factor k of n , \mathbb{G} has exactly one subgroup of order k . This is known as the **fundamental theorem of finite cyclic groups**.

Notation and Symbols 7. If \mathbb{G} is a finite cyclic group of order n and k is a factor of n , then we write $\mathbb{G}[k]$ for the unique finite cyclic group which is the order k subgroup of \mathbb{G} , and call it a **factor group** of \mathbb{G} .

One particularly interesting situation occurs if the order of a given finite cyclic group is a prime number. As we know from the fundamental theorem of arithmetics (3.7), prime numbers have only two factors: the number 1 and the prime number itself. It then follows from the fundamental theorem of finite cyclic groups (definition 4.1.4.1) that those groups have no subgroups other than the trivial group (example 30) and the group itself.

Cryptographic protocols often assume the existence of finite cyclic groups of prime order. However some real-world implementations of those protocols are not defined on prime order groups, but on groups where the order consist of a (usually large) prime number that has small cofactors (see notation 1). In this case, a method called **cofactor clearing** has to be applied to ensure that the computations are not done in the group itself but in its (large) prime order subgroup.

To understand cofactor clearing in detail, let \mathbb{G} be a finite cyclic group of order n , and let k be a factor of n with associated factor group $\mathbb{G}[k]$. We can project any element $g \in \mathbb{G}[k]$ onto the neutral element e of \mathbb{G} by multiplying g k -times with itself:

$$g^k = e \tag{4.6}$$

Consequently, if $c := n \operatorname{div} k$ is the cofactor of k in n , then any element from the full group $g \in \mathbb{G}$ can be projected into the factor group $\mathbb{G}[k]$ by multiplying g c -times with itself. This defines the following map, which is often called **cofactor clearing** in cryptographic literature:

$$(\cdot)^c : \mathbb{G} \rightarrow \mathbb{G}[k] : g \mapsto g^c \quad (4.7)$$

Example 38. Consider the finite cyclic group (\mathbb{Z}_5^*, \cdot) from example 34. Since the order of \mathbb{Z}_5^* is 4, and 4 has the factors 1, 2 and 4, it follows from the fundamental theorem of finite cyclic groups (definition 4.1.4.1) that \mathbb{Z}_5^* has 3 unique subgroups. In fact, the unique subgroup $\mathbb{Z}_5^*[1]$ of order 1 is given by the trivial group $\{1\}$ that contains only the multiplicative neutral element 1. The unique subgroup $\mathbb{Z}_5^*[4]$ of order 4 is \mathbb{Z}_5^* itself, since, by definition, every group is trivially a subgroup of itself. The unique subgroup $\mathbb{Z}_5^*[2]$ of order 2 is more interesting, and is given by the set $\mathbb{Z}_5^*[2] = \{1, 4\}$.

Since \mathbb{Z}_5^* is not a prime order group, and, since the only prime factor of 4 is 2, the “large” prime order subgroup of \mathbb{Z}_5^* is $\mathbb{Z}_5^*[2]$. Moreover, since the cofactor of 2 in 4 is also 2, we get the cofactor clearing map $(\cdot)^2 : \mathbb{Z}_5^* \rightarrow \mathbb{Z}_5^*[2]$. As expected, when we apply this map to all elements of \mathbb{Z}_5^* , we see that it maps onto the elements of $\mathbb{Z}_5^*[2]$ only:

$$1^2 = 1 \quad 2^2 = 4 \quad 3^2 = 4 \quad 4^2 = 1 \quad (4.8)$$

We can therefore use this map to “clear the cofactor” of any element from \mathbb{Z}_5^* , which means that the element is projected onto the “large” prime order subgroup $\mathbb{Z}_5^*[2]$.

Exercise 38. Consider the previous example 38, and show that $\mathbb{Z}_5^*[2]$ is a commutative group.

Exercise 39. Consider the finite cyclic group $(\mathbb{Z}_6, +)$ of modular 6 addition from example 35. Describe all subgroups of $(\mathbb{Z}_6, +)$. Identify the large prime order subgroup of \mathbb{Z}_6 , define its cofactor clearing map and apply that map to all elements of \mathbb{Z}_6 .

Exercise 40. Let (\mathbb{Z}_p^*, \cdot) be the cyclic group from exercise 36. Show that, for $p \geq 5$, not every element $x \in \mathbb{F}_p^*$ is a generator of \mathbb{F}_p^* .

4.1.5 Pairings

Of particular importance for the development of SNARKs are so-called **pairing maps** on commutative groups, defined below.

Definition 4.1.5.1 (Pairing map). Let \mathbb{G}_1 , \mathbb{G}_2 and \mathbb{G}_3 be three commutative groups. Then a **pairing map** is a function

$$e(\cdot, \cdot) : \mathbb{G}_1 \times \mathbb{G}_2 \rightarrow \mathbb{G}_3 \quad (4.9)$$

This function takes pairs (g_1, g_2) of elements from \mathbb{G}_1 and \mathbb{G}_2 , and maps them to elements from \mathbb{G}_3 such that the **bilinearity** property holds, which means that for all $g_1, g'_1 \in \mathbb{G}_1$ and $g_2, g'_2 \in \mathbb{G}_2$ the following two identities are satisfied:

$$e(g_1 \cdot g'_1, g_2) = e(g_1, g_2) \cdot e(g'_1, g_2) \quad \text{and} \quad e(g_1, g_2 \cdot g'_2) = e(g_1, g_2) \cdot e(g_1, g'_2) \quad (4.10)$$

Informally speaking, bilinearity means that it doesn’t matter if we first execute the group law on one side and then apply the bilinear map, or if we first apply the bilinear map and then apply the group law in \mathbb{G}_3 .

A pairing map is called **non-degenerate** if, whenever the result of the pairing is the neutral element in \mathbb{G}_3 , one of the input values is the neutral element of \mathbb{G}_1 or \mathbb{G}_2 . To be more precise, $e(g_1, g_2) = e_{\mathbb{G}_3}$ implies $g_1 = e_{\mathbb{G}_1}$ or $g_2 = e_{\mathbb{G}_2}$.

1553 *Example 39.* One of the most basic examples of a non-degenerate pairing involves the groups
 1554 \mathbb{G}_1 , \mathbb{G}_2 and \mathbb{G}_3 all being groups of integers with addition $(\mathbb{Z}, +)$. In this case, the following
 1555 map defines a non-degenerate pairing:

$$e(\cdot, \cdot) : \mathbb{Z} \times \mathbb{Z} \rightarrow \mathbb{Z} \quad (a, b) \mapsto a \cdot b \quad (4.11)$$

1556 Note that bilinearity follows from the distributive law of integers, meaning that, for $a, b, c \in$
 1557 \mathbb{Z} , the equation $e(a + b, c) = (a + b) \cdot c = a \cdot c + b \cdot c = e(a, c) + e(b, c)$ holds (and the same
 1558 reasoning is true for the second argument b). b

1559 To see that $e(\cdot, \cdot)$ is non-degenerate, assume that $e(a, b) = 0$. Then $a \cdot b = 0$ implies that a or
 1560 b must be zero.

1561 *Exercise 41* (Arithmetic laws for pairing maps). Let \mathbb{G}_1 , \mathbb{G}_2 and \mathbb{G}_3 be finite cyclic groups of
 1562 the same order n , and let $e(\cdot, \cdot) : \mathbb{G}_1 \times \mathbb{G}_2 \rightarrow \mathbb{G}_3$ be a pairing map. Show that, for given $g_1 \in \mathbb{G}_1$,
 1563 $g_2 \in \mathbb{G}_2$ and all $a, b \in \mathbb{Z}_n$, the following identity holds:

$$e(g_1^a, g_2^b) = e(g_1, g_2)^{a \cdot b} \quad (4.12)$$

1564 *Exercise 42.* Consider the remainder class groups $(\mathbb{Z}_n, +)$ from example 34 for some modulus
 1565 n . Show that the following map is a pairing map.

$$e(\cdot, \cdot) : \mathbb{Z}_n \times \mathbb{Z}_n \rightarrow \mathbb{Z}_n \quad (a, b) \mapsto a \cdot b \quad (4.13)$$

1566 Why is the pairing not non-degenerate in general, and what condition must be imposed on
 1567 n such that the pairing will be non-degenerate?

1568 4.1.6 Cryptographic Groups

1569 In this section, we look at classes of groups that are believed to satisfy certain **computational**
 1570 **hardness assumptions**, meaning that it is not feasible to compute them in polynomial time.

1571 *Example 40.* To give an example for a well-known computational hardness assumption, con-
 1572 sider the problem of factorization, i.e. computing the prime factors of a composite integer (see
 1573 example 1). If the prime factors are very large, this is infeasible to do, and is expected to remain
 1574 infeasible. We assume the problem is **computationally hard** or **infeasible**.

1575 Note that, in example 40, we say that the problem is infeasible to solve **if the prime factors**
 1576 **are large enough**. Naturally, this is made more precise in the cryptographic standard model,
 1577 where we have a security parameter, and we say that “there exists a security parameter such that
 1578 it is not feasible to compute a solution to the problem”. In the following examples, the security
 1579 parameter roughly correlates with the order of the group in consideration. In this book, we
 1580 do not include the security parameter in our definitions, since we only aim to provide an intu-
 1581 itive understanding of the cryptographic assumptions, not teach the ability to perform rigorous
 1582 analysis.

1583 Furthermore, understand that these are **assumptions**. Academics have been looking for
 1584 efficient prime factorization algorithms for a long time, and they have been getting better and
 1585 better while computers have become faster and faster – but there always was a higher security
 1586 parameter for which the problem still was infeasible.

1587 In what follows, we describe a few problems arising in the context of groups in cryptography
 1588 that are assumed to be infeasible. We will refer to them throughout the book.

4.1.6.1 The Discrete Logarithm Problem

The so-called **Discrete Logarithm Problem (DLP)**, also called the **Discrete Logarithm Assumption**, is one of the most fundamental assumptions in cryptography.

Definition 4.1.6.1. Let \mathbb{G} be a finite cyclic group of order r and let g be a generator of \mathbb{G} . We know from (4.1) that there is an exponential map $g^{(\cdot)} : \mathbb{Z}_r \rightarrow \mathbb{G} ; x \mapsto g^x$ that maps the residue classes from modulo r arithmetic onto the group in a 1 : 1 correspondence. The **Discrete Logarithm Problem** is the task of finding an inverse to this map, that is, to find a solution $x \in \mathbb{Z}_r$ to the following equation for some given $h, g \in \mathbb{G}$:

$$h = g^x \quad (4.14)$$

There are groups in which the DLP is assumed to be infeasible to solve, and there are groups in which it isn't. We call the former group **DL-secure** groups.

Rephrasing the previous definition, it is believed that, in DL-secure groups, there is a number n such that it is infeasible to compute some number x that solves the equation $h = g^x$ for a given h and g , assuming that the order of the group n is large enough. The number n here corresponds to the security parameter discussed above.

Example 41 (Public key cryptography). One the most basic examples of an application for DL-secure groups is in public key cryptography, where the parties publicly agree on some pair (\mathbb{G}, g) such that \mathbb{G} is a finite cyclic group of appropriate order n , believed to be a DL-secure group, and g is a generator of \mathbb{G} .

In this setting, a secret key is some number $sk \in \mathbb{Z}_r$ and the associated public key pk is the group element $pk = g^{sk}$. Since discrete logarithms are assumed to be hard, it is infeasible for an attacker to compute the secret key from the public key, as this would involve finding solutions x to the following equation (which is believed to be infeasible):

$$pk = g^x \quad (4.15)$$

As example 41 shows, identifying DL-secure groups is an important practical problem. Unfortunately, it is easy to see that it does not make sense to assume the hardness of the Discrete Logarithm Problem in all finite cyclic groups: counterexamples are common and easy to construct.

mention a few examples

4.1.6.2 The decisional Diffie–Hellman assumption

Definition 4.1.6.2. Let \mathbb{G} be a finite cyclic group of order n and let g be a generator of \mathbb{G} . The decisional Diffie–Hellman (DDH) problem is to distinguish (g^a, g^b, g^{ab}) from the triple (g^a, g^b, g^c) for uniformly random values $a, b, c \in \mathbb{Z}_r$.

If we assume the DDH problem is infeasible to solve in \mathbb{G} , we call \mathbb{G} a **DDH-secure** group.

DDH-security is a stronger assumption than DL-security (4.1.6.1), in the sense that if the DDH problem is infeasible, so is the DLP, but not necessarily the other way around.

To see why this is the case, assume that the discrete logarithm assumption does not hold. In that case, given a generator g and a group element h , it is easy to compute some element $x \in \mathbb{Z}_p$ with $h = g^x$. Then the decisional Diffie–Hellman assumption cannot hold, since given some triple (g^a, g^b, z) , one could efficiently decide whether $z = g^{ab}$ is true by first computing the discrete logarithm b of g^b , then computing $g^{ab} = (g^a)^b$ and deciding whether or not $z = g^{ab}$.

On the other hand, the following example shows that there are groups where the discrete logarithm assumption holds but the Decisional Diffie–Hellman Assumption does not.

Example 42 (Efficiently computable bilinear pairings). Let \mathbb{G} be a DL-secure, finite, cyclic group of order r with generator g , and \mathbb{G}_T another group such that there is an efficiently computable pairing map $e(\cdot, \cdot) : \mathbb{G} \times \mathbb{G} \rightarrow \mathbb{G}_T$ that is bilinear and non degenerate (4.9).

In a setting like this, it is easy to show that solving DDH cannot be infeasible, since, given some triple (g^a, g^b, z) , it is possible to efficiently check whether $z = g^{ab}$ by making use of the following pairing:

$$e(g^a, g^b) \stackrel{?}{=} e(g, z) \quad (4.16)$$

Since the bilinearity properties of $e(\cdot, \cdot)$ imply $e(g^a, g^b) = e(g, g)^{ab} = e(g, g^{ab})$, and $e(g, y) = e(g, y')$ implies $y = y'$ due to the non-degenerate property, the equality means $z = g^{ab}$.

It follows that the DDH assumption is indeed stronger than the discrete log assumption, and groups with efficient pairings cannot be DDH-secure groups.

4.1.6.3 The Computational Diffie–Hellman Assumption

Definition 4.1.6.3. Let \mathbb{G} be a finite cyclic group of order n and let g be a generator of \mathbb{G} . The **computational Diffie–Hellman assumption** stipulates that, given randomly and independently chosen elements $a, b \in \mathbb{Z}_r$, it is not possible to compute g^{ab} if only g, g^a and g^b (but not a and b) are known. If this is the case for \mathbb{G} , we call \mathbb{G} a **CDH-secure** group.

In general, we don't know if CDH-security is a stronger assumption than DL-security, or if both assumptions are equivalent. We know that DL-security is necessary for CDH-security, but the other direction is currently not well understood. In particular, there are no known DL-secure groups that are not also CDH-secure.

To see why the discrete logarithm assumption is necessary, assume that it does not hold. Then, given a generator g and a group element h , it is easy to compute some element $x \in \mathbb{Z}_p$ with $h = g^x$. In that case, the computational Diffie–Hellman assumption cannot hold, since, given g, g^a and g^b , it is possible to efficiently compute b , meaning that $g^{ab} = (g^a)^b$ can be computed from this data.

The computational Diffie–Hellman assumption is a weaker assumption than the Decisional Diffie–Hellman Assumption. This means that there are groups where CDH holds and DDH does not hold, while there cannot be groups in which DDH holds but CDH does not hold. To see that, assume that it is efficiently possible to compute g^{ab} from g, g^a and g^b . Then, given (g^a, g^b, z) it is easy to decide whether $z = g^{ab}$ holds or not.

Several variations and special cases of CDH exist. For example, the **square Computational Diffie–Hellman Assumption** assumes that, given g and g^x , it is computationally hard to compute g^{x^2} . The **inverse Computational Diffie–Hellman Assumption** assumes that, given g and g^x , it is computationally hard to compute $g^{x^{-1}}$.

4.1.7 Hashing to Groups

4.1.7.1 Hash functions

Generally speaking, a hash function is any function that can be used to map data of arbitrary size to fixed-size values. Since binary strings of arbitrary length are a way to represent data in general, we can understand a **hash function** as the following map where $\{0, 1\}^*$ represents the set of all binary strings of arbitrary but finite length and $\{0, 1\}^k$ represents the set of all binary strings that have a length of exactly k bits:

$$H : \{0, 1\}^* \rightarrow \{0, 1\}^k \quad (4.17)$$

The **images** of H , that is, the values returned by the hash function H , are called **hash values**, **digests**, or simply **hashes**.

Notation and Symbols 8. In what follows, we call an element $b \in \{0, 1\}$ a **bit**. If $s \in \{0, 1\}^*$ is a binary string, we write $|s| = k$ for its **length**, that is, for the number of bits in s . We write $\langle \rangle$ for the empty binary string, and $s = \langle b_1, b_2, \dots, b_k \rangle$ for a binary string of length k .²

If two binary strings $s = \langle b_1, b_2, \dots, b_k \rangle$ and $s' = \langle b'_1, b'_2, \dots, b'_l \rangle$ are given, then we write $s||s'$ for the **concatenation** that is the string $s||s' = \langle b_1, b_2, \dots, b_k, b'_1, b'_2, \dots, b'_l \rangle$.

If H is a hash function that maps binary strings of arbitrary length onto binary strings of length k , and $s \in \{0, 1\}^*$ is a binary string, we write $H(s)_j$ for the bit at position j in the image $H(s)$.

Example 43 (k -truncation hash). One of the most basic hash functions $H_k : \{0, 1\}^* \rightarrow \{0, 1\}^k$ is given by simply truncating every binary string s of size $|s| > k$ to a string of size k and by filling any string s' of size $|s'| < k$ with zeros. To make this hash function deterministic, we define that both truncation and filling should happen “on the left”.

For example, if the parameter k is given by $k = 3$, $s_1 = \langle 0, 0, 0, 0, 1, 0, 1, 0, 1, 1, 1, 0 \rangle$ and $s_2 = 1$, then $H_3(s_1) = \langle 1, 1, 0 \rangle$ and $H_3(s_2) = \langle 0, 0, 1 \rangle$.

A desirable property of a hash function is **uniformity**, which means that it should map input values as evenly as possible over its output range. In mathematical terms, every string of length k from $\{0, 1\}^k$ should be generated with roughly the same probability.

Of particular interest are so-called **cryptographic** hash functions, which are hash functions that are also **one-way functions**, which essentially means that, given a string y from $\{0, 1\}^k$ it is infeasible to find a string $x \in \{0, 1\}^*$ such that $H(x) = y$ holds. This property is usually called **preimage-resistance**.

Moreover, if a string $x_1 \in \{0, 1\}^*$ is given, then it should be infeasible to find another string $x_2 \in \{0, 1\}^*$ with $x_1 \neq x_2$ and $H(x_1) = H(x_2)$.

In addition, it should be infeasible to find two strings $x_1, x_2 \in \{0, 1\}^*$ such that $H(x_1) = H(x_2)$, which is called **collision resistance**. It is important to note, though, that collisions always exist, since a function $H : \{0, 1\}^* \rightarrow \{0, 1\}^k$ inevitably maps infinitely many values onto the same hash. In fact, for any hash function with digests of length k , finding a preimage to a given digest can always be done using a brute force search in 2^k evaluation steps. It should just be practically impossible to compute those values, and statistically very unlikely to generate two of them by chance.

A third property of a cryptographic hash function is that small changes in the input string, like changing a single bit, should generate hash values that look completely different from each other. This is called **diffusion** or the avalanche effect.

Because cryptographic hash functions map tiny changes in input values onto large changes in the output, implementation errors that change the outcome are usually easy to spot by comparing them to expected output values. The definitions of cryptographic hash functions are therefore usually accompanied by some test vectors of common inputs and expected digests. Since the empty string $\langle \rangle$ is the only string of length 0, a common test vector is the expected digest of the empty string.

Example 44 (k -truncation hash). Consider the k -truncation hash from example 43. Since the empty string has length 0, it follows that the digest of the empty string is the string of length k

²The difference between the notations $b \in \{0, 1\}$ and $s \in \{0, 1\}^*$ is the following: $b \in \{0, 1\}$ means that b is equal to either 0 or 1, whereas s is a string composed of an arbitrary number of 0s and 1s (and s can also be an empty string).

check
footnote

should be
 $H_3(s_1)$
and
 $H_3(s_2)$?

1712 that only contains 0s:

$$H_k(<>) = <0, 0, \dots, 0, 0> \quad (4.18)$$

1713 It is pretty obvious from the definition of H_k that this simple hash function is not a cryptographic
1714 hash function. In particular, every digest is its own preimage, since $H_k(y) = y$ for every string
1715 of size exactly k . Finding preimages is therefore easy, so the property of preimage resistance
1716 does not hold.

1717 In addition, it is easy to construct collisions, as all strings s of size $|s| > k$ that share the
1718 same k -bits “on the right” are mapped to the same hash value. This means that this function is
1719 not collision resistant, either.

1720 Finally, this hash function does not have a lot of diffusion, as changing bits that are not part
1721 of the k right-most bits won’t change the digest at all.

1722 Computing cryptographically secure hash functions in pen-and-paper style is possible but
1723 tedious. Fortunately, Sage can import the **hashlib** library, which is intended to provide a
1724 reliable and stable base for writing Python programs that require cryptographic functions. The
1725 following examples explain how to use **hashlib** in Sage.

1726 *Example 45.* An example of a hash function that is generally believed to be a cryptographically
1727 secure hash function is the so-called **SHA256** hash, which, in our notation, is a function that
1728 maps binary strings of arbitrary length onto binary strings of length 256:

$$SHA256 : \{0, 1\}^* \rightarrow \{0, 1\}^{256} \quad (4.19)$$

1729 To evaluate a proper implementation of the *SHA256* hash function, the digest of the empty
1730 string is supposed to be the following:

$$SHA256(<>) = e3b0c44298fc1c149afb4c8996fb92427ae41e4649b934ca495991b7852b855 \quad (4.20)$$

1731 For better human readability, it is common practice to represent the digest of a string not in
1732 its binary form, but in a hexadecimal representation. We can use Sage to compute *SHA256* and
1733 freely transit between binary, hexadecimal and decimal representations. To do so, we import
1734 **hashlib**’s implementation of *SHA256*:

```

1735 sage: import hashlib                                     159
1736 sage: test = 'e3b0c44298fc1c149afb4c8996fb92427ae41e4649b934  160
1737         ca495991b7852b855'
1738 sage: empty_string = ""                                   161
1739 sage: binary_string = empty_string.encode()              162
1740 sage: hasher = hashlib.sha256(binary_string)             163
1741 sage: result = hasher.hexdigest()                       164
1742 sage: type(result) # Sage represents digests as strings  165
1743 <class 'str'>                                           166
1744 sage: d = ZZ('0x' + result) # conversion to an integer  167
1745 sage: d.str(16) == test # hash is equal to test vector  168
1746 True                                                    169
1747 sage: d.str(16) # hexadecimal representation            170
1748 e3b0c44298fc1c149afb4c8996fb92427ae41e4649b934ca495991b7852b8  171
1749 55
1750 sage: d.str(2) # binary representation                  172

```

```

1751 11100011101100001100010001000010100110001111110000011100000101 173
1752 0010011010111110111110100110010001001100101101111101110010
1753 01001000010011110101110010000011110010001100100100110111001
1754 00110100110010100100100101011001100100011011011110000101001
1755 01011100001010101
1756 sage: d.str(10) # decimal representation 174
1757 10298733624955409702953521232258132278979990064819803499337939 175
1758 7001115665086549

```

1759 4.1.7.2 Hashing to cyclic groups

1760 As we have seen in the previous section, general hash functions map binary strings of arbitrary
 1761 length onto binary strings of some fixed length. However, it is desirable in various cryptographic
 1762 primitives to not simply hash to binary strings of fixed length, but to hash into algebraic struc-
 1763 tures like groups, while keeping (some of) the properties of the hash function, like preimage
 1764 resistance or collision resistance.

1765 Hash functions like this can be defined for various algebraic structures, but, in a sense, the
 1766 most fundamental ones are hash functions that map into groups, because they can be easily
 1767 extended to map into other structures like rings or fields.

1768 To give a more precise definition, let \mathbb{G} be a group and $\{0, 1\}^*$ the set of all finite, binary
 1769 strings, then a **hash-to-group** function is a deterministic map

$$H : \{0, 1\}^* \rightarrow \mathbb{G} \quad (4.21)$$

1770 As the following example shows, hashing to finite cyclic groups can be trivially achieved
 1771 for the price of some undesirable properties of the hash function:

1772 *Example 46* (Naive cyclic group hash). Let \mathbb{G} be a finite cyclic group of order n . If the task is to
 1773 implement a hash-to-group function, one immediate approach can be based on the observation
 1774 that binary strings of size k can be interpreted as integers $z \in \mathbb{Z}$ in the range $0 \leq z < 2^k$ using
 1775 equation 3.4.

1776 To be more precise, let $H : \{0, 1\}^* \rightarrow \{0, 1\}^k$ be a hash function for some parameter k , g a
 1777 generator of \mathbb{G} , and $s \in \{0, 1\}^*$ a binary string. Using equation 3.4 and notation 8, the following
 1778 expression is a non-negative integer:

$$z_{H(s)} = H(s)_0 \cdot 2^0 + H(s)_1 \cdot 2^1 + \dots + H(s)_k \cdot 2^k \quad (4.22)$$

1779 A hash-to-group function for the group \mathbb{G} can then be defined as a composition of the expo-
 1780 nential map $g^{(\cdot)}$ of g with the interpretation of $H(s)$ as an integer:

$$H_g : \{0, 1\}^* \rightarrow \mathbb{G} : s \mapsto g^{z_{H(s)}} \quad (4.23)$$

1781 Constructing a hash-to-group function like this is easy for cyclic groups, and it might be
 1782 good enough in certain applications. It is, however, almost never adequate in cryptographic
 1783 applications, as a discrete log relation might be constructible between some hash values $H_g(s)$
 1784 and $H_g(t)$, regardless of whether or not \mathbb{G} is DL-secure (see section 4.1.6.1).

a few ex-
amples?

To be more precise, a discrete log relation between the group elements $H_g(s)$ and $H_g(t)$ is
 any element $x \in \mathbb{Z}_n$ such that $H_g(s) = H_g(t)^x$. To see how such an x can be constructed, assume
 that $z_{H(s)}$ has a multiplicative inverse in \mathbb{Z}_n . In this case, the element $x = z_{H(t)} \cdot z_{H(s)}^{-1}$ from \mathbb{Z}_n is

a discrete log relation between $H_g(s)$ and $H_g(t)$:

$$\begin{aligned} g^{z_{H(t)}} &= g^{z_{H(t)}} && \Leftrightarrow \\ g^{z_{H(t)}} &= g^{z_{H(t)} \cdot z_{H(s)} \cdot z_{H(s)}^{-1}} && \Leftrightarrow \\ g^{z_{H(t)}} &= g^{z_{H(s)} \cdot x} && \Leftrightarrow \\ H_g(t) &= (H_g(s))^x \end{aligned}$$

Therefore, applications where discrete log relations between hash values are undesirable need different approaches. Many of these approaches start with a way to hash into the set \mathbb{Z}_r of modular r arithmetics.

4.1.7.3 Pedersen Hashes

The so-called **Pedersen Hash Function** [Pedersen, 1992] provides a way to map fixed size tuples of elements from modular arithmetics onto elements of finite cyclic groups in such a way that discrete log relations (see example 46) between different images are avoidable. Compositions of a Pedersen Hash with a general hash function (4.17) then provide hash-to-group functions that map strings of arbitrary length onto group elements.

To be more precise, let j be an integer, \mathbb{G} a finite cyclic group of order n , and $\{g_1, \dots, g_j\} \subset \mathbb{G}$ a uniform and randomly generated set of generators of \mathbb{G} . Then **Pedersen's hash function** is defined as follows:

$$H_{\{g_1, \dots, g_j\}} : (\mathbb{Z}_r)^j \rightarrow \mathbb{G} : (x_1, \dots, x_j) \mapsto \prod_{i=1}^j g_i^{x_i} \quad (4.24)$$

It can be shown that Pedersen's hash function is collision-resistant under the assumption that \mathbb{G} is DL-secure (see section 4.1.6.1). It is important to note though, that the following family of functions does not qualify as a **pseudorandom function family**.

$$\{H_{\{g_1, \dots, g_j\}} \mid g_1, \dots, g_j \in \mathbb{G}\} \quad (4.25)$$

From an implementation perspective, it is important to derive the set of generators $\{g_1, \dots, g_k\}$ in such a way that they are as uniform and random as possible. In particular, any known discrete log relation between two generators, that is, any known $x \in \mathbb{Z}_n$ with $g_h = (g_i)^x$, must be avoided.

Example 47. To compute an actual Pedersen's hash, consider the cyclic group \mathbb{Z}_5^* from example 34. We know from example 38 that the elements 2 and 3 are generators of \mathbb{Z}_5^* , and it follows that the following map is a Pedersen's hash function:

$$H_{\{2,3\}} : \mathbb{Z}_4 \times \mathbb{Z}_4 \rightarrow \mathbb{Z}_5^* ; (x, y) \mapsto 2^x \cdot 3^y \quad (4.26)$$

To see how this map can be calculated, we choose the input value $(1, 3)$ from $\mathbb{Z}_4 \times \mathbb{Z}_4$. Then, using the multiplication table from (3.24), we calculate $H_{\{2,3\}}(1, 3) = 2^1 \cdot 3^3 = 2 \cdot 2 = 4$.

To see how the composition of a hash function with $H_{\{2,3\}}$ defines a hash-to-group function, consider the *SHA256* hash function from example 45. Given some binary string $s \in \{0, 1\}^*$, we can insert the two least significant bits $SHA256(s)_0$ and $SHA256(s)_1$ from the image $SHA256(s)$ into $H_{\{2,3\}}$ to get an element in \mathbb{Z}_5^* . This defines the following hash-to-group function

$$SHA256_H_{\{2,3\}} : \{0, 1\}^* \rightarrow \mathbb{Z}_5^* ; s \mapsto 2^{SHA256(s)_0} \cdot 3^{SHA256(s)_1}$$

To see how this hash function can be calculated, consider the empty string $\langle \rangle$. Since we know from the Sage computation in example 45, that $SHA256(\langle \rangle)_0 = 1$ and that $SHA256(\langle \rangle)_1 = 0$, we get $SHA_256H_{\{2,3\}}(\langle \rangle) = 2^1 \cdot 3^0 = 2$.

pseudorandom
function
family

Of course, computing $SHA256_{H_{\{2,3\}}}$ in a pen-and-paper style is difficult. However, we can easily implement this function in Sage in the following way:

```

sage: import hashlib
sage: def SHA256_H(x):
.....:     Z5 = Integers(5) # define the group type
.....:     hasher = hashlib.sha256(x) # compute SHA256
.....:     digest = hasher.hexdigest()
.....:     z = ZZ(digest, 16) # cast into integer
.....:     z_bin = z.digits(base=2, padto=256) # cast to 256
.....:     bits
.....:     return Z5(2)^z_bin[0] * Z5(3)^z_bin[1]
sage: SHA256_H(b"") # evaluate on empty string
2
sage: SHA256_H(b"SHA") # possible images are {1,2,3}
3
sage: SHA256_H(b"Math")
1

```

Exercise 43. Consider the multiplicative group \mathbb{Z}_{13}^* of modular 13 arithmetic from example 33. Choose a set of 3 generators of \mathbb{Z}_{13}^* , define its associated Pedersen Hash Function, and compute the Pedersen Hash of $(3, 7, 11) \in \mathbb{Z}_{12}$.

Exercise 44. Consider the Pedersen Hash from exercise 43. Compose it with the $SHA256$ hash function from example 45 to define a hash-to-group function. Implement that function in Sage.

4.1.7.4 Pseudorandom Function Families in DDH-secure groups

As noted in 4.24, the family of Pederson's hash functions, parameterized by a set of generators $\{g_1, \dots, g_j\}$ does not qualify as a family of pseudorandom functions, and should therefore not be instantiated as such. To see an example of a proper family of pseudorandom functions in groups where the decisional Diffie–Hellman assumption (see section 4.1.6.2) is assumed to hold true, let \mathbb{G} be a DDH-secure cyclic group of order n with generator g , and let $\{a_0, a_1, \dots, a_k\} \subset \mathbb{Z}_n^*$ be a uniform randomly generated set of numbers invertible in modular n arithmetics. Then a family of pseudorandom functions, parameterized by the seed $\{a_0, a_1, \dots, a_k\}$ is given as follows:

$$F_{\{a_0, a_1, \dots, a_k\}} : \{0, 1\}^{k+1} \rightarrow \mathbb{G} : (b_0, \dots, b_k) \mapsto g^{b_0 \cdot \prod_{i=1}^k a_i^{b_i}} \quad (4.27)$$

Exercise 45. Consider the multiplicative group \mathbb{Z}_{13}^* of modular 13 arithmetic from example 33 and the parameter $k = 3$. Choose a generator of \mathbb{Z}_{13}^* , a seed and instantiate a member of the family given in (4.27) for that seed. Evaluate that member on the binary string $\langle 1, 0, 1 \rangle$.

4.2 Commutative Rings

In the previous section, we have seen that integers are a commutative group with respect to integer addition. However, as we know, there are two arithmetic operations defined on integers: addition and multiplication. However, in contrast to addition, multiplication does not define a group structure, given that integers generally don't have multiplicative inverses. Configurations like these constitute so-called **commutative rings with unit**, and are defined as follows:

1850 *Definition 4.2.0.1* (Commutative ring with unit). A **commutative ring with unit** $(R, +, \cdot, 1)$ is
 1851 a set R with two maps, $+: R \times R \rightarrow R$ and $\cdot: R \times R \rightarrow R$, called **addition** and **multiplication**,
 1852 and an element $1 \in R$, called the **unit**, such that the following conditions hold:

- 1853 • $(R, +)$ is a commutative group where the neutral element is denoted with 0.
- 1854 • **Commutativity of multiplication**: $r_1 \cdot r_2 = r_2 \cdot r_1$ for all $r_1, r_2 \in R$.
- 1855 • **Multiplicative neutral unit**: $1 \cdot g = g$ for all $g \in R$.
- 1856 • **Associativity**: For every $g_1, g_2, g_3 \in \mathbb{G}$, the equation $g_1 \cdot (g_2 \cdot g_3) = (g_1 \cdot g_2) \cdot g_3$ holds.
- 1857 • **Distributivity**: For all $g_1, g_2, g_3 \in R$, the distributive law $g_1 \cdot (g_2 + g_3) = g_1 \cdot g_2 + g_1 \cdot g_3$
 1858 holds.

what are
the gs
here?
copy+paste
error from
4.1.0.1?

1859 If $(R, +, \cdot, 1)$ is a commutative ring with unit, and $R' \subset R$ is a subset of R such that the restriction
 1860 of addition and multiplication to R' define a commutative ring with addition $+: R' \times R' \rightarrow R'$,
 1861 multiplication $\cdot: R' \times R' \rightarrow R'$ and unit 1 on R' , then $(R', +, \cdot, 1)$ is called a **subring** of $(R, +, \cdot, 1)$.

1862 *Notation and Symbols 9.* Since we are exclusively concerned with commutative rings in this
 1863 book, we often just call them rings, keeping the notation of commutativity implicit. A set R with
 1864 two maps, $+$ and \cdot , which satisfies all previously mentioned rules except for the commutativity
 1865 law of multiplication, is called a non-commutative ring.

1866 If there is no risk of ambiguity (about what the addition and multiplication maps of a ring
 1867 are), we frequently drop the symbols $+$ and \cdot and simply write R as notation for the ring, keeping
 1868 those maps implicit. In this case we also say that R is of ring type, indicating that R is not simply
 1869 a set but a set together with an addition and a multiplication map.

1870 *Example 48* (The ring of integers). The set \mathbb{Z} of integers with the usual addition and multipli-
 1871 cation is the archetypical example of a commutative ring with unit 1.

1872 **sage: ZZ**

190

1873 **Integer Ring**

191

1874 *Example 49* (Underlying commutative group of a ring). Every commutative ring with unit
 1875 $(R, +, \cdot, 1)$ gives rise to a group, if we disregard multiplication.

1876 The following example is somewhat unusual, but we encourage you to think through it
 1877 because it helps to detach the mind from familiar styles of computation, and concentrate on the
 1878 abstract algebraic explanation.

1879 *Example 50.* Let $S := \{\bullet, \star, \odot, \otimes\}$ be a set that contains four elements, and let addition and
 1880 multiplication on S be defined as follows:

\cup	\bullet	\star	\odot	\otimes
\bullet	\bullet	\star	\odot	\otimes
\star	\star	\odot	\otimes	\bullet
\odot	\odot	\otimes	\bullet	\star
\otimes	\otimes	\bullet	\star	\odot

\circ	\bullet	\star	\odot	\otimes
\bullet	\bullet	\bullet	\bullet	\bullet
\star	\bullet	\star	\odot	\otimes
\odot	\bullet	\odot	\bullet	\odot
\otimes	\bullet	\otimes	\odot	\star

(4.28)

1881 Then (S, \cup, \circ, \star) is a ring with unit \star and zero \bullet . It therefore makes sense to ask for solutions to
 1882 equations like the following one:

$$\otimes \circ (x \cup \odot) = \star \quad (4.29)$$

The task here is to find $x \in S$ such that (4.29) holds. To see how such a “moonmath equation” can be solved, we have to keep in mind that rings behave mostly like normal numbers when it comes to bracketing and computation rules. The only differences are the symbols, and the actual way to add and multiply them. With this in mind, we solve the equation for x in the “usual way”:³

$$\begin{array}{ll}
 \otimes \circ (x \cup \odot) = \star & \# \text{ apply the distributive law} \\
 \otimes \circ x \cup \otimes \circ \odot = \star & \# \otimes \circ \odot = \odot \\
 \otimes \circ x \cup \odot = \star & \# \text{ concatenate the } \cup \text{ inverse of } \odot \text{ to both sides} \\
 \otimes \circ x \cup \odot \cup -\odot = \star \cup -\odot & \# \odot \cup -\odot = \bullet \\
 \otimes \circ x \cup \bullet = \star \cup -\odot & \# \bullet \text{ is the } \cup \text{ neutral element} \\
 \otimes \circ x = \star \cup -\odot & \# \text{ for } \cup \text{ we have } -\odot = \odot \\
 \otimes \circ x = \star \cup \odot & \# \star \cup \odot = \otimes \\
 \otimes \circ x = \otimes & \# \text{ concatenate the } \circ \text{ inverse of } \otimes \text{ to both sides} \\
 (\otimes)^{-1} \circ \otimes \circ x = (\otimes)^{-1} \circ \otimes & \# \text{ multiply with the multiplicative inverse} \\
 \star \circ x = \star & \\
 x = \star &
 \end{array}$$

Even though this equation looked really alien at first glance, we could solve it basically exactly the way we solve “normal” equations containing numbers.

Note, however, that whenever a multiplicative inverse is needed to solve an equation in the usual way in a ring, things can be very different than most of us are used to. For example, the following equation cannot be solved for x in the usual way, since there is no multiplicative inverse for \odot in our ring.

$$\odot \circ x = \otimes \quad (4.30)$$

We can confirm this by looking at the multiplication table in (4.28) to see that no such x exists.

As another example, the following equation does not have a single solution but two: $x \in \{\star, \otimes\}$.

$$\odot \circ x = \odot \quad (4.31)$$

Having no solution or two solutions is certainly not something we are used to from types like the rational numbers \mathbb{Q} .

Example 51 (Ring of Polynomials). Considering the definition of polynomials from section 3.4 again, we notice that what we have informally called the type R of the coefficients must in fact be a commutative ring with a unit, since we need addition, multiplication, commutativity and the existence of a unit for $R[x]$ to have the properties we expect.

In fact, if we consider R to be a ring and we define addition and multiplication of polynomials as in (3.28), the set $R[x]$ is a commutative ring with a unit, where the polynomial 1 is the multiplicative unit. We call this ring the **ring of polynomials with coefficients in R** .

sage: `ZZ['x']`

192

³Note that there are more efficient ways to solve this equation. The point of our computation is to show how the axioms of a ring can be used to solve the equation.

1903 **Univariate Polynomial Ring in x over Integer Ring** 193

1904 *Example 52* (Ring of modular n arithmetic). Let n be a modulus and $(\mathbb{Z}_n, +, \cdot)$ the set of all re-
 1905 mainder classes of integers modulo n , with the projection of integer addition and multiplication
 1906 as defined in section 3.3.4. Then $(\mathbb{Z}_n, +, \cdot)$ is a commutative ring with unit 1.

1907 **sage: Integers(6)** 194

1908 **Ring of integers modulo 6** 195

1909 *Example 53* (Binary Representations in Modular Arithmetic). **TODO** (Non unique)

1910 *Example 54* (Polynomial evaluation in the exponent of group generators). As we show in section
 1911 6.2.3, a key insight in many zero-knowledge protocols is the ability to encode computations as
 1912 polynomials and then to hide the information of that computation by evaluating the polynomial
 1913 “in the exponent” of certain cryptographic groups (section 8.2).

add exam-
ple

To understand the underlying principle of this idea, consider the exponential map (4.1) again. If \mathbb{G} is a finite cyclic group of order n with generator $g \in \mathbb{G}$, then the ring structure of $(\mathbb{Z}_n, +, \cdot)$ corresponds to the group structure of \mathbb{G} in the following way:

$$g^{x+y} = g^x \cdot g^y \quad g^{x \cdot y} = (g^x)^y \quad \text{for all } x, y \in \mathbb{Z}_n \quad (4.32)$$

This correspondence allows polynomials with coefficients in \mathbb{Z}_n to be evaluated “in the exponent” of a group generator. To see what this means, let $p \in \mathbb{Z}_n[x]$ be a polynomial with $p(x) = a_m \cdot x^m + a_{m-1}x^{m-1} + \dots + a_1x + a_0$, and let $s \in \mathbb{Z}_n$ be an evaluation point. Then the previously defined exponential laws 4.32 imply the following identity:

$$\begin{aligned} g^{p(s)} &= g^{a_m \cdot s^m + a_{m-1}s^{m-1} + \dots + a_1s + a_0} \\ &= \left(g^{s^m}\right)^{a_m} \cdot \left(g^{s^{m-1}}\right)^{a_{m-1}} \cdot \dots \cdot (g^s)^{a_1} \cdot g^{a_0} \end{aligned} \quad (4.33)$$

1914 Utilizing these identities, it is possible to evaluate any polynomial p of degree $\deg(p) \leq m$ at a
 1915 “secret” evaluation point s in the exponent of g without any knowledge about s , assuming that
 1916 \mathbb{G} is a DL-group. To see this, assume that the set $\{g, g^s, g^{s^2}, \dots, g^{s^m}\}$ is given, but s is unknown.
 1917 Then $g^{p(s)}$ can be computed using (4.33), but it is not feasible to compute s .

1918 *Example 55.* To give an example of the evaluation of a polynomial in the exponent of a finite
 1919 cyclic group, consider the exponential map from example 36:

$$3^{(\cdot)} : \mathbb{Z}_4 \rightarrow \mathbb{Z}_5^* ; x \mapsto 3^x \quad (4.34)$$

Choosing the polynomial $p(x) = 2x^2 + 3x + 1$ from $\mathbb{Z}_4[x]$, we first evaluate the polynomial at the point $s = 2$, and then write the result into the exponent 3 as follows:

$$\begin{aligned} 3^{p(2)} &= 3^{2 \cdot 2^2 + 3 \cdot 2 + 1} \\ &= 3^{2 \cdot 0 + 2 + 1} \\ &= 3^3 \\ &= 2 \end{aligned}$$

This was possible because we had access to the evaluation point 2. On the other hand, if we only had access to the set $\{3, 4, 1\}$ and we knew that this set represents the set $\{3, 3^s, 3^{s^2}\}$ for

some secret value s , we could evaluate p at the point s in the exponent of 3 as follows:

$$\begin{aligned} 3^{p(s)} &= 1^2 \cdot 4^3 \cdot 3^1 \\ &= 1 \cdot 4 \cdot 3 \\ &= 2 \end{aligned}$$

Both computations agree, since the secret point s was equal to 2 in this example. However the second evaluation was possible without any knowledge about s . agree

4.2.1 Hashing into Modular Arithmetic

As we have seen in section 4.1.7, various constructions for hashing to groups are known and used in applications. As commutative rings are commutative groups when we disregard the multiplication, hash-to-group constructions can be applied for hashing into commutative rings. We review some frequently used applications below.

One of the most widely used applications of hash-into-ring constructions are hash functions that map into the ring \mathbb{Z}_n of modular n arithmetics for some modulus n . Different approaches of constructing such a function are known, but probably the most widely used ones are based on the insight that the images of general hash functions can be interpreted as binary representations of integers, as explained in example 46.

It follows from this interpretation that one simple method of hashing into \mathbb{Z}_n is constructed by observing that if n is a modulus with a bit length (3.4) of $k = \lceil \log_2 n \rceil$, then every binary string $\langle b_0, b_1, \dots, b_{k-1} \rangle$ of length k defines an integer z in the range $0 \leq z \leq 2^k - 1 < n$:

$$z = b_0 \cdot 2^0 + b_1 \cdot 2^1 + \dots + b_{k-1} \cdot 2^{k-1} \quad (4.35)$$

Now, since $z < n$, we know that z is guaranteed to be in the set $\{0, 1, \dots, n-1\}$, and hence it can be interpreted as an element of \mathbb{Z}_n . Consequently, if $H : \{0, 1\}^* \rightarrow \{0, 1\}^k$ is a hash function, then a hash-to-ring function can be constructed as follows:

$$H_{|n|_2-1} : \{0, 1\}^* \rightarrow \mathbb{Z}_n : s \mapsto H(s)_0 \cdot 2^0 + H(s)_1 \cdot 2^1 + \dots + H(s)_{k-1} \cdot 2^{k-1} \quad (4.36)$$

A drawback of this hash function is that the distribution of the hash values in \mathbb{Z}_n is not necessarily uniform. In fact, if n is larger than 2^{k-1} , then by design $H_{|n|_2-1}$ will never hash onto values $z \geq 2^{k-1}$. Using this hashing method therefore generates approximately uniform hashes only if n is very close to 2^k . In the worst case, when $n = 2^k - 1$, it misses almost half of all elements from \mathbb{Z}_n .

An advantage of this approach is that properties like preimage resistance or collision resistance (see section 4.1.7.1) of the original hash function $H(\cdot)$ are preserved.

Example 56. To analyze a particular implementation of a $H_{|n|_2-1}$ hash function, we use a 5-bit truncation of the SHA256 hash from example 45 and define a hash into \mathbb{Z}_{16} as follows:

$$H_{|16|_2-5} : \{0, 1\}^* \rightarrow \mathbb{Z}_{16} : s \mapsto \text{SHA256}(s)_0 \cdot 2^0 + \text{SHA256}(s)_1 \cdot 2^1 + \dots + \text{SHA256}(s)_4 \cdot 2^4$$

Since $k = |16|_2 = 5$ and $16 - 2^{k-1} = 0$, this hash maps uniformly onto \mathbb{Z}_{16} . We can use Sage to implement it:

```
sage: import hashlib
```


put sub-
subsection
title here

```

1949 sage: def Hash5(x):
1950     ....:     Z16 = Integers(16)
1951     ....:     hasher = hashlib.sha256(x) # compute SHA56
1952     ....:     digest = hasher.hexdigest()
1953     ....:     d = ZZ(digest, base=16) # cast to integer
1954     ....:     d = d.str(2)[-4:] # keep 5 least significant bits
1955     ....:     d = ZZ(d, base=2) # cast to integer
1956     ....:     return Z16(d) # cast to Z16
1957 sage: Hash5(b' ')
1958 5


```

1959 We can then use Sage to apply this function to a large set of input values in order to plot a
 1960 visualization of the distribution over the set $\{0, \dots, 15\}$. Executing over 500 input values gives
 1961 the following plot:

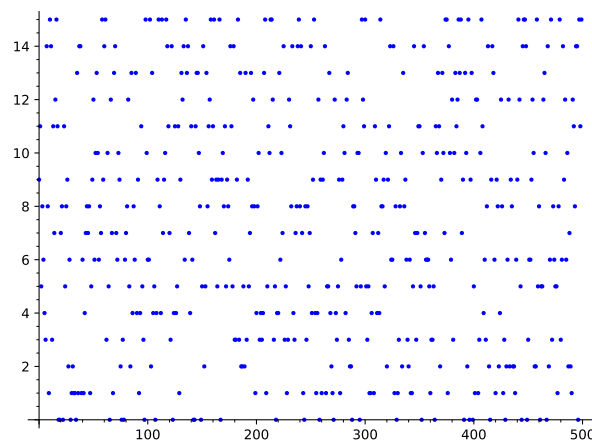


1962

1963 To get an intuition of uniformity, we can count the number of times the hash function $H_{|16|_2-1}$
 1964 maps onto each number in the set $\{0, 1, \dots, 15\}$ in a loop of 100000 hashes, and compare that
 1965 to the ideal uniform distribution, which would map exactly 6250 samples to each element. This
 1966 gives the following result:

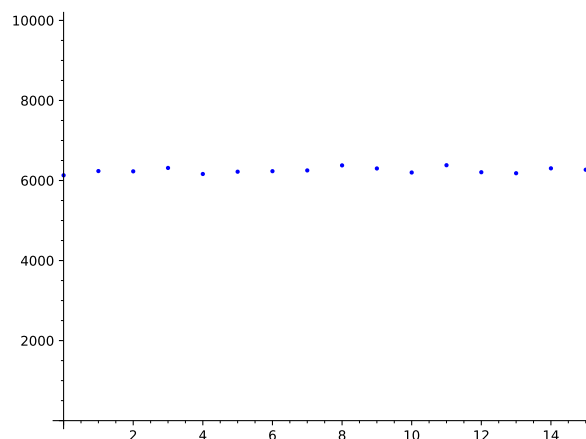

1967

1968 The lack of uniformity becomes apparent if we want to construct a similar hash function for \mathbb{Z}_n
 1969 for any other 5 bit integer n in the range $17 \leq n \leq 31$. In this case, the definition of the hash
 1970 function is exactly the same as for \mathbb{Z}_{16} , and hence, the images will not exceed the value 15.
 1971 So, for example, even in the case of hashing to \mathbb{Z}_{31} , the hash function never maps to any value
 1972 larger than 15, leaving almost half of all numbers out of the image range.

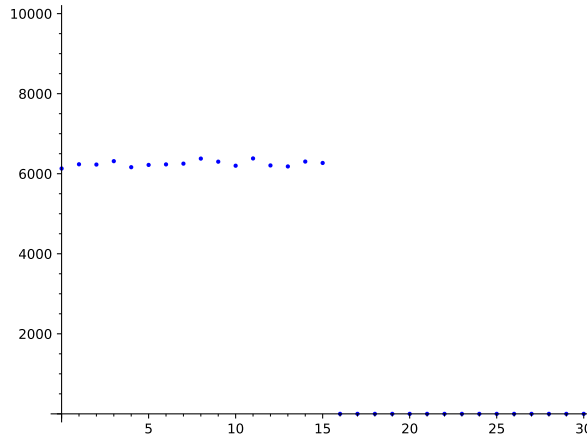
 put sub-
subsection
title here

A second widely used method of hashing into \mathbb{Z}_n is constructed by observing the following: If n is a modulus with a bit-length of $|n|_2 = k_1$, and $H : \{0, 1\}^* \rightarrow \{0, 1\}^{k_2}$ is a hash function that produces digests of size k_2 , and $k_2 \geq k_1$, then a hash-to-ring function can be constructed by interpreting the image of H as a binary representation of an integer, and then taking the modulus by n to map into \mathbb{Z}_n :

$$H'_{mod_n} : \{0, 1\}^* \rightarrow \mathbb{Z}_n : s \mapsto \left(H(s)_0 \cdot 2^0 + H(s)_1 \cdot 2^1 + \dots + H(s)_{k_2} \cdot 2^{k_2} \right) \bmod n \quad (4.37)$$

A drawback of this hash function is that computing the modulus requires some computational effort. In addition, the distribution of the hash values in \mathbb{Z}_n might not be uniform, depending on the number $2^{k_2+1} \bmod n$. An advantage of this function is that potential properties of the original hash function $H(\cdot)$ (like preimage resistance or collision resistance) are preserved, and the distribution can be made almost uniform, with only negligible bias depending on what modulus n and images size k_2 are chosen.


Example 57. To give an implementation of the H_{mod_n} hash function, we use k_2 -bit truncation of the *SHA256* hash from example 45, and define a hash into \mathbb{Z}_{23} as follows:

$$H_{mod_{23}, k_2} : \{0, 1\}^* \rightarrow \mathbb{Z}_{23} : s \mapsto \left(SHA256(s)_0 \cdot 2^0 + SHA256(s)_1 \cdot 2^1 + \dots + SHA256(s)_{k_2} \cdot 2^{k_2} \right) \bmod 23$$

We want to use various instantiations of k_2 to visualize the impact of truncation length on the distribution of the hashes in \mathbb{Z}_{23} . We can use Sage to implement it as follows:

```
sage: import hashlib
sage: Z23 = Integers(23)
sage: def Hash_mod23(x, k2):
.....:     hasher = hashlib.sha256(x.encode('utf-8')) # Compute
SHA256
.....:     digest = hasher.hexdigest()
.....:     d = ZZ(digest, base=16) # cast to integer
.....:     d = d.str(2)[-k2:] # keep k2+1 LSB
.....:     d = ZZ(d, base=2) # cast to integer
.....:     return Z23(d) # cast to Z23
```

We can then use Sage to apply this function to a large set of input values in order to plot visualizations of the distribution over the set $\{0, \dots, 22\}$ for various values of k_2 , by counting the number of times it maps onto each number in a loop of 100000 hashes. We get the following plot:

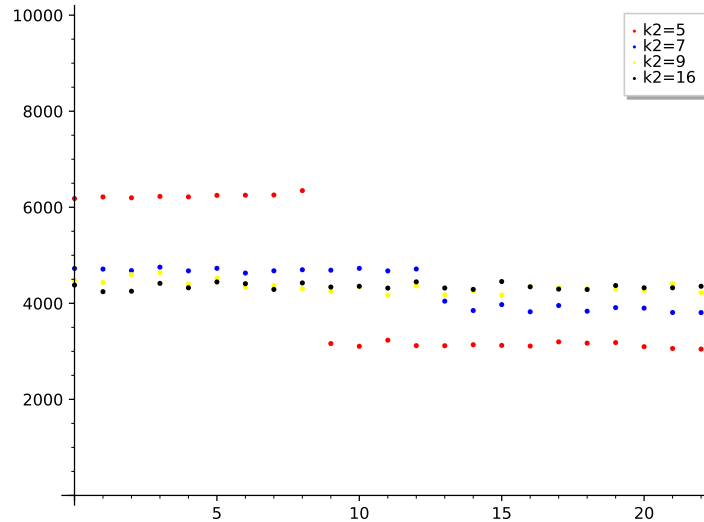

4.2.1.1 The “try-and-increment” method

A third method that can sometimes be found in implementations is the so-called “**try-and-increment**” method. To understand this method, we define an integer $z \in \mathbb{Z}$ from any hash value $H(s)$ as we did in the previous methods:

$$z = H(s)_0 \cdot 2^0 + H(s)_1 \cdot 2^1 + \dots + H(s)_{k-1} \cdot 2^k \quad (4.38)$$

Hashing into \mathbb{Z}_n is then achievable by first computing z , and then trying to see if $z \in \mathbb{Z}_n$. If it is, then the hash is done; if not, the string s is modified in a deterministic way and the process is repeated until a suitable element $z \in \mathbb{Z}_n$ is found. A suitable, deterministic modification could be to concatenate the original string by some bit counter. A “try-and-increment” algorithm would then work like in algorithm 6.

Algorithm 6 Hash-to- \mathbb{Z}_n

Require: $n \in \mathbb{Z}$ with $|n|_2 = k$ and $s \in \{0, 1\}^*$

procedure TRY-AND-INCREMENT(n, k, s)

$c \leftarrow 0$

repeat

$s' \leftarrow s || c_bits()$

$z \leftarrow H(s')_0 \cdot 2^0 + H(s')_1 \cdot 2^1 + \dots + H(s')_k \cdot 2^k$

$c \leftarrow c + 1$

until $z < n$

return x

end procedure

Ensure: $z \in \mathbb{Z}_n$

Depending on the parameters, this method can be very efficient. In fact, if k is sufficiently large and n is close to 2^{k+1} , the probability for $z < n$ is very high, and the repeat loop will almost always be executed a single time only. A drawback is, however, that the probability of having to execute the loop multiple times is not zero.

4.3 Fields

We started this chapter with the definition of a group (section 4.1), which we then expanded into the definition of a commutative ring with a unit (section 4.2). These types of rings generalize the behavior of integers. In this section, we look at those special cases of commutative rings where every element other than the neutral element of addition has a multiplicative inverse. Those structures behave very much like the set of rational numbers \mathbb{Q} . Rational numbers are, in a sense, an extension of the ring of integers, that is, they are constructed by including newly defined multiplicative inverses (fractions) to the integers. Fields are defined as follows:

Definition 4.3.0.1 (Field). A **field** $(\mathbb{F}, +, \cdot)$ is a set \mathbb{F} with two maps $+: \mathbb{F} \times \mathbb{F} \rightarrow \mathbb{F}$ and $\cdot: \mathbb{F} \times \mathbb{F} \rightarrow \mathbb{F}$ called **addition** and **multiplication**, such that the following conditions hold:

- $(\mathbb{F}, +)$ is a commutative group, where the neutral element is denoted by 0.
- $(\mathbb{F} \setminus \{0\}, \cdot)$ is a commutative group, where the neutral element is denoted by 1.
- (Distributivity) The equation $g_1 \cdot (g_2 + g_3) = g_1 \cdot g_2 + g_1 \cdot g_3$ holds for all $g_1, g_2, g_3 \in \mathbb{F}$.

If $(\mathbb{F}, +, \cdot)$ is a field and $\mathbb{F}' \subset \mathbb{F}$ is a subset of \mathbb{F} such that the restriction of addition and multiplication to \mathbb{F}' define a field with addition $+: \mathbb{F}' \times \mathbb{F}' \rightarrow \mathbb{F}'$ and multiplication $\cdot: \mathbb{F}' \times \mathbb{F}' \rightarrow \mathbb{F}'$ on \mathbb{F}' , then $(\mathbb{F}', +, \cdot)$ is called a **subfield** of $(\mathbb{F}, +, \cdot)$ and $(\mathbb{F}, +, \cdot)$ is called an **extension field** of $(\mathbb{F}', +, \cdot)$.

Notation and Symbols 10. If there is no risk of ambiguity (about what the addition and multiplication maps of a field are), we frequently omit the symbols $+$ and \cdot , and simply write \mathbb{F} as notation for a field, keeping maps implicit. In this case, we also say that \mathbb{F} is of field type, indicating that \mathbb{F} is not simply a set but a set with an addition and a multiplication map that satisfies the definition of a field (4.3.0.1).

We call $(\mathbb{F}, +)$ the **additive group** of the field. We use the notation $\mathbb{F}^* := \mathbb{F} \setminus \{0\}$ for the set of all elements excluding the neutral element of addition, called (\mathbb{F}^*, \cdot) the **multiplicative group** of the field.

The **characteristic** of a field \mathbb{F} , represented as $\text{char}(\mathbb{F})$, is the smallest natural number $n \geq 1$ for which the n -fold sum of the multiplicative neutral element 1 equals zero, i.e. for which $\sum_{i=1}^n 1 = 0$. If such an $n > 0$ exists, the field is said to have a **finite characteristic**. If, on the other hand, every finite sum of 1 is such that it is not equal to zero, then the field is defined to have characteristic 0. **S: Tried to disambiguate the scope of negation between 1. “It is true of every finite sum of 1 that it is not equal to 0” and 2. “It is not true of every finite sum of 1 that it is equal to 0” From the example below, it looks like 1. is the intended meaning here, correct?**

Example 58 (Field of rational numbers). Probably the best known example of a field is the set of rational numbers \mathbb{Q} together with the usual definition of addition, subtraction, multiplication and division. Since there is no natural number $n \in \mathbb{N}$ such that $\sum_{j=0}^n 1 = 0$ in the set of rational numbers, the characteristic of the field \mathbb{Q} is given by $\text{char}(\mathbb{Q}) = 0$.

sage: QQ

Rational Field

Example 59 (Field with two elements). It can be shown that, in any field, the neutral element of addition 0 must be different from the neutral element of multiplication 1, that is, $0 \neq 1$ always holds in a field. This means that the smallest field must contain at least two elements. As the following addition and multiplication tables show, there is indeed a field with two elements, which is usually called \mathbb{F}_2 :

Check
change of
wording

Let $\mathbb{F}_2 := \{0, 1\}$ be a set that contains two elements, and let addition and multiplication on \mathbb{F}_2 be defined as follows:

$$\begin{array}{c|cc} + & 0 & 1 \\ \hline 0 & 0 & 1 \\ 1 & 1 & 0 \end{array} \quad \begin{array}{c|cc} \cdot & 0 & 1 \\ \hline 0 & 0 & 0 \\ 1 & 0 & 1 \end{array} \quad (4.39)$$

Since $1 + 1 = 0$ in the field \mathbb{F}_2 , we know that the characteristic of \mathbb{F}_2 given by $\text{char}(\mathbb{F}_2) = 2$. The multiplicative subgroup \mathbb{F}_2^* of \mathbb{F}_2 is given by the trivial group $\{1\}$.

```

sage: F2 = GF(2)
sage: F2(1) # Get an element from GF(2)
1
sage: F2(1) + F2(1) # Addition
0
sage: F2(1) / F2(1) # Division
1

```

Exercise 46. Consider the ring of modular 5 arithmetics $(\mathbb{Z}_5, +, \cdot)$ from example 14. Show that $(\mathbb{Z}_5, +, \cdot)$ is a field. What is the characteristic of \mathbb{Z}_5 ? Prove that the equation $a \cdot x = b$ has only a single solution $x \in \mathbb{Z}_5$ for any given $a, b \in \mathbb{Z}_5^*$.

Exercise 47. Consider the ring of modular 6 arithmetics $(\mathbb{Z}_6, +, \cdot)$ from example 9. Show that $(\mathbb{Z}_6, +, \cdot)$ is not a field.

4.3.1 Prime fields

As we have seen in many of the examples in previous sections, modular arithmetic behaves similarly to the ordinary arithmetics of integers in many ways. This is due to the fact that remainder class sets \mathbb{Z}_n are commutative rings with units (see example 52).

However, we have also seen in example 36 that, whenever the modulus is a prime number, every remainder class other than the zero class has a modular multiplicative inverse. This is an important observation, since it immediately implies that, in case the modulus is a prime number, the remainder class set \mathbb{Z}_n is not just a ring but actually a **field**. Moreover, since $\sum_{j=0}^n 1 = 0$ in \mathbb{Z}_n , we know that those fields have the finite characteristic n .

Notation and Symbols 11 (Prime Fields). Let $p \in \mathbb{P}$ be a prime number and $(\mathbb{Z}_p, +, \cdot)$ the ring of modular p arithmetics (see example 52). To distinguish prime fields from arbitrary modular arithmetic rings, we write $(\mathbb{F}_p, +, \cdot)$ for the ring of modular p arithmetics and call it the **prime field** of characteristic p .

Prime fields are the foundation of many of the contemporary algebra-based cryptographic systems, as they have a number of desirable properties. One of these is that any prime field of characteristic p contains exactly p elements, which can be represented on a computer with not more than $\log_2(p)$ many bits. On the other hand, fields like rational numbers require a potentially unbounded amount of bits for any full-precision representation.

Since prime fields are special cases of modular arithmetic rings, addition and multiplication can be computed by first doing normal integer addition and multiplication, and then considering the remainder in Euclidean division by p as the result. For any prime field element $x \in \mathbb{F}_p$, its additive inverse (the negative) is given by $-x = p - x \bmod p$. For $x \neq 0$, the multiplicative inverse always exists, and is given by $x^{-1} = x^{p-2}$. Division is then defined by multiplication with the multiplicative inverse, as explained in section 3.3.5. Alternatively, the multiplicative inverse can be computed using the Extended Euclidean Algorithm as explained in (3.23).

2100 *Example 60.* The smallest possible field is the field \mathbb{F}_2 of characteristic 2, as we have seen in
 2101 example 59. It is the prime field of the prime number 2.

2102 *Example 61.* The field \mathbb{F}_5 from example 14 is a prime field, as defined by its addition and
 2103 multiplication table (3.24).

2104 *Example 62.* To summarize the basic aspects of computation in prime fields, let us consider the
 2105 prime field \mathbb{F}_5 (example 14) and simplify the following expression:

$$\left(\frac{2}{3} - 2\right) \cdot 2 \quad (4.40)$$

The first thing to note is that, since \mathbb{F}_5 is a field, all rules are identical to the rules we learned in school when we were dealing with rational, real or complex numbers. This means we can use methods like bracketing (distributivity) or addition as usual. For ease of computation, we can consult the addition and multiplication tables in (3.24).

$$\begin{aligned} \left(\frac{2}{3} - 2\right) \cdot 2 &= \frac{2}{3} \cdot 2 - 2 \cdot 2 && \# \text{ distributive law} \\ &= \frac{2 \cdot 2}{3} - 2 \cdot 2 && 4 \bmod 5 = 4 \\ &= \frac{4}{3} - 4 && \# \text{ multiplicative inverse of 3 is } 3^{5-2} \bmod 5 = 2 \\ &= 4 \cdot 2 - 4 && \# \text{ additive inverse of 4 is } 5 - 4 = 1 \\ &= 4 \cdot 2 + 1 && 8 \bmod 5 = 3 \\ &= 3 + 1 && 4 \bmod 5 = 4 \\ &= 4 \end{aligned}$$

2106 In this example, we computed the multiplicative inverse of 3 using the identity $x^{-1} = x^{p-2}$
 2107 in a prime field. This is impractical for large prime numbers. Recall that another way of
 2108 computing the multiplicative inverse is the Extended Euclidean Algorithm (see 3.13). To refresh
 2109 our memory, the algorithm solves the equation $x^{-1} \cdot 3 + t \cdot 5 = 1$, for x^{-1} (even though t is
 2110 irrelevant in this case). We get the following:

k	r_k	x_k^{-1}	t_k
0	3	1	.
1	5	0	.
2	3	1	.
3	2	-1	.
4	1	2	.

(4.41)

2111 So the multiplicative inverse of 3 in \mathbb{Z}_5 is 2, and, indeed, if we compute the product of 3 with
 2112 its multiplicative inverse 2, we get the neutral element 1 in \mathbb{F}_5 .

2113 *Exercise 48* (Prime field \mathbb{F}_3). Construct the addition and multiplication table of the prime field
 2114 \mathbb{F}_3 .

2115 *Exercise 49* (Prime field \mathbb{F}_{13}). Construct the addition and multiplication table of the prime field
 2116 \mathbb{F}_{13} .

2117 *Exercise 50.* Consider the prime field \mathbb{F}_{13} from exercise 49. Find the set of all pairs $(x, y) \in$
 2118 $\mathbb{F}_{13} \times \mathbb{F}_{13}$ that satisfy the following equation:

$$x^2 + y^2 = 1 + 7 \cdot x^2 \cdot y^2 \quad (4.42)$$

4.3.2 Square Roots

As we know from integer arithmetics, some integers, like 4 or 9, are squares of other integers: for example, $4 = 2^2$ and $9 = 3^2$. However, we also know that not all integers are squares of other integers: for example, there is no integers $x \in \mathbb{Z}$ such that $x^2 = 2$. If an integer a is square of another integer b , then it make sense to define the square root of a to be b .

In the context of prime fields, an element that is a square of another element is also called a **quadratic residue**, and an element that is not a square of another element is called a **quadratic non-residue**. This distinction is of particular importance in our studies on elliptic curves (chapter 5), as only square numbers can actually be points on an elliptic curve.

To make the intuition of quadratic residues and their roots precise, we give the following definition:

Definition 4.3.2.1. let $p \in \mathbb{P}$ be a prime number and \mathbb{F}_p its associated prime field. Then a number $x \in \mathbb{F}_p$ is called a **square root** of another number $y \in \mathbb{F}_p$, if x is a solution to the following equation:

$$x^2 = y \quad (4.43)$$

In this case, y is called a **quadratic residue**. On the other hand, if y is given and the quadratic equation has no solution x , we call y a **quadratic non-residue**.

For any $y \in \mathbb{F}_p$, we denote the set of all square roots of y in the prime field \mathbb{F}_p as follows:

$$\sqrt{y} := \{x \in \mathbb{F}_p \mid x^2 = y\} \quad (4.44)$$

Informally speaking, quadratic residues are numbers that have a square root, while quadratic non-residues are numbers that don't have square roots. The situation therefore parallels the familiar case of integers, where some integers like 4 or 9 have a square root, and others like 2 or 3 don't (within the set of integers).

If y is a quadratic non-residue, then $\sqrt{y} = \emptyset$ (an empty set), and if $y = 0$, then $\sqrt{y} = \{0\}$.

Moreover if $y \neq 0$ is a quadratic residue, then it has precisely two roots $\sqrt{y} = \{x, p-x\}$ for some $x \in \mathbb{F}_p$. We adopt the convention to call the smaller one (when interpreted as an integer) the **positive square root** and the larger one the **negative square root**.

If $p \in \mathbb{P}_{\geq 3}$ is an odd prime number with associated prime field \mathbb{F}_p , then there are precisely $(p+1)/2$ many quadratic residues and $(p-1)/2$ quadratic non-residues.

Example 63 (Quadratic residues and roots in \mathbb{F}_5). Let us consider the prime field \mathbb{F}_5 from example 14 again. All square numbers can be found on the main diagonal of the multiplication table in (3.24). As you can see, in \mathbb{F}_5 , only the numbers 0, 1 and 4 have square roots: $\sqrt{0} = \{0\}$, $\sqrt{1} = \{1, 4\}$, $\sqrt{2} = \emptyset$, $\sqrt{3} = \emptyset$ and $\sqrt{4} = \{2, 3\}$. The numbers 0, 1 and 4 are therefore quadratic residues, while the numbers 2 and 3 are quadratic non-residues.

In order to describe whether an element of a prime field is a square number or not, the so-called **Legendre symbol** can sometimes be found in the literature, defined as follows:

Let $p \in \mathbb{P}$ be a prime number and $y \in \mathbb{F}_p$ an element from the associated prime field. Then the *Legendre symbol* of y is defined as follows:

$$\left(\frac{y}{p}\right) := \begin{cases} 1 & \text{if } y \text{ has square roots} \\ -1 & \text{if } y \text{ has no square roots} \\ 0 & \text{if } y = 0 \end{cases} \quad (4.45)$$

Example 64. Looking at the quadratic residues and non-residues in \mathbb{F}_5 from example 14 again, we can deduce the following Legendre symbols based on example 63.

$$\left(\frac{0}{5}\right) = 0, \quad \left(\frac{1}{5}\right) = 1, \quad \left(\frac{2}{5}\right) = -1, \quad \left(\frac{3}{5}\right) = -1, \quad \left(\frac{4}{5}\right) = 1.$$

The Legendre symbol provides a criterion to decide whether or not an element from a prime field has a quadratic root or not. This, however, is not just of theoretical use: the so-called **Euler criterion** provides a compact way to actually compute the Legendre symbol. To see that, let $p \in \mathbb{P}_{\geq 3}$ be an odd prime number and $y \in \mathbb{F}_p$. Then the Legendre symbol can be computed as follows:

$$\left(\frac{y}{p}\right) = y^{\frac{p-1}{2}} \quad (4.46)$$

Example 65. Looking at the quadratic residues and non-residues in \mathbb{F}_5 from example 63 again, we can compute the following Legendre symbols using the Euler criterion:

$$\begin{aligned} \left(\frac{0}{5}\right) &= 0^{\frac{5-1}{2}} = 0^2 = 0 \\ \left(\frac{1}{5}\right) &= 1^{\frac{5-1}{2}} = 1^2 = 1 \\ \left(\frac{2}{5}\right) &= 2^{\frac{5-1}{2}} = 2^2 = 4 = -1 \\ \left(\frac{3}{5}\right) &= 3^{\frac{5-1}{2}} = 3^2 = 4 = -1 \\ \left(\frac{4}{5}\right) &= 4^{\frac{5-1}{2}} = 4^2 = 1 \end{aligned}$$

Exercise 51. Consider the prime field \mathbb{F}_{13} from exercise 49. Compute the Legendre symbol $\left(\frac{x}{13}\right)$ and the set of roots \sqrt{x} for all elements $x \in \mathbb{F}_{13}$.

4.3.2.1 Hashing into prime fields

An important problem in cryptography is the ability to hash to (various subsets) of elliptic curves. As we will see in chapter 5, those curves are often defined over prime fields, and hashing to a curve might start with hashing to the prime field. It is therefore important to understand how to hash into prime fields.

In section 4.2.1, we looked at a few methods of hashing into the modular arithmetic rings \mathbb{Z}_n for arbitrary $n > 1$. As prime fields are just special instances of those rings, all methods for hashing into \mathbb{Z}_n functions can be used for hashing into prime fields, too.

4.3.3 Prime Field Extensions

Prime fields, as defined in the previous section, are basic building blocks of cryptography. However, as we will see in chapter 8, so-called pairing-based SNARK systems are crucially dependent on certain group pairings (4.9) defined on elliptic curves over **prime field extensions**. In this section, we therefore introduce those extensions.

Given some prime number $p \in \mathbb{P}$, a natural number $m \in \mathbb{N}$, and an irreducible polynomial $P \in \mathbb{F}_p[x]$ of degree m with coefficients from the prime field \mathbb{F}_p , a prime field extension $(\mathbb{F}_{p^m}, +, \cdot)$ is defined as follows.

The set \mathbb{F}_{p^m} of the prime field extension is given by the set of all polynomials with a degree less than m :

$$\mathbb{F}_{p^m} := \{a_{m-1}x^{m-1} + a_{m-2}x^{m-2} + \dots + a_1x + a_0 \mid a_i \in \mathbb{F}_p\} \quad (4.47)$$

2182 The addition law of the prime field extension \mathbb{F}_{p^m} is given by the usual addition of polynomials
 2183 as defined in (3.28):

$$+ : \mathbb{F}_{p^m} \times \mathbb{F}_{p^m} \rightarrow \mathbb{F}_{p^m}, (\sum_{j=0}^m a_j x^j, \sum_{j=0}^m b_j x^j) \mapsto \sum_{j=0}^m (a_j + b_j) x^j \quad (4.48)$$

2184 The multiplication law of the prime field extension \mathbb{F}_{p^m} is given by first multiplying the two
 2185 polynomials as defined in (3.29), then dividing the result by the irreducible polynomial p and
 2186 keeping the remainder:

$$\cdot : \mathbb{F}_{p^m} \times \mathbb{F}_{p^m} \rightarrow \mathbb{F}_{p^m}, (\sum_{j=0}^m a_j x^j, \sum_{j=0}^m b_j x^j) \mapsto (\sum_{n=0}^{2m} \sum_{i=0}^n a_i b_{n-i} x^n) \bmod P \quad (4.49)$$

2187 The neutral element of the additive group $(\mathbb{F}_{p^m}, +)$ is given by the zero polynomial 0. The
 2188 additive inverse is given by the polynomial with all negative coefficients. The neutral element
 2189 of the multiplicative group $(\mathbb{F}_{p^m}^*, \cdot)$ is given by the unit polynomial 1. The multiplicative inverse
 2190 can be computed by the Extended Euclidean Algorithm (see 3.13).

2191 We can see from the definition of \mathbb{F}_{p^m} that the field is of characteristic p , since the mul-
 2192 tiplicative neutral element 1 is equivalent to the multiplicative element 1 from the underlying
 2193 prime field, and hence $\sum_{j=0}^p 1 = 0$. Moreover, \mathbb{F}_{p^m} is finite and contains p^m many elements,
 2194 since elements are polynomials of degree $< m$, and every coefficient a_j can have p many differ-
 2195 ent values. In addition, we see that the prime field \mathbb{F}_p is a subfield of \mathbb{F}_{p^m} that occurs when we
 2196 restrict the elements of \mathbb{F}_{p^m} to polynomials of degree zero.

2197 One key point is that the construction of \mathbb{F}_{p^m} depends on the choice of an irreducible poly-
 2198 nomial, and, in fact, different choices will give different multiplication tables, since the remainders
 2199 from dividing a polynomial product by those polynomials will be different.

2200 It can, however, be shown that the fields for different choices of P are **isomorphic**, which
 2201 means that there is a one-to-one correspondence between all of them. As a result, from an ab-
 2202 stract point of view, they are the same thing. From an implementations point of view, however,
 2203 some choices are preferable to others because they allow for faster computations.

2204 *Remark 3.* Similarly to the way prime fields \mathbb{F}_p are generated by starting with the ring of integers
 2205 and then dividing by a prime number p and keeping the remainder, prime field extensions \mathbb{F}_{p^m}
 2206 are generated by starting with the ring $\mathbb{F}_p[x]$ of polynomials and then dividing them by an
 2207 irreducible polynomial of degree m and keeping the remainder.

2208 In fact, it can be shown that \mathbb{F}_{p^m} is the set of all remainders when dividing any polynomial
 2209 $Q \in \mathbb{F}_p[x]$ by an irreducible polynomial P of degree m . This is analogous to how \mathbb{F}_p is the set of
 2210 all remainders when dividing integers by p .

2211 Any field \mathbb{F}_{p^m} constructed in the above manner is a field extension of \mathbb{F}_p . To be more
 2212 general, a field $\mathbb{F}_{p^{m_2}}$ is a field extension of a field $\mathbb{F}_{p^{m_1}}$ if and only if m_1 divides m_2 . From this,
 2213 we can deduce that, for any given fixed prime number, there are nested sequences of subfields
 2214 whenever the power m_j divides the power m_{j+1} :

$$\mathbb{F}_p \subset \mathbb{F}_{p^{m_1}} \subset \cdots \subset \mathbb{F}_{p^{m_k}} \quad (4.50)$$

2215 To get a more intuitive picture of this, we construct an extension field of the prime field \mathbb{F}_3
 2216 in the following example, and we can see how \mathbb{F}_3 sits inside that extension field.

Example 66 (The Extension field \mathbb{F}_{32}). In exercise 48, we have constructed the prime field \mathbb{F}_3 .
 In this example, we apply the definition of a field extension (4.47) to construct the extension
 field \mathbb{F}_{32} . We start by choosing an irreducible polynomial of degree 2 with coefficients in \mathbb{F}_3 .

check
reference

We try $P(t) = t^2 + 1$. Possibly the fastest way to show that P is indeed irreducible is to just insert all elements from \mathbb{F}_3 to see if the result is ever zero. We compute as follows:

$$P(0) = 0^2 + 1 = 1$$

$$P(1) = 1^2 + 1 = 2$$

$$P(2) = 2^2 + 1 = 1 + 1 = 2$$

2217 This implies that P is irreducible, since all factors must be of the form $(t - a)$ for a being a root
 2218 of P . The set \mathbb{F}_{3^2} contains all polynomials of degrees lower than two with coefficients in \mathbb{F}_3 ,
 2219 which are precisely as listed below:

$$\mathbb{F}_{3^2} = \{0, 1, 2, t, t+1, t+2, 2t, 2t+1, 2t+2\} \quad (4.51)$$

2220 As expected, our extension field contains 9 elements. Addition is defined as addition of
 2221 polynomials; for example $(t+2) + (2t+2) = (1+2)t + (2+2) = 1$. Doing this computation
 2222 for all elements gives the following addition table

+	0	1	2	t	t+1	t+2	2t	2t+1	2t+2
0	0	1	2	t	t+1	t+2	2t	2t+1	2t+2
1	1	2	0	t+1	t+2	t	2t+1	2t+2	2t
2	2	0	1	t+2	t	t+1	2t+2	2t	2t+1
t	t	t+1	t+2	2t	2t+1	2t+2	0	1	2
t+1	t+1	t+2	t	2t+1	2t+2	2t	1	2	0
t+2	t+2	t	t+1	2t+2	2t	2t+1	2	0	1
2t	2t	2t+1	2t+2	0	1	2	t	t+1	t+2
2t+1	2t+1	2t+2	2t	1	2	0	t+1	t+2	t
2t+2	2t+2	2t	2t+1	2	0	1	t+2	t	t+1

(4.52)

2223 As we can see, the group $(\mathbb{F}_3, +)$ is a subgroup of the group $(\mathbb{F}_{3^2}, +)$, obtained by only
 2224 considering the first three rows and columns of this table.

2225 We can use the addition table (4.52) to deduce the additive inverse (the negative) of any
 2226 element from \mathbb{F}_{3^2} . For example, in \mathbb{F}_{3^2} we have $-(2t+1) = t+2$, since $(2t+1) + (t+2) = 0$.

Multiplication needs a bit more computation, as we first have to multiply the polynomials, and whenever the result has a degree ≥ 2 , we have to apply a polynomial division algorithm (algorithm 3) to divide the product by the polynomial P and keep the remainder. To see how this works, let us compute the product of $t+2$ and $2t+2$ in \mathbb{F}_{3^2} :

$$\begin{aligned}
 (t+2) \cdot (2t+2) &= (2t^2 + 2t + t + 1) \bmod (t^2 + 1) \\
 &= (2t^2 + 1) \bmod (t^2 + 1) & \# 2t^2 + 1 : t^2 + 1 &= 2 + \frac{2}{t^2 + 1} \\
 &= 2
 \end{aligned}$$

2227 This means that the product of $t+2$ and $2t+2$ in \mathbb{F}_{3^2} is 2. Performing this computation for all

elements gives the following multiplication table:

\cdot	0	1	2	t	t+1	t+2	2t	2t+1	2t+2
0	0	0	0	0	0	0	0	0	0
1	0	1	2	t	t+1	t+2	2t	2t+1	2t+2
2	0	2	1	2t	2t+2	2t+1	t	t+2	t+1
t	0	t	2t	2	t+2	2t+2	1	t+1	2t+1
t+1	0	t+1	2t+2	t+2	2t	1	2t+1	2	t
t+2	0	t+2	2t+1	2t+2	1	t	t+1	2t	2
2t	0	2t	t	1	2t+1	t+1	2	2t+2	t+2
2t+1	0	2t+1	t+2	t+1	2	2t	2t+2	t	1
2t+2	0	2t+2	t+1	2t+1	t	2	t+2	1	2t

(4.53)

As was the case in previous examples, we can use the table (4.53) to deduce the multiplicative inverse of any non-zero element from \mathbb{F}_{3^2} . For example, in \mathbb{F}_{3^2} we have $(2t+1)^{-1} = 2t+2$, since $(2t+1) \cdot (2t+2) = 1$.

Looking at the multiplication table (4.53), we can also see that the only quadratic residues in \mathbb{F}_{3^2} are from the set $\{0, 1, 2, t, 2t\}$, with $\sqrt{0} = \{0\}$, $\sqrt{1} = \{1, 2\}$, $\sqrt{2} = \{t, 2t\}$, $\sqrt{t} = \{t+2, 2t+1\}$ and $\sqrt{2t} = \{t+1, 2t+2\}$.

Since \mathbb{F}_{3^2} is a field, we can solve equations as we would for other fields (such as rational numbers). To see that, let us find all $x \in \mathbb{F}_{3^2}$ that solve the quadratic equation $(t+1)(x^2 + (2t+2)) = 2$. We compute as follows:

$$\begin{aligned}
 (t+1)(x^2 + (2t+2)) &= 2 && \# 2 \text{ distributive law} \\
 (t+1)x^2 + (t+1)(2t+2) &= 2 \\
 (t+1)x^2 + (t) &= 2 && \# 2 \text{ add the additive inverse of } t \\
 (t+1)x^2 + (t) + (2t) &= (2) + (2t) \\
 (t+1)x^2 &= 2t+2 && \# \text{ multiply with the multiplicative invers of } t+1 \\
 (t+2)(t+1)x^2 &= (t+2)(2t+2) && \# \text{ multiply with the multiplicative invers of } t+1 \\
 x^2 &= 2 && \# 2 \text{ is quadratic residue. Take the roots.} \\
 x &\in \{t, 2t\}
 \end{aligned}$$

Computations in extension fields are arguably on the edge of what can reasonably be done with pen and paper. Fortunately, Sage provides us with a simple way to do these computations.

```

sage: Z3 = GF(3) # prime field
sage: Z3t.<t> = Z3[] # polynomials over Z3
sage: P = Z3t(t^2+1)
sage: P.is_irreducible()
True
sage: F3_2.<t> = GF(3^2, name='t', modulus=P) # Extension
      field F_3^2
sage: F3_2
Finite Field in t of size 3^2
sage: F3_2(t+2)*F3_2(2*t+2) == F3_2(2)
True
sage: F3_2(2*t+2)^(-1) # multiplicative inverse
2*t + 1

```

```

2250 sage: # verify our solution to (t+1)(x^2 + (2t+2)) = 2      237
2251 sage: F3_2(t+1)*(F3_2(t)**2 + F3_2(2*t+2)) == F3_2(2)    238
2252 True                                                         239
2253 sage: F3_2(t+1)*(F3_2(2*t)**2 + F3_2(2*t+2)) == F3_2(2)  240
2254 True                                                         241

```

2255 *Exercise 52.* Consider the extension field \mathbb{F}_{3^2} from the previous example and find all pairs of
 2256 elements $(x, y) \in \mathbb{F}_{3^2}$, for which the following equation holds:

$$y^2 = x^3 + 4 \quad (4.54)$$

2257 *Exercise 53.* Show that the polynomial $Q = x^2 + x + 2$ from $\mathbb{F}_3[x]$ is irreducible. Construct the
 2258 multiplication table of \mathbb{F}_{3^2} with respect to Q and compare it to the multiplication table of \mathbb{F}_{3^2}
 2259 from example 66.

2260 *Exercise 54.* Show that the polynomial $P = t^3 + t + 1$ from $\mathbb{F}_5[t]$ is irreducible. Then consider
 2261 the extension field \mathbb{F}_{5^3} defined relative to P . Compute the multiplicative inverse of $(2t^2 + 4) \in$
 2262 \mathbb{F}_{5^3} using the Extended Euclidean Algorithm. Then find all $x \in \mathbb{F}_{5^3}$ that solve the following
 2263 equation:

$$(2t^2 + 4)(x - (t^2 + 4t + 2)) = (2t + 3) \quad (4.55)$$

2264 *Exercise 55.* Consider the prime field \mathbb{F}_5 . Show that the polynomial $P = x^2 + 2$ from $\mathbb{F}_5[x]$ is
 2265 irreducible. Implement the finite field \mathbb{F}_{5^2} in Sage.

2266 4.4 Projective Planes

2267 Projective planes are particular geometric constructs defined over a given field. In a sense,
 2268 projective planes extend the concept of the ordinary Euclidean plane by including “points at
 2269 infinity.”

2270 To understand the idea of constructing of projective planes, note that, in an ordinary Eu-
 2271 clidean plane, two lines either intersect in a single point or are parallel. In the latter case, both
 2272 lines are either the same, that is, they intersect in all points, or do not intersect at all. A projec-
 2273 tive plane can then be thought of as an ordinary plane, but equipped with an additional “point at
 2274 infinity” such that two different lines always intersect in a single point. Parallel lines intersect
 2275 “at infinity”.

2276 Such an inclusion of infinity points makes projective planes particularly useful in the de-
 2277 scription of elliptic curves, as the description of such a curve in an ordinary plane needs an
 2278 additional symbol for “the point at infinity” to give the set of points on the curve the structure
 2279 of a group 5.1. Translating the curve into projective geometry includes this “point at infinity”
 2280 more naturally into the set of all points on a projective plane.

2281 To be more precise, let \mathbb{F} be a field, $\mathbb{F}^3 := \mathbb{F} \times \mathbb{F} \times \mathbb{F}$ the set of all tuples of three elements
 2282 over \mathbb{F} and $x \in \mathbb{F}^3$ with $x = (X, Y, Z)$. Then there is exactly one *line* L_x in \mathbb{F}^3 that intersects both
 2283 $(0, 0, 0)$ and x , given by the set $L_x = \{(k \cdot X, k \cdot Y, k \cdot Z) \mid k \in \mathbb{F}\}$. A point in the **projective plane**
 2284 over \mathbb{F} can then be defined as such a **line** if we exclude the intersection of that line with $(0, 0, 0)$.
 2285 This leads to the following definition of a **point** in projective geometry:

$$[X : Y : Z] := \{(k \cdot X, k \cdot Y, k \cdot Z) \mid k \in \mathbb{F}^*\} \quad (4.56)$$

2286 Points in projective geometry are therefore lines in \mathbb{F}^3 where the intersection with $(0, 0, 0)$ is
 2287 excluded. Given a field \mathbb{F} , the **projective plane** of that field is then defined as the set of all

2288 points excluding the point $[0 : 0 : 0]$:

$$\mathbb{FP}^2 := \{[X : Y : Z] \mid (X, Y, Z) \in \mathbb{F}^3 \text{ with } (X, Y, Z) \neq (0, 0, 0)\} \quad (4.57)$$

2289 It can be shown that a projective plane over a finite field \mathbb{F}_{p^m} contains $p^{2m} + p^m + 1$ number of
 2290 elements.

2291 To understand why the projective point $[X : Y : Z]$ is also a line, consider the situation where
 2292 the underlying field \mathbb{F} is the set of rational numbers \mathbb{Q} . In this case, \mathbb{Q}^3 can be seen as the three-
 2293 dimensional space, and $[X : Y : Z]$ is an ordinary line in this 3-dimensional space that intersects
 2294 zero and the point with coordinates X, Y and Z such that the intersection with zero is excluded.

2295 The key observation here is that points in the projective plane \mathbb{FP}^2 are lines in the 3-
 2296 dimensional space \mathbb{F}^3 . However, it should be kept in mind that, for finite fields, the terms
 2297 **space** and **line** share very little visual similarity with their counterparts over the set of rational
 2298 numbers.

2299 It follows from this that points $[X : Y : Z] \in \mathbb{FP}^2$ are not simply described by fixed coor-
 2300 dinates (X, Y, Z) , but by **sets of coordinates**, where two different coordinates (X_1, Y_1, Z_1) and
 2301 (X_2, Y_2, Z_2) describe the same point if and only if there is some non-zero field element $k \in \mathbb{F}^*$
 2302 such that $(X_1, Y_1, Z_1) = (k \cdot X_2, k \cdot Y_2, k \cdot Z_2)$. Points $[X : Y : Z]$ are called **projective coordinates**.

2303 *Notation and Symbols* 12 (Projective coordinates). Projective coordinates of the form $[X : Y : 1]$
 2304 are descriptions of so-called **affine points**. Projective coordinates of the form $[X : Y : 0]$ are
 2305 descriptions of so-called **points at infinity**. In particular, the projective coordinate $[1 : 0 : 0]$
 2306 describes the so-called **line at infinity**.

2307 *Example 67.* Consider the field \mathbb{F}_3 from exercise 48 . As this field only contains three elements,
 2308 it does not take too much effort to construct its associated projective plane $\mathbb{F}_3\mathbb{P}^2$, which we
 2309 know only contains 13 elements.

To find $\mathbb{F}_3\mathbb{P}^2$, we have to compute the set of all lines in $\mathbb{F}_3 \times \mathbb{F}_3 \times \mathbb{F}_3$ that intersect $(0, 0, 0)$,
 excluding their intersection with $(0, 0, 0)$. Since those lines are parameterized by tuples (x_1, x_2, x_3) ,

we compute as follows:

$$\begin{aligned}
[0 : 0 : 1] &= \{(k \cdot x_1, k \cdot x_2, k \cdot x_3) \mid k \in \mathbb{F}_3^*\} = \{(0, 0, 1), (0, 0, 2)\} \\
[0 : 0 : 2] &= \{(k \cdot x_1, k \cdot x_2, k \cdot x_3) \mid k \in \mathbb{F}_3^*\} = \{(0, 0, 2), (0, 0, 1)\} = [0 : 0 : 1] \\
[0 : 1 : 0] &= \{(k \cdot x_1, k \cdot x_2, k \cdot x_3) \mid k \in \mathbb{F}_3^*\} = \{(0, 1, 0), (0, 2, 0)\} \\
[0 : 1 : 1] &= \{(k \cdot x_1, k \cdot x_2, k \cdot x_3) \mid k \in \mathbb{F}_3^*\} = \{(0, 1, 1), (0, 2, 2)\} \\
[0 : 1 : 2] &= \{(k \cdot x_1, k \cdot x_2, k \cdot x_3) \mid k \in \mathbb{F}_3^*\} = \{(0, 1, 2), (0, 2, 1)\} \\
[0 : 2 : 0] &= \{(k \cdot x_1, k \cdot x_2, k \cdot x_3) \mid k \in \mathbb{F}_3^*\} = \{(0, 2, 0), (0, 1, 0)\} = [0 : 1 : 0] \\
[0 : 2 : 1] &= \{(k \cdot x_1, k \cdot x_2, k \cdot x_3) \mid k \in \mathbb{F}_3^*\} = \{(0, 2, 1), (0, 1, 2)\} = [0 : 1 : 2] \\
[0 : 2 : 2] &= \{(k \cdot x_1, k \cdot x_2, k \cdot x_3) \mid k \in \mathbb{F}_3^*\} = \{(0, 2, 2), (0, 1, 1)\} = [0 : 1 : 1] \\
[1 : 0 : 0] &= \{(k \cdot x_1, k \cdot x_2, k \cdot x_3) \mid k \in \mathbb{F}_3^*\} = \{(1, 0, 0), (2, 0, 0)\} \\
[1 : 0 : 1] &= \{(k \cdot x_1, k \cdot x_2, k \cdot x_3) \mid k \in \mathbb{F}_3^*\} = \{(1, 0, 1), (2, 0, 2)\} \\
[1 : 0 : 2] &= \{(k \cdot x_1, k \cdot x_2, k \cdot x_3) \mid k \in \mathbb{F}_3^*\} = \{(1, 0, 2), (2, 0, 1)\} \\
[1 : 1 : 0] &= \{(k \cdot x_1, k \cdot x_2, k \cdot x_3) \mid k \in \mathbb{F}_3^*\} = \{(1, 1, 0), (2, 2, 0)\} \\
[1 : 1 : 1] &= \{(k \cdot x_1, k \cdot x_2, k \cdot x_3) \mid k \in \mathbb{F}_3^*\} = \{(1, 1, 1), (2, 2, 2)\} \\
[1 : 1 : 2] &= \{(k \cdot x_1, k \cdot x_2, k \cdot x_3) \mid k \in \mathbb{F}_3^*\} = \{(1, 1, 2), (2, 2, 1)\} \\
[1 : 2 : 0] &= \{(k \cdot x_1, k \cdot x_2, k \cdot x_3) \mid k \in \mathbb{F}_3^*\} = \{(1, 2, 0), (2, 1, 0)\} \\
[1 : 2 : 1] &= \{(k \cdot x_1, k \cdot x_2, k \cdot x_3) \mid k \in \mathbb{F}_3^*\} = \{(1, 2, 1), (2, 1, 2)\} \\
[1 : 2 : 2] &= \{(k \cdot x_1, k \cdot x_2, k \cdot x_3) \mid k \in \mathbb{F}_3^*\} = \{(1, 2, 2), (2, 1, 1)\} \\
[2 : 0 : 0] &= \{(k \cdot x_1, k \cdot x_2, k \cdot x_3) \mid k \in \mathbb{F}_3^*\} = \{(2, 0, 0), (1, 0, 0)\} = [1 : 0 : 0] \\
[2 : 0 : 1] &= \{(k \cdot x_1, k \cdot x_2, k \cdot x_3) \mid k \in \mathbb{F}_3^*\} = \{(2, 0, 1), (1, 0, 2)\} = [1 : 0 : 2] \\
[2 : 0 : 2] &= \{(k \cdot x_1, k \cdot x_2, k \cdot x_3) \mid k \in \mathbb{F}_3^*\} = \{(2, 0, 2), (1, 0, 1)\} = [1 : 0 : 1] \\
[2 : 1 : 0] &= \{(k \cdot x_1, k \cdot x_2, k \cdot x_3) \mid k \in \mathbb{F}_3^*\} = \{(2, 1, 0), (1, 2, 0)\} = [1 : 2 : 0] \\
[2 : 1 : 1] &= \{(k \cdot x_1, k \cdot x_2, k \cdot x_3) \mid k \in \mathbb{F}_3^*\} = \{(2, 1, 1), (1, 2, 2)\} = [1 : 2 : 2] \\
[2 : 1 : 2] &= \{(k \cdot x_1, k \cdot x_2, k \cdot x_3) \mid k \in \mathbb{F}_3^*\} = \{(2, 1, 2), (1, 2, 1)\} = [1 : 2 : 1] \\
[2 : 2 : 0] &= \{(k \cdot x_1, k \cdot x_2, k \cdot x_3) \mid k \in \mathbb{F}_3^*\} = \{(2, 2, 0), (1, 1, 0)\} = [1 : 1 : 0] \\
[2 : 2 : 1] &= \{(k \cdot x_1, k \cdot x_2, k \cdot x_3) \mid k \in \mathbb{F}_3^*\} = \{(2, 2, 1), (1, 1, 2)\} = [1 : 1 : 2] \\
[2 : 2 : 2] &= \{(k \cdot x_1, k \cdot x_2, k \cdot x_3) \mid k \in \mathbb{F}_3^*\} = \{(2, 2, 2), (1, 1, 1)\} = [1 : 1 : 1]
\end{aligned}$$

These lines define the 13 points in the projective plane $\mathbb{F}_3\mathbb{P}$:

$$\begin{aligned}
\mathbb{F}_3\mathbb{P} = \{ & [0 : 0 : 1], [0 : 1 : 0], [0 : 1 : 1], [0 : 1 : 2], [1 : 0 : 0], [1 : 0 : 1], \\
& [1 : 0 : 2], [1 : 1 : 0], [1 : 1 : 1], [1 : 1 : 2], [1 : 2 : 0], [1 : 2 : 1], [1 : 2 : 2] \}
\end{aligned}$$

2310 This projective plane contains 9 affine points, three points at infinity and one line at infinity.

2311 To understand the ambiguity in projective coordinates a bit better, let us consider the point
 2312 $[1 : 2 : 2]$. As this point in the projective plane is a line in $\mathbb{F}_3^3 \setminus \{(0, 0, 0)\}$, it has the projective
 2313 coordinates $(1, 2, 2)$ as well as $(2, 1, 1)$, since the former coordinate gives the latter when multi-
 2314 plied in \mathbb{F}_3 by the factor 2. In addition, note that, for the same reasons, the points $[1 : 2 : 2]$ and
 2315 $[2 : 1 : 1]$ are the same, since their underlying sets are equal.

2316 *Exercise 56.* Construct the so-called **Fano plane**, that is, the projective plane over the finite
 2317 field \mathbb{F}_2 .

Chapter 5

Elliptic Curves

Generally speaking, elliptic curves are geometric objects in projective planes (see section 4.4) over a given field, made up of points that satisfy certain equations. One of their key features from the point of view of cryptography is that, if the underlying field is of positive characteristic, elliptic curves are finite, cyclic groups (section 4.1.1). Further, it is believed that the Discrete Logarithm Problem (section 4.1.6.1) on many elliptic curve groups is hard, given that the underlying characteristic is large enough.

A special class of elliptic curves are so-called pairing-friendly curves, which have a notation of a group pairing (section 4.9) attached to them, which has cryptographically advantageous properties.

In this chapter, we introduce elliptic curves as they are used in pairing-based approaches to the construction of SNARKs. The elliptic curves we consider are all defined over prime fields or prime field extensions, meaning that we rely heavily on the concepts and notations from chapter 4.

5.1 Short Weierstrass Curves

In this section, we introduce **Short Weierstrass curves**, which are the most general types of curves over finite fields of characteristics greater than 3 (see chapter 4.3), and start with their so-called **affine representation**.¹

We then introduce the elliptic curve group law, and describe elliptic curve scalar multiplication, which is an instantiation of the exponential map of general cyclic groups 4.2. After that, we look at the projective representation of elliptic curves, which has the advantage that no special symbol is necessary to represent the point at infinity.²

We finish this section with an explicit equivalence that transforms the affine representations into projective representations and vice versa.

¹Introducing elliptic curves in their affine representation is probably not the most common and conceptually cleanest way, but we believe that such an introduction makes elliptic curves more understandable to beginners, since an elliptic curve in the affine representation is just a set of pairs of numbers, so it is more accessible to readers unfamiliar with projective coordinates. However, the affine representation has the disadvantage that a special “point at infinity” that is not a point on the curve, is necessary to describe the curve’s group structure.

²As this representation is conceptually more straightforward, this is how elliptic curves are usually introduced in math classes. We believe that the major drawback from a beginner’s point of view is that in the projective representation, points are elements from projective planes, which are classes of numbers.


do we still need the explanation of projective planes from the previous chapter? or can they be moved to this one?

5.1.1 Affine Short Weierstrass form

Probably the least abstract and most straight-forward way to introduce elliptic curves for non-mathematicians and beginners is the so-called **affine representation** of a **Short Weierstrass curve**. To see what this is, let \mathbb{F} be a finite field of characteristic q with $q > 3$, and let $a, b \in \mathbb{F}$ be two field elements such that the so-called **discriminant** $4a^3 + 27b^2$ is not equal to zero. Then a **Short Weierstrass elliptic curve** $E_{a,b}(\mathbb{F})$ over \mathbb{F} in its affine representation is the set of all pairs of field elements $(x, y) \in \mathbb{F} \times \mathbb{F}$ that satisfy the Short Weierstrass cubic equation $y^2 = x^3 + a \cdot x + b$, together with a distinguished symbol \mathcal{O} , called the **point at infinity**:

$$E_{a,b}(\mathbb{F}) = \{(x, y) \in \mathbb{F} \times \mathbb{F} \mid y^2 = x^3 + a \cdot x + b\} \cup \{\mathcal{O}\} \quad (5.1)$$

The term “curve” is used here because, if an elliptic curve is defined over a characteristic zero field, like the field \mathbb{Q} of rational numbers, the set of all points $(x, y) \in \mathbb{Q} \times \mathbb{Q}$ that satisfy $y^2 = x^3 + a \cdot x + b$ looks like a curve. We should note, however, that visualizing elliptic curves over finite fields as “curves” has its limitations, and we will therefore not dwell on the geometric picture too much, but focus on the computational properties instead. To understand the visual difference, consider the following two elliptic curves:

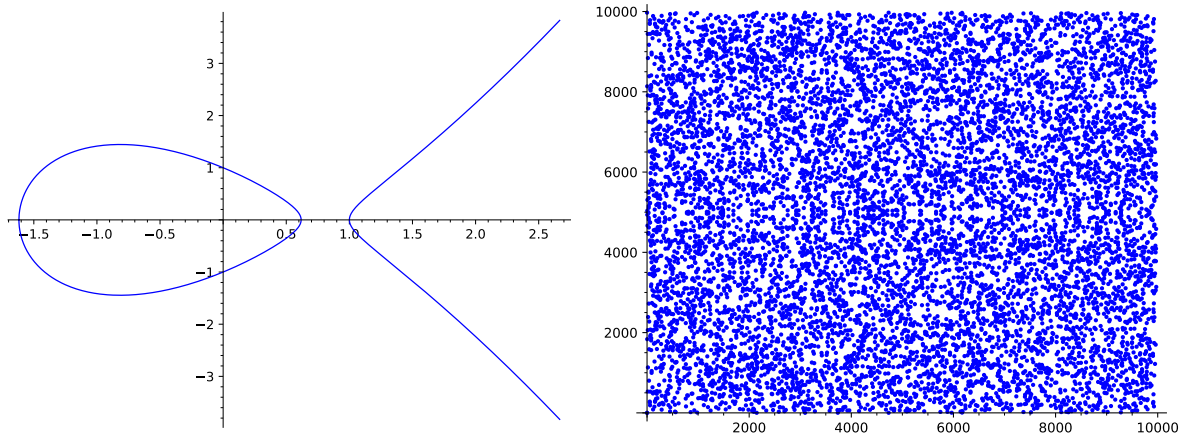

Both elliptic curves are defined by the same Short Weierstrass equation $y^2 = x^3 - 2x + 1$, but the first curve is defined over the rational numbers \mathbb{Q} , that is, the pair (x, y) contains rational numbers, while the second one is defined over the prime field \mathbb{F}_{9973} , which means that both coordinates x and y are from the prime field \mathbb{F}_{9973} . Every blue dot represents a pair (x, y) that is a solution to $y^2 = x^3 - 2x + 1$. As we can see, the second curve hardly looks like a geometric structure one would naturally call a curve. This shows that our geometric intuitions from \mathbb{Q} are less applicable to curves over finite fields.

The equation $4a^3 + 27b^2 \neq 0$ ensures that the curve is **non-singular**, which loosely means that the curve has no cusps or self-intersections in the geometric sense, if seen as an actual curve. As we will see in 5.1.2, cusps and self-intersections would make the group law potentially ambiguous.

Throughout this book, we have encouraged you to do as many computations in a pen-and-paper fashion as possible, as this helps getting a deeper understanding of the details. However, when dealing with elliptic curves, computations can quickly become cumbersome and tedious, and we might get lost in the details. Fortunately, Sage is very helpful in dealing with elliptic curves. The following snippet shows a way to define elliptic curves and how to work with them in Sage:

```
sage: F5 = GF(5) # define the base field
```

242

```

2376 sage: a = F5(2) # parameter a                243
2377 sage: b = F5(4) # parameter b                244
2378 sage: # check discriminant                    245
2379 sage: F5(6)*(F5(4)*a^3+F5(27)*b^2) != F5(0)    246
2380 True                                           247
2381 sage: # Short Weierstrass curve over field F5   248
2382 sage: E = EllipticCurve(F5,[a,b]) # y^2 == x^3 + ax +b 249
2383 sage: # point on a curve                       250
2384 sage: P = E(0,2) # 2^2 == 0^3 + 2*0 + 4         251
2385 sage: P.xy() # affine coordinates              252
2386 (0, 2)                                         253
2387 sage: INF = E(0) # point at infinity            254
2388 sage: try: # point at infinity has no affine coordinates 255
2389 .....:     INF.xy()                           256
2390 .....: except ZeroDivisionError:                257
2391 .....:     pass                                258
2392 sage: P = E.plot() # create a plotted version   259

```

2393 The following three examples give a more practical understanding of what an elliptic curve is
 2394 and how we can compute it. We advise you to read these examples carefully, and ideally also
 2395 do the computations yourself. We will repeatedly build on these examples in this chapter, and
 2396 use example 69 throughout the entire book.

2397 *Example 68.* Consider the prime field \mathbb{F}_5 from example 14. To define an elliptic curve over \mathbb{F}_5 ,
 2398 we have to choose two numbers a and b from that field. Assuming we choose $a = 1$ and $b = 1$,
 2399 then $4a^3 + 27b^2 \equiv 1 \pmod{5}$. This means that the corresponding elliptic curve $E_{1,1}(\mathbb{F}_5)$ is
 2400 given by the set of all pairs (x, y) from \mathbb{F}_5 that satisfy the equation $y^2 = x^3 + x + 1$, along with
 2401 the special symbol \mathcal{O} , which represents the “point at infinity”.


2402 To get a better understanding of this curve, observe that, if we arbitrarily choose to test
 2403 the pair $(x, y) = (1, 1)$, we see that $1^2 \neq 1^3 + 1 + 1$, and hence $(1, 1)$ is not a point on the
 2404 curve $E_{1,1}(\mathbb{F}_5)$. On the other hand, if we choose to test the pair $(x, y) = (2, 1)$, we see that
 2405 $1^2 = 2^3 + 2 + 1$, and hence the pair $(2, 1)$ is a point on the curve $E_{1,1}(\mathbb{F}_5)$ (Remember that all
 2406 computations are done in modulo 5 arithmetics.)

Since the set $\mathbb{F}_5 \times \mathbb{F}_5$ of all pairs (x, y) from \mathbb{F}_5 only contains $5 \cdot 5 = 25$ pairs, we can
 compute the curve by just inserting every possible pair (x, y) into the Short Weierstrass equation
 $y^2 = x^3 + x + 1$. If the equation holds, the pair is a curve point. If not, that means that the point
 is not on the curve. Combining the result of this computation with the point at infinity gives the
 curve as follows:

$$E_{1,1}(\mathbb{F}_5) = \{\mathcal{O}, (0, 1), (2, 1), (3, 1), (4, 2), (4, 3), (0, 4), (2, 4), (3, 4)\}$$

2407 This means that the elliptic curve is a set of 9 elements, 8 of which are pairs of elements from
 2408 \mathbb{F}_5 , and one is special symbol \mathcal{O} (the point at infinity). Visualizing $E_{1,1}(\mathbb{F}_5)$ gives the following
 2409 plot:

should \mathcal{O}
also be
shown as
a point?

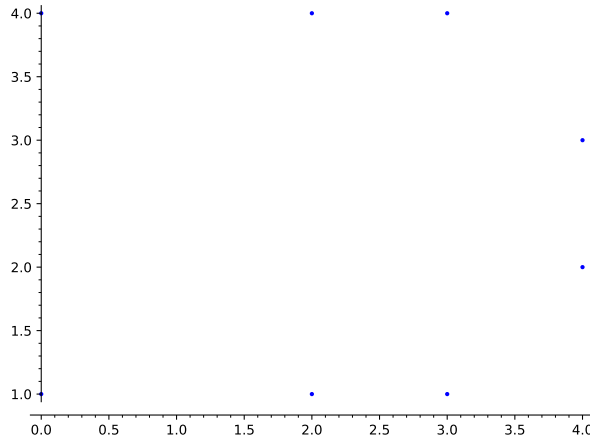

In the development of SNARKs, it is sometimes necessary to do elliptic curve cryptography “in a circuit”, which basically means that the elliptic curve needs to be implemented in a certain SNARK-friendly way. We will look at what this means in chapter 7. To be able to do this efficiently, it is desirable to have curves with special properties. The following example is a pen-and-paper version of such a curve, called **Tiny-jubjub**. We design this curve especially to resemble a well-known cryptographically secure curve, called **Baby-jubjub**, the latter of which is extensively used in real-world SNARKs.³ The interested reader is advised to study this example carefully, as we will use it and build on it in various places throughout the book.


Example 69 (The Tiny-jubjub curve). Consider the prime field \mathbb{F}_{13} from exercise 49. If we choose $a = 8$ and $b = 8$, then $4a^3 + 27b^2 \equiv 6 \pmod{13}$, and the corresponding elliptic curve is given by all pairs (x, y) from \mathbb{F}_{13} such that $y^2 = x^3 + 8x + 8$ holds. We call this curve the **Tiny-jubjub** curve (in its affine Short Weierstrass representation), or TJJ_{13} for short.

Since the set $\mathbb{F}_{13} \times \mathbb{F}_{13}$ of all pairs (x, y) from \mathbb{F}_{13} only contains $13 \cdot 13 = 169$ pairs, we can compute the curve by just inserting every possible pair (x, y) into the Short Weierstrass equation $y^2 = x^3 + 8x + 8$. We get the following result:

$$TJJ_{13} = \{\mathcal{O}, (1, 2), (1, 11), (4, 0), (5, 2), (5, 11), (6, 5), (6, 8), (7, 2), (7, 11), (8, 5), (8, 8), (9, 4), (9, 9), (10, 3), (10, 10), (11, 6), (11, 7), (12, 5), (12, 8)\} \quad (5.2)$$

As we can see, the curve consists of 20 points; 19 pairs of elements from \mathbb{F}_{13} and the point at infinity. To get a visual impression of the TJJ_{13} curve, we might plot all of its points (except the point at infinity):

³In the literature, the **Baby-jubjub curve** is commonly introduced as a so-called Twisted Edwards curve, which we will cover in 5.3. However, as we will see in 5.3, every Twisted Edwards curve is equivalent to a Short Weierstrass curve and hence we start with an introduction of Tiny-Jubjub in its Short Weierstrass incarnation.

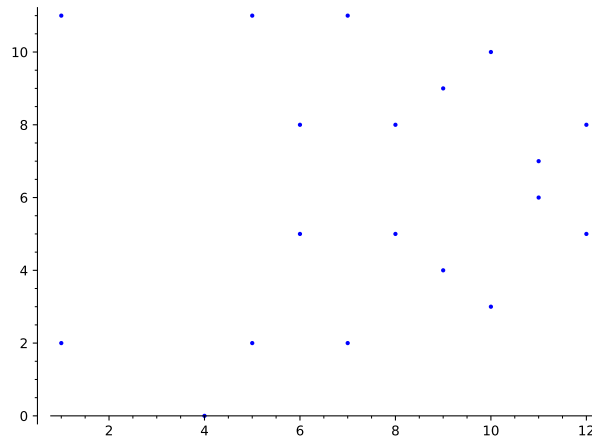

As we will see in what follows, this curve is rather special, as it is possible to represent it in two alternative forms called the **Montgomery** and the **Twisted Edwards form** (See sections 5.2 and 5.3, respectively).

Now that we have seen two pen-and-paper friendly elliptic curves, let us look at a curve that is used in actual cryptography. Cryptographically secure elliptic curves are not **qualitatively** different from the curves we looked at so far, but the prime number modulus of their prime field is much larger. Typical examples use prime numbers that have binary representations in the magnitude of more than double the size of the desired **security level**. If, for example, a security of 128 bits is desired, a prime modulus of binary size ≥ 256 is chosen. The following example provides such a curve.

**security
level**

Example 70 (Bitcoin's secp256k1 curve). To give an example of a real-world, cryptographically secure curve, let us look at curve secp256k1, which is famous for being used in the public key cryptography of Bitcoin. The prime field \mathbb{F}_p of secp256k1 is defined by the following prime number:

$$p = 115792089237316195423570985008687907853269984665640564039457584007908834671663$$

The binary representation of this number needs 256 bits, which implies that the prime field \mathbb{F}_p contains approximately 2^{256} many elements, which is considered quite large. To get a better impression of how large the base field is: the number 2^{256} is approximately in the same order of magnitude as the estimated number of atoms in the observable universe.

The curve secp256k1 is defined by the parameters $a, b \in \mathbb{F}_p$ with $a = 0$ and $b = 7$. Since $4 \cdot 0^3 + 27 \cdot 7^2 \bmod p = 1323$, those parameters indeed define an elliptic curve given as follows:

$$\text{secp256k1} = \{(x, y) \in \mathbb{F}_p \times \mathbb{F}_p \mid y^2 = x^3 + 7\}$$

Clearly, the secp256k1 curve is too large to be useful in pen-and-paper computations, since it can be shown that the number of its elements is a prime number r that also has a binary representation of 256 bits:

$$r = 115792089237316195423570985008687907852837564279074904382605163141518161494337$$

Cryptographically secure elliptic curves are therefore not useful in pen-and-paper computations, but fortunately, Sage handles large curves efficiently:

```
sage: p = 1157920892373161954235709850086879078532699846656405 260
      64039457584007908834671663 2444
```

```

2445 sage: # Hexadecimal representation
2446 sage: p.str(16)
2447 ffffffffffffffffffffffffffffffffffffffffffffffffffefffffc
2448 2f
2449 sage: p.is_prime()
2450 True
2451 sage: p.nbits()
2452 256
2453 sage: Fp = GF(p)
2454 sage: secp256k1 = EllipticCurve(Fp, [0, 7])
2455 sage: r = secp256k1.order() # number of elements
2456 sage: r.str(16)
2457 fffffffffffffffffffffffffffffffffffebaaedce6af48a03bbfd25e8cd03641
2458 41
2459 sage: r.is_prime()
2460 True
2461 sage: r.nbits()
2462 256

```

2463 *Exercise 57.* Consider the curve $E_1(\mathbb{F})$ from example 68 and compute the set of all curve points
 2464 $(x, y) \in E_1(\mathbb{F})$.

2465 *Exercise 58.* Consider the curve TJJ_13 from example 69 and compute the set of all curve
 2466 points $(x, y) \in TJJ_13$.

2467 *Exercise 59.* Look up the definition of curve BLS12-381, implement it in Sage, and compute
 2468 the number of all curve points.

2469 5.1.1.1 Isomorphic affine Short Weierstrass curves

2470 As explained previously in this chapter, elliptic curves are defined by pairs of parameters $(a, b) \in$
 2471 $\mathbb{F} \times \mathbb{F}$ for some field \mathbb{F} . An important question in classifying elliptic curves is to decide which
 2472 pairs of parameters (a, b) and (a', b') instantiate equivalent curves in the sense that there is a 1:1
 2473 correspondence between the set of curve points.

2474 To be more precise, let \mathbb{F} be a field, and let (a, b) and (a', b') be two pairs of parameters such
 2475 that there is an invertible field element $c \in \mathbb{F}^*$ such that $a' = a \cdot c^4$ and $b' = b \cdot c^6$ hold. Then
 2476 the elliptic curves $E_{a,b}(\mathbb{F})$ and $E_{a',b'}(\mathbb{F})$ are called **isomorphic**, and there is a map that maps the
 2477 curve points of $E_{a,b}(\mathbb{F})$ onto the curve points of $E_{a',b'}(\mathbb{F})$:

$$I : E_{a,b}(\mathbb{F}) \rightarrow E_{a',b'}(\mathbb{F}) : \begin{cases} (x, y) \\ \mathcal{O} \end{cases} \mapsto \begin{cases} (c^2 \cdot x, c^2 \cdot y) \\ \mathcal{O} \end{cases} \quad (5.3)$$

2478 This map is a 1:1 correspondence, and its inverse map is given by mapping the point at infinity
 2479 onto the point at infinity, and mapping each curve point (x, y) onto the curve point $(c^{-2}x, c^{-2}y)$.

2480 *Example 71.* Consider the Short Weierstrass elliptic curve $E_{1,1}(\mathbb{F}_5)$ from example 68 and the
 2481 following elliptic curve:

$$E_{1,4}(\mathbb{F}_5) := \{(x, y) \in \mathbb{F}_5 \times \mathbb{F}_5 \mid y^3 = x^3 + x + 4\} \quad (5.4)$$

2482 If we insert all pairs of elements $(x, y) \in \mathbb{F}_5 \times \mathbb{F}_5$ into the Short Weierstrass equation $y^3 =$
 2483 $x^3 + x + 4$ of $E_{1,4}(\mathbb{F}_5)$, we get the following set of points:

$$E_{1,4}(\mathbb{F}_5) = \{\mathcal{O}, (0, 2), (0, 3), (1, 1), (1, 4), (2, 2), (2, 3), (3, 2), (3, 3)\} \quad (5.5)$$

As we can see, both curves are of the same order. Since 2 is an invertible element from \mathbb{F}_5 with $1 = 2^4 \cdot 1$ and $4 = 2^6 \cdot 1$, $E_{1,4}(\mathbb{F})$ and $E_{1,1}(\mathbb{F})$ are isomorphic: the map $I : E_{1,1}(\mathbb{F}_5) \rightarrow E_{1,4}(\mathbb{F}_5) : (x, y) \mapsto (4x, 4y)$ from 5.3 defines a 1:1 correspondence. For example, the point $(4, 3) \in E_{1,1}(\mathbb{F})$ is mapped onto the point $I(4, 3) = (4 \cdot 4, 4 \cdot 3) = (1, 2) \in E_{1,4}(\mathbb{F})$.

Exercise 60. Let \mathbb{F} be a finite field, let (a, b) and (a', b') be two pairs of parameters, and let $c \in \mathbb{F}^*$ be an invertible field element such that $a' = a \cdot c^4$ and $b' = b \cdot c^6$ hold. Show that the function I from (5.3) maps curve points onto curve points.

Exercise 61. Consider the Tiny-jubjub curve from example 69 and the elliptic curve $E_{5,12}(\mathbb{F}_{13})$ defined as follows:

$$E_{5,12}(\mathbb{F}_{13}) = \{(x, y) \in \mathbb{F}_{13} \times \mathbb{F}_{13} \mid y^2 = x^3 + 5x + 12\} \quad (5.6)$$

Show that TJJ_13 and $E_{5,12}(\mathbb{F}_{13})$ are isomorphic. Then compute the set of all points from $E_{5,12}(\mathbb{F}_{13})$, construct I and map all points of TJJ_13 onto $E_{5,12}(\mathbb{F}_{13})$.

5.1.1.2 Affine compressed representation

As we have seen in example 70, cryptographically secure elliptic curves are defined over large prime fields, where elements of those fields typically need more than 255 bits of storage on a computer. Since elliptic curve points consist of pairs of those field elements, they need double that amount of storage.

However, we can reduce the amount of space needed to represent a curve point by using a technique called **point compression**. To understand this, note that, for each given $x \in \mathbb{F}$, there are only 2 possible values of $y \in \mathbb{F}$ such that the pair (x, y) is a point on an affine Short Weierstrass curve, since x and y have to satisfy the equation $y^2 = x^3 + a \cdot x + b$. From this, it follows that y can be computed from x , since it is an element from the set of square roots $\sqrt{x^3 + a \cdot x + b}$ (see 4.44), which contains exactly two elements for $x^3 + a \cdot x + b \neq 0$ and exactly one element for $x^3 + a \cdot x + b = 0$.

This implies that we can represent a curve point in **compressed form** by simply storing the x coordinate together with a single bit called the **sign bit**, the latter of which deterministically decides which of the two roots to choose. One convention could be to always choose the root closer to 0 when the sign bit is 0, and the root closer to the order of \mathbb{F} when the sign bit is 1. In case the y coordinate is zero, both sign bits give the same result.

Example 72 (Tiny-jubjub). To understand the concept of compressed curve points a bit better, consider the TJJ_13 curve from example 69 again. Since this curve is defined over the prime field \mathbb{F}_{13} , and numbers between 0 and 13 need approximately 4 bits to be represented, each TJJ_13 point on this curve needs 8 bits of storage in uncompressed form. The following set represents the uncompressed form of the points on this curve:

$$TJJ_13 = \{\mathcal{O}, (1, 2), (1, 11), (4, 0), (5, 2), (5, 11), (6, 5), (6, 8), (7, 2), (7, 11), (8, 5), (8, 8), (9, 4), (9, 9), (10, 3), (10, 10), (11, 6), (11, 7), (12, 5), (12, 8)\} \quad (5.7)$$

Using the technique of point compression, we can reduce the bits needed to represent the points on this curve to 5 per point. To achieve this, we can replace the y coordinate in each (x, y) pair by a sign bit indicating whether or not y is closer to 0 or to 13. As a result, y values in the range $[0, \dots, 6]$ will have the sign bit 0, while y -values in the range $[7, \dots, 12]$ will have the sign bit 1. Applying this to the points in TJJ_13 gives the compressed representation as follows:

$$TJJ_13 = \{\mathcal{O}, (1, 0), (1, 1), (4, 0), (5, 0), (5, 1), (6, 0), (6, 1), (7, 0), (7, 1), (8, 0), (8, 1), (9, 0), (9, 1), (10, 0), (10, 1), (11, 0), (11, 1), (12, 0), (12, 1)\} \quad (5.8)$$

Note that the numbers $7, \dots, 12$ are the negatives (additive inverses) of the numbers $1, \dots, 6$ in modular 13 arithmetics, and that $-0 = 0$.

To recover the uncompressed counterpart of, say, the compressed point $(5, 1)$, we insert the x coordinate 5 into the Short Weierstrass equation and get $y^2 = 5^3 + 8 \cdot 5 + 8 = 4$. As expected, 4 is a quadratic residue in \mathbb{F}_{13} with roots $\sqrt{4} = \{2, 11\}$. Since the sign bit of the point is 1, we have to choose the root closer to the modulus 13, which is 11. The uncompressed point is therefore $(5, 11)$.

5.1.2 Affine Group Law

One of the key properties of an elliptic curve is that it is possible to define a group law on the set of its points such that the point at infinity serves as the neutral element, and inverses are reflections on the x -axis. The origin of this law can be understood in a geometric picture and is known as the **chord-and-tangent rule**. In the affine representation of a Short Weierstrass curve, the rule can be described in the following way, using the symbol \oplus for the group law:

Definition 5.1.2.1 (Chord-and-tangent rule: geometric definition).

- (Point at infinity) We define the point at infinity \mathcal{O} as the neutral element of addition, that is, we define $P \oplus \mathcal{O} = P$ for all points $P \in E(\mathbb{F})$.
- (Chord Rule) Let P and Q be two distinct points on an elliptic curve, neither of them the point at infinity: $P, Q \in E(\mathbb{F}) \setminus \{\mathcal{O}\}$ and $P \neq Q$.
The sum of P and Q is defined as follows:
Consider the line l which intersects the curve in P and Q . If l intersects the elliptic curve at a third point R' , define the sum of P and Q as the reflection of R' at the x -axis: $R = P \oplus Q$. If the line l does not intersect the curve at a third point, define the sum to be the point at infinity \mathcal{O} . Calling such a line a **chord**, it can be shown that no chord will intersect the curve in more than three points. This implies that addition is not ambiguous.
- (Tangent Rule) Let P be a point on an elliptic curve, which is not the point at infinity: $P \in E(\mathbb{F}) \setminus \{\mathcal{O}\}$.
The sum of P with itself (the doubling of P) is defined as follows:
Consider the line which is tangential to the elliptic curve at P , in the sense that it “just touches” the curve at that point. If this line intersects the elliptic curve at a second point R' , the sum $P \oplus P$ is the reflection of R' at the x -axis. If it does not intersect the curve at a third point, define the sum to be the point at infinity \mathcal{O} . Calling such a line a **tangent**, it can be shown that no such tangent will intersect the curve in more than two points. This implies that doubling is not ambiguous.

It can be shown that the points of an elliptic curve form a commutative group with respect to the previously stated chord-and-tangent rule such that \mathcal{O} acts the neutral element, and the inverse of any element $P \in E(\mathbb{F})$ is the reflection of P on the x -axis.

The chord-and-tangent rule defines the group law of an elliptic curve geometrically, and we just stated it informally as an intuition above. In order to apply those rules on a computer, we have to translate it into algebraic equations. To do so, first observe that, for any two given curve points $(x_1, y_1), (x_2, y_2) \in E(\mathbb{F})$, the identity $x_1 = x_2$ implies $y_2 = \pm y_1$ as explained in section 5.1.1.2. This shows that the following rules are a complete description of the elliptic curve group $(E(\mathbb{F}), \oplus)$:

Definition 5.1.2.2 (Chord-and-tangent rule: algebraic definition).

- 2557 • (The neutral element) The point at infinity \mathcal{O} is the neutral element.
- 2558 • (The inverse element) The inverse of \mathcal{O} is \mathcal{O} . For any other curve point $(x, y) \in E(\mathbb{F}) \setminus \{\mathcal{O}\}$,
2559 the inverse is given by $(x, -y)$.
- 2560 • (The group law) For any two curve points $P, Q \in E(\mathbb{F})$, the group law is defined by one of
2561 the following cases:

- 2562 1. (Neutral element) If $Q = \mathcal{O}$, then the group law is defined as $P \oplus Q = P$.
- 2563 2. (Inverse elements) If $P = (x, y)$ and $Q = (x, -y)$, the group law is defined as $P \oplus Q =$
2564 \mathcal{O} .
3. (Tangent Rule) If $P = (x, y)$ with $y \neq 0$, the group law $P \oplus P = (x', y')$ is defined as
follows:

$$x' = \left(\frac{3x^2 + a}{2y} \right)^2 - 2x \quad , \quad y' = \left(\frac{3x^2 + a}{2y} \right)^2 (x - x') - y$$
4. (Chord Rule) If $P = (x_1, y_1)$ and $Q = (x_2, y_2)$ such that $x_1 \neq x_2$, the group law $R =$
 $P \oplus Q$ with $R = (x_3, y_3)$ is defined as follows:

$$x_3 = \left(\frac{y_2 - y_1}{x_2 - x_1} \right)^2 - x_1 - x_2 \quad , \quad y_3 = \left(\frac{y_2 - y_1}{x_2 - x_1} \right) (x_1 - x_3) - y_1$$

2565 *Notation and Symbols* 13. Let \mathbb{F} be a field and $E(\mathbb{F})$ an elliptic curve over \mathbb{F} . We write \oplus for
2566 the group law on $E(\mathbb{F})$, $(E(\mathbb{F}), \oplus)$ for the commutative group of elliptic curve points, and use
2567 the additive notation (notation 4) on this group. If P is a point on a Short Weierstrass curve with
2568 $P = (x, 0)$ then P is called **self-inverse**.

2569 As we can see, it is very efficient to compute inverses on elliptic curves. However, com-
2570 puting the addition of elliptic curve points in the affine representation needs to consider many
2571 cases, and involves extensive finite field divisions. As we will see in 5.1.3.1, the addition law is
2572 simplified in projective coordinates.

2573 Let us look at some practical examples of how the group law on an elliptic curve is com-
2574 puted.

2575 *Example 73.* Consider the elliptic curve $E_{1,1}(\mathbb{F}_5)$ from example 68 again. As we have seen, the
2576 curve consists of the following 9 elements:

$$E_{1,1}(\mathbb{F}_5) = \{\mathcal{O}, (0, 1), (2, 1), (3, 1), (4, 2), (4, 3), (0, 4), (2, 4), (3, 4)\} \quad (5.9)$$

2577 We know that this set defines a group, so we can perform addition on any two elements from
2578 $E_{1,1}(\mathbb{F}_5)$ to get a third element of this group.

To give an example, consider the elements $(0, 1)$ and $(4, 2)$. Neither of these elements is
the neutral element \mathcal{O} , and since the x coordinate of $(0, 1)$ is different from the x coordinate of
 $(4, 2)$, we know that we have to use the chord rule from definition 5.1.2.2 to compute the sum

$(0, 1) \oplus (4, 2)$:

$$\begin{aligned} x_3 &= \left(\frac{y_2 - y_1}{x_2 - x_1} \right)^2 - x_1 - x_2 && \# \text{ insert points} \\ &= \left(\frac{2 - 1}{4 - 0} \right)^2 - 0 - 4 && \# \text{ simplify in } \mathbb{F}_5 \\ &= \left(\frac{1}{4} \right)^2 + 1 = 4^2 + 1 = 1 + 1 = 2 \end{aligned}$$

$$\begin{aligned} y_3 &= \left(\frac{y_2 - y_1}{x_2 - x_1} \right) (x_1 - x_3) - y_1 && \# \text{ insert points} \\ &= \left(\frac{2 - 1}{4 - 0} \right) (0 - 2) - 1 && \# \text{ simplify in } \mathbb{F}_5 \\ &= \left(\frac{1}{4} \right) \cdot 3 + 4 = 4 \cdot 3 + 4 = 2 + 4 = 1 \end{aligned}$$

So, in the elliptic curve $E_{1,1}(\mathbb{F}_5)$, we get $(0, 1) \oplus (4, 2) = (2, 1)$, and, indeed, the pair $(2, 1)$ is an element of $E_{1,1}(\mathbb{F}_5)$ as expected. On the other hand, $(0, 1) \oplus (0, 4) = \mathcal{O}$, since both points have equal x coordinates and inverse y coordinates, rendering them inverses of each other. Adding the point $(4, 2)$ to itself, we have to use the tangent rule from definition 5.1.2.2:

$$\begin{aligned} x' &= \left(\frac{3x^2 + a}{2y} \right)^2 - 2x && \# \text{ insert points} \\ &= \left(\frac{3 \cdot 4^2 + 1}{2 \cdot 2} \right)^2 - 2 \cdot 4 && \# \text{ simplify in } \mathbb{F}_5 \\ &= \left(\frac{3 \cdot 1 + 1}{4} \right)^2 + 3 \cdot 4 = \left(\frac{4}{4} \right)^2 + 2 = 1 + 2 = 3 \end{aligned}$$

$$\begin{aligned} y' &= \left(\frac{3x^2 + a}{2y} \right)^2 (x - x') - y && \# \text{ insert points} \\ &= \left(\frac{3 \cdot 4^2 + 1}{2 \cdot 2} \right)^2 (4 - 3) - 2 && \# \text{ simplify in } \mathbb{F}_5 \\ &= 1 \cdot 1 + 3 = 4 \end{aligned}$$

2579 So, in the elliptic curve $E_{1,1}(\mathbb{F}_5)$, we get the doubling of $(4, 2)$, that is, $(4, 2) \oplus (4, 2) = (3, 4)$,
 2580 and, indeed, the pair $(3, 4)$ is an element of $E_{1,1}(\mathbb{F}_5)$ as expected. The group $E_{1,1}(\mathbb{F}_5)$ has no
 2581 self-inverse points other than the neutral element \mathcal{O} , since no point has 0 as its y coordinate. We
 2582 can use Sage to double-check the computations.

2583	sage: F5 = GF(5)	277
2584	sage: E1 = EllipticCurve(F5, [1, 1])	278
2585	sage: INF = E1(0) # point at infinity	279
2586	sage: P1 = E1(0, 1)	280
2587	sage: P2 = E1(4, 2)	281
2588	sage: P3 = E1(0, 4)	282

```

2589 sage: R1 = E1(2,1) 283
2590 sage: R2 = E1(3,4) 284
2591 sage: R1 == P1+P2 285
2592 True 286
2593 sage: INF == P1+P3 287
2594 True 288
2595 sage: R2 == P2+P2 289
2596 True 290
2597 sage: R2 == 2*P2 291
2598 True 292
2599 sage: P3 == P3 + INF 293
2600 True 294

```

Example 74 (Tiny-jubjub). Consider the TJJ_13 curve from example 69 again, and recall that its group of points is given as follows:

$$TJJ_13 = \{\mathcal{O}, (1,2), (1,11), (4,0), (5,2), (5,11), (6,5), (6,8), (7,2), (7,11), (8,5), (8,8), (9,4), (9,9), (10,3), (10,10), (11,6), (11,7), (12,5), (12,8)\} \quad (5.10)$$

In contrast to the group from the previous example, this group contains a self-inverse point, which is different from the neutral element, defined by $(4,0)$. To see what this means, observe that we cannot add $(4,0)$ to itself using the tangent rule from definition 5.1.2.2, as the y coordinate is zero. Instead, we have to use the rule for additive inverses, since $0 = -0$. We get $(4,0) \oplus (4,0) = \mathcal{O}$ in TJJ_13 , which shows that the point $(4,0)$ is the inverse of itself, because adding it to itself results in the neutral element. We check our calculation with Sage:

```

2607 sage: F13 = GF(13) 295
2608 sage: TJJ = EllipticCurve(F13, [8,8]) 296
2609 sage: P = TJJ(4,0) 297
2610 sage: INF = TJJ(0) # Point at infinity 298
2611 sage: INF == P+P 299
2612 True 300
2613 sage: INF == 2*P 301
2614 True 302

```

Example 75. Consider the secp256k1 curve from example 70 again. The following code uses Sage to generate two random affine curve points and then add these points together:

```

2617 sage: P = secp256k1.random_point() 303
2618 sage: Q = secp256k1.random_point() 304
2619 sage: R = P + Q 305
2620 sage: P.xy() 306
2621 (6070076295624452645596634364834655716426580912039179392371412 307
2622     9369136688260292, 29673295876685224195468278880311458812219
2623     088382227984012608195536474036814022)
2624 sage: Q.xy() 308
2625 (5247194042811061165750495035417510017812719936866851091175044 309
2626     9518447011176011, 30766336547191909935029794829197856276498
2627     279375959322372476976742940208342797)
2628 sage: R.xy() 310

```

(8840045343705721806436028450813866140318570678671254298385868 311
 4375925727757420, 11528179307361610402063702980974311905898
 4756291022909031554321025973163059640)

Exercise 62. Consider the commutative group (TJJ_13, \oplus) of the Tiny-jubjub curve from example 69.

1. Compute the inverse of $(10, 10)$, \mathcal{O} , $(4, 0)$ and $(1, 2)$.
2. Solve the equation $x \oplus (9, 4) = (5, 2)$ for some $x \in TJJ_13$.

5.1.2.1 Scalar multiplication

As we have seen in the previous section, elliptic curves $E(\mathbb{F})$ have the structure of a commutative group associated to them. It can be shown that this group is finite and cyclic whenever the underlying field \mathbb{F} is finite. As we know from (4.2), this implies that there is a notation of scalar multiplication associated to any elliptic curve over finite fields.

To understand this scalar multiplication, recall from definition 4.1.2.1 that every finite cyclic group of order n has a generator g and an associated exponential map $g^{(\cdot)} : \mathbb{Z}_n \rightarrow \mathbb{G}$, where g^x is the x -fold product of g with itself.

Elliptic curve scalar multiplication is the exponential map written in additive notation. To be more precise, let \mathbb{F} be a finite field, $E(\mathbb{F})$ an elliptic curve of order n , and P a generator of $E(\mathbb{F})$. Then the **elliptic curve scalar multiplication** with base P is defined as follows (where $[0]P = \mathcal{O}$ and $[m]P = P + P + \dots + P$ is the m -fold sum of P with itself):

$$[\cdot]P : \mathbb{Z}_n \rightarrow E(\mathbb{F}) ; m \mapsto [m]P$$

Therefore, elliptic curve scalar multiplication is an instantiation of the general exponential map using additive instead of multiplicative notation.

5.1.2.2 Logarithmic Ordering

As explained in (4.5), the inverse of the exponential map exists, and it is usually called the **elliptic curve discrete logarithm map**. However, we don't know of any efficient way to actually compute this map, which is one reason why some elliptic curves are believed to be DL-secure (see definition 4.1.6.1).

One useful property of the exponential map in regard to the examples in this book is that it can be used to greatly simplify pen-and-paper computations. As we have seen in example 73, computing the elliptic curve addition law takes quite a bit of effort when done without a computer. However, when g is a generator of a small pen-and-paper elliptic curve group of order n , we can use the exponential map to write the elements of the group in the following way, which we call its **logarithmic order** with respect to the generator g :

$$\mathbb{G} = \{[1]g \rightarrow [2]g \rightarrow [3]g \rightarrow \dots \rightarrow [n-1]g \rightarrow \mathcal{O}\} \quad (5.11)$$

For small pen-and-paper groups, the logarithmic order greatly simplifies complicated elliptic curve addition into the much simpler case of modular n arithmetic. In order to add two curve points P and Q , we only have to look up their discrete log relations with the generator $P = [l]g$ and $Q = [m]g$, and compute the group law as $P \oplus Q = [l+m]g$, where $l+m$ is addition in modular n arithmetics.

The reader should keep in mind though, that many elliptic curves are believed to be DL-secure (definition 4.1.6.1), which implies that, for those curves, the logarithmic order can not be computed efficiently.

In the following example, we look at some implications of the fact that elliptic curves are finite cyclic groups and apply the logarithmic order.

Example 76. Consider the elliptic curve group $E_{1,1}(\mathbb{F}_5)$ from example 68. Since it is a finite cyclic group of order 9, and the prime factorization of 9 is $3 \cdot 3$, we can use the fundamental theorem of finite cyclic groups (definition 4.1.4.1) to reason about all its subgroups. In fact, since the only factors of 9 are 1, 3 and 9, we know that $E_{1,1}(\mathbb{F}_5)$ has the following subgroups:

- $E_{1,1}(\mathbb{F}_5)[9]$ is a subgroup of order 9. By definition, any group is a subgroup of itself.
- $E_{1,1}(\mathbb{F}_5)[3] = \{(2, 1), (2, 4), \mathcal{O}\}$ is a subgroup of order 3. This is the subgroup associated to the prime factor 3.
- $E_{1,1}(\mathbb{F}_5)[1] = \{\mathcal{O}\}$ is a subgroup of order 1. This is the trivial subgroup.

Moreover, since $E_{1,1}(\mathbb{F}_5)$ and all its subgroups are cyclic, we know from definition 4.1.2.1 that they must have generators. For example, the curve point $(2, 1)$ is a generator of the order 3 subgroup $E_{1,1}(\mathbb{F}_5)[3]$, since every element of $E_{1,1}(\mathbb{F}_5)[3]$ can be generated by repeatedly adding $(2, 1)$ to itself:

$$\begin{aligned} [1](2, 1) &= (2, 1) \\ [2](2, 1) &= (2, 4) \\ [3](2, 1) &= \mathcal{O} \end{aligned}$$

Since $(2, 1)$ is a generator, we know from (4.1) that it gives rise to an exponential map from the finite field \mathbb{F}_3 onto \mathbb{G}_2 defined by scalar multiplication:

$$[\cdot](2, 1) : \mathbb{F}_3 \rightarrow E_{1,1}(\mathbb{F}_5)[3] : x \mapsto [x](2, 1) \quad (5.12)$$

To give an example of a generator that generates the entire group $E_{1,1}(\mathbb{F}_5)$, consider the point $(0, 1)$. Applying the tangent rule repeatedly, we compute as follows:

$$\begin{array}{ll} [0](0, 1) = \mathcal{O} & [1](0, 1) = (0, 1) \\ [2](0, 1) = (4, 2) & [3](0, 1) = (2, 1) \\ [4](0, 1) = (3, 4) & [5](0, 1) = (3, 1) \\ [6](0, 1) = (2, 4) & [7](0, 1) = (4, 3) \\ [8](0, 1) = (0, 4) & [9](0, 1) = \mathcal{O} \end{array} \quad (5.13)$$

Again, since $(0, 1)$ is a generator, we know from (4.1) that it gives rise to an exponential map. However, since the group order is not a prime number, the exponential map does not map from a field, but from the ring \mathbb{Z}_9 of modular 9 arithmetics:

$$[\cdot](0, 1) : \mathbb{Z}_9 \rightarrow E_{1,1}(\mathbb{F}_5) : x \mapsto [x](0, 1) \quad (5.14)$$

Using the generator $(0, 1)$ and its associated exponential map, we can write $E(\mathbb{F}_1)$ in logarithmic order with respect to $(0, 1)$ as explained in definition 5.1.2.2. We get the following:

$$E_{1,1}(\mathbb{F}_5) = \{(0, 1) \rightarrow (4, 2) \rightarrow (2, 1) \rightarrow (3, 4) \rightarrow (3, 1) \rightarrow (2, 4) \rightarrow (4, 3) \rightarrow (0, 4) \rightarrow \mathcal{O}\} \quad (5.15)$$

This indicates that the first element is a generator, and the n -th element is the scalar product of n and the generator. To see how logarithmic orders like this simplify the computations in small elliptic curve groups, consider example 73 again. In that example, we use the chord-and-tangent rule to compute $(0, 1) \oplus (4, 2)$. Now, in the logarithmic order of $E_1(\mathbb{F})$, we can compute that sum much easier, since we can directly see that $(0, 1) = [1](0, 1)$ and $(4, 2) = [2](0, 1)$. We can then deduce $(0, 1) \oplus (4, 2) = (2, 1)$ as follows:

$$(0, 1) \oplus (4, 2) = [1](0, 1) \oplus [2](0, 1) = [3](0, 1) = (2, 1) \quad (5.16)$$

To give another example, we can immediately see that $(3, 4) \oplus (4, 3) = (4, 2)$, without doing any expensive elliptic curve addition, since we know that $(3, 4) = [4](0, 1)$ and $(4, 3) = [7](0, 1)$ from the logarithmic ordering of $E_{1,1}(\mathbb{F}_5)$. Since $4 + 7 = 2$ in \mathbb{Z}_9 , the result must be $[2](0, 1) = (4, 2)$.

Finally, we can use $E_{1,1}(\mathbb{F}_5)$ as an example to understand the concept of cofactor clearing from definition 4.7. Since the order of $E_{1,1}(\mathbb{F}_5)$ is 9, we only have a single factor, which happens to be the cofactor as well. Cofactor clearing then implies that we can map any element from $E_{1,1}(\mathbb{F}_5)$ onto its prime factor group $E_{1,1}(\mathbb{F}_5)[3]$ by scalar multiplication with 3. For example, taking the element $(3, 4)$, which is not in $E_{1,1}(\mathbb{F}_5)[3]$, and multiplying it with 3, we get $[3](3, 4) = (2, 1)$, which is an element of $E_{1,1}(\mathbb{F}_5)[3]$ as expected.

Example 77. Consider the Tiny-jubjub curve TJJ_13 from example 69 again. In this example, we look at the subgroups of the Tiny-jubjub curve, define generators, and compute the logarithmic order for pen-and-paper computations. Then we take another look at the principle of cofactor clearing.

Since the order of TJJ_13 is 20, and the prime factorization of 20 is $2^2 \cdot 5$, we know that the TJJ_13 contains a “large” prime-order subgroup of size 5 and a small prime order subgroup of size 2.

To compute those groups, we can apply the technique of cofactor clearing (4.7) in a try-and-repeat loop. We start the loop by arbitrarily choosing an element $P \in TJJ_13$, then multiplying that element with the cofactor of the group that we want to compute. If the result is \mathcal{O} , we try a different element and repeat the process until the result is different from the point at infinity \mathcal{O} .

To compute a generator for the small prime-order subgroup $(TJJ_13)[2]$, first observe that the cofactor is 10, since $20 = 2 \cdot 10$. We then arbitrarily choose the curve point $(5, 11) \in TJJ_13$ and compute $[10](5, 11) = \mathcal{O}$. Since the result is the point at infinity, we have to try another curve point, say $(9, 4)$. We get $[10](9, 4) = (4, 0)$ and we can deduce that $(4, 0)$ is a generator of $(TJJ_13)[2]$. Logarithmic order then gives the following order:

$$(TJJ_13)[2] = \{(4, 0) \rightarrow \mathcal{O}\} \quad (5.17)$$

This is expected, since we know from example 74 that $(4, 0)$ is self-inverse, with $(4, 0) \oplus (4, 0) = \mathcal{O}$. We double-check the computations using Sage:

```

sage: F13 = GF(13)
sage: TJJ = EllipticCurve(F13, [8, 8])
sage: P = TJJ(5, 11)
sage: INF = TJJ(0)
sage: 10*P == INF
True
sage: Q = TJJ(9, 4)
sage: R = TJJ(4, 0)
sage: 10*Q == R

```

check
reference

2726

True

321

We can apply the same reasoning to the “large” prime-order subgroup $(TJJ_13)[5]$, which contains 5 elements. To compute a generator for this group, first observe that the associated cofactor is 4, since $20 = 5 \cdot 4$. We choose the curve point $(9, 4) \in TJJ_13$ again, and compute $[4](9, 4) = (7, 11)$. Since the result is not the point at infinity, we know that $(7, 11)$ is a generator of $(TJJ_13)[5]$. Using the generator $(7, 11)$, we compute the exponential map $[\cdot](7, 11) : \mathbb{F}_5 \rightarrow TJJ_13[5]$ and get the following:

$$\begin{aligned} [0](7, 11) &= \mathcal{O} \\ [1](7, 11) &= (7, 11) \\ [2](7, 11) &= (8, 5) \\ [3](7, 11) &= (8, 8) \\ [4](7, 11) &= (7, 2) \end{aligned}$$

2727

2728

2729

We can use this computation to write the large-order prime group $(TJJ_13)[5]$ of the Tinyjubjub curve in logarithmic order, which we will use quite frequently in what follows. We get the following:

$$(TJJ_13)[5] = \{(7, 11) \rightarrow (8, 5) \rightarrow (8, 8) \rightarrow (7, 2) \rightarrow \mathcal{O}\} \quad (5.18)$$

2730

2731

From this, we can immediately see, for example, that $(8, 8) \oplus (7, 2) = (8, 5)$, since $3 + 4 = 2$ in \mathbb{F}_5 .

2732

2733

2734

2735

Based on the previous two examples, you reader might get the impression that elliptic curve computation can be largely replaced by modular arithmetics. This however, is not true in general, but only an artifact of small groups, where it is possible to write the entire group in a logarithmic order.

2736

2737

Exercise 63. Consider example 76 and compute the set $\{[1](0, 1), [2](0, 1), \dots, [8](0, 1), [9](0, 1)\}$ using the tangent rule only.

2738

2739

Exercise 64. Consider example 77 and compute the scalarmultiplications $[10](5, 11)$ as well as $[10](9, 4)$ and $[4](9, 4)$ with pen and paper using the algorithm from exercise 37.

2740

5.1.3 Projective Short Weierstrass form

2741

2742

2743

As we have seen in the previous section, describing elliptic curves as pairs of points that satisfy a certain equation is relatively straight-forward. However, in order to define a group structure on the set of points, we had to add a special point at infinity to act as the neutral element.

2744

2745

2746

Recalling the definition of projective planes 4.4, we know that points at infinity are handled as ordinary points in projective geometry. Therefore, it makes sense to look at the definition of a Short Weierstrass curve in projective geometry.

2747

2748

2749

2750

2751

To see what a Short Weierstrass curve in projective coordinates is, let \mathbb{F} be a finite field of order q and characteristic > 3 , let $a, b \in \mathbb{F}$ be two field elements such that $4a^3 + 27b^2 \bmod q \neq 0$ and let \mathbb{FP}^2 be the projective plane over \mathbb{F} as introduced in section 4.4. Then a **projective Short Weierstrass elliptic curve** over \mathbb{F} is the set of all points $[X : Y : Z] \in \mathbb{FP}^2$ from the projective plane that satisfy the cubic equation $Y^2 \cdot Z = X^3 + a \cdot X \cdot Z^2 + b \cdot Z^3$:

$$E(\mathbb{FP}^2) = \{[X : Y : Z] \in \mathbb{FP}^2 \mid Y^2 \cdot Z = X^3 + a \cdot X \cdot Z^2 + b \cdot Z^3\} \quad (5.19)$$

S: move that section here?

To understand how the point at infinity is unified in this definition, recall from section 4.4 that, in projective geometry, points at infinity are given by projective coordinates $[X : Y : 0]$. Inserting representatives $(x_1, y_1, 0) \in [X : Y : 0]$ from those coordinates into the defining cubic equation 5.19 results in the following identity:

$$\begin{aligned} y_1^2 \cdot 0 &= x_1^3 + a \cdot x_1 \cdot 0^2 + b \cdot 0^3 \\ 0 &= x_1^3 \end{aligned} \quad \Leftrightarrow$$

This implies $X = 0$, and shows that the only projective point at infinity that is also a point on a projective Short Weierstrass curve is the class $[0, 1, 0] = \{(0, y, 0) \mid y \in \mathbb{F}\}$. The point $[0 : 1 : 0]$ is the projective representation of the point at infinity \mathcal{O} in the affine representation. The projective representation of a Short Weierstrass curve, therefore, has the advantage that it does not need a special symbol to represent the point at infinity from the affine definition.

Example 78. To get an intuition of how an elliptic curve in projective geometry looks, consider curve $E_{1,1}(\mathbb{F}_5)$ from example 68. We know that, in its affine representation, the set of points on the affine Short Weierstrass curve is given as follows:

$$E_{1,1}(\mathbb{F}_5) = \{\mathcal{O}, (0, 1), (2, 1), (3, 1), (4, 2), (4, 3), (0, 4), (2, 4), (3, 4)\} \quad (5.20)$$

This is defined as the set of all pairs $(x, y) \in \mathbb{F}_5 \times \mathbb{F}_5$ such that the affine Short Weierstrass equation $y^2 = x^3 + ax + b$ with $a = 1$ and $b = 1$ is satisfied.

To find the set of elements of $E_{1,1}(\mathbb{F}_5)$ in the projective representation of a Short Weierstrass curve with the same parameters $a = 1$ and $b = 1$, we have to compute the set of projective points $[X : Y : Z]$ from the projective plane $\mathbb{F}_5\mathbb{P}^2$ that satisfies the following homogenous cubic equation for any representative $(x_1, y_1, z_1) \in [X : Y : Z]$:

$$y_1^2 z_1 = x_1^3 + 1 \cdot x_1 z_1^2 + 1 \cdot z_1^3 \quad (5.21)$$

We know from section 4.4 that the projective plane $\mathbb{F}_5\mathbb{P}^2$ contains $5^2 + 5 + 1 = 31$ elements, so we can insert all elements into equation (5.21) and see if both sides match.

For example, consider the projective point $[0 : 4 : 1]$. We know from (4.56) that this point in the projective plane represents the following line in $\mathbb{F}_5^3 \setminus \{(0, 0, 0)\}$:

$$[0 : 4 : 1] = \{(0, 4, 1), (0, 3, 2), (0, 2, 3), (0, 1, 4)\} \quad (5.22)$$

To check whether or not $[0 : 4 : 1]$ satisfies (5.21), we can insert any representative, in other words, any element from (5.22). Each element satisfies the equation if and only if all other elements satisfy the equation. As an arbitrary choice, we insert $(0, 3, 2)$ and get the following result:

$$3^2 \cdot 2 = 0^3 + 1 \cdot 0 \cdot 2^2 + 1 \cdot 2^3 \Leftrightarrow 3 = 3$$

This tells us that the affine point $[0 : 4 : 1]$ is indeed a solution to the equation (5.21), but we could just as well have inserted any other element. For example, inserting $(0, 1, 4)$ also satisfies (5.21):

$$1^2 \cdot 4 = 0^3 + 1 \cdot 0 \cdot 4^2 + 1 \cdot 4^3 \Leftrightarrow 4 = 4$$

To find the projective representation of $E_{1,1}(\mathbb{F}_5)$, we first observe that the projective line at infinity $[1 : 0 : 0]$ is not a curve point on any projective Short Weierstrass curve, since it cannot satisfy the defining equation in (5.19) for any parameter a and b . Therefore, we can exclude it from our consideration.

Moreover, a point at infinity $[X : Y : 0]$ can only satisfy the equation in (5.19) for any a and b , if $X = 0$, which implies that the only point at infinity relevant for Short Weierstrass elliptic curves is $[0 : 1 : 0]$, since $[0 : k : 0] = [0 : 1 : 0]$ for all $k \in \mathbb{F}^*$. Therefore, we can exclude all points at infinity except the point $[0 : 1 : 0]$.

All points that remain are the affine points $[X : Y : 1]$. Inserting all of them into (5.21), we get the set of all projective curve points as follows:

$$E_1(\mathbb{F}_5\mathbb{P}^2) = \{[0 : 1 : 0], [0 : 1 : 1], [2 : 1 : 1], [3 : 1 : 1], [4 : 2 : 1], [4 : 3 : 1], [0 : 4 : 1], [2 : 4 : 1], [3 : 4 : 1]\} \quad (5.23)$$

If we compare this with the affine representation, we see that there is a 1:1 correspondence between the points in the affine representation in (5.20) and the affine points in projective geometry, and that the projective point $[0 : 1 : 0]$ represents the additional point \mathcal{O} in the affine representation.

Exercise 65. Consider example 78 and compute the set (5.23) by inserting all points from the projective plane $\mathbb{F}_5\mathbb{P}^2$ into the defining projective Short Weierstrass equation.

Exercise 66. Compute the projective representation of the Tiny-jubjub curve (example 69) and the logarithmic order of its large prime-order subgroup with respect to the generator $[7 : 11 : 1]$ in projective coordinates.

5.1.3.1 Projective Group law

As we saw in section 5.1.2, one of the key properties of an elliptic curve is that it comes with a definition of a group law on the set of its points, described geometrically by the chord-and-tangent rule (definition 5.1.2.1). This rule was fairly intuitive, with the exception of the distinguished point at infinity, which appeared whenever the chord or the tangent did not have a third intersection point with the curve.

One of the key features of projective coordinates is that, in projective space, it is guaranteed that any chord will always intersect the curve in three points, and any tangent will intersect it in two points. So, the geometric picture simplifies, as we don't need to consider external symbols and associated cases. The price to pay for this mathematical simplification is that projective coordinates might be less intuitive for beginners.

It can be shown that the points of an elliptic curve in projective space form a commutative group with respect to the tangent-and-chord rule such that the projective point $[0 : 1 : 0]$ is the neutral element, and the additive inverse of a point $[X : Y : Z]$ is given by $[X : -Y : Z]$. The addition law is usually described by algorithm 7, minimizing the number of necessary additions and multiplications in the base field.

Exercise 67. Consider example 78 again. Compute the following expression for projective points on $E_1(\mathbb{F}_5\mathbb{P}^2)$ using algorithm 7:

- $[0 : 1 : 0] \oplus [4 : 3 : 1]$
- $[0 : 3 : 0] \oplus [3 : 1 : 2]$
- $-[0 : 4 : 1] \oplus [3 : 4 : 1]$
- $[4 : 3 : 1] \oplus [4 : 2 : 1]$

Check if
following
Alg is
floated
too far

Algorithm 7 Projective Short Weierstrass Addition Law

Require: $[X_1 : Y_1 : Z_1], [X_2 : Y_2 : Z_2] \in E(\mathbb{F}_{\mathbb{P}^2})$

procedure ADD-RULE($[X_1 : Y_1 : Z_1], [X_2 : Y_2 : Z_2]$)

if $[X_1 : Y_1 : Z_1] == [0 : 1 : 0]$ **then**

$[X_3 : Y_3 : Z_3] \leftarrow [X_2 : Y_2 : Z_2]$

else if $[X_2 : Y_2 : Z_2] == [0 : 1 : 0]$ **then**

$[X_3 : Y_3 : Z_3] \leftarrow [X_1 : Y_1 : Z_1]$

else

$U_1 \leftarrow Y_2 \cdot Z_1$

$U_2 \leftarrow Y_1 \cdot Z_2$

$V_1 \leftarrow X_2 \cdot Z_1$

$V_2 \leftarrow X_1 \cdot Z_2$

if $V_1 == V_2$ **then**

if $U_1 \neq U_2$ **then** $[X_3 : Y_3 : Z_3] \leftarrow [0 : 1 : 0]$

else

if $Y_1 == 0$ **then** $[X_3 : Y_3 : Z_3] \leftarrow [0 : 1 : 0]$

else

$W \leftarrow a \cdot Z_1^2 + 3 \cdot X_1^2$

$S \leftarrow Y_1 \cdot Z_1$

$B \leftarrow X_1 \cdot Y_1 \cdot S$

$H \leftarrow W^2 - 8 \cdot B$

$X' \leftarrow 2 \cdot H \cdot S$

$Y' \leftarrow W \cdot (4 \cdot B - H) - 8 \cdot Y_1^2 \cdot S^2$

$Z' \leftarrow 8 \cdot S^3$

$[X_3 : Y_3 : Z_3] \leftarrow [X' : Y' : Z']$

end if

end if

else

$U = U_1 - U_2$

$V = V_1 - V_2$

$W = Z_1 \cdot Z_2$

$A = U^2 \cdot W - V^3 - 2 \cdot V^2 \cdot V_2$

$X' = V \cdot A$

$Y' = U \cdot (V^2 \cdot V_2 - A) - V^3 \cdot U_2$

$Z' = V^3 \cdot W$

$[X_3 : Y_3 : Z_3] \leftarrow [X' : Y' : Z']$

end if

end if

return $[X_3 : Y_3 : Z_3]$

end procedure

Ensure: $[X_3 : Y_3 : Z_3] == [X_1 : Y_1 : Z_1] \oplus [X_2 : Y_2 : Z_2]$

and then solve the equation $[X : Y : Z] \oplus [0 : 1 : 1] = [2 : 4 : 1]$ for some point $[X : Y : Z]$ from the projective Short Weierstrass curve $E_1(\mathbb{F}_5\mathbb{P}^2)$.

Exercise 68. Compare the affine addition law for Short Weierstrass curves with the projective addition rule. Which branch in the projective rule corresponds to which case in the affine law?

5.1.3.2 Coordinate Transformations

As we can see by comparing the examples 78 and 78, there is a close relation between the affine and the projective representation of a Short Weierstrass curve. This is not a coincidence. In fact, from a mathematical point of view, projective and affine Short Weierstrass curves describe the same thing, as there is a one-to-one correspondence (an isomorphism) between both representations for any parameters a and b .

To specify the correspondence, let $E(\mathbb{F})$ and $E(\mathbb{F}\mathbb{P}^2)$ be an affine and a projective Short Weierstrass curve defined for the same parameters a and b . Then, the function in (5.24) maps points from the affine representation to points from the projective representation of a Short Weierstrass curve. In other words, if the pair of field elements (x, y) satisfies the affine Short Weierstrass equation $y^2 = x^3 + ax + b$, then all homogeneous coordinates $(x_1, y_1, z_1) \in [x : y : 1]$ satisfy the projective Short Weierstrass equation $y_1^2 \cdot z_1 = x_1^3 + ay_1 \cdot z_1^2 + b \cdot z_1^3$.

$$I : E(\mathbb{F}) \rightarrow E(\mathbb{F}\mathbb{P}^2) : \begin{array}{ll} (x, y) & \mapsto [x : y : 1] \\ \mathcal{O} & \mapsto [0 : 1 : 0] \end{array} \quad (5.24)$$

This map is a 1 : 1 correspondence, which means that it maps exactly one point from the affine representation onto one point from the projective representation. It is therefore possible to invert this map in order to map points from the projective representation to points from the affine representation of a Short Weierstrass curve. The inverse is given by the following map:

$$I^{-1} : E(\mathbb{F}\mathbb{P}^2) \rightarrow E(\mathbb{F}) : [X : Y : Z] \mapsto \begin{cases} (\frac{X}{Z}, \frac{Y}{Z}) & \text{if } Z \neq 0 \\ \mathcal{O} & \text{if } Z = 0 \end{cases} \quad (5.25)$$

Note that the only projective point $[X : Y : Z]$ with $Z = 0$ that satisfies the equation in 5.19 is given by the class $[0 : 1 : 0]$. A key feature of I and its inverse is that both maps respect the group structure, which means that the neutral element is mapped to the neutral element $I(\mathcal{O}) = [0 : 1 : 0]$, and that $I((x_1, y_1) \oplus (x_2, y_2))$ is equal to $I(x_1, y_1) \oplus I(x_2, y_2)$. The same holds true for the inverse map I^{-1} .

Maps with these properties are called **group isomorphisms**, and, from a mathematical point of view, the existence of function I implies that the affine and the projective definition of Short Weierstrass elliptic curves are equivalent, and represent the same mathematical thing in just two different views. Implementations can therefore choose freely between these two representations.

5.2 Montgomery Curves

Affine and the projective Short Weierstrass forms are the most general ways to describe elliptic curves over fields of characteristics larger than 3. However, in certain situations, it might be advantageous to consider more specialized representations of elliptic curves, in order to get faster algorithms for the group law or the scalar multiplication, for example.

same example twice

As we will see in this section, so-called **Montgomery curves** are a subset of all elliptic curves that can be written in the **Montgomery form**. Those curves allow for constant time algorithms for (specializations of) the elliptic curve scalar multiplication.

To see what a Montgomery curve in its affine representation is, let \mathbb{F} be a finite field of characteristic $p > 3$, and let $A, B \in \mathbb{F}$ be two field elements such that $B \neq 0$ and $A^2 \neq 4$. A **Montgomery elliptic curve** $M(\mathbb{F})$ over \mathbb{F} in its affine representation is the set of all pairs of field elements $(x, y) \in \mathbb{F} \times \mathbb{F}$ that satisfy the **Montgomery cubic equation** $B \cdot y^2 = x^3 + A \cdot x^2 + x$, together with a distinguished symbol \mathcal{O} , called the **point at infinity**.

$$M(\mathbb{F}) = \{(x, y) \in \mathbb{F} \times \mathbb{F} \mid B \cdot y^2 = x^3 + A \cdot x^2 + x\} \cup \{\mathcal{O}\} \quad (5.26)$$

Despite the fact that Montgomery curves look different from Short Weierstrass curves, they are just a special way to describe certain Short Weierstrass curves. In fact, every curve in affine Montgomery form can be transformed into an elliptic curve in Short Weierstrass form. To see that, assume that a curve is given in Montgomery form $By^2 = x^3 + Ax^2 + x$. The associated Short Weierstrass form is then defined as follows:

$$y^2 = x^3 + \frac{3 - A^2}{3 \cdot B^2} \cdot x + \frac{2 \cdot A^3 - (9 \bmod q) \cdot A}{(27 \bmod q) \cdot B^3} \quad (5.27)$$

On the other hand, not every elliptic curve $E(\mathbb{F})$ over base field \mathbb{F} given in Short Weierstrass form $y^2 = x^3 + ax + b$ can be converted into Montgomery form. For a Short Weierstrass curve to be a Montgomery curve, the following conditions need to hold:

Definition 5.2.0.1.

- The number of points on $E(\mathbb{F})$ is divisible by 4.
- The polynomial $z^3 + az + b \in \mathbb{F}[z]$ has at least one root $z_0 \in \mathbb{F}$.
- $3z_0^2 + a$ is a quadratic residue in \mathbb{F}^* .

When these conditions are satisfied, then for $s = (\sqrt{3z_0^2 + a})^{-1}$, a Montgomery curve is defined by the following equation:

$$sy^2 = x^3 + (3z_0s)x^2 + x \quad (5.28)$$

In the following example, we will look at the Tiny-jubjub curve again, and show that it is actually a Montgomery curve.

Example 79. Consider the prime field \mathbb{F}_{13} and the Tiny-jubjub curve TJJ_{13} from example 69. To see that it is a Montgomery curve, we have to check the requirements from definition 5.2.0.1:

Since the order of TJJ_{13} is 20, which is divisible by 4, the first requirement is met.

As for the second criterion, since $a = 8$ and $b = 8$, we have to check that the polynomial $P(z) = z^3 + 8z + 8$ has a root in \mathbb{F}_{13} . To see this, we simply evaluate P at all numbers $z \in \mathbb{F}_{13}$, and find that $P(4) = 0$, so a root is given by $z_0 = 4$.

In the last step, we have to check that $3 \cdot z_0^2 + a$ has a root in \mathbb{F}_{13}^* . We compute as follows:

$$\begin{aligned} 3z_0^2 + a &= 3 \cdot 4^2 + 8 \\ &= 3 \cdot 3 + 8 \\ &= 9 + 8 \\ &= 4 \end{aligned}$$

2877 To see that 4 is a quadratic residue in \mathbb{F}_{13} , we use Euler's criterion (4.46) to compute the
 2878 Legendre symbol of 4. We get the following:

$$\left(\frac{4}{13}\right) = 4^{\frac{13-1}{2}} = 4^6 = 1$$

2879 This means that 4 does have a root in \mathbb{F}_{13} . In fact, computing a root of 4 in \mathbb{F}_{13} is easy, since
 2880 the integer root 2 of 4 is also one of its roots in \mathbb{F}_{13} . The other root is given by $13 - 4 = 9$.

Since all requirements are met, we have shown that TJJ_13 is indeed a Montgomery curve, and we can use (5.28) to compute its associated Montgomery form as follows:

$$\begin{aligned} s &= \left(\sqrt{3 \cdot z_0^2 + 8}\right)^{-1} \\ &= 2^{-1} && \# \text{ Fermat's little theorem} \\ &= 2^{13-2} && \# 2048 \bmod 13 = 7 \\ &= 7 \end{aligned}$$

The defining equation for the Montgomery form of the Tiny-jubjub curve is given by as follows:

$$\begin{aligned} sy^2 &= x^3 + (3z_0s)x^2 + x && \Rightarrow \\ 7 \cdot y^2 &= x^3 + (3 \cdot 4 \cdot 7)x^2 + x && \Leftrightarrow \\ 7 \cdot y^2 &= x^3 + 6x^2 + x \end{aligned}$$

2881 So, we get the defining parameters as $B = 7$ and $A = 6$, and we can write the Tiny-jubjub curve
 2882 in its affine Montgomery representation as follows:

$$TJJ_13 = \{(x, y) \in \mathbb{F}_{13} \times \mathbb{F}_{13} \mid 7 \cdot y^2 = x^3 + 6x^2 + x\} \cup \{\mathcal{O}\} \quad (5.29)$$

Now that we have the abstract definition of the Tiny-jubjub curve in Montgomery form, we can compute the set of points by inserting all pairs $(x, y) \in \mathbb{F}_{13} \times \mathbb{F}_{13}$, similarly to how we computed the curve points in its Short Weierstrass representation (5.2). We get the following:

$$\begin{aligned} M_TJJ_13 = \{ &\mathcal{O}, (0, 0), (1, 4), (1, 9), (2, 4), (2, 9), (3, 5), (3, 8), (4, 4), (4, 9), \\ &(5, 1), (5, 12), (7, 1), (7, 12), (8, 1), (8, 12), (9, 2), (9, 11), (10, 3), (10, 10)\} \end{aligned} \quad (5.30)$$

2883 We can check the results with Sage:

```

2884 sage: F13 = GF(13)                                     322
2885 sage: L_MTJJ = []                                       323
2886 ....: for x in F13:                                     324
2887 ....:     for y in F13:                                  325
2888 ....:         if F13(7)*y^2 == x^3 + F13(6)*x^2 + x:    326
2889 ....:             L_MTJJ.append((x, y))                  327
2890 sage: MTJJ = Set(L_MTJJ)                                328
2891 sage: # does not compute the point at infinity          329

```

2892 *Exercise 69.* Consider example 79 and compute the set in (5.30) by inserting every pair of field
 2893 elements $(x, y) \in \mathbb{F}_{13} \times \mathbb{F}_{13}$ into the defining Montgomery equation.

2894 *Exercise 70.* Consider the elliptic curve $E_1(\mathbb{F})$ from example 68 and show that $E_1(\mathbb{F})$ is not a
 2895 Montgomery curve.

2896 *Exercise 71.* Consider the elliptic curve secp256k1 from example 70 and show that secp256k1
 2897 is not a Montgomery curve.

check
reference

5.2.1 Affine Montgomery coordinate transformation

Comparing the Montgomery representation in (5.29) with the Short Weierstrass representation of the same curve in (5.2), we see that there is a 1:1 correspondence between the curve points in these two examples. This is no accident. In fact, if $M_{A,B}$ is a Montgomery curve, and $E_{a,b}$ a Short Weierstrass curve with $a = \frac{3-A^2}{3B^2}$ and $b = \frac{2A^2-9A}{27B^3}$, then the following function maps all points in Montgomery representation onto the points in Short Weierstrass representation:

$$I : M_{A,B} \rightarrow E_{a,b} : (x, y) \mapsto \left(\frac{3x+A}{3B}, \frac{y}{B} \right) \quad (5.31)$$

The point at infinity of the Montgomery form is mapped to the point at infinity of the Short Weierstrass form. This map is a 1:1 correspondence (an isomorphism), and its inverse map is given by the following equation (where z_0 is a root of the polynomial $z^3 + az + b \in \mathbb{F}[z]$ and $s = (\sqrt{3z_0^2 + a})^{-1}$).

$$I^{-1} : E_{a,b} \rightarrow M_{A,B} : (x, y) \mapsto (s \cdot (x - z_0), s \cdot y) \quad (5.32)$$

The point at infinity of the Short Weierstrass form is mapped to the point at infinity of the Montgomery form. Using this map, it is therefore possible for implementations of Montgomery curves to freely transit between the Short Weierstrass and the Montgomery form.

Example 80. Consider the Tiny-jubjub curve again. In 5.2 we defined its Short Weierstrass representation and in example 5.29, we derived its Montgomery representation.

To see how the coordinate transformation I works in this example, let's map points from the Montgomery representation onto points from the Short Weierstrass representation. Inserting, for example, the point $(0,0)$ from the Montgomery representation (5.29) into I gives the following:

$$\begin{aligned} I(0,0) &= \left(\frac{3 \cdot 0 + A}{3B}, \frac{0}{B} \right) \\ &= \left(\frac{3 \cdot 0 + 6}{3 \cdot 7}, \frac{0}{7} \right) \\ &= \left(\frac{6}{8}, 0 \right) \\ &= (4, 0) \end{aligned}$$

As we can see, the Montgomery point $(0,0)$ maps to the self-inverse point $(4,0)$ of the Short Weierstrass representation. On the other hand, we can use our computations of $s = 7$ and $z_0 = 4$ from example 79 to compute the inverse map I^{-1} , which maps points on the Short Weierstrass representation to points on the Montgomery form. Inserting, for example, $(4,0)$ we get the following:

$$\begin{aligned} I^{-1}(4,0) &= (s \cdot (4 - z_0), s \cdot 0) \\ &= (7 \cdot (4 - 4), 0) \\ &= (0, 0) \end{aligned}$$

As expected, the inverse map maps the Short Weierstrass point back to where it originated in the Montgomery form. We can use Sage to check that our computation of I is correct:

```

2915 sage: # Compute I of Montgomery form: 330
2916 sage: L_I_MTJJ = [] 331
2917 sage: for (x,y) in L_MTJJ: # LMTJJ as defined previously 332
2918 .....:     v = (F13(3)*x + F13(6))/(F13(3)*F13(7)) 333
2919 .....:     w = y/F13(7) 334
2920 .....:     L_I_MTJJ.append((v,w)) 335
2921 sage: I_MTJJ = Set(L_I_MTJJ) 336
2922 sage: # Computation \concept{short Weierstrass} form 337
2923 sage: C_WTJJ = EllipticCurve(F13, [8, 8]) 338
2924 sage: L_WTJJ = [P.xy() for P in C_WTJJ.points() if P.order() > 339
2925 1]
2926 sage: WTJJ = Set(L_WTJJ) 340
2927 sage: # check I(Montgomery) == Weierstrass 341
2928 sage: WTJJ == I_MTJJ 342
2929 True 343
2930 sage: # check the inverse map I^(-1) 344
2931 sage: L_IINV_WTJJ = [] 345
2932 sage: for (v,w) in L_WTJJ: 346
2933 .....:     x = F13(7)*(v-F13(4)) 347
2934 .....:     y = F13(7)*w 348
2935 .....:     L_IINV_WTJJ.append((x,y)) 349
2936 sage: IINV_WTJJ = Set(L_IINV_WTJJ) 350
2937 sage: MTJJ == IINV_WTJJ 351
2938 True 352

```

5.2.2 Montgomery group law

We have seen that Montgomery curves are special cases of Short Weierstrass curves. As such, they have a group structure defined on the set of their points, which can also be derived from the chord-and-tangent rule. In accordance with Short Weierstrass curves, it can be shown that the identity $x_1 = x_2$ implies $y_2 = \pm y_1$, meaning that the following rules are a complete description of the elliptic curve group law:

Definition 5.2.2.1 (Montgomery group law).

- (The neutral element) The point at infinity \mathcal{O} is the neutral element.
- (The inverse element) The inverse of \mathcal{O} is \mathcal{O} . For any other curve point $(x, y) \in M(\mathbb{F}_q) \setminus \{\mathcal{O}\}$, the inverse is given by $(x, -y)$.
- (The group law) For any two curve points $P, Q \in M(\mathbb{F}_q)$, the group law is defined by one of the following cases:
 1. (Neutral element) If $Q = \mathcal{O}$, then the sum is defined as $P \oplus Q = P$.
 2. (Inverse elements) If $P = (x, y)$ and $Q = (x, -y)$, the group law is defined as $P \oplus Q = \mathcal{O}$.
 3. (Tangent rule) If $P = (x, y)$ with $y \neq 0$, the group law $P \oplus P = (x', y')$ is defined as follows:

$$x' = \left(\frac{3x_1^2 + 2Ax_1 + 1}{2By_1} \right)^2 \cdot B - (x_1 + x_2) - A, \quad y' = \frac{3x_1^2 + 2Ax_1 + 1}{2By_1} (x_1 - x') - y_1$$

4. (Chord rule) If $P = (x_1, y_1)$ and $Q = (x_2, y_2)$ such that $x_1 \neq x_2$, the group law $R = P \oplus Q$ with $R = (x_3, y_3)$ is defined as follows:

$$x' = \left(\frac{y_2 - y_1}{x_2 - x_1}\right)^2 B - (x_1 + x_2) - A, \quad y' = \frac{y_2 - y_1}{x_2 - x_1} (x_1 - x') - y_1$$

2955 *Exercise 72.* Consider the commutative group (M_TJJ_13, \oplus) of the Tiny-jubjub curve in its
2956 Montgomery form from example (5.30).

2957 1. Compute the inverse of $(1, 9)$, \mathcal{O} , $(7, 12)$ and $(4, 9)$.

2958 2. Solve the equation $x \oplus (3, 8) = (10, 3)$ for some $x \in M_TJJ_13$.

2959 Choose some element $x \in M_TJJ_13$ and test if x is a generator of M_TJJ_13 . If x is not a
2960 generator, repeat until you find some generator x . Write M_TJJ_13 in logarithmic order with
2961 respect to x .

2962 5.3 Twisted Edwards Curves

2963 As we have seen in definition 5.1.2.2 and definition 5.2.2.1, both Short Weierstrass and Mont-
2964 gomery curves have somewhat complicated group laws, as many cases have to be distinguished.
2965 This can add complexity to a programming implementation, because each case translates to
2966 another branches in a computer program. However, in the context of SNARK development,
2967 computational models for bounded computations are used in which program branches are un-
2968 desirably costly (more on this in section 6.2.1 and 6.2.2). To make elliptic curves “SNARK-
2969 friendly”, it is therefore advantageous to look for curves with a group law that requires no
2970 branches and utilizes as few field operations as possible.

2971 So-called **SNARK-friendly Twisted Edwards curves** are particularly useful here, as these
2972 curves have a compact and easily implementable group law that works for all points including
2973 the point at infinity. Implementing this law needs no branching.

2974 To see what a **Twisted Edwards curve** in its affine form looks like, let \mathbb{F} be a finite field
2975 of characteristic > 3 , and let $a, d \in \mathbb{F} \setminus \{0\}$ be two non-zero field elements such that $a \neq d$. A
2976 **Twisted Edwards elliptic curve** in its affine representation is the set of all pairs (x, y) from
2977 $\mathbb{F} \times \mathbb{F}$ that satisfy the Twisted Edwards equation $a \cdot x^2 + y^2 = 1 + d \cdot x^2 y^2$:

$$E(\mathbb{F}) = \{(x, y) \in \mathbb{F} \times \mathbb{F} \mid a \cdot x^2 + y^2 = 1 + d \cdot x^2 y^2\} \quad (5.33)$$

2978 A Twisted Edwards curve is called a **SNARK-friendly Twisted Edwards curve** if the param-
2979 eter a is a quadratic residue and the parameter d is a quadratic non-residue.

2980 As we can see from the definition, affine Twisted Edwards curves look somewhat different
2981 from Short Weierstrass curves, as their affine representation does not need a special symbol to
2982 represent the point at infinity. In fact, the pair $(0, 1)$ is always a point on any Twisted Edwards
2983 curve, and it takes the role of the point at infinity.

2984 Despite their different appearances, Twisted Edwards curves are equivalent to Montgomery
2985 curves in the sense that, for every Twisted Edwards curve, there is a Montgomery curve, and a
2986 way to map the points of one curve onto the other (and vice versa) in a 1:1 correspondence.

2987 To see that, assume that a curve in Twisted Edwards form is given. The associated Mont-
2988 gomery curve is then defined by the Montgomery equation:

$$\frac{4}{a-d} y^2 = x^3 + \frac{2(a+d)}{a-d} \cdot x^2 + x \quad (5.34)$$

2989 On the other hand, a Montgomery curve $By^2 = x^3 + Ax^2 + x$ such that $B \neq 0$ and $A^2 \neq 4$
 2990 gives rise to a Twisted Edwards curve defined by the following equation:

$$\left(\frac{A+2}{B}\right)x^2 + y^2 = 1 + \left(\frac{A-2}{B}\right)x^2y^2 \quad (5.35)$$

Example 81. Consider the Tiny-jubjub curve from example 69 again. We know from example 79 that it is a Montgomery curve, and, since Montgomery curves are equivalent to Twisted Edwards curves, we want to write this curve in Twisted Edwards form. We use equation (5.35), and compute the parameters a and d as follows:

$$\begin{aligned} a &= \frac{A+2}{B} && \# \text{ insert } A=6 \text{ and } B=7 \\ &= \frac{8}{7} = 3 && \# 7^{-1} = 2 \\ d &= \frac{A-2}{B} \\ &= \frac{4}{7} = 8 \end{aligned}$$

2991 Thus, we get the defining parameters $a = 3$ and $d = 8$.

Since our goal is to use this curve later in implementations of pen-and-paper SNARKs, let us show that Tiny-jubjub is also a SNARK-friendly Twisted Edwards curve. To see that, we have to show that a is a quadratic residue and d is a quadratic non-residue. We therefore compute the Legendre symbols of a and d using Euler's criterion. We get the following:

$$\begin{aligned} \left(\frac{3}{13}\right) &= 3^{\frac{13-1}{2}} \\ &= 3^6 = 1 \\ \left(\frac{8}{13}\right) &= 8^{\frac{13-1}{2}} \\ &= 8^6 = 12 = -1 \end{aligned}$$

2992 This proves that Tiny-jubjub is SNARK-friendly. We can write the Tiny-jubjub curve in its
 2993 affine Twisted Edwards representation as follows:

$$TJJ_{13} = \{(x, y) \in \mathbb{F}_{13} \times \mathbb{F}_{13} \mid 3 \cdot x^2 + y^2 = 1 + 8 \cdot x^2 \cdot y^2\} \quad (5.36)$$

2994 Now that we have the abstract definition of our Tiny-jubjub curve in Twisted Edwards form,
 2995 we can compute the set of points by inserting all pairs $(x, y) \in \mathbb{F}_{13} \times \mathbb{F}_{13}$, similarly to how
 2996 we computed the curve points in its Short Weierstrass or Edwards representation. We get the
 2997 following:

$$\begin{aligned} TE_TJJ_{13} = \{ &(0, 1), (0, 12), (1, 2), (1, 11), (2, 6), (2, 7), (3, 0), (5, 5), (5, 8), (6, 4), \\ &(6, 9), (7, 4), (7, 9), (8, 5), (8, 8), (10, 0), (11, 6), (11, 7), (12, 2), (12, 11)\} \end{aligned} \quad (5.37)$$

2998 We double-check our results with Sage:

2999 **sage:** `F13 = GF(13)`

```

3000 sage: L_ETJJ = []
3001 .....: for x in F13:
3002 .....:     for y in F13:
3003 .....:         if F13(3)*x^2 + y^2 == 1+ F13(8)*x^2*y^2:
3004 .....:             L_ETJJ.append((x,y))
3005 sage: ETJJ = Set(L_ETJJ)

```

3006 5.3.1 Twisted Edwards group law

3007 As we have seen, Twisted Edwards curves are equivalent to Montgomery curves, and, as such,
 3008 they also have a group law. However, in contrast to Montgomery and Short Weierstrass curves,
 3009 the group law of SNARK-friendly Twisted Edwards curves can be described by a single com-
 3010 putation that works in all cases, even if we add the neutral element, the inverse, or if we have to
 3011 double a point.

3012 To see what the Twisted Edwards group law looks like, let $(x_1, y_1), (x_2, y_2)$ be two points on
 3013 an Edwards curve $E(\mathbb{F})$. The sum of those points is then given by the following equation:

$$(x_1, y_1) \oplus (x_2, y_2) = \left(\frac{x_1 y_2 + y_1 x_2}{1 + d x_1 x_2 y_1 y_2}, \frac{y_1 y_2 - a x_1 x_2}{1 - d x_1 x_2 y_1 y_2} \right) \quad (5.38)$$

3014 In order to see what the neutral element of the group law is, first observe that the point $(0, 1)$
 3015 is a solution to the Twisted Edwards equation $a \cdot x^2 + y^2 = 1 + d \cdot x^2 \cdot y^2$ for any parameters a and
 3016 d , and hence $(0, 1)$ is a point on any Twisted Edwards curve. It can be shown that $(0, 1)$ serves
 3017 as the neutral element, and that the inverse of a point (x_1, y_1) is given by the point $(-x_1, y_1)$.

Example 82. Let's look at the Tiny-jubjub curve in Edwards form from (5.36) again. As we have seen, this curve is given by as follows:

$$TE_TJJ_13 = \{(0, 1), (0, 12), (1, 2), (1, 11), (2, 6), (2, 7), (3, 0), (5, 5), (5, 8), (6, 4), (6, 9), (7, 4), (7, 9), (8, 5), (8, 8), (10, 0), (11, 6), (11, 7), (12, 2), (12, 11)\} \quad (5.39)$$

To get an understanding of the Twisted Edwards addition law, let's first add the neutral element $(0, 1)$ to itself. We apply the group law from (5.38) and get the following:

$$\begin{aligned} (0, 1) \oplus (0, 1) &= \left(\frac{0 \cdot 1 + 1 \cdot 0}{1 + 8 \cdot 0 \cdot 0 \cdot 1 \cdot 1}, \frac{1 \cdot 1 - 3 \cdot 0 \cdot 0}{1 - 8 \cdot 0 \cdot 0 \cdot 1 \cdot 1} \right) \\ &= (0, 1) \end{aligned}$$

3018 So, as expected, the neutral element added to itself results in the neutral element.

Now let's add the neutral element to some other curve point. We get the following:

$$\begin{aligned} (0, 1) \oplus (8, 5) &= \left(\frac{0 \cdot 5 + 1 \cdot 8}{1 + 8 \cdot 0 \cdot 8 \cdot 1 \cdot 5}, \frac{1 \cdot 5 - 3 \cdot 0 \cdot 8}{1 - 8 \cdot 0 \cdot 8 \cdot 1 \cdot 5} \right) \\ &= (8, 5) \end{aligned}$$

3019 Again, as expected, adding the neutral element to any element will result in that element.

Given any curve point (x, y) , we know that its inverse is given by $(-x, y)$. To see how adding a point to its inverse works, we compute as follows:

$$\begin{aligned}
 (5, 5) \oplus (8, 5) &= \left(\frac{5 \cdot 5 + 5 \cdot 8}{1 + 8 \cdot 5 \cdot 8 \cdot 5 \cdot 5}, \frac{5 \cdot 5 - 3 \cdot 5 \cdot 8}{1 - 8 \cdot 5 \cdot 8 \cdot 5 \cdot 5} \right) \\
 &= \left(\frac{12 + 1}{1 + 5}, \frac{12 - 3}{1 - 5} \right) \\
 &= \left(\frac{0}{6}, \frac{12 + 10}{1 + 8} \right) \\
 &= \left(0, \frac{9}{9} \right) \\
 &= (0, 1)
 \end{aligned}$$

Adding a curve point to its inverse gives the neutral element, as expected.

As we have seen from these examples, the Twisted Edwards addition law handles edge cases particularly well and in a unified way.

Exercise 73. Consider the commutative group (TE_TJJ_13, \oplus) from example 82.

1. Compute the inverse of $(1, 11)$, $(0, 1)$, $(3, 0)$ and $(5, 8)$.

2. Solve the equation $x \oplus (5, 8) = (1, 11)$ for some $x \in TE_TJJ_13$.

Choose some element $x \in TE_TJJ_13$, and test if x is a generator of TE_TJJ_13 . If x is not a generator, repeat until you find some generator x . Write TE_TJJ_13 in logarithmic order with respect to x .

5.4 Elliptic Curve Pairings

As introduced in (4.9), some groups come with the notion of a pairing map. In this section, we discuss **pairings on elliptic curves**, which form the basis of several zk-SNARKs and other zero-knowledge proof schemes, essentially because they allow computations “in the exponent” (see example 36) to be split into different parts computable by different parties.

We start out by defining some important subgroups of the so-called full torsion group of an elliptic curve. We then introduce the Weil pairing of an elliptic curve, and describe Miller’s algorithm, which makes these pairings efficiently computable.

5.4.1 Embedding Degrees

As we will see in what follows, every elliptic curve gives rise to a pairing map. However, we will also see in example 85 that not every such pairing can be efficiently computed. In order to distinguish curves with efficiently computable pairings from the rest, we need to start with an introduction to the so-called **embedding degree** of a curve.

To see what the embedding degree of an elliptic curve is, let \mathbb{F} be a finite field of order $|\mathbb{F}| = q$, $E(\mathbb{F})$ an elliptic curve over \mathbb{F} , and let r be a prime factor of the order n of $E(\mathbb{F})$. The embedding degree of $E(\mathbb{F})$ with respect to r is the smallest integer k such that the following equation holds:

$$r \mid q^k - 1 \tag{5.40}$$

3046 Fermat's little theorem (3.16) implies that there always exists an embedding degree $k(r)$ for
 3047 every elliptic curve and that any factor r of the curve's order n , since $k = r - 1$ is always a
 3048 solution to the congruency $q^k \equiv 1 \pmod{r}$. This implies that the remainder of the integer
 3049 division of $q^{r-1} - 1$ by r is 0.

3050 *Notation and Symbols* 14. Let \mathbb{F} be a finite field of order q , and be $E(\mathbb{F})$ an elliptic curve over
 3051 \mathbb{F} such that r is a prime factor of the order of $E(\mathbb{F})$. We write $k(r)$ for the embedding degree of
 3052 $E(\mathbb{F})$ with respect to r .

3053 *Example 83.* To get a better intuition of the embedding degree, let's consider the elliptic curve
 3054 $E_{1,1}(\mathbb{F}_5)$ from example 68. We know that the order of $E_{1,1}(\mathbb{F}_5)$ is 9, and, since the only prime
 3055 factor of 9 is 3, we compute the embedding degree of $E_{1,1}(\mathbb{F}_5)$ with respect to 3.

3056 To find the embedding degree, we have to find the smallest integer k such that 3 divides
 3057 $q^k - 1 = 5^k - 1$. We try and increment until we find a proper k .

$$\begin{array}{ll} k = 1 : 5^1 - 1 = 4 & \text{not divisible by 3} \\ k = 2 : 5^2 - 1 = 24 & \text{divisible by 3} \end{array}$$

3058 This shows that the embedding degree of the elliptic curve $E_{1,1}(\mathbb{F}_5)$ relative to the the prime
 3059 factor 3 of the order of $E_{1,1}(\mathbb{F}_5)$ is 2.

3060 *Example 84.* Let us consider the Tiny-jubjub curve TJJ_13 from example 69. We know that the
 3061 order of TJJ_13 is 20, and that the order therefore has two prime factors, a large prime factor 5
 3062 and a small prime factor 2.

We start by computing the embedding degree of TJJ_13 with respect to the large prime
 factor 5. To find this embedding degree, we have to find the smallest integer k such that 5
 divides $q^k - 1 = 13^k - 1$. We try and increment until we find a proper k .

$$\begin{array}{ll} k = 1: 13^1 - 1 = 12 & \text{not divisible by 5} \\ k = 2: 13^2 - 1 = 168 & \text{not divisible by 5} \\ k = 3: 13^3 - 1 = 2196 & \text{not divisible by 5} \\ k = 4: 13^4 - 1 = 28560 & \text{divisible by 5} \end{array}$$

3063 Now we know that the embedding degree of TJJ_13 relative to the the prime factor 5 is $k(5) = 4$.

3064 In real-world applications, like in the case of pairing-friendly elliptic curves such as BLS_12-
 3065 381, usually only the embedding degree of the large prime factor is relevant. In the case of our
 3066 Tiny-jubjub curve, this is represented by 5. It should be noted, however, that every prime factor
 3067 of a curve's order has its own embedding degree despite the fact that this is mostly irrelevant in
 3068 applications.

To find the embedding degree of the small prime factor 2, we have to find the smallest
 integer k such that 2 divides $q^k - 1 = 13^k - 1$. We try and increment until we find a proper k .

$$k = 1: 13^1 - 1 = 12 \quad \text{divisible by 2}$$

3069 Now we know that the embedding degree of TJJ_13 relative to the the prime factor 2 is 1.
 3070 As we have seen, different prime factors can have different embedding degrees in general.

3071 We check our computations with Sage:

3072 `sage: p = ZZ(13)` 360
 3073 `sage: # large prime factor` 361

 add refer-
ence

```

3074 sage: r = ZZ(5) 362
3075 sage: k = ZZ(1) 363
3076 sage: while k < r: # Fermat's little theorem 364
3077     ....:     if (p^k-1)%r == 0: 365
3078     ....:         break 366
3079     ....:     k=k+1 367
3080 sage: k 368
3081 4 369
3082 sage: # small prime factor 370
3083 sage: r = ZZ(2) 371
3084 sage: k = ZZ(1) 372
3085 sage: while k < r: # Fermat's little theorem 373
3086     ....:     if (p^k-1)%r == 0: 374
3087     ....:         break 375
3088     ....:     k=k+1 376
3089 sage: k 377
3090 1 378

```

3091 *Example 85.* To give an example of a cryptographically secure real-world elliptic curve that
 3092 does not have a small embedding degree, let's look at curve secp256k1 again. We know from
 3093 example 70 that the order of this curve is a prime number, which means that we only have a
 3094 single embedding degree.

3095 To test potential embedding degrees k , say, in the range $1 \leq k < 1000$, we can use Sage and
 3096 compute as follows:

```

3097 sage: p = ZZ(1157920892373161954235709850086879078532699846656 379
3098         40564039457584007908834671663)
3099 sage: r = ZZ(1157920892373161954235709850086879078528375642790 380
3100         74904382605163141518161494337)
3101 sage: k = ZZ(1) 381
3102 sage: while k < 1000: 382
3103     ....:     if (p^k-1)%r == 0: 383
3104     ....:         break 384
3105     ....:     k=k+1 385
3106 sage: k 386
3107 1000 387

```

3108 We see that secp256k1 has no embedding degree $k < 1000$, which means that secp256k1 is a
 3109 curve that has no small embedding degree. This property will be of importance later on.

add refer-
ence

3110 5.4.1.1 Elliptic Curves over extension fields

3111 Suppose that p is a prime number, and \mathbb{F}_p its associated prime field. We know from equation
 3112 (4.47) that the fields \mathbb{F}_{p^m} are extensions of \mathbb{F}_p in the sense that \mathbb{F}_p is a subfield of \mathbb{F}_{p^m} . This
 3113 implies that we can extend the affine plane that an elliptic curve is defined on by changing
 3114 the base field to any extension field. To be more precise, let $E(\mathbb{F}) = \{(x, y) \in \mathbb{F} \times \mathbb{F} \mid y^2 =$
 3115 $x^3 + a \cdot x + b\}$ be an affine Short Weierstrass curve, with parameters a and b taken from \mathbb{F} . If \mathbb{F}'
 3116 is an extension field of \mathbb{F} , then we extend the domain of the curve by defining $E(\mathbb{F}')$ as follows:
 3117

TODO:Rewri
intro
together
with Sven

$$E(\mathbb{F}') = \{(x, y) \in \mathbb{F}' \times \mathbb{F}' \mid y^2 = x^3 + a \cdot x + b\} \quad (5.41)$$

While we did not change the defining parameters, we consider curve points from the affine plane over the extension field now. Since $\mathbb{F} \subset \mathbb{F}'$, it can be shown that the original elliptic curve $E(\mathbb{F})$ is a sub-curve of the extension curve $E(\mathbb{F}')$.

Example 86. Consider the prime field \mathbb{F}_5 from example 62 together with the elliptic curve $E_{1,1}(\mathbb{F}_5)$ and its definition from example 68 and the construction the extension field \mathbb{F}_{5^2} relative to the polynomial $t^2 + 2 \in \mathbb{F}_5[t]$ from exercise 55. In this example we extend the definition of $E_{1,1}(\mathbb{F}_5)$ to an elliptic curve over \mathbb{F}_{5^2} and compute its set of points:

$$E_1(\mathbb{F}_{5^2}) = \{(x, y) \in \mathbb{F}_{5^2} \times \mathbb{F}_{5^2} \mid y^2 = x^3 + x + 1\}$$

Since \mathbb{F}_{5^2} contains 25 points, in order to compute the set $E_1(\mathbb{F}_{5^2})$, we have to try $25 \cdot 25 = 625$ pairs, which is probably a bit tedious. Instead, we use Sage to compute the curve for us. To do, we choose the representation of \mathbb{F}_{5^2} from 55. We get:

```

3124 sage: F5= GF(5)                                     388
3125 sage: F5t.<t> = F5[]                                 389
3126 sage: P_MOD_2 = F5t(t^2+2)                          390
3127 sage: P_MOD_2.is_irreducible()                      391
3128 True                                                392
3129 sage: F5_2.<t> = GF(5^2, name='t', modulus=P_MOD_2)  393
3130 sage: E1F5_2 = EllipticCurve(F5_2, [1, 1])          394
3131 sage: E1F5_2.order()                                395
3132 27                                                  396

```

The curve $E_1(\mathbb{F}_{5^2})$ consist of 27 points, in contrast to curve $E_1(\mathbb{F}_5)$, which consists of 9 points. Writing those points down gives the following:

$$\begin{aligned}
E_1(\mathbb{F}_{5^2}) = \{ & \mathcal{O}, (0, 4), (0, 1), (3, 4), (3, 1), (4, 3), (4, 2), (2, 4), (2, 1), \\
& (4t + 3, 3t + 4), (4t + 3, 2t + 1), (3t + 2, t), (3t + 2, 4t), \\
& (2t + 2, t), (2t + 2, 4t), (2t + 1, 4t + 4), (2t + 1, t + 1), \\
& (2t + 3, 3), (2t + 3, 2), (t + 3, 2t + 4), (t + 3, 3t + 1), \\
& (3t + 1, t + 4), (3t + 1, 4t + 1), (3t + 3, 3), (3t + 3, 2), (1, 4t), (1, t) \}
\end{aligned}$$

As we can see, the set of points from the elliptic curve $E_{1,1}(\mathbb{F}_5)$ is a subset of the sets of points from the elliptic curve $E(\mathbb{F}_{5^2})$. This was expected since the prime field \mathbb{F}_5 is a subfield of the finite field \mathbb{F}_{5^2} .

Exercise 74. Consider the Short Weierstrass elliptic curve $E(\mathbb{F}_{5^2})$ from example 86, compute the expression $(4t + 3, 2t + 1) \oplus (3t + 3, 2)$ using pen and paper and double-check the computation using sage. Then solve the equation $x \oplus (3t + 3, 3) = (3, 4)$ for some $x \in E(\mathbb{F}_{5^2})$. After that compute the scalar multiplication $[5](2t + 1, 4t + 4)$ using the double-and-add algorithm from exercise 37.

Exercise 75. Consider the Tiny-jubjub curve from example 69. Show that the polynomial $t^4 + 2 \in \mathbb{F}_{13}[t]$ is irreducible. Then write a sage program to implement the finite field extension \mathbb{F}_{13^4} , implement the curve extension $TJJ_{13}(\mathbb{F}_{13^4})$ and compute the number of curve points.

5.4.2 Full torsion groups

As we will see in what follows, cryptographically interesting pairings are defined on so-called torsion subgroups of elliptic curves. To define **torsion groups** of an elliptic curve, let \mathbb{F} be a

finite field, $E(\mathbb{F})$ an elliptic curve of order n and r a factor of n . Then the r -torsion group of the elliptic curve $E(\mathbb{F})$ is defined as the set

$$E(\mathbb{F})[r] := \{P \in E(\mathbb{F}) \mid [r]P = \mathcal{O}\} \quad (5.42)$$

The fundamental theorem of finite cyclic groups 4.1.4.1 states that every factor r of a cyclic group's order uniquely defines a subgroup of the size of that factor and those subgroup are important examples of r -torsion groups. We have seen examples of those subgroups in 76 and 77.

When we consider elliptic curve extensions as defined in 5.41, we could ask what happens to the r -torsion groups in the extension. One might intuitively think that their extension just parallels the extension of the curve. For example, when $E(\mathbb{F}_p)$ is a curve over prime field \mathbb{F}_p , with some r -torsion group $E(\mathbb{F}_p)[r]$ and when we extend the curve to $E(\mathbb{F}_{p^m})$, then there might be a bigger r -torsion group $E(\mathbb{F}_{p^m})[r]$ such that $E(\mathbb{F}_p)[r]$ is a subgroup of $E(\mathbb{F}_{p^m})[r]$. This might make intuitive sense, as $E(\mathbb{F}_p)$ is a subset of $E(\mathbb{F}_{p^m})$.

However, the actual situation is a bit more surprising than that. To see that, let \mathbb{F}_p be a prime field and let $E(\mathbb{F}_p)$ be an elliptic curve of order n , such that r is a factor of n , with embedding degree $k(r)$ and r -torsion group $E(\mathbb{F}_p)[r]$. Then the r -torsion group $E(\mathbb{F}_{p^m})[r]$ of a curve extension is equal to $E(\mathbb{F}_p)[r]$, only as long as the power m is less than the embedding degree $k(r)$ of $E(\mathbb{F}_p)$.

For the prime power $p^{k(r)}$, the r -torsion group $E(\mathbb{F}_{p^{k(r)}})[r]$ might then be larger than $E(\mathbb{F}_p)[r]$ and it contains $E(\mathbb{F}_p)[r]$ as a subgroup. We call it the **full r -torsion group** of that elliptic curve and write it as follows

$$E[r] := E(\mathbb{F}_{p^{k(r)}})[r] \quad (5.43)$$

The r -torsion groups $E(\mathbb{F}_{p^m})[r]$ of any curve extensions for $m > k(r)$ are all equal to $E[r]$. In this sense $E[r]$ is already the largest r -torsion group, which justifies the name. The full r -torsion group contains r^2 many elements and consists of $r + 1$ subgroups, one of which is $E(\mathbb{F}_p)[r]$. The following diagram summarizes the situation:

$$\begin{array}{ccccccccccc} E(\mathbb{F}_p) & \subset & \cdots & \subset & E(\mathbb{F}_{p^{k(r)-1}}) & \subset & E(\mathbb{F}_{p^{k(r)}})[r] & \subset & E(\mathbb{F}_{p^{k(r)+1}})[r] & \subset & \cdots \\ E(\mathbb{F}_p)[r] & = & \cdots & = & E(\mathbb{F}_{p^{k(r)-1}})[r] & \subset & E(\mathbb{F}_{p^{k(r)}})[r] & = & E(\mathbb{F}_{p^{k(r)+1}})[r] & = & \cdots \end{array} \quad (5.44)$$

So, when we consider nested elliptic curve extensions as in 5.44, ordered by the prime power m , then the r -torsion group stays constant for every level m that is smaller than the embedding degree $k(r)$, while it suddenly blossoms into a larger group on level $k(r)$ with $r + 1$ subgroups, and then all r -torsion groups on higher levels $m \geq k(r)$ stay the same. In other words, once the extension field is big enough to find one more curve point P with $[r]P = \mathcal{O}$ that is not an element of the curve over the base field, then we actually find all of the points in the full torsion group.

Example 87. Consider curve $E_{1,1}(\mathbb{F}_5)$ again. We know from 76 that it contains a 3-torsion group and that the embedding degree of 3 is $k(3) = 2$. From this we can deduce that we can find the full 3-torsion group $E_1[3]$ in the curve extension $E_1(\mathbb{F}_{5^2})$, the latter of which we computed in example 86.

Since that curve is small, in order to find the full 3-torsion, we can loop through all elements of $E_1(\mathbb{F}_{5^2})$ and check the defining equation $[3]P = \mathcal{O}$. Invoking Sage and using our implementation of $E_1(\mathbb{F}_{5^2})$ in sage from 86, we compute as follows:

```
sage: INF = E1F5_2(0) # Point at infinity
sage: L_E1_3 = []
```



```

3186 sage: for p in E1F5_2: 399
3187     ....:     if 3*p == INF: 400
3188     ....:         L_E1_3.append(p) 401
3189 sage: E1_3 = Set(L_E1_3) # Full 3-torsion set 402

```

$$E_1[3] = \{\mathcal{O}, (2, 1), (2, 4), (1, t), (1, 4t), (2t+1, t+1), (2t+1, 4t+4), (3t+1, t+4), (3t+1, 4t+1)\}$$

3190 As we can see the group $E_1[3]$ contains $9 = 3^2$ many elements and the 3-torsion group $E_{1,1}(\mathbb{F}_5)[3]$
3191 of the curve over the prime field is a subset of the full torsion group.

3192 *Example 88.* Consider the Tiny-jubjub curve from example 69. We know from example 84 that
3193 it contains a 5-torsion group and that the embedding degree of 5 is 4. This implies that we can
3194 find the full 5-torsion group $TJJ_13[5]$ in the curve extension $TJJ_13(\mathbb{F}_{13^4})$.

3195 To compute the full torsion, first observe that, since \mathbb{F}_{13^4} contains 28561 elements, comput-
3196 ing $TJJ_13(\mathbb{F}_{13^4})$ means checking $28561^2 = 815730721$ elements. From each of these curve
3197 points P , we then have to check the equation $[5]P = \mathcal{O}$. Doing this for 815730721 is a bit too
3198 slow even on a computer.

3199 Fortunately, Sage has a function that computes all points P , such that $[m]P = Q$ for given
3200 integer m and curve point Q . Using the curve extension from exercise 75, the following Sage
3201 code provides a way to compute the full torsion group:

```

3202 sage: # define the extension field 403
3203 sage: F13= GF(13) # prime field 404
3204 sage: F13t.<t> = F13[] # polynomials over t 405
3205 sage: P_MOD_4 = F13t(t^4+2) # degree 4 irreducible polynomial 406
3206 sage: P_MOD_4.is_irreducible() 407
3207 True 408
3208 sage: F13_4.<t> = GF(13^4, name='t', modulus=P_MOD_4) 409
3209 sage: TJJF13_4 = EllipticCurve(F13_4, [8,8]) # TJJ extension 410
3210 sage: # compute the full 5-torsion 411
3211 sage: INF = TJJF13_4(0) # point at infinity 412
3212 sage: L_TJJF13_4_5 = INF.division_points(5) # [5]P == INF 413
3213 sage: TJJF13_4_5 = Set(L_TJJF13_4_5) 414
3214 sage: TJJF13_4_5.cardinality() # number of elements 415
3215 25 416

```

3216 As expected, we get a group that contains $5^2 = 25$ elements. To see that the embedding degree 4
3217 is actually the smallest prime power to find the full 5-torsion group, let's compute the 5-torsion
3218 group over of the Tiny-jubjub curve of the extension field \mathbb{F}_{13^3} . We get the following:

```

3219 sage: # define the extension field 417
3220 sage: P_MOD_3 = F13t(t^3+2) # degree 3 irreducible polynomial 418
3221 sage: P_MOD_3.is_irreducible() 419
3222 True 420
3223 sage: F13_3.<t> = GF(13^3, name='t', modulus=P_MOD_3) 421
3224 sage: TJJF13_3 = EllipticCurve(F13_3, [8,8]) # TJJ extension 422
3225 sage: # compute the 5-torsion 423
3226 sage: INF = TJJF13_3(0) 424
3227 sage: L_TJJF13_3_5 = INF.division_points(5) # [5]P == INF 425
3228 sage: TJJF13_3_5 = Set(L_TJJF13_3_5) # 5$-torsion 426
3229 sage: TJJF13_3_5.cardinality() # number of elements 427

```

5

428

As we can see, the 5-torsion group of Tiny-jubjub over \mathbb{F}_{13^3} is equal to the 5-torsion group of Tiny-jubjub over \mathbb{F}_{13} itself.

Example 89. Let's look at the curve `secp256k1`. We know from example 70 that the curve is of some prime order r . Because of this, the only torsion group to consider is the curve itself, so the curve group is the r -torsion.

In order to find the full r -torsion of `secp256k1`, we need to compute the embedding degree k . And as we have seen in 85 it is at least not small. However, we know from Fermat's little theorem 3.16 that a finite embedding degree must exist. It can be shown that it is given by the following 256-bit number:

$$k = 192986815395526992372618308347813175472927379845817397100860523586360249056$$

This means that the embedding degree is very large, which implies that the field extension \mathbb{F}_{p^k} is very large too. To understand how big \mathbb{F}_{p^k} is, recall that an element of \mathbb{F}_{p^m} can be represented as a string $\langle x_0, \dots, x_m \rangle$ of m elements, each containing a number from the prime field \mathbb{F}_p . Now, in the case of `secp256k1`, such a representation has k -many entries, each of them 256 bits in size. So, without any optimizations, representing such an element would need $k \cdot 256$ bits, which is too much to be representable in the observable universe. It follows that it is not only infeasible to compute the full r -torsion group of `secp256k1`, but moreover to even write down single elements of that group in general.

Exercise 76. Consider the full 5-torsion group $TJJ_13[5]$ from example 88. Write down the set of all elements from this group and identify the subset of all elements from $TJJ_13(\mathbb{F}_{13})[5]$ as well as $TJJ_13(\mathbb{F}_{13^2})[5]$. Then compute the 5-torsion group $TJJ_13(\mathbb{F}_{13^8})[5]$.

Exercise 77. Consider the curve `secp256k1` from example 70 and its full r -torsion group as introduced in example 89. Write down a single element from the curves full torsion group that is not the point at infinity.

5.4.3 Pairing groups

As we have stated above, any full r -torsion group contains $r + 1$ cyclic subgroups, two of which are of particular interest in pairing-based elliptic curve cryptography. To characterize these groups, we need to consider the so-called **Frobenius endomorphism** of an elliptic curve $E(\mathbb{F})$ over some finite field \mathbb{F} of characteristic p :

$$\pi : E(\mathbb{F}) \rightarrow E(\mathbb{F}) : \begin{array}{ccc} (x, y) & \mapsto & (x^p, y^p) \\ \mathcal{O} & \mapsto & \mathcal{O} \end{array} \quad (5.45)$$

It can be shown that π maps curve points to curve points. The first thing to note is that, in case \mathbb{F} is a prime field, the Frobenius endomorphism acts as the identity map, since $(x^p, y^p) = (x, y)$ on prime fields due to Fermat's little theorem 3.16. This means that the Frobenius map is more interesting on elliptic curves over prime field extensions.

With the Frobenius map at hand, we can characterize two important subgroups of the full r -torsion group $E[r]$ of an elliptic curve. The first subgroup is the group of elements from the full r -torsion group, on which the Frobenius map acts trivially. Since in pairing-based cryptography, this group is usually written as \mathbb{G}_1 , assuming that the prime factor r in the definition is implicitly given, we define \mathbb{G}_1 as follows:

$$\mathbb{G}_1[r] := \{(x, y) \in E[r] \mid \pi(x, y) = (x, y)\} \quad (5.46)$$

It can be shown that \mathbb{G}_1 is precisely the r -torsion group $E(\mathbb{F}_p)[r]$ of the unextended elliptic curve defined over the prime field. There is another subgroup of the full r -torsion group that can be characterized by the Frobenius map and in the context of pairing-based cryptography, this subgroup is often called \mathbb{G}_2 . This group is defined as follows:

$$\mathbb{G}_2[r] := \{(x, y) \in E[r] \mid \pi(x, y) = [p](x, y)\} \quad (5.47)$$

Notation and Symbols 15. If $E(\mathbb{F})$ is an elliptic curve and r is the largest prime factor of the curves order, we call $\mathbb{G}_1[r]$ and $\mathbb{G}_2[r]$ **pairing groups**. If the prime factor r is clear from the context, we sometimes simply write \mathbb{G}_1 and \mathbb{G}_2 to mean $\mathbb{G}_1[r]$ and $\mathbb{G}_2[r]$, respectively.

It should be noted that other definitions of \mathbb{G}_2 exists in the literature, too. However, in the context of pairing-based cryptography, this is a common choice as it is particularly useful because we can define efficient hash functions that map into \mathbb{G}_2 , which is not possible for all subgroups of the full r -torsion.

Example 90. Consider the curve $E_{1,1}(\mathbb{F}_5)$ from example 68 again. As we have seen, this curve has the embedding degree $k = 2$, and a full 3-torsion group is given as follows:

$$E_1[3] = \{\mathcal{O}, (2, 1), (2, 4), (1, t), (1, 4t), (2t + 1, t + 1), (2t + 1, 4t + 4), (3t + 1, t + 4), (3t + 1, 4t + 1)\} \quad (5.48)$$

According to the general theory, $E_1[3]$ contains 4 subgroups, and we can characterize the subgroups \mathbb{G}_1 and \mathbb{G}_2 using the Frobenius endomorphism. Unfortunately, at the time of writing, Sage does not have a predefined Frobenius endomorphism for elliptic curves, so we have to use the Frobenius endomorphism of the underlying field as a temporary workaround. Using our implementation of $E_1[3]$ in sage from example 87, we compute \mathbb{G}_1 as follows:

```

3280 sage: L_G1 = []
3281 sage: for P in E1_3:
3282     ....:     PiP = E1F5_2([a.frobenius() for a in P]) # pi(P)
3283     ....:     if P == PiP:
3284     ....:         L_G1.append(P)
3285 sage: G1 = Set(L_G1)
```

As expected, the group $\mathbb{G}_1 = \{\mathcal{O}, (2, 4), (2, 1)\}$ is identical to the 3-torsion group of the (unextended) curve over the prime field $E_{1,1}(\mathbb{F}_5)$.

In order to compute the group \mathbb{G}_2 for the curve $E_{1,1}(\mathbb{F}_5)$, we can use almost the same algorithm as we used for the computation of \mathbb{G}_1 . Since $p = 5$ we get the following:

```

3290 sage: L_G2 = []
3291 sage: for P in E1_3:
3292     ....:     PiP = E1F5_2([a.frobenius() for a in P]) # pi(P)
3293     ....:     pP = 5*P # [5]P
3294     ....:     if pP == PiP:
3295     ....:         L_G2.append(P)
3296 sage: G2 = Set(L_G2)
```

Thus, we have computed the pairing group \mathbb{G}_2 of the full 3-torsion group of curve $E_{1,1}(\mathbb{F}_5)$ as the set $\mathbb{G}_2 = \{\mathcal{O}, (1, t), (1, 4t)\}$.

Example 91. Consider the Tiny-jubjub curve TJJ_{13} from example 69. In example 88 we computed its full 5 torsion, which is a group that has 6 subgroups. We compute \mathbb{G}_1 using Sage as follows:

```

3302 sage: L_TJJ_G1 = []
3303 sage: for P in TJJF13_4_5:
3304     ....:     PiP = TJJF13_4([a.frobenius() for a in P]) # pi(P)
3305     ....:     if P == PiP:
3306     ....:         L_TJJ_G1.append(P)
3307 sage: TJJ_G1 = Set(L_TJJ_G1)

```

3308 We get $\mathbb{G}_1 = \{\mathcal{O}, (7, 2), (8, 8), (8, 5), (7, 11)\}$ and as expected, \mathbb{G}_1 is identical to the 5-torsion group of the (unextended) curve over the prime field TJJ_3 as computed in example 5.18.

3310 In order to compute the group \mathbb{G}_2 for the tiny jubjub curve, we can use almost the same algorithm as we used for the computation of \mathbb{G}_1 . Since $p = 13$ we get the following:

```

3312 sage: L_TJJ_G2 = []
3313 sage: for P in TJJF13_4_5:
3314     ....:     PiP = TJJF13_4([a.frobenius() for a in P]) # pi(P)
3315     ....:     pP = 13*P # [13]P
3316     ....:     if pP == PiP: # pi(P) == [13]P
3317     ....:         L_TJJ_G2.append(P)
3318 sage: TJJ_G2 = Set(L_TJJ_G2)

```

3319 $\mathbb{G}_2 = \{\mathcal{O}, (9t^2 + 7, t^3 + 11t), (9t^2 + 7, 12t^3 + 2t), (4t^2 + 7, 5t^3 + 10t), (4t^2 + 7, 8t^3 + 3t)\}$

3320 *Example 92.* Consider Bitcoin's curve `secp256k1` again. Since the group \mathbb{G}_1 is identical to the torsion group of the unextended curve, and since `secp256k1` has prime order, we know that, in this case, \mathbb{G}_1 is identical to `secp256k1` itself. However it is infeasible to compute elements from \mathbb{G}_2 , since according to example 89 we can not store average curve points from the extension curve $\text{secp256k1}(\mathbb{F}_{p^k})$ on any computer, let alone compute their images under the Frobenius map.

3326 *Exercise 78.* Consider the small prime factor 2 of the Tiny-jubjub curve. Compute the full 2-torsion group of TJJ_{13} and then compute the groups $\mathbb{G}_1[2]$ and $\mathbb{G}_2[2]$.

3328 5.4.4 The Weil pairing

3329 Recall the definition of a non-degenerate group pairing from 4.9. In this part, we consider a pairing function defined on the subgroups $\mathbb{G}_1[r]$ and $\mathbb{G}_2[r]$ of the full r -torsion $E[r]$ of a Short Weierstrass elliptic curve. To be more precise, let $E(\mathbb{F}_p)$ be an elliptic curve of embedding degree k such that r is a prime factor of its order. Then the **Weil pairing** is defined as the following bilinear, non-degenerate map:

$$e(\cdot, \cdot) : \mathbb{G}_1[r] \times \mathbb{G}_2[r] \rightarrow \mathbb{F}_{p^k}^* ; (P, Q) \mapsto (-1)^r \cdot \frac{f_{r,P}(Q)}{f_{r,Q}(P)} \quad (5.49)$$

3334 The extension field elements $f_{r,P}(Q), f_{r,Q}(P) \in \mathbb{F}_{p^k}$ in the definition of the Weil pairing are computed by **Miller's algorithm**:

3335 Understanding the details of how and why this algorithm works requires the concept of **divisors**, which is outside of the scope this book. The interested reader might look at XXX. As we can see the algorithm is more efficient on prime numbers r , that have a low Hamming weight 3.4.

3340 We call an elliptic curve $E(\mathbb{F}_p)$ **pairing-friendly** if there is a prime factor of the groups order such that the Weil pairing is efficiently computable with respect to that prime factor. In

check
floating of
algorithm

add refer-
ences

Algorithm 8 Miller's algorithm for Short Weierstrass curves $y^2 = x^3 + ax + b$

Require: $r > 3$, $P \in E[r]$, $Q \in E[r]$ and

$b_0, \dots, b_t \in \{0, 1\}$ with $r = b_0 \cdot 2^0 + b_1 \cdot 2^1 + \dots + b_t \cdot 2^t$ and $b_t = 1$

procedure MILLER'S ALGORITHM(P, Q)

if $P = \mathcal{O}$ or $Q = \mathcal{O}$ or $P = Q$ **then**

return $f_{r,P}(Q) \leftarrow (-1)^r$

end if

$(x_T, y_T) \leftarrow (x_P, y_P)$

$f_1 \leftarrow 1$

$f_2 \leftarrow 1$

for $j \leftarrow t - 1, \dots, 0$ **do**

$m \leftarrow \frac{3 \cdot x_T^2 + a}{2 \cdot y_T}$

$f_1 \leftarrow f_1^2 \cdot (y_Q - y_T - m \cdot (x_Q - x_T))$

$f_2 \leftarrow f_2^2 \cdot (x_Q + 2x_T - m^2)$

$x_{2T} \leftarrow m^2 - 2x_T$

$y_{2T} \leftarrow -y_T - m \cdot (x_{2T} - x_T)$

$(x_T, y_T) \leftarrow (x_{2T}, y_{2T})$

if $b_j = 1$ **then**

$m \leftarrow \frac{y_T - y_P}{x_T - x_P}$

$f_1 \leftarrow f_1 \cdot (y_Q - y_T - m \cdot (x_Q - x_T))$

$f_2 \leftarrow f_2 \cdot (x_Q + (x_P + x_T) - m^2)$

$x_{T+P} \leftarrow m^2 - x_T - x_P$

$y_{T+P} \leftarrow -y_T - m \cdot (x_{T+P} - x_T)$

$(x_T, y_T) \leftarrow (x_{T+P}, y_{T+P})$

end if

end for

$f_1 \leftarrow f_1 \cdot (x_Q - x_T)$

return $f_{r,P}(Q) \leftarrow \frac{f_1}{f_2}$

end procedure

3342 real-world applications of pairing-friendly elliptic curves, the embedding degree is usually a
 3343 small number like 2, 4, 6 or 12, and the number r is the largest prime factor of the curve's order.

3344 *Example 93.* Consider curve $E_{1,1}(\mathbb{F}_5)$ from example 68. Since the only prime factor of the
 3345 group's order is 3, we cannot compute the Weil pairing on this group using our definition of
 3346 Miller's algorithm. In fact, since \mathbb{G}_1 is of order 3, executing the algorithm will lead to a "division
 3347 by zero".

Example 94. Consider the Tiny-jubjub curve $TJJ_{13}(\mathbb{F}_{13})$ from example 69 and its associated
 pairing groups from example 91:

$$\mathbb{G}_1[5] = \{\mathcal{O}, (7, 2), (8, 8), (8, 5), (7, 11)\}$$

$$\mathbb{G}_2[5] = \{\mathcal{O}, (9t^2 + 7, t^3 + 11t), (9t^2 + 7, 12t^3 + 2t), (4t^2 + 7, 5t^3 + 10t), (4t^2 + 7, 8t^3 + 3t)\}$$

Since we know from example 84 that the embedding degree of 5 is 4, we can instantiate the
 general definition of the Weil pairing for this example as follows:

$$e(\cdot, \cdot) : \mathbb{G}_1[5] \times \mathbb{G}_2[5] \rightarrow \mathbb{F}_{13^4}$$

3348 The first if-statement in Miller's algorithm, implies that $e(\mathcal{O}, Q) = 1$ as well as $e(P, \mathcal{O}) = 1$
 3349 for all arguments $P \in \mathbb{G}_1[5]$ and $Q \in \mathbb{G}_2[5]$. In order to compute a non-trivial Weil pairing, we
 3350 choose the argument $P = (7, 2) \in \mathbb{G}_1$ and $Q = (9t^2 + 7, 12t^3 + 2t) \in \mathbb{G}_2$. Invoking sage we get
 3351 the following computation of the Weil pairing:

```

3352 sage: F13 = GF(13)                                455
3353 sage: F13t.<t> = F13[]                               456
3354 sage: P_MOD_4 = F13t(t^4+2)                         457
3355 sage: F13_4.<t> = GF(13^4, name='t', modulus=P_MOD_4) 458
3356 sage: TJJF13_4 = EllipticCurve(F13_4, [8, 8])        459
3357 sage: P=TJJF13_4([7, 2])                             460
3358 sage: Q=TJJF13_4([9*t^2+7, 12*t^3+2*t])              461
3359 sage: P.weil_pairing(Q, 5)                            462
3360 7*t^3 + 7*t^2 + 6*t + 3                             463

```

3361 *Example 95.* Consider Bitcoin's curve secp256k1 again. As we have seen in example 92, it is
 3362 infeasible to compute elements from the pairing group \mathbb{G}_2 and as we know from example 89
 3363 it is moreover infeasible to do calculations in the extension field \mathbb{F}_{p^k} . It follows that the Weil
 3364 pairing is not efficiently computable and that secp256k1 is not pairing friendly.

3365 5.5 Hashing to Curves

3366 Elliptic curve cryptography frequently requires the ability to hash data onto elliptic curves. If
 3367 the order of the curve is not a prime number, hashing to prime order subgroups is of importance,
 3368 too and in the context of pairing-friendly curves, it is sometimes necessary to hash specifically
 3369 onto the pairing group \mathbb{G}_1 or \mathbb{G}_2 as introduced in 5.4.3.

3370 As we have seen in section 4.1.7, some general methods are known for hashing into fi-
 3371 nite cyclic groups and since elliptic curves over finite fields are finite and cyclic groups, those
 3372 methods can be utilized in this case, too. However, in what follows we want to describe some
 3373 methods specific to elliptic curves that are frequently used in real-world applications.

5.5.1 Try-and-increment hash functions

One of the most straight-forward ways of hashing onto an elliptic curve point in a secure way is to use a cryptographic hash function together with one of the hashing into modular arithmetics methods as described in section 4.2.1.

Both constructions can be combined in such a way that the image provides an element of the base field of the elliptic curve together with a single auxiliary bit. The base field element can then be interpreted as the x -coordinate of a potential curve point, and the auxiliary bit can be used to determine one of the two possible y coordinates of that curve point as explained in 5.1.1.2.

Such an approach would be deterministic and easy to implement, and it would conserve the cryptographic properties of the original hash function. However, not all x coordinates generated in such a way will result in quadratic residues when inserted into the defining equation. It follows that not all field elements give rise to actual curve points.

In fact, on a prime field, only half of the field elements are quadratic residues. Hence, assuming an even distribution of the hash values in the field, this method would fail to generate a curve point in about half of the attempts.

One way to account for this problem is the following so-called **try-and-increment** method. Instead of simply hashing a binary string s to the field, this method use a try-and-increment hash to the base field as described in 4.2.1.1 in combination with a single auxiliary bit derived from the underlying cryptographic hash function.

If any try of hashing to the field does not result in a field element or a valid curve point, the counter is incremented, and the hashing is repeated. This is done until a valid curve point is found.

Algorithm 9 Hash-to- $E(\mathbb{F}_p)$

Require: $p \in \mathbb{Z}$ with $|p| = k$ and $s \in \{0, 1\}^*$

Require: Curve equation $y^2 = x^3 + ax + b$ over \mathbb{F}_p

procedure TRY-AND-INCREMENT(r, k, s)

$c \leftarrow 0$

 ▷ Try-and-Increment counter

repeat

$s' \leftarrow s || \text{Bits}(c)$

$x \leftarrow H(s')_0 \cdot 2^0 + H(s')_1 \cdot 2^1 + \dots + H(s')_k \cdot 2^k$

 ▷ potential x

$y^2 \leftarrow x^3 + a \cdot x + b$

 ▷ potential y^2

$c \leftarrow c + 1$

until $x < p$ and $(y^2)^{\frac{p-1}{2}} \bmod p = 1$

 ▷ Check x in field and y^2 has root

if $H(s')_{k+1} == 0$ **then**

 ▷ auxiliary bit decides root

$y \leftarrow y' \in \sqrt{y^2}$ with $0 \leq y' \leq (p-1)/2$

else

$y \leftarrow y' \in \sqrt{y^2}$ with $(p-1)/2 < y' < p$

end if

return (x, y)

end procedure

Ensure: $(x, y) \in E(\mathbb{F}_p)$

check if
the algo-
rithm is
floated
properly

The try-and-increment method is relatively easy to implement, and it maintains the cryptographic properties of the original hash function. It should be noted that if the curve is not of prime order, the image of the try-and-increment hash will be a general curve point that might

not be an element from the large prime-order subgroup. To map onto the large prime order subgroup it is therefore necessary to apply the technique of cofactor clearing as explained in 4.7.

Example 96. Consider the Tiny-jubjub curve from example 69. We want to construct a try-and-increment hash function that maps a binary string s of arbitrary length onto the large prime-order subgroup of size 5 from example 5.18.

Since the curve TJJ_{13} is defined over the field \mathbb{F}_{13} , and the binary representation of 13 is $Bits(13) = \langle 1, 1, 0, 1 \rangle$, one way to implement a try-and-increment function is to apply SHA256 from Sage's hashlib library on the concatenation $s||c$ for some binary counter string c , and use the first 4 bits of the image to try to hash into \mathbb{F}_{13} . In case we are able to hash to a value x such that $x^3 + 8 \cdot x + 8$ is a quadratic residue in \mathbb{F}_{13} , we use the fifth bit to decide which of the two possible roots of $x^3 + 8 \cdot x + 8$ we will choose as the y coordinate. The result is a curve point different from the point at infinity. To project it onto the large prime order subgroup $TJJ_{13}[5]$, we multiply it with the cofactor 4. If the result is not the point at infinity, it is the result of the hash.

To make this concrete, let $s = \langle 1, 1, 1, 0, 0, 1, 0, 0, 0, 0 \rangle$ be our binary string that we want to hash onto $TJJ_{13}[5]$. We use a binary counter string starting at zero, that is, we choose $c = \langle 0 \rangle$. Invoking Sage, we define the try-hash function as follows:

```

3418 sage: import hashlib                                     464
3419 sage: def try_hash(s,c):                                  465
3420 .....:     s_1 = s+c # string concatenation              466
3421 .....:     hasher = hashlib.sha256(s_1.encode('utf-8')) # 467
3422     compute SHA256
3423 .....:     digest = hasher.hexdigest()                   468
3424 .....:     z = ZZ(digest, 16) # cast into integer         469
3425 .....:     z_bin = z.digits(base=2, padto=256) # cast to 256 470
3426     bits
3427 .....:     x = z_bin[0]*2^0 + z_bin[1]*2^1 + z_bin[2]*2^2+z_bin 471
3428     [3]*2^3
3429 .....:     return (x,z_bin[4])                             472
3430 sage: try_hash('1110010000', '0')                       473
3431 (15, 1)                                                    474

```

As we can see, our first attempt to hash into \mathbb{F}_{13} was not successful, as 15 is not an element in \mathbb{F}_{13} , so we increment the binary counter by 1 and try again:

```

3434 sage: try_hash('1110010000', '1')                       475
3435 (3, 1)                                                    476

```

With this try, we found a hash into \mathbb{F}_{13} . However, this point is not guaranteed to define a curve point. To see that, we insert $x = 3$ into the right side of the Short Weierstrass equation of the Tiny-jubjub curve, and compute $3^3 + 8 \cdot 3 + 8 = 7$. However, 7 is not a quadratic residue in \mathbb{F}_{13} , since $7^{\frac{13-1}{2}} = 7^6 = 12 = -1$. This means that the field element 7 is not suitable as the x -coordinate of any curve point. We therefore have to increment the counter another time:

```

3441 sage: try_hash('1110010000', '10')                      477
3442 (12, 1)                                                    478

```

Since $12^3 + 8 \cdot 12 + 8 = 12$, and we have $\sqrt{12} = \{5, 8\}$, we finally found the valid x -coordinate

$x = 12$ for a curve point hash. Now, since the auxiliary bit of this hash is 1, we choose the larger root $y = 8$ as the y coordinate and get the following hash which is a valid curve point on the Tiny-jubjub curve:

$$H_{TJJ_13}(< 1, 1, 1, 0, 0, 0, 0, 0 >) = (12, 8)$$

In order to project this onto the “large” prime-order subgroup, we have to do cofactor clearing, that is, we have to multiply the point with the cofactor 4. Using sage we get

```
sage: P = TJJ_13(12, 8) 479
sage: (4*P).xy() 480
(8, 8) 481
```

This implies that hashing the binary string $< 1, 1, 1, 0, 0, 0, 0, 0 >$ onto the large prime order subgroup $TJJ_13[5]$ gives the hash value $(8, 8)$ as a result.

$$H_{TJJ_13[5]}(< 1, 1, 1, 0, 0, 0, 0, 0 >) = (8, 8)$$

Exercise 79. Use our definition of the `try_hash` algorithm to implement a hash function $H_{TJJ_13[5]} : \{0, 1\}^* \rightarrow TJJ_13(\mathbb{F}_{13})[5]$ that maps binary strings of arbitrary length onto the 5-torsion group of $TJJ_13(\mathbb{F}_{13})$.

Exercise 80. Implement a cryptographic hash function $H_{secp256k1} : \{0, 1\}^* \rightarrow secp256k1$ that maps binary strings of arbitrary length onto the elliptic curve `secp256k1`.

5.6 Constructing elliptic curves

Cryptographically secure elliptic curves like `secp256k1` 70 have been known for quite some time. Given the latest advancements of cryptography, however, it is often necessary to design and instantiate elliptic curves from scratch that satisfy certain very specific properties.

For example, in the context of SNARK development, it became necessary to design elliptic curves that can be efficiently implemented inside of a so-called **circuit** in order to enable primitives like elliptic curve **signature schemes** in a zero-knowledge proof. Such a curve is given by the ~~Baby-jubjub curve in XXX, and we have paralleled its definition by introducing~~ the Tiny-jubjub curve from example 69. As we have seen, those curves are instances of so-called Twisted Edwards curves, and as such have easy to implement addition laws that work without branching. However, we introduced the Tiny-jubjub curve out of thin air, as we just gave the curve parameters without explaining how we came up with them.

Another requirement in the context of many so-called **pairing-based zero-knowledge proofing systems** is the existence of a suitable, pairing-friendly curve with a specified security level and a low embedding degree as defined in 5.40. Famous examples are the `BLS_12` and the `NMT` curves.

The major goal of this section is to explain the most important method of designing elliptic curves with predefined properties from scratch, called the **complex multiplication method**. We will apply this method in section to synthesize a particular `BLS_6` curve, which is one of the most insecure curves, that is particular well suited to serve as the main curve to build our pen-and-paper SNARKs on. As we will see, this curve has a “large” prime factor subgroup of order 13, which implies that we can use our Tiny-jubjub curve to implement certain elliptic curve cryptographic primitives in circuits over that `BLS_6` curve.

Before we introduce the complex multiplication method, we have to explain a few properties of elliptic curves that are of key importance in understanding that method.

circuit

signature
schemesadd refer-
enceadd refer-
ences

5.6.1 The Trace of Frobenius

To understand the complex multiplication method of elliptic curves, we have to define the so-called **trace** of an elliptic curve first.

We know that elliptic curves are cyclic groups of finite order. Therefore, an interesting question is whether it is possible to estimate the number of elements that this curve contains. Since an affine Short Weierstrass curve consists of pairs (x, y) of elements from a finite field \mathbb{F}_q plus the point at infinity, and the field \mathbb{F}_q contains q elements, the number of curve points cannot be arbitrarily large, since it can contain at most $q^2 + 1$ many elements.

There is however, a more precise estimation, usually called the **Hasse bound**. To understand it, let $E(\mathbb{F}_q)$ be an affine Short Weierstrass curve over a finite field \mathbb{F}_q of order q , and let $|E(\mathbb{F}_q)|$ be the order of the curve. Then there is an integer $t \in \mathbb{Z}$, called the **trace of Frobenius** of the curve, such that $|t| \leq 2\sqrt{q}$ and the following equation holds:

$$|E(\mathbb{F}_q)| = q + 1 - t \quad (5.50)$$

A positive trace, therefore, implies that the curve contains no more points than the underlying field, whereas a non-negative trace means that the curve contains more points. However, the estimation $|t| \leq 2\sqrt{q}$ implies that the difference is not very large in either direction, and the number of elements in an elliptic curve is always approximately in the same order of magnitude as the size of the curve's base field.

Example 97. Consider the elliptic curve $E_{1,1}(\mathbb{F}_5)$ from example 68. We know that it contains 9 curve points. Since the order of \mathbb{F}_5 is 5, we compute the trace of $E_{1,1}(\mathbb{F}_5)$ to be $t = -3$, since the Hasse bound is given by the following equation:

$$9 = 5 + 1 - (-3)$$

Indeed, we have $|t| \leq 2\sqrt{q}$, since $\sqrt{5} > 2$ and $|-3| = 3 \leq 4 = 2 \cdot 2 < 2 \cdot \sqrt{5}$.

Example 98. To compute the trace of the Tiny-jubjub curve, recall from example 69 that the order of TJJ_13 is 20. Since the order of \mathbb{F}_{13} is 13, we can therefore use the Hasse bound and compute the trace as $t = -6$:

$$20 = 13 + 1 - (-6) \quad (5.51)$$

Again, we have $|t| \leq 2\sqrt{q}$, since $\sqrt{13} > 3$ and $|-6| = 6 = 2 \cdot 3 < 2 \cdot \sqrt{13}$.

Example 99. To compute the trace of `secp256k1`, recall from example 70 that this curve is defined over a prime field with p elements, and that the order of that group is given by r :

$$p = 115792089237316195423570985008687907853269984665640564039457584007908834671663$$

$$r = 115792089237316195423570985008687907852837564279074904382605163141518161494337$$

Using the Hasse bound $r = p + 1 - t$, we therefore compute $t = p + 1 - r$, which gives the trace of curve `secp256k1` as follows:

$$t = 432420386565659656852420866390673177327$$

As we can see, `secp256k1` contains less elements than its underlying field. However, the difference is tiny, since the order of `secp256k1` is in the same order of magnitude as the order of the underlying field. Compared to p and r , the integer t is tiny.

```
sage: p = 1157920892373161954235709850086879078532699846656405 482
      64039457584007908834671663
```

```

3505 sage: r = 1157920892373161954235709850086879078528375642790749 483
3506       04382605163141518161494337
3507 sage: t = p + 1 -r 484
3508 sage: t.nbits() 485
3509 129 486
3510 sage: abs(RR(t)) <= 2*sqrt(RR(p)) 487
3511 True 488

```

3512 5.6.2 The j -invariant

3513 As we have seen in XXX, two elliptic curves $E_1(\mathbb{F})$ defined by $y^2 = x^3 + ax + b$ and $E_2(\mathbb{F})$
 3514 defined by $y^2 + a'x + b'$ are strictly isomorphic if and only if there is a quadratic residue $d \in \mathbb{F}$
 3515 such that $a' = ad^2$ and $b' = bd^3$.

add refer-
ence

3516 There is, however, a more general way to classify elliptic curves over finite fields \mathbb{F}_q , based
 3517 on the so-called **j -invariant** of an elliptic curve with $j(E(\mathbb{F}_q)) \in \mathbb{F}_q$, as defined below:

$$j(E(\mathbb{F}_q)) = 1728 \cdot \frac{4 \cdot a^3}{4 \cdot a^3 + 27 \cdot b^2} \bmod q \quad (5.52)$$

3518 A detailed description of the j -invariant is beyond the scope of this book. For our present
 3519 purposes, it is sufficient to note that two elliptic curves $E_1(\mathbb{F})$ and $E_2(\mathbb{F}')$ are isomorphic over
 3520 the **algebraic closures** of \mathbb{F} and \mathbb{F}' , if and only if $\overline{\mathbb{F}} = \overline{\mathbb{F}'}$ and $j(E_1) = j(E_2)$.

algebraic
closures

3521 So, the j -invariant is an important tool to classify elliptic curves and it is needed in the com-
 3522 plex multiplication method to decide on an actual curve instantiation that implements abstractly
 3523 chosen properties.

Example 100. Consider the elliptic curve $E_{1,1}(\mathbb{F}_5)$ from example 68. We compute its j -invariant
 as follows:

check
reference

$$\begin{aligned}
 j(E_{1,1}(\mathbb{F}_5)) &= 1728 \cdot \frac{4 \cdot 1^3}{4 \cdot 1^3 + 27 \cdot 1^2} \bmod 5 \\
 &= 3 \cdot \frac{4}{4 + 2} \\
 &= 3 \cdot 4 \\
 &= 2
 \end{aligned}$$

Example 101. Consider the elliptic curve TJJ_{13} from example 69. We compute its j -invariant
 as follows:

check
reference

$$\begin{aligned}
 j(TJJ_{13}) &= 1728 \cdot \frac{4 \cdot 8^3}{4 \cdot 8^3 + 27 \cdot 8^2} \bmod 13 \\
 &= 12 \cdot \frac{4 \cdot 5}{4 \cdot 5 + 1 \cdot 12} \\
 &= 12 \cdot \frac{7}{7 + 12} \\
 &= 12 \cdot 7 \cdot 6^{-1} \\
 &= 2 \cdot 7 \\
 &= 1
 \end{aligned}$$

3524 *Example 102.* Consider secp256k1 from example 70. We compute its j -invariant using Sage:

```

3525 sage: p = 1157920892373161954235709850086879078532699846656405 489
3526       64039457584007908834671663
3527 sage: F = GF(p) 490
3528 sage: j = F(1728) * ( (F(4) * F(0) ^3) / (F(4) * F(0) ^3 + F(27) * F(7) ^2) ) 491
3529 sage: j == F(0) 492
3530 True 493

```

3531 5.6.3 The Complex Multiplication Method

3532 As we have seen in the previous sections, elliptic curves have various defining properties, like
 3533 their order, their prime factors, the embedding degree, or the cardinality (number of elements)
 3534 of the base field. The **complex multiplication** (CM) method provides a practical way of con-
 3535 structing elliptic curves with pre-defined restrictions on the order and the base field.

3536 The complex multiplication method starts by choosing a base field \mathbb{F}_q of the curve $E(\mathbb{F}_q)$
 3537 we want to construct such that $q = p^m$ for some prime number p , and $m \in \mathbb{N}$. We assume $p > 3$
 3538 to simplify things in what follows.

3539 Next, the trace of Frobenius $t \in \mathbb{Z}$ of the curve is chosen such that p and t are coprime, that
 3540 is, $\gcd(p, t) = 1$ holds true and $|t| \leq 2\sqrt{q}$. The choice of t also defines the curve's order r , since
 3541 $r = p + 1 - t$ by the Hasse bound 5.50, so choosing t will determine the large order subgroup as
 3542 well as all small cofactors. The resulting r must be such that the curve meets the application's
 3543 security requirements.

3544 Note that the choice of p and t also determines the embedding degree k of any prime-order
 3545 subgroup of the curve, since k is defined as the smallest number such that the prime order n
 3546 divides the number $q^k - 1$.

3547 In order for the complex multiplication method to work, neither q nor t can be arbitrary,
 3548 but must be chosen in such a way that two additional integers $D \in \mathbb{Z}$ and $v \in \mathbb{Z}$ exist and the
 3549 following conditions hold:

$$\begin{aligned}
 D &< 0 \\
 (D = 0 \text{ or } D = 1) \bmod 4 \\
 4q &= t^2 + |D|v^2
 \end{aligned}
 \tag{5.53}$$

3550 If such numbers exist, we call D the **CM-discriminant**, and we know that we can construct
 3551 a curve $E(\mathbb{F}_q)$ over a finite field \mathbb{F}_q such that the order of the curve is $|E(\mathbb{F}_q)| = q + 1 - t$.

3552 It is the goal of the complex multiplication method to actually construct such a curve, that is
 3553 finding the parameters a and b from \mathbb{F}_q in the defining Weierstrass equation such that the curve
 3554 has the desired order r .

3555 Finding solutions to equation 5.53 can be achieved in different ways. In general, it can
 3556 be said that there are well-known constraints for elliptic curve families (e.g. the BLS families
 3557 REFERENCES) that provides families of solutions. In what follows, we will look at one type
 3558 curve in the BLS-family, which gives an entire range of solutions. Are we looking at a subtype
 3559 of BLS or is BLS the specific type we're referring to?

disambiguate

Assuming that proper parameters q , t , D and v are found, we have to compute the so-called
Hilbert class polynomial $H_D \in \mathbb{Z}[x]$ of the CM-discriminant D , which is a polynomial with

integer coefficients. To do so, we first have to compute the following set:

$$S(D) = \{(A, B, C) \mid A, B, C \in \mathbb{Z}, D = B^2 - 4AC, \gcd(A, B, C) = 1, \\ |B| \leq A \leq \sqrt{\frac{|D|}{3}}, A \leq C, \text{ if } B < 0 \text{ then } |B| < A < C\}$$

One way to compute this set is to first compute the integer $A_{max} = \text{Floor}(\sqrt{\frac{|D|}{3}})$, then loop through all the integers $0 \leq A \leq A_{max}$, as well as through all the integers $-A \leq B \leq A$ and check if there is an integer C that satisfies the equation $D = B^2 - 4AC$ and the rest of the requirements from ??.

3564 To compute the Hilbert class polynomial, the so-called ***j*-function** (or *j*-invariant) is needed,
3565 which is a complex function defined on the upper half \mathbb{H} of the complex plane \mathbb{C} , usually written
3566 as follows:

$$j: \mathbb{H} \rightarrow \mathbb{C} \quad (5.54)$$

What this means is that the j -functions takes complex numbers $(x + y \cdot i)$ with a positive imaginary part $y > 0$ as inputs and returns a complex number $j(x + i \cdot y)$ as a result.

For the purposes of this book, it is not important to understand the j -function in detail, and we can use Sage to compute it in a similar way that we would use Sage to compute any other well-known function. It should be noted, however, that the computation of the j -function in Sage is sometimes prone to precision errors. For example, the j -function has a root in $\frac{-1+iv\sqrt{3}}{2}$, which Sage only approximates. Therefore, when using Sage to compute the j -function, we need to take precision loss into account and possibly round to the nearest integer.

```

3575 sage: z = ComplexField(100)(0,1) 494
3576 sage: z # (0+1i) 495
3577 1.00000000000000000000000000000000*I 496
3578 sage: elliptic_j(z) 497
3579 1728.000000000000000000000000000000 498
3580 sage: # j-function only defined for positive imaginary 499
3581 arguments
3582 sage: z = ComplexField(100)(1,-1) 500
3583 sage: try: 501
3584 .....:     elliptic_j(z) 502
3585 .....: except PariError: 503
3586 .....:     pass 504
3587 sage: # root at (-1+i sqrt(3))/2 505
3588 sage: z = ComplexField(100)(-1,sqrt(3))/2 506
3589 sage: elliptic_j(z) 507
3590 -2.6445453750358706361219364880e-88 508
3591 sage: elliptic_j(z).imag().round() 509
3592 0 510
3593 sage: elliptic_j(z).real().round() 511
3594 0 512

```

3595 With a way to compute the j -function and the precomputed set $S(D)$ at hand, we can now

3596 compute the Hilbert class polynomial as follows:

$$H_D(x) = \prod_{(A,B,C) \in S(D)} \left(x - j \left(\frac{-B + \sqrt{D}}{2A} \right) \right) \quad (5.55)$$

3597 In other words, we loop over all elements (A, B, C) from the set $S(D)$ and compute the j -
3598 function at the point $\frac{-B + \sqrt{D}}{2A}$, where D is the CM-discriminant that we chose in a previous step.
3599 The result defines a factor of the Hilbert class polynomial and all factors are multiplied together.

3600 It can be shown that the Hilbert class polynomial is an integer polynomial, but actual com-
3601 putations need high-precision arithmetic to avoid approximation errors that usually occur in
3602 computer approximations of the j -function (as shown above). So, in case the calculated Hilbert
3603 class polynomial does not have integer coefficients, we need to round the result to the nearest
3604 integer. Given that the precision we used was high enough, the result will be correct.

In the next step, we use the Hilbert class polynomial $H_D \in \mathbb{Z}[x]$, and project it to a polyno-
mial $H_{D,q} \in \mathbb{F}_q[x]$ with coefficients in the base field \mathbb{F}_q as chosen in the first step. We do this by
simply reducing the coefficients modulo p , that is, if $H_D(x) = a_mx^m + a_{m-1}x^{m-1} + \dots + a_1x + a_0$,
we compute the q -modulus of each coefficient $\tilde{a}_j = a_j \bmod p$, which yields the **projected**
Hilbert class polynomial as follows:

$$H_{D,p}(x) = \tilde{a}_m x^m + \tilde{a}_{m-1} x^{m-1} + \dots + \tilde{a}_1 x + \tilde{a}_0$$

3605 We then search for roots of $H_{D,p}$, since every root j_0 of $H_{D,p}$ defines a family of elliptic curves
3606 over \mathbb{F}_q , which all have a j -invariant 5.54 equal to j_0 . We can pick any root, since all of them
3607 define an elliptic curve. However, some of the curves with the correct j -invariant might have an
3608 order different from the one we initially decided on. Therefore, we need a way to decide on a
3609 curve with the correct order.

3610 To compute a curve with the correct order, we have to distinguish a few different cases
3611 based on our choice of the root $j_0 \in \mathbb{F}_q$ and of the CM-discriminant $D \in \mathbb{Z}$. If $j_0 \neq 0$ or
3612 $j_0 \neq 1728 \bmod q$, we compute $c_1 = \frac{j_0}{(1728 \bmod q) - j_0} \in \mathbb{F}_q$, then we chose some arbitrary quadratic
3613 non-residue $c_2 \in \mathbb{F}_q$, and some arbitrary cubic non-residue $c_3 \in \mathbb{F}_q$.

3614 The following table is guaranteed to define a curve with the correct order $r = q + 1 - t$ for
3615 the fields order q and the trace of Frobenius t we initially decided on:

- 3616 • Case $j_0 \neq 0$ and $j_0 \neq 1728 \bmod q$. A curve with the correct order is defined by one of the
3617 following equations:

$$y^2 = x^3 + 3c_1x + 2c_1 \quad \text{or} \quad y^2 = x^3 + 3c_1c_2^2x + 2c_1c_2^3 \quad (5.56)$$

- 3618 • Case $j_0 = 0$ and $D \neq -3$. A curve with the correct order is defined by one of the following
3619 equations:

$$y^2 = x^3 + 1 \quad \text{or} \quad y^2 = x^3 + c_2^3 \quad (5.57)$$

- Case $j_0 = 0$ and $D = -3$. A curve with the correct order is defined by one of the following
equations:

$$\begin{aligned} y^2 &= x^3 + 1 \quad \text{or} \quad y^2 = x^3 + c_2^3 \quad \text{or} \\ y^2 &= x^3 + c_3^2 \quad \text{or} \quad y^2 = c_3^2 c_2^3 \quad \text{or} \\ y^2 &= x^3 + c_3^{-2} \quad \text{or} \quad y^2 = x^3 + c_3^{-2} c_2^3 \end{aligned}$$

- Case $j_0 = 1728 \bmod q$ and $D \neq -4$. A curve with the correct order is defined by one of the following equations:

$$y^2 = x^3 + x \quad \text{or} \quad y^2 = x^3 + c_2^2 x \quad (5.58)$$

- Case $j_0 = 1728 \bmod q$ and $D = -4$. A curve with the correct order is defined by one of the following equations:

$$\begin{aligned} y^2 &= x^3 + x \quad \text{or} \quad y^2 = x^3 + c_2 x \quad \text{or} \\ y^2 &= x^3 + c_2^2 x \quad \text{or} \quad y^2 = x^3 + c_2^3 x \end{aligned}$$

To decide the proper defining Short Weierstrass equation, we therefore have to compute the order of any of the potential curves above, and then choose the one that fits our initial requirements.

To summarize, using the complex multiplication method, it is possible to synthesize elliptic curves with predefined order over predefined base fields from scratch. However, the curves that are constructed this way are just some representatives of a larger class of curves, all of which have the same order. Therefore, in real-world applications, it is sometimes more advantageous to choose a different representative from that class. To do so recall from 5.1.1.1 that any curve defined by the Short Weierstrass equation $y^2 = x^3 + ax + b$ is isomorphic to a curve of the form $y^2 = x^3 + ad^4x + bd^6$ for some invertible field element $d \in \mathbb{F}_q^*$.

In order to find a suitable representative (e.g. with small parameters a and b) in the last step, the curve designer might choose an invertible field element d such that the transformed curve has the properties they wanted.

Example 103. Consider curve $E_{1,1}(\mathbb{F}_5)$ from example 68. We want to use the complex multiplication method to derive that curve from scratch. Since $E_{1,1}(\mathbb{F}_5)$ is a curve of order $r = 9$ over the prime field of order $q = 5$, we know from example 97 that its trace of Frobenius is $t = -3$, which also implies that q and $|t|$ are coprime.

check
reference

We then have to find parameters $D, v \in \mathbb{Z}$ such that the criteria in 5.53 hold. We get the following:

$$\begin{aligned} 4q &= t^2 + |D|v^2 && \Rightarrow \\ 20 &= (-3)^2 + |D|v^2 && \Leftrightarrow \\ 11 &= |D|v^2 \end{aligned}$$

Now, since 11 is a prime number, the only solution is $|D| = 11$ and $v = 1$ here. With $D = -11$ and the Euclidean division of -11 by 4 being $-11 = -3 \cdot 4 + 1$, we have $-11 \bmod 4 = 1$, which shows that $D = -11$ is a proper choice.

In the next step, we have to compute the Hilbert class polynomial H_{-11} . To do so, we first have to find the set $S(D)$. To compute that set, observe that, since $\sqrt{\frac{|D|}{3}} \approx 1.915 < 2$, we know from $A \leq \sqrt{\frac{|D|}{3}}$ and $A \in \mathbb{Z}$ that A must be either 0 or 1.

For $A = 0$, we know $B = 0$ from the constraint $|B| \leq A$. However, in this case, there could be no C satisfying $-11 = B^2 - 4AC$. So we try $A = 1$ and deduce $B \in \{-1, 0, 1\}$ from the constraint $|B| \leq A$. The case $B = -1$ can be excluded, since then $B < 0$ has to imply $|B| < A$. The case $B = 0$ can also be excluded, as there cannot be an integer C with $-11 = -4C$, since 11 is a prime number.

This leaves the case $B = 1$, and we compute $C = 3$ from the equation $-11 = 1^2 - 4C$, which gives the solution $(A, B, C) = (1, 1, 3)$:

$$S(D) = \{(1, 1, 3)\}$$

With the set $S(D)$ at hand, we can compute the Hilbert class polynomial of $D = -11$. To do so, we have to insert the term $\frac{-1+\sqrt{-11}}{2 \cdot 1}$ into the j -function. To do so, first observe that $\sqrt{-11} = i\sqrt{11}$, where i is the imaginary unit, defined by $i^2 = -1$. Using this, we can use Sage to compute the j -invariant and get the following:

$$H_{-11}(x) = x - j\left(\frac{-1+i\sqrt{11}}{2}\right) = x + 32768$$

As we can see, in this particular case, the Hilbert class polynomial is a linear function with a single integer coefficient. In the next step, we have to project it onto a polynomial from $\mathbb{F}_5[x]$ by computing the modular 5 remainder of the coefficients 1 and 32768. We get $32768 \bmod 5 = 3$, from which it follows that the projected Hilbert class polynomial is considered a polynomial from $\mathbb{F}_5[x]$:

$$H_{-11,5}(x) = x + 3$$

As we can see, the only root of this polynomial is $j = 2$, since $H_{-11,5}(2) = 2 + 3 = 0$. We therefore have a situation with $j \neq 0$ and $j \neq 1728$, which tells us that we have to compute the parameter c_1 in modular 5 arithmetics:

$$c_1 = \frac{2}{1728 - 2}$$

3650 Since $1728 \bmod 5 = 3$, we get $c_1 = 2$.

3651 Next, we have to check if the curve $E(\mathbb{F}_5)$ defined by the Short Weierstrass equation $y^2 =$
 3652 $x^3 + 3 \cdot 2x + 2 \cdot 2$ has the correct order. We use Sage, and find that the order is indeed 9, so it is a
 3653 curve with the required parameters. Thus, we have successfully constructed the curve with the
 3654 desired properties.

Note, however, that in real-world applications, it might be useful to choose parameters a and b that have certain properties, e.g. to be as small as possible. As we know from XXX, choosing any quadratic residue $d \in \mathbb{F}_5$ gives a curve of the same order defined by $y^2 = x^2 + ak^2x + bk^3$. Since 4 is a quadratic residue in \mathbb{F}_4 , we can transform the curve defined by $y^2 = x^3 + x + 4$ into the curve $y^2 = x^3 + 4^2 + 4 \cdot 4^3$ which gives the following:

$$y^2 = x^3 + x + 1$$

3655 This is the curve $E_{1,1}(\mathbb{F}_5)$ that we used extensively throughout this book. Thus, using the
 3656 complex multiplication method, we were able to derive a curve with specific properties from
 3657 scratch.

3658 *Example 104.* Consider the Tiny-jubjub curve TJJ_13 from example 69. We want to use the
 3659 complex multiplication method to derive that curve from scratch. Since TJJ_13 is a curve of
 3660 order $r = 20$ over the prime field of order $q = 13$, we know from example 98 that its trace of
 3661 Frobenius is $t = -6$, which also implies that q and $|t|$ are coprime.

We then have to find parameters $D, v \in \mathbb{Z}$ such that 5.53 holds. We get the following:

$$\begin{aligned} 4q &= t^2 + |D|v^2 && \Rightarrow \\ 4 \cdot 13 &= (-6)^2 + |D|v^2 && \Rightarrow \\ 52 &= 36 + |D|v^2 && \Leftrightarrow \\ 16 &= |D|v^2 \end{aligned}$$

add refer-
ence

check
reference

check
reference

3662 This equation has two solutions for (D, v) , namely $(-4, \pm 2)$ and $(-16, \pm 1)$. Looking at the
 3663 first solution, we know that $D = -4$ implies $j = 1728$, and the constructed curve is defined by a
 3664 Short Weierstrass equation 5.1 that has a vanishing parameter $b = 0$. We can therefore conclude
 3665 that choosing $D = -4$ will not help us reconstructing TJJ_13 . It will produce curves with order
 3666 20, just not the one we are looking for.

 check
reference

So we choose the second solution $D = -16$. In the next step, we have to compute the Hilbert class polynomial H_{-16} . To do so, we first have to find the set $S(D)$. To compute that set, observe that since $\sqrt{\frac{|-16|}{3}} \approx 2.31 < 3$, we know from $A \leq \sqrt{\frac{|-16|}{3}}$ and $A \in \mathbb{Z}$ that A must be in the range $0..2$. So we loop through all possible values of A and through all possible values of B under the constraints $|B| \leq A$, and if $B < 0$ then $|B| < A$. Then we compute potential C 's from $-16 = B^2 - 4AC$. We get the following two solutions for $S(D)$: we get

$$S(D) = \{(1, 0, 4), (2, 0, 2)\}$$

With the set $S(D)$ at hand, we can compute the Hilbert class polynomial of $D = -16$. We can use Sage to compute the j -invariant and get the following:

$$\begin{aligned} H_{-16}(x) &= \left(x - j \left(\frac{i\sqrt{16}}{2} \right) \right) \left(x - j \left(\frac{i\sqrt{16}}{4} \right) \right) \\ &= (x - 287496)(x - 1728) \end{aligned}$$

As we can see, in this particular case, the Hilbert class polynomial is a quadratic function with two integer coefficients. In the next step, we have to project it onto a polynomial from $\mathbb{F}_5[x]$ by computing the modular 5 remainder of the coefficients 1, 287496 and 1728. We get $287496 \bmod 13 = 1$ and $1728 \bmod 13 = 2$, which means that the projected Hilbert class polynomial is as follows:

$$H_{-11,5}(x) = (x - 1)(x - 12) = (x + 12)(x + 1)$$

3667 This is considered a polynomial from $\mathbb{F}_{13}[x]$. Thus, we have two roots, namely $j = 1$ and
 3668 $j = 12$. We already know that $j = 12$ is the wrong root to construct the Tiny-jubjub curve, since
 3669 $1728 \bmod 13 = 2$, and that case is not compatible with a curve with $b \neq 0$. So we choose $j = 1$.

Another way to decide the proper root is to compute the j -invariant of the Tiny-jubjub curve. We get the following:

$$\begin{aligned} j(TJJ_13) &= 12 \frac{4 \cdot 8^3}{4 \cdot 8^3 + 1 \cdot 8^2} \\ &= 12 \frac{4 \cdot 5}{4 \cdot 5 + 12} \\ &= 12 \frac{7}{7 + 12} \\ &= 12 \frac{7}{7 + 12} \\ &= 1 \end{aligned}$$

This is equal to the root $j = 1$ of the Hilbert class polynomial $H_{-16,13}$ as expected. We therefore have a situation with $j \neq 0$ and $j \neq 1728$, which tells us that we have to compute the parameter c_1 in modular 5 arithmetics:

$$c_1 = \frac{1}{12 - 1} = 6$$

Since $1728 \bmod 13 = 12$, we get $c_1 = 6$. Then we have to check if the curve $E(\mathbb{F}_5)$ defined by the Short Weierstrass equation $y^2 = x^3 + 3 \cdot 6x + 2 \cdot 6$, which is equivalent to $y^2 = x^3 + 5x + 12$, has the correct order. We use Sage and find that the order is 8, which implies that the trace of this curve is 6, not -6 as required. So we have to consider the second possibility, and choose some quadratic non-residue $c_2 \in \mathbb{F}_{13}$. We choose $c_2 = 5$ and compute the Short Weierstrass equation $y^2 = x^3 + 5c_2^2 + 12c_2^3$ as follows:

$$y^2 = x^3 + 8x + 5$$

We use Sage and find that the order is 20, which is indeed the correct one. As we know from XXX, choosing any quadratic residue $d \in \mathbb{F}_5$ gives a curve of the same order defined by $y^2 = x^2 + ad^2x + bd^3$. Since 12 is a quadratic residue in \mathbb{F}_{13} , we can transform the curve defined by $y^2 = x^3 + 8x + 5$ into the curve $y^2 = x^3 + 12^2 \cdot 8 + 5 \cdot 12^3$ which gives the following:

$$y^2 = x^3 + 8x + 8$$

add reference

3670 This is the Tiny-jubjub curve that we used extensively throughout this book. So using the
3671 complex multiplication method, we were able to derive a curve with specific properties from
3672 scratch.

Example 105. To consider a real-world example, we want to use the complex multiplication method in combination with Sage to compute `secp256k1` from scratch. So based on example 70, we decided to compute an elliptic curve over a prime field \mathbb{F}_p of order r for the following security parameters:

check reference

$$p = 115792089237316195423570985008687907853269984665640564039457584007908834671663$$

$$r = 115792089237316195423570985008687907852837564279074904382605163141518161494337$$

According to example 99, this gives the following trace of Frobenius:

check reference

$$t = 432420386565659656852420866390673177327$$

3673 We also decided that we want a curve of the form $y^2 = x^3 + b$, that is, we want the parameter
3674 a to be zero. This implies that the j -invariant of our curve must be zero.

3675 In a first step, we have to find a CM-discriminant D and some integer v such that the equation
3676 $4p = t^2 + |D|v^2$ is satisfied. Since we aim for a vanishing j -invariant, the first thing to try is
3677 $D = -3$. In this case, we can compute $v^2 = (4p - t^2)$, and if v^2 happens to be an integer that
3678 has a square root v , we are done. Invoking Sage we compute as follows:

```

3679 sage: D = -3 513
3680 sage: p = 1157920892373161954235709850086879078532699846656405 514
3681       64039457584007908834671663
3682 sage: r = 1157920892373161954235709850086879078528375642790749 515
3683       04382605163141518161494337
3684 sage: t = p+1-r 516
3685 sage: v_sqr = (4*p - t^2)/abs(D) 517
3686 sage: v_sqr.is_integer() 518
3687 True 519
3688 sage: v = sqrt(v_sqr) 520
3689 sage: v.is_integer() 521
3690 True 522

```

```

3691 sage: 4*p == t^2 + abs(D)*v^2 523
3692 True 524
3693 sage: v 525
3694 303414439467246543595250775667605759171 526

```

3695 The pair $(D, v) = (-3, 303414439467246543595250775667605759171)$ does indeed solve the
3696 equation, which tells us that there is a curve of order r over a prime field of order p , defined by
3697 a Short Weierstrass equation $y^2 = x^3 + b$ for some $b \in \mathbb{F}_p$. Now we need to compute b .

3698 For $D = -3$, we already know that the associated Hilbert class polynomial is given by
3699 $H_{-3}(x) = x$, which gives the projected Hilbert class polynomial as $H_{-3,p} = x$ and the j -invariant
3700 of our curve is guaranteed to be $j = 0$. Now, looking at 5.6.3, we see that there are 6 possible
3701 cases to construct a curve with the correct order r . In order to construct the curves in question,
3702 we have to choose some arbitrary quadratic and cubic non-residue. So we loop through \mathbb{F}_p to
3703 find them, invoking Sage:

check
reference

```

3704 sage: F = GF(p) 527
3705 sage: for c2 in F: 528
3706 ....:     try: # quadratic residue 529
3707 ....:         _ = c2.nth_root(2) 530
3708 ....:     except ValueError: # quadratic non-residue 531
3709 ....:         break 532
3710 sage: c2 533
3711 3 534
3712 sage: for c3 in F: 535
3713 ....:     try: 536
3714 ....:         _ = c3.nth_root(3) 537
3715 ....:     except ValueError: 538
3716 ....:         break 539
3717 sage: c3 540
3718 2 541

```

3719 We found the quadratic non-residue $c_2 = 3$ and the cubic non-residue $c_3 = 2$. Using those
3720 numbers, we check the six cases against the the expected order r of the curve we want to
3721 synthesize:

```

3722 sage: C1 = EllipticCurve(F, [0, 1]) 542
3723 sage: C1.order() == r 543
3724 False 544
3725 sage: C2 = EllipticCurve(F, [0, c2^3]) 545
3726 sage: C2.order() == r 546
3727 False 547
3728 sage: C3 = EllipticCurve(F, [0, c3^2]) 548
3729 sage: C3.order() == r 549
3730 False 550
3731 sage: C4 = EllipticCurve(F, [0, c3^2*c2^3]) 551
3732 sage: C4.order() == r 552
3733 False 553
3734 sage: C5 = EllipticCurve(F, [0, c3^(-2)]) 554
3735 sage: C5.order() == r 555
3736 False 556

```

```

3737 sage: C6 = EllipticCurve(F, [0, c3^(-2) * c2^3]) 557
3738 sage: C6.order() == r 558
3739 True 559

```

As expected, we found an elliptic curve of the correct order r over a prime field of size p . In principle, we are done, as we have found a curve with the same basic properties as secp256k1. However, the curve is defined by the following equation, which uses a very large parameter b_1 , and so it might perform too slowly in certain algorithms.

$$y^2 = x^3 + 86844066927987146567678238756515930889952488499230423029593188005931626003754$$

It is also not very elegant to be written down by hand. It might therefore be advantageous to find an isomorphic curve with the smallest possible parameter b_2 . In order to find such a b_2 , we have to choose a quadratic residue d such that $b_2 = b_1 \cdot d^3$ is as small as possible. To do so, we rewrite the last equation into the following form:

$$d = \sqrt[3]{\frac{b_2}{b_1}}$$

what does this mean? Maybe just delete it

```

3740 Then we use Sage to loop through values  $b_2 \in \mathbb{F}_p$  until it finds some number such that the
3741 quotient  $\frac{b_2}{b_1}$  has a cube root  $d$  and this cube root itself is a quadratic residue.

3742 sage: b1=86844066927987146567678238756515930889952488499230423 560
3743 029593188005931626003754
3744 sage: for b2 in F: 561
3745 ....:     try: 562
3746 ....:         d = (b2/b1).nth_root(3) 563
3747 ....:         try: 564
3748 ....:             _ = d.nth_root(2) 565
3749 ....:             if d != 0: 566
3750 ....:                 break 567
3751 ....:         except ValueError: 568
3752 ....:             pass 569
3753 ....:     except ValueError: 570
3754 ....:         pass 571
3755 sage: b2 572
3756 7 573

```

Indeed, the smallest possible value is $b_2 = 7$ and the defining Short Weierstrass equation of a curve over \mathbb{F}_p with prime order r is $y^2 = x^3 + 7$, which we might call secp256k1. As we have just seen, the complex multiplication method is powerful enough to derive cryptographically secure curves like secp256k1 from scratch.

Exercise 81. Show that the Hilbert class polynomials for the CM-discriminants $D = -3$ and $D = -4$ are given by $H_{-3,q}(x) = x$ and $H_{-4,q} = x - (1728 \bmod q)$.

3763 5.6.4 The BLS6_6 pen-and-paper curve

3764 In this paragraph, we summarize our understanding of elliptic curves to derive our main pen-
 3765 and-paper example for the rest of the book. To do so, we want to use the complex multiplication
 3766 method to derive a pairing-friendly elliptic curve that has similar properties to curves that are

used in actual cryptographic protocols. However, we design the curve specifically to be useful in pen-and-paper examples, which mostly means that the curve should contain only a few points so that we are able to derive exhaustive addition and pairing tables.

A well-understood family of pairing-friendly curves is the the group of BLS curves (STUFF ABOUT THE HISTORY AND THE NAMING CONVENTION), which are derived in [XXX]. BLS curves are particularly useful in our case if the embedding degree k satisfies $k \equiv 6 \pmod{0}$. Of course, the smallest embedding degree k that satisfies this congruency is $k = 6$ and we therefore aim for a BLS6 curve as our main pen-and-paper example.

To apply the complex multiplication method from page 118 ff., recall that this method starts with a definition of the base field \mathbb{F}_{p^m} , as well as the trace of Frobenius t and the order of the curve. If the order $p^m + 1 - t$ is not a prime number, then the order r of the largest prime factor group needs to be controlled.

In the case of BLS_6 curves, the parameter m is chosen to be 1, which means that the curves are defined over prime fields. All relevant parameters p , t and r are then themselves parameterized by the following three polynomials:

$$\begin{aligned} r(x) &= \Phi_6(x) \\ t(x) &= x + 1 \\ q(x) &= \frac{1}{3}(x-1)^2(x^2 - x + 1) + x \end{aligned} \tag{5.59}$$

In the equations above, Φ_6 is the 6-th cyclotomic polynomial and $x \in \mathbb{N}$ is a parameter that the designer has to choose in such a way that the evaluation of p , t and r at the point x gives integers that have the proper size to meet the security requirements of the curve that they want to design. It is then guaranteed that the complex multiplication method can be used in combination with those parameters to define an elliptic curve with CM-discriminant $D = -3$, embedding degree $k = 6$, and curve equation $y^2 = x^3 + b$ for some $b \in \mathbb{F}_p$.

For example, if the curve should target the 128-bit security level, ~~due to the Pholaard-rho attack~~ (TODO) the parameter r should be prime number of at least 256 bits.

In order to design the smallest BLS_6 curve, we therefore have to find a parameter x such that $r(x)$, $t(x)$ and $q(x)$ are the smallest natural numbers that satisfy $q(x) > 3$ and $r(x) > 3$.⁴

We therefore initiate the design process of our BLS6 curve by looking up the 6-th cyclotomic polynomial, which is $\Phi_6 = x^2 - x + 1$, and then insert small values for x into the defining polynomials r, t, q . We get the following results:

$$\begin{array}{lll} x = 1 & (r(x), t(x), q(x)) & (1, 2, 1) \\ x = 2 & (r(x), t(x), q(x)) & (3, 3, 3) \\ x = 3 & (r(x), t(x), q(x)) & (7, 4, \frac{37}{3}) \\ x = 4 & (r(x), t(x), q(x)) & (13, 5, 43) \end{array}$$

Since $q(1) = 1$ is not a prime number, the first x that gives a proper curve is $x = 2$. However, such a curve would be defined over a base field of characteristic 3, and we would rather like to avoid that. We therefore find $x = 4$, which defines a curve over the prime field of characteristic 43 that has a trace of Frobenius $t = 5$ and a larger order prime group of size $r = 13$.

Since the prime field \mathbb{F}_{43} has 43 elements and 43's binary representation is $43_2 = 101011$, which consists of 6 digits, the name of our pen-and-paper curve should be BLS6_6, since its is

⁴The smallest BLS curve will also be the most insecure BLS curve. However, since our goal with this curve is ease of pen-and-paper computation rather than security, it fits the purposes of this book.

common to name a BLS curve by its embedding degree and the bit-length of the modulus in the base field. We call *BLS6_6* the **moon-math-curve**.

Based on 5.50, we know that the Hasse bound implies that *BLS6_6* will contain exactly 39 elements. Since the prime factorization of 39 is $39 = 3 \cdot 13$, we have a “large” prime factor group of size 13, as expected, and a small cofactor group of size 3. Fortunately, a subgroup of order 13 is well suited for our purposes, as 13 elements can be easily handled in the associated addition, scalar multiplication and pairing tables in a pen-and-paper style.

We can check that the embedding degree is indeed 6 as expected, since $k = 6$ is the smallest number k such that $r = 13$ divides $43^k - 1$.

```
sage: for k in range(1,42): # Fermat's little theorem
      ....:     if (43^k-1)%13 == 0:
      ....:         break
sage: k
6
```

In order to compute the defining equation $y^2 = x^3 + ax + b$ of *BLS6-6*, we use the complex multiplication method as described in 5.6.3. The goal is to find $a, b \in \mathbb{F}_{43}$ representations that are particularly **nice to work with**. The authors of XXX showed that the CM-discriminant of every BLS curve is $D = -3$ and, indeed, the following equation has the four solutions $(D, v) \in \{(-3, -7), (-3, 7), (-49, -1), (-49, 1)\}$ if D is required to be negative, as expected:

$$\begin{aligned} 4p &= t^2 + |D|v^2 && \Rightarrow \\ 4 \cdot 43 &= 5^2 + |D|v^2 && \Rightarrow \\ 172 &= 25 + |D|v^2 && \Leftrightarrow \\ 49 &= |D|v^2 \end{aligned}$$

This means that $D = -3$ is indeed a proper CM-discriminant, and we can deduce that the parameter a has to be 0, and that the Hilbert class polynomial is given by $H_{-3,43}(x) = x$.

This implies that the j -invariant of *BLS6_6* is given by $j(\text{BLS6}_6) = 0$. We therefore have to look at case XXX in table 5.6.3 to derive a parameter b . To decide the proper case for $j_0 = 0$ and $D = -3$, we therefore have to choose some arbitrary quadratic non-residue c_2 and cubic non-residue c_3 in \mathbb{F}_{43} . We choose $c_2 = 5$ and $c_3 = 36$. We check these with Sage:

```
sage: F43 = GF(43)
sage: c2 = F43(5)
      ....: try: # quadratic residue
      ....:     c2.nth_root(2)
      ....: except ValueError: # quadratic non-residue
      ....:     c2
sage: c3 = F43(36)
      ....: try:
      ....:     c3.nth_root(3)
      ....: except ValueError:
      ....:     c3
```

Using those numbers we check the six possible cases from 5.6.3 against the the expected order 39 of the curve we want to synthesize:

check
reference

check
reference

what
does this
mean?

add refer-
ence

add refer-
ence

check
reference

check
reference


```


3836 sage: BLS61 = EllipticCurve(F43, [0, 1])
3837 sage: BLS61.order() == 39
3838 False
3839 sage: BLS62 = EllipticCurve(F43, [0, c2^3])
3840 sage: BLS62.order() == 39
3841 False
3842 sage: BLS63 = EllipticCurve(F43, [0, c3^2])
3843 sage: BLS63.order() == 39
3844 True
3845 sage: BLS64 = EllipticCurve(F43, [0, c3^2*c2^3])
3846 sage: BLS64.order() == 39
3847 False
3848 sage: BLS65 = EllipticCurve(F43, [0, c3^(-2)])
3849 sage: BLS65.order() == 39
3850 False
3851 sage: BLS66 = EllipticCurve(F43, [0, c3^(-2)*c2^3])
3852 sage: BLS66.order() == 39
3853 False
3854 sage: BLS6 = BLS63 # our BLS6 curve in the book

```

As expected, we found an elliptic curve of the correct order 39 over a prime field of size 43, defined by the following equation:

$$BLS6_6 := \{(x, y) \mid y^2 = x^3 + 6 \text{ for all } x, y \in \mathbb{F}_{43}\} \quad (5.60)$$

There are other choices for b , such as $b = 10$ or $b = 23$, but all these curves are isomorphic, and hence represent the same curve in a different way. Since $BLS6_6$ only contains 39 points, it is possible to give a visual impression of the curve:

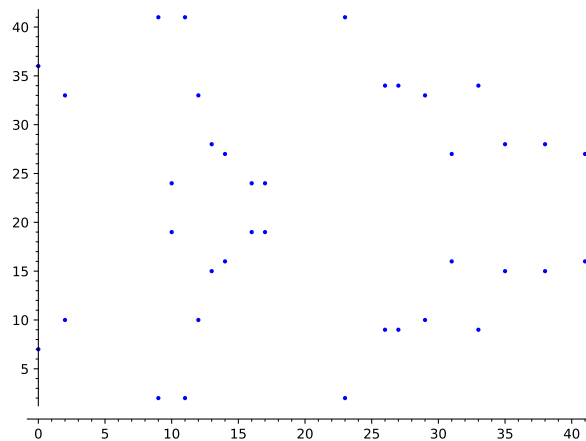

As we can see, our curve has some desirable properties: it does not contain self-inverse points, that is, points with $y = 0$. It follows that the addition law can be optimized, since the branch for those cases can be eliminated.

Summarizing the previous procedure, we have used the method of Barreto, Lynn and Scott to construct a pairing-friendly elliptic curve of embedding degree 6. However, in order to do elliptic curve cryptography on this curve, note that, since the order of $BLS6_6$ is 39, its group of rational points is not a finite cyclic group of prime order. We therefore have to find a suitable

add refer-
ence

subgroup as our main target. Since $39 = 13 \cdot 3$, we know that the curve must contain a “large” prime-order group of size 13 and a small cofactor group of order 3.

The following step is to construct this group. One way to do so is to find a generator. We can achieve this by choosing an arbitrary element of the group that is not the point at infinity, and then multiply that point with the cofactor of the group’s order. If the result is not the point at infinity, the result will be a generator. If it is the point at infinity we have to choose a different element.

In order to find a generator for the large order subgroup of size 13, we first notice that the cofactor of 13 is 3, since $39 = 3 \cdot 13$. We then need to construct an arbitrary element from $BLS6_6$. To do so in a pen-and-paper style, we can choose some *arbitrary* $x \in \mathbb{F}_{43}$ and see if there is some solution $y \in \mathbb{F}_{43}$ that satisfies the defining Short Weierstrass equation $y^2 = x^3 + 6$. We choose $x = 9$, and check that $y = 2$ is a proper solution:

$$\begin{aligned} y^2 &= x^3 + 6 && \Rightarrow \\ 2^2 &= 9^3 + 6 && \Leftrightarrow \\ 4 &= 4 \end{aligned}$$

This implies that $P = (9, 2)$ is therefore a point on $BLS6_6$. To see if we can project this point onto a generator of the large order prime group $BLS6_6[13]$, we have to multiply P with the cofactor, that is, we have to compute $[3](9, 2)$. After some computation (EXERCISE) we get $[3](9, 2) = (13, 15)$. Since this is not the point at infinity, we know that $(13, 15)$ must be a generator of $BLS6_6[13]$. The generator $g_{BLS6_6[13]}$, which we will use in pairing computations in the remainder of this book, is given as follows:

add exercise

$$g_{BLS6_6[13]} = (13, 15) \quad (5.61)$$

Since $g_{BLS6_6[13]}$ is a generator, we can use it to construct the subgroup $BLS6_6[13]$ by repeatedly adding the generator to itself. Using Sage, we get the following:

```

3883 sage: P = BLS6(9, 2)                                609
3884 sage: Q = 3*P                                         610
3885 sage: Q.xy()                                          611
3886 (13, 15)                                             612
3887 sage: BLS6_13 = []                                   613
3888 sage: for x in range(0, 13): # cyclic of order 13     614
3889 .....:     P = x*Q                                    615
3890 .....:     BLS6_13.append(P)                         616

```

Repeatedly adding a generator to itself, as we just did, will generate small groups in logarithmic order with respect to the generator as, explained on page 45 ff. We therefore get the following description of the large prime-order subgroup of $BLS6_6$:

check reference

$$\begin{aligned} BLS6_6[13] = \\ \{(13, 15) \rightarrow (33, 34) \rightarrow (38, 15) \rightarrow (35, 28) \rightarrow (26, 34) \rightarrow (27, 34) \rightarrow \\ (27, 9) \rightarrow (26, 9) \rightarrow (35, 15) \rightarrow (38, 28) \rightarrow (33, 9) \rightarrow (13, 28) \rightarrow \mathcal{O}\} \end{aligned} \quad (5.62)$$

Having a logarithmic description of this group is tremendously helpful in pen-and-paper computations. To see that, observe that we know from XXX that there is an exponential map from

add reference

the scalar field \mathbb{F}_{13} to $BLS6_6[13]$ with respect to our generator, which generates the group in logarithmic order:

$$[\cdot]_{(13,15)} : \mathbb{F}_{13} \rightarrow BLS6_6[13] ; x \mapsto [x](13, 15)$$

So, for example, we have $[1]_{(13,15)} = (13, 15)$, $[7]_{(13,15)} = (27, 9)$ and $[0]_{(13,15)} = \mathcal{O}$ and so on. The relevant point here is that we can use this representation to do computations in $BLS6_6[13]$ efficiently in our head using XXX, as in the following example:

$$\begin{aligned} (27, 34) \oplus (33, 9) &= [6](13, 15) \oplus [11](13, 15) \\ &= [6 + 11](13, 15) \\ &= [4](13, 15) \\ &= (35, 28) \end{aligned}$$

add reference

So XXX is really all we need to do computations in $BLS6_6[13]$ in this book efficiently. However, out of convenience, the following picture lists the entire addition table of that group, as it might be useful in pen-and-paper computations:

add reference

\oplus	\mathcal{O}	(13, 15)	(33, 34)	(38, 15)	(35, 28)	(26, 34)	(27, 34)	(27, 9)	(26, 9)	(35, 15)	(38, 28)	(33, 9)	(13, 28)
\mathcal{O}	\mathcal{O}	(13, 15)	(33, 34)	(38, 15)	(35, 28)	(26, 34)	(27, 34)	(27, 9)	(26, 9)	(35, 15)	(38, 28)	(33, 9)	(13, 28)
(13, 15)	(13, 15)	(33, 34)	(38, 15)	(35, 28)	(26, 34)	(27, 34)	(27, 9)	(26, 9)	(35, 15)	(38, 28)	(33, 9)	(13, 28)	\mathcal{O}
(33, 34)	(33, 34)	(38, 15)	(35, 28)	(26, 34)	(27, 34)	(27, 9)	(26, 9)	(35, 15)	(38, 28)	(33, 9)	(13, 28)	\mathcal{O}	(13, 15)
(38, 15)	(38, 15)	(35, 28)	(26, 34)	(27, 34)	(27, 9)	(26, 9)	(35, 15)	(38, 28)	(33, 9)	(13, 28)	\mathcal{O}	(13, 15)	(33, 34)
(35, 28)	(35, 28)	(26, 34)	(27, 34)	(27, 9)	(26, 9)	(35, 15)	(38, 28)	(33, 9)	(13, 28)	\mathcal{O}	(13, 15)	(33, 34)	(38, 15)
(26, 34)	(26, 34)	(27, 34)	(27, 9)	(26, 9)	(35, 15)	(38, 28)	(33, 9)	(13, 28)	\mathcal{O}	(13, 15)	(33, 34)	(38, 15)	(35, 28)
(27, 34)	(27, 34)	(27, 9)	(26, 9)	(35, 15)	(38, 28)	(33, 9)	(13, 28)	\mathcal{O}	(13, 15)	(33, 34)	(38, 15)	(35, 28)	(26, 34)
(27, 9)	(27, 9)	(26, 9)	(35, 15)	(38, 28)	(33, 9)	(13, 28)	\mathcal{O}	(13, 15)	(33, 34)	(38, 15)	(35, 28)	(26, 34)	(27, 34)
(26, 9)	(26, 9)	(35, 15)	(38, 28)	(33, 9)	(13, 28)	\mathcal{O}	(13, 15)	(33, 34)	(38, 15)	(35, 28)	(26, 34)	(27, 34)	(27, 9)
(35, 15)	(35, 15)	(38, 28)	(33, 9)	(13, 28)	\mathcal{O}	(13, 15)	(33, 34)	(38, 15)	(35, 28)	(26, 34)	(27, 34)	(27, 9)	(26, 9)
(38, 28)	(38, 28)	(33, 9)	(13, 28)	\mathcal{O}	(13, 15)	(33, 34)	(38, 15)	(35, 28)	(26, 34)	(27, 34)	(27, 9)	(26, 9)	(35, 15)
(33, 9)	(33, 9)	(13, 28)	\mathcal{O}	(13, 15)	(33, 34)	(38, 15)	(35, 28)	(26, 34)	(27, 34)	(27, 9)	(26, 9)	(35, 15)	(38, 28)
(13, 28)	(13, 28)	\mathcal{O}	(13, 15)	(33, 34)	(38, 15)	(35, 28)	(26, 34)	(27, 34)	(27, 9)	(26, 9)	(35, 15)	(38, 28)	(33, 9)

Now that we have constructed a “large” cyclic prime-order subgroup of $BLS6_6$ suitable for many pen-and-paper computations in elliptic curve cryptography, we have to look at how to do pairings in this context. We know that $BLS6_6$ is a pairing-friendly curve by design, since it has a small embedding degree $k = 6$. It is therefore possible to compute Weil pairings efficiently. However, in order to do so, we have to decide the groups \mathbb{G}_1 and \mathbb{G}_2 as explained in exercise 76.

Since $BLS6_6$ has two non-trivial subgroups, it would be possible to use any of them as the n -torsion group. However, in cryptography, the only secure choice is to use the large prime-order subgroup, which in our case is $BLS6_6[13]$. We therefore decide to consider the 13-torsion and define $G_1[13]$ as the first argument for the Weil pairing function:

check reference

$$\begin{aligned} \mathbb{G}_1[13] = \{ & (13, 15) \rightarrow (33, 34) \rightarrow (38, 15) \rightarrow (35, 28) \rightarrow (26, 34) \rightarrow (27, 34) \rightarrow \\ & (27, 9) \rightarrow (26, 9) \rightarrow (35, 15) \rightarrow (38, 28) \rightarrow (33, 9) \rightarrow (13, 28) \rightarrow \mathcal{O} \} \end{aligned}$$

In order to construct the domain for the second argument, we need to construct $\mathbb{G}_2[13]$, which, according to the general theory, should be defined by those elements P of the full 13-torsion group $BLS6_6[13]$ that are mapped to $43 \cdot P$ under the Frobenius endomorphism (equation 5.45).

check reference

3908 To compute $\mathbb{G}_2[13]$, we therefore have to find the full 13-torsion group first. To do so, we
 3909 use the technique from XXX, which tells us that the full 13-torsion can be found in the curve
 3910 extension over the extension field \mathbb{F}_{43^6} , since the embedding degree of $BLS6_6$ is 6:

$$BLS6_6 := \{(x, y) \mid y^2 = x^3 + 6 \text{ for all } x, y \in \mathbb{F}_{43^6}\} \quad (5.63)$$

3911 Thus, we have to construct \mathbb{F}_{43^6} , a field that contains 6321363049 elements. In order to do
 3912 so, we use the procedure of XXX and start by choosing a non-reducible polynomial of degree 6
 3913 from the ring of polynomials $\mathbb{F}_{43}[t]$. We choose $p(t) = t^6 + 6$. Using Sage, we get the following:

add refer-
ence

```
3915 sage: F43 = GF(43) 617
3916 sage: F43t.<t> = F43[] 618
3917 sage: p = F43t(t^6+6) 619
3918 sage: p.is_irreducible() 620
3919 True 621
3920 sage: F43_6.<v> = GF(43^6, name='v', modulus=p) 622
```

3921 Recall from XXX that elements $x \in \mathbb{F}_{43^6}$ can be seen as polynomials $a_0 + a_1v + a_2v^2 + \dots +$
 3922 a_5v^5 with the usual addition of polynomials and multiplication modulo $t^6 + 6$.

add refer-
ence

3923 In order to compute $\mathbb{G}_2[13]$, we first have to extend $BLS6_6$ to \mathbb{F}_{43^6} , that is, we keep the
 3924 defining equation, but expand the domain from \mathbb{F}_{43} to \mathbb{F}_{43^6} . After that, we have to find at least
 3925 one element P from that curve that is not the point at infinity, is in the full 13-torsion and
 3926 satisfies the identity $\pi(P) = [43]P$. We can then use this element as our generator of $\mathbb{G}_2[13]$ and
 3927 construct all other elements by repeatedly adding the generator to itself.

3928 Since $BLS6(\mathbb{F}_{43^6})$ contains 6321251664 elements, it's not a good strategy to simply loop
 3929 through all elements. Fortunately, Sage has a way to loop through elements from the torsion
 3930 group directly:

```
3931 sage: BLS6 = EllipticCurve(F43_6, [0, 6]) # curve extension 623
3932 sage: INF = BLS6(0) # point at infinity 624
3933 sage: for P in INF.division_points(13): # full 13-torsion 625
3934     ....: # PI(P) == [q]P 626
3935     ....:     if P.order() == 13: # exclude point at infinity 627
3936     ....:         PiP = BLS6([a.frobenius() for a in P]) 628
3937     ....:         qP = 43*P 629
3938     ....:         if PiP == qP: 630
3939     ....:             break 631
3940 sage: P.xy() 632
3941 (7*v^2, 16*v^3) 633
```

3942 We found an element from the full 13-torsion that is in the Eigenspace of the Eigenvalue 43,
 3943 which implies that it is an element of $\mathbb{G}_2[13]$. As $\mathbb{G}_2[13]$ is cyclic of prime order, this element
 3944 must be a generator:

$$g_{\mathbb{G}_2[13]} = (7v^2, 16v^3) \quad (5.64)$$

3945 We can use this generator to compute \mathbb{G}_2 in logarithmic order with respect to $g_{\mathbb{G}_2[13]}$. Using
 3946 Sage we get the following:

```
3947 sage: Q = BLS6(7*v^2, 16*v^3) 634
3948 sage: BLS6_13_2 = [] 635
```

```

3949 sage: for x in range(0,13):
3950     ....:     P = x*Q
3951     ....:     BLS6_13_2.append(P)

```

636
637
638

$$\begin{aligned} \mathbb{G}_2 = \{ & (7v^2, 16v^3) \rightarrow (10v^2, 28v^3) \rightarrow (42v^2, 16v^3) \rightarrow (37v^2, 27v^3) \rightarrow \\ & (16v^2, 28v^3) \rightarrow (17v^2, 28v^3) \rightarrow (17v^2, 15v^3) \rightarrow (16v^2, 15v^3) \rightarrow \\ & (37v^2, 16v^3) \rightarrow (42v^2, 27v^3) \rightarrow (10v^2, 15v^3) \rightarrow (7v^2, 27v^3) \rightarrow \mathcal{O} \} \end{aligned} \quad (5.65)$$

Again, having a logarithmic description of $\mathbb{G}_2[13]$ is tremendously helpful in pen-and-paper computations, as it reduces complicated computation in the extended curves to modular 13 arithmetics, as in the following example:

$$\begin{aligned} (17v^2, 28v^3) \oplus (10v^2, 15v^3) &= [6](7v^2, 16v^3) \oplus [11](7v^2, 16v^3) \\ &= [6+11](7v^2, 16v^3) \\ &= [4](7v^2, 16v^3) \\ &= (37v^2, 27v^3) \end{aligned}$$

3952 So XXX is really all we need to do computations in $\mathbb{G}_2[13]$ in this book efficiently.

3953 To summarize the previous steps, we have found two subgroups, $\mathbb{G}_1[13]$ and $\mathbb{G}_2[13]$ suit-
 3954 able to do Weil pairings on *BLS6_6* as explained in 5.49. Using the logarithmic order XXX
 3955 of $\mathbb{G}_1[13]$, the logarithmic order XXX of $\mathbb{G}_2[13]$ and the bilinearity in 5.66, we can do Weil
 3956 pairings on *BLS6_6* in a pen-and-paper style:

$$e([k_1]g_{BLS6_6[13]}, [k_2]g_{\mathbb{G}_2[13]}) = e(g_{BLS6_6[13]}, g_{\mathbb{G}_2[13]})^{k_1 \cdot k_2} \quad (5.66)$$

3957 Observe that the Weil pairing between our two generators is given by the following identity:

$$e(g_{BLS6_6[13]}, g_{\mathbb{G}_2[13]}) = 5v^5 + 16v^4 + 16v^3 + 15v^2 + 3v + 41 \quad (5.67)$$

```

3959 sage: g1 = BLS6([13,15])
3960 sage: g2 = BLS6([7*v^2, 16*v^3])
3961 sage: g1.weil_pairing(g2,13)
3962 5*v^5 + 16*v^4 + 16*v^3 + 15*v^2 + 3*v + 41

```

639
640
641
642

3963 5.6.5 Hashing to pairing groups

3964 We give various constructions to hash into \mathbb{G}_1 and \mathbb{G}_2 .

3965 We start with hashing to the scalar field... **TO APPEAR**

3966 None of these techniques work for hashing into \mathbb{G}_2 . We therefore implement Pederson's
 3967 Hash for BLS6.

We start with \mathbb{G}_1 . Our goal is to define an 12-bit bounded hash function:

$$H_1 : \{0, 1\}^{12} \rightarrow \mathbb{G}_1$$

Since $12 = 3 \cdot 4$ we “randomly” select 4 uniformly distributed generators $\{(38, 15), (35, 28), (27, 34), (38, 28)\}$ from \mathbb{G}_1 and use the pseudo-random function from XXX. Therefore, we have

to choose a set of 4 randomly generated invertible elements from \mathbb{F}_{13} for every generator. We choose the following:

$$\begin{aligned}(38, 15) &: \{2, 7, 5, 9\} \\ (35, 28) &: \{11, 4, 7, 7\} \\ (27, 34) &: \{5, 3, 7, 12\} \\ (38, 28) &: \{6, 5, 1, 8\}\end{aligned}$$

3968 Our hash function is then computed as follows:

$$\begin{aligned}H_1(x_{11}, x_1, \dots, x_0) &= [2 \cdot 7^{x_{11}} \cdot 5^{x_{10}} \cdot 9^{x_9}](38, 15) + [11 \cdot 4^{x_8} \cdot 7^{x_7} \cdot 7^{x_6}](35, 28) + \\ &\quad [5 \cdot 3^{x_5} \cdot 7^{x_4} \cdot 12^{x_3}](27, 34) + [6 \cdot 5^{x_2} \cdot 1^{x_1} \cdot 8^{x_0}](38, 28)\end{aligned}$$

3969 Note that $a^x = 1$ when $x = 0$. Hence, those terms can be omitted in the computation. In
3970 particular, the hash of the 12-bit zero string is given as follows:

correct
computa-
tions

WRONG – ORDERING – REDO

$$\begin{aligned}H_1(0) &= [2](38, 15) + [11](35, 28) + [5](27, 34) + [6](38, 28) = \\ &\quad (27, 34) + (26, 34) + (35, 28) + (26, 9) = (33, 9) + (13, 28) = (38, 28)\end{aligned}$$

The hash of 011010101100 is given as follows:

fill in
missing
parts

$$\begin{aligned}H_1(011010101100) &= \text{WRONG – ORDERING – REDO} \\ [2 \cdot 7^0 \cdot 5^1 \cdot 9^1](38, 15) &+ [11 \cdot 4^0 \cdot 7^1 \cdot 7^0](35, 28) + [5 \cdot 3^1 \cdot 7^0 \cdot 12^1](27, 34) + [6 \cdot 5^1 \cdot 1^0 \cdot 8^0](38, 28) = \\ [2 \cdot 5 \cdot 9](38, 15) &+ [11 \cdot 7](35, 28) + [5 \cdot 3 \cdot 12](27, 34) + [6 \cdot 5](38, 28) = \\ [12](38, 15) &+ [12](35, 28) + [11](27, 34) + [4](38, 28) =\end{aligned}$$

TOAPPEAR

We can use the same technique to define a 12-bit bounded hash function in \mathbb{G}_2 :

$$H_2 : \{0, 1\}^{12} \rightarrow \mathbb{G}_2$$

Again, we “randomly” select 4 uniformly distributed generators $\{(7v^2, 16v^3), (42v^2, 16v^3), (17v^2, 15v^3), (10v^2, 15v^3)\}$ from \mathbb{G}_2 , and use the pseudo-random function from XXX. Therefore, we have to choose a set of 4 randomly generated invertible elements from \mathbb{F}_{13} for every generator:

add refer-
ence

$$\begin{aligned}(7v^2, 16v^3) &: \{8, 4, 5, 7\} \\ (42v^2, 16v^3) &: \{12, 1, 3, 8\} \\ (17v^2, 15v^3) &: \{2, 3, 9, 11\} \\ (10v^2, 15v^3) &: \{3, 6, 9, 10\}\end{aligned}$$

Our hash function is then computed like this:

$$\begin{aligned}H_1(x_{11}, x_{10}, \dots, x_0) &= [8 \cdot 4^{x_{11}} \cdot 5^{x_{10}} \cdot 7^{x_9}](7v^2, 16v^3) + [12 \cdot 1^{x_8} \cdot 3^{x_7} \cdot 8^{x_6}](42v^2, 16v^3) + \\ &\quad [2 \cdot 3^{x_5} \cdot 9^{x_4} \cdot 11^{x_3}](17v^2, 15v^3) + [3 \cdot 6^{x_2} \cdot 9^{x_1} \cdot 10^{x_0}](10v^2, 15v^3)\end{aligned}$$


We extend this to a hash function that maps unbounded bitstrings to \mathbb{G}_2 by precomposing with an actual hash function like MD5, and feed the first 12 bits of its outcome into our previously defined hash function, with $\text{TinyMD5}_{\mathbb{G}_2}(s) = H_2(\text{MD5}(s)_0, \dots, \text{MD5}(s)_{11})$:

$$\text{TinyMD5}_{\mathbb{G}_2} : \{0, 1\}^* \rightarrow \mathbb{G}_2$$

For example, since $MD5('') = 0xd41d8cd98f00b204e9800998ecf8427e$, and the binary representation of the hexadecimal number $0x27e$ is 001001111110 , we compute $TinyMD5_{\mathbb{G}_2}$ of the empty string as follows:

$$TinyMD5_{\mathbb{G}_2}('') = H_2(MD5(s)_{11}, \dots, MD5(s)_0) = H_2(001001111110) =$$

3971



Chapter 6

Statements

As we have seen in the informal introduction XXX, a SNARK is a succinct non-interactive argument of knowledge, where the knowledge-proof attests to the correctness of statements like “The prover knows the prime factorization of a given number” or “The prover knows the preimage to a given SHA2 digest value” and similar things. However, human-readable statements like these are imprecise and not very useful from a formal perspective.

In this chapter we therefore look more closely at ways to formalize statements in mathematically rigorous ways, useful for SNARK development. We start by introducing formal languages as a way to define statements properly (section 6.1). We will then look at algebraic circuits and Rank-1 Constraint Systems [R1CS] as two particularly useful ways to define statements in certain formal languages (section 6.2).

Proper statement design should be of high priority in the development of SNARKs, since unintended true statements can lead to potentially severe and almost undetectable security vulnerabilities in the applications of SNARKs.

6.1 Formal Languages

Formal languages provide the theoretical background in which statements can be formulated in a logically rigorous way and where proving the correctness of any given statement can be realized by computing words in that language.

One might argue that the understanding of formal languages is not very important in SNARK development and associated statement design, but terms from that field of research are standard jargon in many papers on zero-knowledge proofs. We therefore believe that at least some introduction to formal languages and how they fit into the picture of SNARK development is beneficial, mostly to give developers a better intuition about where all this is located in the bigger picture of the logic landscape. In addition, formal languages give a better understanding of what a formal proof for a statement actually is.

Roughly speaking, a formal language (or just language for short) is nothing but a set of words and words, in turn, are strings of letters taken from some alphabet and formed according to some defining rules of the language.

To be more precise, let Σ be any set and Σ^* the set of all **strings** of finite length $\langle x_1, \dots, x_n \rangle$ of elements x_j from Σ including the empty string $\langle \rangle \in \Sigma^*$. Then, a **language** L , in its most general definition, is nothing but a subset of the set of all finite strings Σ^* . In this context, the set Σ is called the **alphabet** of the language L , elements from Σ are called letters and elements from L are called **words**. If there are rules that specify which strings from Σ^* belong to the language and which don't, those rules are called the **grammar** of the language. If L_1 and L_2 are

Chapter
1?

two formal languages over the same alphabet, we call L_1 and L_2 **equivalent** if they consist of the same set of words.

While the term language might suggest a deeper relation to the well known **natural languages** like English, formal languages and natural languages differ in many ways. The following two examples will provide some intuition about formal languages and their differences to natural languages:

Example 106 (The English language). To give a better understanding of formal languages consider the natural language English. The English alphabet is given by the following set

$$\Sigma_{English} = \{A, a, B, b, C, c, D, d, E, e, F, f, G, g, H, h, I, i, J, j, K, k, L, l, M, m, N, n, O, o, P, p, Q, q, R, r, S, s, T, t, U, u, V, v, W, w, X, x, Y, y, Z, z\}$$

The natural language English does not define words by abstract rules, but by something we might call historical human convention as a word in the language English is distinguished from any other string from the English alphabet by human convention not by formal rules. In that regard strings like “tea” or “eat” are words in English, but “aet” and “tae” are not, because people agree on that. So while the set of all English words is a formal language $L_{English} \subset \Sigma_{English}$ there is no formal grammar that defines what a word in English is and what not.

It should also be recognized that in such a simple definition, the “grammar” of the natural language English is different from the grammar of the formal language English. The grammar of natural English defines how sentences are generated from words, while sentences have no meaning in our simple formal language English.

In order to express natural English sentences in a formal English language, one has to extend the alphabet by a space character together with the set of all punctuations and then include the grammar of the natural language English into the formal language English. It should be noted however that in such a formal language, sentences like “I drink tea, but I don’t eat meat.” from the natural language English are actually words in the formal language English.

Example 107 (Alternating Binary strings). To consider a very basic formal language with an almost trivial grammar, consider the set of the two letters 0 and 1 as our alphabet Σ :

$$\Sigma = \{0, 1\}$$

Also imply the grammar that a proper word must consist of alternating binary letters of arbitrary length including the empty string. The associated language L_{alt} is the set of all finite binary strings, where a 1 must follow a 0 and vice versa. So, for example, $\langle 1, 0, 1, 0, 1, 0, 1, 0, 1 \rangle \in L_{alt}$ is a word in this languages as is $\langle 0 \rangle \in L_{alt}$ or the empty word $\langle \rangle \in L_{alt}$. However, the binary string $\langle 1, 0, 1, 0, 1, 0, 1, 1, 1 \rangle \in \{0, 1\}^*$ is not a proper word, as it violates the grammar of L_{alt} , since the last 3 letters are all 1. Furthermore, the string $\langle 0, A, 0, A, 0, A, 0 \rangle$ is not a proper word, as not all its letters are from the alphabet Σ .

6.1.0.0.1 Decision Functions Our previous definition of formal languages is very general and many subclasses of languages are known in the literature. However, in the context of SNARK development, languages are commonly defined as **decision problems** where a so-called **deciding relation** $R \subset \Sigma^*$ decides whether a given string $x \in \Sigma^*$ is a word in the language or not. If $x \in R$ then x is a word in the associated language L_R and if $x \notin R$ then not. The relation R therefore summarizes the grammar of language L_R .

Unfortunately, in some literature on proof systems, $x \in R$ is often written as $R(x)$, which is misleading since in general R is not a function but a relation in Σ^* . For the sake of this book, we

therefore adopt a different point of view and work with what we might call a **decision function** instead:

$$R : \Sigma^* \rightarrow \{true, false\} \quad (6.1)$$

Decision functions decide if a string $x \in \Sigma^*$ is an element of a language or not. In case a decision function is given, the associated language itself can be written as the set of all strings that are decided by R , i.e as the set:

$$L_R := \{x \in \Sigma^* \mid R(x) = true\} \quad (6.2)$$

In the context of formal languages and decision problems, a **statement** S is the claim that language L contains a word x , i.e a statement claims that there exists some $x \in L$. A constructive **proof** for statement S is given by some string $P \in \Sigma^*$ and a proof is **verified** by checking $R(P) = true$. In this case, P is called an **instance** of the statement S .

Example 108 (Alternating Binary strings). To consider a very basic formal language with a decision function, consider the language L_{alt} from example 107. Attempting to write the grammar of this language in a more formal way, we can define the following decision function:

$$R : \{0, 1\}^* \rightarrow \{true, false\} ; \langle x_0, x_1, \dots, x_n \rangle \mapsto \begin{cases} true & x_{j-1} \neq x_j \text{ for all } 1 \leq j \leq n \\ false & \text{else} \end{cases}$$

We can use this function to decide if given binary strings are words in L_{alt} or not. Some examples are given below:

$$R(\langle 1, 0, 1 \rangle) = true, \quad R(\langle 0 \rangle) = true, \quad R(\langle \rangle) = true, \quad R(\langle 1, 1 \rangle) = false$$

Given language L_{alt} , it makes sense to claim the following statement: “There exists an alternating string.” One way to prove this statement constructively is by providing an actual instance, that is, providing an example of an alternating string like $x = \langle 1, 0, 1 \rangle$. Constructing string $\langle 1, 0, 1 \rangle$ therefore proves the statement “There exists an alternating string.”, because one can verify that $R(\langle 1, 0, 1 \rangle) = true$.

Example 109 (Programming Language). Programming languages are a very important class of formal languages. For these languages, the alphabet is usually (a subset) of the ASCII table, and the grammar is defined by the rules of the programming language’s compiler. Words, then, are nothing but properly written computer programs that the compiler accepts. The compiler can therefore be interpreted as the decision function.

To give an unusual example strange enough to highlight the point, consider the programming language Malbolge as defined in XXX. This language was specifically designed to be almost impossible to use and writing programs in this language is a difficult task. An interesting claim is therefore the statement: “There exists a computer program in Malbolge”. As it turned out, proving this statement constructively, that is, providing an example instance of such a program, is not an easy task, as it took two years after the introduction of Malbolge to write a program that its compiler accepts. So, for two years, no one was able to prove the statement constructively.

To look at the high-level description of Malbolge more formally, we write $L_{Malbolge}$ for the language that uses the ASCII table as its alphabet and its words are strings of ASCII letters that the Malbolge compiler accepts. Proving the statement “There exists a computer program in Malbolge” is then equivalent to the task of finding some word $x \in L_{Malbolge}$. The string

(=<'9876Z4321UT.-Q+*)M'&%\$H"! }|Bzy?=|{z]KwZY44Eq0/{mlk**

hKs_dG5[m_BA{?-Y;;Vb'rR5431M}/.zHGwEDCBA@98\6543W10/.R,+O<

add reference

is an example of such a proof, as it is excepted by the Malbolge compiler and is compiled to an executable binary that displays “Hello, World.” (See XXX). In this example, the Malbolge compiler therefore serves as the verification process.

add reference

Example 110 (The Empty Language). To see that not every language has even a single word, consider the alphabet $\Sigma = \mathbb{Z}_6$, where \mathbb{Z}_6 is the ring of modular 6 arithmetic as derived in example 9. Distinguishing the set \mathbb{Z}_6^* of all elements in modular 6 arithmetic that have multiplicative inverses from the set $(\mathbb{Z}_6)^*$ of all finite strings over the alphabet \mathbb{Z}_6 , we define the following decision function:

$$R_0 : (\mathbb{Z}_6)^* \rightarrow \{true, false\} ; \langle x_1, \dots, x_n \rangle \mapsto \begin{cases} true & n = 1 \text{ and } x \cdot x = 2 \\ false & \text{else} \end{cases}$$

We write L_0 for the associated language. As we can see from the multiplication table of \mathbb{Z}_6 in example 9, the ring \mathbb{Z}_6 does not contain any element x such that $x \cdot x = 2$, which implies $R_0(\langle x_1, \dots, x_n \rangle) = false$ for all strings $\langle x_1, \dots, x_n \rangle \in \Sigma^*$. The language therefore does not contain any words. Proving the statement “There exists a word in L_0 ” constructively by providing an instance is therefore impossible. The verification will never check any string.

Example 111 (3-Factorization). We will use the following simple example repeatedly throughout this book. The task is to develop a SNARK that proves knowledge of three factors of an element from the finite field \mathbb{F}_{13} . There is nothing particularly useful about this example from an application point of view, however, in a sense, it is the most simple example that gives rise to a non trivial SNARK in some of the most common zero-knowledge proof systems.

Formalizing the high-level description, we use $\Sigma := \mathbb{F}_{13}$ as the underlying alphabet of this problem and define the language $L_{3, fac}$ to consists of those strings of field elements from \mathbb{F}_{13} that contain exactly 4 letters x_1, x_2, x_3, x_4 which satisfy the equation $x_1 \cdot x_2 \cdot x_3 = x_4$.

So, for example, the string $\langle 2, 12, 4, 5 \rangle$ is a word in $L_{3, fac}$, while neither $\langle 2, 12, 11 \rangle$, nor $\langle 2, 12, 4, 7 \rangle$ nor $\langle 2, 12, 7, UPS \rangle$ are words in $L_{3, fac}$ as they don’t satisfy the grammar or are not defined over the alphabet \mathbb{F}_{13} .

Distinguishing the set \mathbb{F}_{13}^* of all elements in the multiplicative group of \mathbb{F}_{13} from the set $(\mathbb{F}_{13})^*$ of all finite strings over the alphabet \mathbb{F}_{13} , we can describe the language $L_{3, fac}$ more formally by introducing a decision function:

$$R_{3, fac} : (\mathbb{F}_{13})^* \rightarrow \{true, false\} ; \langle x_1, \dots, x_n \rangle \mapsto \begin{cases} true & n = 4 \text{ and } x_1 \cdot x_2 \cdot x_3 = x_4 \\ false & \text{else} \end{cases}$$

Having defined the language $L_{3, fac}$, it then makes sense to claim the statement “There is a word in $L_{3, fac}$ ”. The way $L_{3, fac}$ is designed, this statement is equivalent to the statement “There are four elements x_1, x_2, x_3, x_4 from the finite field \mathbb{F}_{13} such that the equation $x_1 \cdot x_2 \cdot x_3 = w_4$ holds.”

Proving the correctness of this statement constructively means to actually find some concrete field elements like $x_1 = 2, x_2 = 12, x_3 = 4$ and $x_4 = 5$ that satisfy the decision function $R_{3, fac}$. The string $\langle 2, 12, 4, 5 \rangle$ is therefore a constructive proof for the statement that $L_{3, fac}$ contains words and the computation $R_{3, fac}(\langle 2, 12, 4, 5 \rangle) = true$ is a verification of that proof. In contrast, the string $\langle 2, 12, 4, 7 \rangle$ is not a proof of the statement, since the check $R_{3, fac}(\langle 2, 12, 4, 7 \rangle) = false$ does not verify the proof.

Example 112 (Tiny-jubjub Membership). In one of our main examples, we derive a SNARK that proves a pair (x, y) of field elements from \mathbb{F}_{13} to be a point on the tiny-jubjub curve in its twisted Edwards form as derived in example 5.36.

jubjub

In the first step, we define a language such that points on the tiny-jubjub curve are in 1:1 correspondence with words in that language.

Since the tiny-jubjub curve is an elliptic curve over the field \mathbb{F}_{13} , we choose the alphabet $\Sigma = \mathbb{F}_{13}$. In this case, the set $(\mathbb{F}_{13})^*$ consists of all finite strings of field elements from \mathbb{F}_{13} . To define the grammar, recall from 5.36 that a point on the tiny-jubjub curve is a pair (x, y) of field elements such that $3 \cdot x^2 + y^2 = 1 + 8 \cdot x^2 \cdot y^2$. We can use this equation to derive the following decision function:

$$R_{\text{tiny.jj}} : (\mathbb{F}_{13})^* \rightarrow \{true, false\}; \langle x_1, \dots, x_n \rangle \mapsto \begin{cases} true & n = 2 \text{ and } 3 \cdot x_1^2 + x_2^2 = 1 + 8 \cdot x_1^2 \cdot x_2^2 \\ false & \text{else} \end{cases}$$

The associated language $L_{\text{tiny.jj}}$ is then given as the set of all strings from $(\mathbb{F}_{13})^*$ that are mapped onto *true* by $R_{\text{tiny.jj}}$. We get

$$L_{\text{tiny.jj}} = \{ \langle x_1, \dots, x_n \rangle \in (\mathbb{F}_{13})^* \mid R_{\text{tiny.jj}}(\langle x_1, \dots, x_n \rangle) = true \}$$

We can claim the statement “There is a word in $L_{\text{tiny.jj}}$ ” and because $L_{\text{tiny.jj}}$ is defined by $R_{\text{tiny.jj}}$, this statement is equivalent to the claim “The tiny-jubjub curve in its twisted Edwards form has a curve point.”

A constructive proof for this statement is a string $\langle x, y \rangle$ of field elements from \mathbb{F}_{13} that satisfies the twisted Edwards equation. Example 5.36 therefore implies that the string $\langle 11, 6 \rangle$ is a constructive proof and the computation $R_{\text{tiny.jj}}(\langle 11, 6 \rangle) = true$ is a proof verification. In contrast, the string $\langle 1, 1 \rangle$ is not a proof of the statement, since the computation $R_{\text{tiny.jj}}(\langle 1, 1 \rangle) = false$ does not verify the proof.

Exercise 82. Define a decision function such that the associated language L_{Exercise_1} consist precisely of all solutions to the equation $5x + 4 = 28 + 2x$ over \mathbb{F}_{13} . Provide a constructive proof for the claim: “There exist a word in L_{Exercise_1} and verify the proof.”

Exercise 83. Consider modular 6 arithmetic \mathbb{Z}_6 from example 9, the alphabet $\Sigma = \mathbb{Z}_6$ and the decision function

$$R_{\text{example}_9} : \Sigma^* \rightarrow \{true, false\}; \langle x_1, \dots, x_n \rangle \mapsto \begin{cases} true & n = 1 \text{ and } 3 \cdot x_1 + 3 = 0 \\ false & \text{else} \end{cases}$$

Compute all words in the associated language L_{example_9} , provide a constructive proof for the statement “There exist a word in L_{example_9} ” and verify the proof.

6.1.0.0.2 Instance and Witness As we have seen in the previous paragraph, statements provide membership claims in formal languages, and instances serve as constructive proofs for those claims. However, in the context of **zero-knowledge** proof systems, our notion of constructive proofs is refined in such a way that it is possible to hide parts of the proof instance and still be able to prove the statement. In this context, it is therefore necessary to split a proof into an unhidden, public part called the **instance** and a hidden, private part called a **witness**.

To account for this separation of a proof instance into an instance and a witness part, our previous definition of formal languages needs a refinement. Instead of a single alphabet, the refined definition considers two alphabets Σ_I and Σ_W , and a decision function defined as follows:

$$R : \Sigma_I^* \times \Sigma_W^* \rightarrow \{true, false\}; (i; w) \mapsto R(i; w) \quad (6.3)$$

Words are therefore strings $(i;w) \in \Sigma_I^* \times \Sigma_W^*$ with $R(i;w) = \text{true}$. The refined definition differentiates between inputs $i \in \Sigma_I$ and inputs $w \in \Sigma_W$. The input i is called an **instance** and the input w is called a **witness** of R .

If a decision function is given, the associated language is defined as the set of all strings from the underlying alphabets that are verified by the decision function:

$$L_R := \{(i;w) \in \Sigma_I^* \times \Sigma_W^* \mid R(i;w) = \text{true}\} \quad (6.4)$$

In this refined context, a **statement** S is a claim that, given an instance $i \in \Sigma_I^*$, there is a witness $w \in \Sigma_W^*$ such that language L contains a word $(i;w)$. A constructive **proof** for statement S is given by some string $P = (i;w) \in \Sigma_I^* \times \Sigma_W^*$ and a proof is **verified** by $R(P) = \text{true}$.

At this point, it is important to note that, while constructive proofs in languages that distinguish between instance and witness as in don't look very different from constructive proofs in languages from 6.1.0.0.1, we will see in 8 that given some instance, there are proof systems able to prove the statement (at least with high probability) without revealing anything about the witness. In this sense the witness is often called the **private input** and the instance is called the **public input**.

It is worth understanding the difference between statements as defined in 6.1.0.0.1 and the refined notion of statements from this paragraph. While statements in the sense of the previous paragraph can be seen as membership claims, statements in the refined definition can be seen as knowledge-claims, where a prover claims knowledge of a witness for a given instance. For a more detailed discussion on this topic see [XXX sec 1.4]

Example 113 (SHA256 – Knowledge of Preimage). One of the most common examples in the context of zero-knowledge proof systems is the **knowledge-of-a-preimage proof** for some cryptographic hash function like *SHA256*, where a publicly known *SHA256* digest value is given, and the task is to prove knowledge of a preimage for that digest under the *SHA256* function, without revealing that preimage.

To understand this problem in detail, we have to introduce a language able to describe the knowledge-of-preimage problem in such a way that the claim “Given digest i , there is a preimage w such that $SHA256(w) = i$ ” becomes a statement in that language. Since *SHA256* is a function

$$SHA256 : \{0,1\}^* \rightarrow \{0,1\}^{256}$$

that maps binary strings of arbitrary length onto binary strings of length 256 and we want to prove knowledge of preimages, we have to consider binary strings of size 256 as instances and binary strings of arbitrary length as witnesses.

An appropriate alphabet Σ_I for the set of all instances and an appropriate alphabet Σ_W for the set of all witnesses is therefore given by the set $\{0,1\}$ of the two binary letters and a proper decision function is given by:

$$R_{SHA256} : \{0,1\}^* \times \{0,1\}^* \rightarrow \{\text{true}, \text{false}\};$$

$$(i;w) \mapsto \begin{cases} \text{true} & |i| = 256, i = SHA256(w) \\ \text{false} & \text{else} \end{cases}$$

We write L_{SHA256} for the associated language and note that it consists of words, which are strings $(i;w)$ such that the instance i is the *SHA256* image of the witness w .

Given some instance $i \in \{0,1\}^{256}$, a statement in L_{SHA256} is the claim “Given digest i , there is a preimage w such that $SHA256(w) = i$ ”, which is exactly what the knowledge-of-preimage problem is about. A constructive proof for this statement is therefore given by a preimage w to the digest i and proof verification is achieved by verifying that $SHA256(w) = i$.

add reference

4158 *Example 114 (3-factorization).* To give another intuition about the implication of refined lan-
 4159 guages, consider $L_{3.fac}$ from example 111 again. As we have seen, a constructive proof in
 4160 $L_{3.fac}$ is given by 4 field elements x_1, x_2, x_3 and x_4 from \mathbb{F}_{13} such that the product in modular
 4161 13 arithmetic of the first three elements is equal to the 4'th element.

4162 Splitting words from $L_{3.fac}$ into instance and witness parts, we can reformulate the problem
 4163 and introduce different levels of knowledge-claims into the problem. For example, we could
 4164 reformulate the membership statement of $L_{3.fac}$ into a statement where all factors x_1, x_2, x_3 of
 4165 x_4 are witnesses and only the product x_4 is the instance. A statement for this reformulation is
 4166 then expressed by the claim: "Given an instance field element x_4 , there are three witness factors
 4167 of x_4 ". Assuming some instance x_4 , a constructive proof for the associated knowledge claim is
 4168 then provided by any string (x_1, x_2, x_3) such that $x_1 \cdot x_2 \cdot x_3 = x_4$.

We can formalize this new language, which we might call $L_{3.fac_zk}$, by defining the follow-
 ing decision function:

$$R_{3.fac_zk} : (\mathbb{F}_{13})^* \times (\mathbb{F}_{13})^* \rightarrow \{true, false\};$$

$$(< i_1, \dots, i_n >; < w_1, \dots, w_m >) \mapsto \begin{cases} true & n = 1, m = 3, i_1 = w_1 \cdot w_2 \cdot w_3 \\ false & else \end{cases}$$

4169 The associated language $L_{3.fac_zk}$ is defined by all strings from $(\mathbb{F}_{13})^* \times (\mathbb{F}_{13})^*$ that are mapped
 4170 onto *true* under the decision function $R_{3.fac_zk}$.

4171 Considering the distinction we made between the instance and the witness part in $L_{3.fac_zk}$,
 4172 one might ask why we chose the factors x_1, x_2 and x_3 to be the witness and the product x_4 to
 4173 be the instance and why we didn't choose another combination? This was an arbitrary choice
 4174 in the example. Every other combination of instance and witness would be equally valid. For
 4175 example, it would be possible to declare all variables as witness or to declare all variables as
 4176 instance. Actual choices are determined by the application only.

4177 *Example 115 (The Tiny-Jubjub Curve).* Consider the language $L_{tiny.jj}$ from example 112. As
 4178 we have seen, a constructive proof in $L_{tiny.jj}$ is given by a pair (x_1, x_2) of field elements from
 4179 \mathbb{F}_{13} such that the pair is a point of the tiny-jubjub curve in its Edwards representation.

4180 We look at a reasonable splitting of words from $L_{tiny.jj}$ into instance and witness parts. The
 4181 two obvious choices are to either choose both coordinates x_1 as x_2 as instance inputs, or to
 4182 choose both coordinates x_1 as x_2 as witness inputs.

In case both coordinates are instance, we define the grammar of the associated language by
 introducing the following decision function:

$$R_{tiny.jj.1} : (\mathbb{F}_{13})^* \times (\mathbb{F}_{13})^* \rightarrow \{true, false\};$$

$$(< I_1, \dots, I_n >; < W_1, \dots, W_m >) \mapsto \begin{cases} true & n = 2, m = 0 \text{ and } 3 \cdot I_1^2 + I_2^2 = 1 + 8 \cdot I_1^2 \cdot I_2^2 \\ false & else \end{cases}$$

4183 The language $L_{tiny.jj.1}$ is defined as the set of all strings from $(\mathbb{F}_{13})^* \times (\mathbb{F}_{13})^*$ that are mapped
 4184 onto *true* by $R_{tiny.jj.1}$.

In case both coordinates are witness inputs, we define the grammar of the associated refined
 language by introducing the following decision function:

$$R_{tiny.jj_zk} : (\mathbb{F}_{13})^* \times (\mathbb{F}_{13})^* \rightarrow \{true, false\};$$

$$(< I_1, \dots, I_n >; < W_1, \dots, W_m >) \mapsto \begin{cases} true & n = 0, m = m \text{ and } 3 \cdot W_1^2 + W_2^2 = 1 + 8 \cdot W_1^2 \cdot W_2^2 \\ false & else \end{cases}$$

4185 The language $L_{\text{tiny.jj_zk}}$ is defined as the set of all strings from $(\mathbb{F}_{13})^* \times (\mathbb{F}_{13})^*$ that are mapped
 4186 onto *true* by $R_{\text{tiny.jj_zk}}$.

Exercise 84. Consider the modular 6 arithmetic \mathbb{Z}_6 from example 9 as alphabets Σ_I and Σ_W and the following decision function

$$R_{\text{linear}} : \Sigma^* \times \Sigma^* \rightarrow \{\text{true}, \text{false}\};$$

$$(i; w) \mapsto \begin{cases} \text{true} & |i| = 3 \text{ and } |w| = 1 \text{ and } i_1 \cdot w_1 + i_2 = i_3 \\ \text{false} & \text{else} \end{cases}$$

Which of the following instances (i_1, i_2, i_3) has a proof of knowledge in L_{linear} ?

$$(3, 3, 0), \quad (2, 1, 0), \quad (4, 4, 2)$$

4187 *Exercise 85* (Edwards Addition on Tiny-Jubjub). Consider the tiny-jubjub curve together with
 4188 its twisted Edwards addition law from example 69. Define an instance alphabet Σ_I , a witness
 4189 alphabet Σ_W and a decision function R_{add} with associated language L_{add} such that a string
 4190 $(i; w) \in \Sigma_I^* \times \Sigma_W^*$ is a word in L_{add} if and only if i is a pair of curve points on the tiny-jubjub
 4191 curve in Edwards form and w is the sum of those curve points.

4192 Choose some instance $i \in \Sigma_I^*$, provide a constructive proof for the statement “There is a
 4193 witness $w \in \Sigma_W^*$ such that $(i; w)$ is a word in L_{add} ” and verify that proof. Then find some
 4194 instance $i \in \Sigma_I^*$ such that i has no knowledge proof in L_{add} .

4195 **6.1.0.0.3 Modularity** From a developers perspective, it is often useful to construct complex
 4196 statements and their representing languages from simple ones. In the context of zero-knowledge
 4197 proof systems, those simple building blocks are often called **gadgets**, and gadget libraries usu-
 4198 ally contain representations of atomic types like booleans, integers, various hash functions,
 4199 elliptic curve cryptography and many more (See chapter 7 for that). In order to synthesize state-
 4200 ments, developers then combine predefined gadgets into complex logic. We call the ability to
 4201 combine statements into more complex statements **modularity**.

4202 To understand the concept of modularity on the level of formal languages defined by deci-
 4203 sion functions, we need to look at the **intersection** of two languages, which exists whenever
 4204 both languages are defined over the same alphabet. In this case, the intersection is a language
 4205 that consists of strings which are words in both languages.

4206 To be more precise, let L_1 and L_2 be two languages defined over the same instance and
 4207 witness alphabets Σ_I and Σ_W . Then the intersection $L_1 \cap L_2$ of L_1 and L_2 is defined as

$$L_1 \cap L_2 := \{x \mid x \in L_1 \text{ and } x \in L_2\} \quad (6.5)$$

4208 If both languages are defined by decision functions R_1 and R_2 , the following function is a
 4209 decision function for the intersection language $L_1 \cap L_2$:

$$R_{L_1 \cap L_2} : \Sigma_I^* \times \Sigma_W^* \rightarrow \{\text{true}, \text{false}\}; (i, w) \mapsto R_1(i, w) \text{ and } R_2(i, w) \quad (6.6)$$

4210 Thus, the intersection of two decision-function-based languages is a also decision-function-
 4211 based language. This is important from an implementations point of view: It allows us to
 4212 construct complex decision functions, their languages and associated statements from simple
 4213 building blocks. Given a publicly known instance $i \in \Sigma_I^*$ a statement in an intersection language
 4214 then claims knowledge of a witness that satisfies all relations simultaneously.

6.2 Statement Representations

As we have seen in the previous section, formal languages and their definitions by decision functions are a powerful tool to describe statements in a formally rigorous manner.

However, from the perspective of existing zero-knowledge proof systems, not all ways to actually represent decision functions are equally useful. Depending on the proof system, some are more suitable than others. In this section, we will describe two of the most common ways to represent decision functions and their statements.

6.2.1 Rank-1 Quadratic Constraint Systems

Although decision functions are expressible in various ways, many contemporary proving systems require the decision function to be expressed in terms of a system of quadratic equations over a finite field. This is true in particular for pairing-based proving systems like the one we describe in chapter 8, roughly because it is possible to separate instance and witness and then check solutions to those equations “in the exponent” of pairing-friendly cryptographic groups.

In this section, we will have a closer look at a particular type of quadratic equations called **Rank-1 (quadratic) Constraints Systems**, which are a common standard in zero-knowledge proof systems. We will start with a general introduction to those constraint systems and then look at their relation to formal languages. Then we will look into a common way to compute solutions to those systems.

6.2.1.0.1 R1CS representation To understand what **Rank-1 (quadratic) Constraint Systems** [R1CS] are in detail, let \mathbb{F} be a field, n, m and $k \in \mathbb{N}$ three numbers and a_j^i, b_j^i and $c_j^i \in \mathbb{F}$ constants from \mathbb{F} for every index $0 \leq j \leq n+m$ and $1 \leq i \leq k$. Then a Rank-1 Constraint System is defined as the following set of k many equations:

$$\begin{aligned} (a_0^1 + \sum_{j=1}^n a_j^1 \cdot I_j + \sum_{j=1}^m a_{n+j}^1 \cdot W_j) \cdot (b_0^1 + \sum_{j=1}^n b_j^1 \cdot I_j + \sum_{j=1}^m b_{n+j}^1 \cdot W_j) &= c_0^1 + \sum_{j=1}^n c_j^1 \cdot I_j + \sum_{j=1}^m c_{n+j}^1 \cdot W_j \\ &\vdots \\ (a_0^k + \sum_{j=1}^n a_j^k \cdot I_j + \sum_{j=1}^m a_{n+j}^k \cdot W_j) \cdot (b_0^k + \sum_{j=1}^n b_j^k \cdot I_j + \sum_{j=1}^m b_{n+j}^k \cdot W_j) &= c_0^k + \sum_{j=1}^n c_j^k \cdot I_j + \sum_{j=1}^m c_{n+j}^k \cdot W_j \end{aligned}$$

If a Rank-1 Constraint System is given, the parameter k is called the **number of constraints** and each equation is called a **constraint**. If a pair of strings $\langle I_1, \dots, I_n \rangle; \langle W_1, \dots, W_m \rangle$ of field elements satisfies these equations, $\langle I_1, \dots, I_n \rangle$ is called an **instance** and $\langle W_1, \dots, W_m \rangle$ is called a **witness** of the system.

Remark 4 (Matrix notation). The presentation of Rank-1 Constraint Systems can be simplified using the notation of vectors and matrices, which abstracts over the indices. In fact if $x = (1, I, W) \in \mathbb{F}^{1+n+m}$ is a $(n+m+1)$ -dimensional vector, A, B, C are $(n+m+1) \times k$ -dimensional matrices and \odot is the **Schur/Hadamard product**, then a R1CS can be written as

$$Ax \odot Bx = Cx$$

However, since we did not introduce vector spaces and matrix calculus in the book, we use XXX as the defining equation for rank-1 constraints systems. We only highlighted the matrix notation, because it is sometimes used in the literature.

It can be shown that every bounded computation is expressible as a Rank-1 Constraint System and R1CS is therefore a universal model for bounded computations. We will derive some

Schur/Hadamard product

add reference

insights into common approaches of how to compile bounded computation into Rank-1 Constraint Systems in chapter 7.

Generally speaking, the idea of a Rank-1 Constraint System is to keep track of all the values that any variable can hold during a computation and to bind the relationships among all those variables that are implied by the computation itself. Once relations between all steps of a computer program are constrained, program execution is then enforced to be computed in exactly in the expected way without any opportunity for deviations. In this sense, solutions to Rank-1 Constraint Systems are proofs of proper program execution.

Example 116 (R1CS for 3-Factorization). To provide a better intuition of Rank-1 Constraint Systems, consider the language $L_{3.fac_zk}$ from example 114 again. As we have seen, $L_{3.fac_zk}$ consists of words $\langle I_1 \rangle; \langle W_1, W_2, W_3 \rangle$ over the alphabet \mathbb{F}_{13} such that $I_1 = W_1 \cdot W_2 \cdot W_3$. We show how to rewrite the problem as a Rank-1 Constraint System.

Since R1CS are systems of quadratic equations, expressions like $W_1 \cdot W_2 \cdot W_3$ which contain products of more than two factors (which are therefore not quadratic) have to be rewritten in a process often called **flattening**. To flatten the defining equation $I_1 = W_1 \cdot W_2 \cdot W_3$ of $L_{3.fac_zk}$ we introduce a new variable W_4 , which captures two of the three multiplications in $W_1 \cdot W_2 \cdot W_3$. We get the following two constraints

$$\begin{aligned} W_1 \cdot W_2 &= W_4 && \text{constraint 1} \\ W_4 \cdot W_3 &= I_1 && \text{constraint 2} \end{aligned}$$

Given some instance I_1 , any solution (W_1, W_2, W_3, W_4) to this system of equations provides a solution to the original equation $I_1 = W_1 \cdot W_2 \cdot W_3$ and vice versa. Both equations are therefore equivalent in the sense that solutions are in a 1:1 correspondence.

Looking at both equations from this constraints system, we see how each constraint enforces a step in the computation. In fact, constraint 1 forces any computation to multiply the witness W_1 and W_2 first. Otherwise it would not be possible to compute the witness W_4 , which is needed to solve constraint 2. Witness W_4 therefore expresses the constraining of an intermediate computational state.

At this point, one might ask why equation 1 constrains the system to compute $W_1 \cdot W_2$ first. In order to compute $W_1 \cdot W_2 \cdot W_3$, calculating $W_2 \cdot W_3$, or $W_1 \cdot W_3$ in the beginning and then multiplying the result with the remaining factor gives the exact same result. The reason is purely a matter of choice. For example, the following R1CS would define the exact same language:

$$\begin{aligned} W_2 \cdot W_3 &= W_4 && \text{constraint 1} \\ W_4 \cdot W_1 &= I_1 && \text{constraint 2} \end{aligned}$$

It follows that R1CS are in general **not unique** descriptions of any given situation: many different R1CS are able to describe the same problem.

To see that the two quadratic equations qualify as a Rank-1 Constraint System, choose the parameter $n = 1$, $m = 4$ and $k = 2$ as well as

$$\begin{aligned} a_0^1 &= 0 & a_1^1 &= 0 & a_2^1 &= 1 & a_3^1 &= 0 & a_4^1 &= 0 & a_5^1 &= 0 \\ a_0^2 &= 0 & a_1^2 &= 0 & a_2^2 &= 0 & a_3^2 &= 0 & a_4^2 &= 0 & a_5^2 &= 1 \\ b_0^1 &= 0 & b_1^1 &= 0 & b_2^1 &= 0 & b_3^1 &= 1 & b_4^1 &= 0 & b_5^1 &= 0 \\ b_0^2 &= 0 & b_1^2 &= 0 & b_2^2 &= 0 & b_3^2 &= 0 & b_4^2 &= 1 & b_5^2 &= 0 \\ c_0^1 &= 0 & c_1^1 &= 0 & c_2^1 &= 0 & c_3^1 &= 0 & c_4^1 &= 0 & c_5^1 &= 1 \\ c_0^2 &= 0 & c_1^2 &= 1 & c_2^2 &= 0 & c_3^2 &= 0 & c_4^2 &= 0 & c_5^2 &= 0 \end{aligned}$$

With this choice, the Rank-1 Constraint System of our 3-factorization problem can be written in its most general form as follows:

$$\begin{aligned} (a_0^1 + a_1^1 I_1 + a_2^1 W_1 + a_3^1 W_2 + a_4^1 W_3 + a_5^1 W_4) \cdot (b_0^1 + b_1^1 I_1 + b_2^1 W_1 + b_3^1 W_2 + b_4^1 W_3 + b_5^1 W_4) &= (c_0^1 + c_1^1 I_1 + c_2^1 W_1 + c_3^1 W_2 + c_4^1 W_3 + c_5^1 W_4) \\ (a_0^2 + a_1^2 I_1 + a_2^2 W_2 + a_3^2 W_2 + a_4^2 W_3 + a_5^2 W_4) \cdot (b_0^2 + b_1^2 I_1 + b_2^2 W_2 + b_3^2 W_2 + b_4^2 W_3 + b_5^2 W_4) &= (c_0^2 + c_1^2 I_1 + c_2^2 W_2 + c_3^2 W_2 + c_4^2 W_3 + c_5^2 W_4) \end{aligned}$$

4268 *Example 117* (R1CS for the Tiny-Jubjub curve points). Consider the languages $L_{\text{tiny.jj.1}}$ from
 4269 example 115, which consist of words $\langle I_1, I_2 \rangle$ over the alphabet \mathbb{F}_{13} such that $3 \cdot I_1^2 + I_2^2 =$
 4270 $1 + 8 \cdot I_1^2 \cdot I_2^2$.

We derive a Rank-1 Constraint System such that its solutions are in a 1:1 correspondence with words in $L_{\text{tiny.jj.1}}$. To achieve this, we first rewrite the defining equation:

$$\begin{aligned} 3 \cdot I_1^2 + I_2^2 &= 1 + 8 \cdot I_1^2 \cdot I_2^2 && \Leftrightarrow \\ 0 &= 1 + 8 \cdot I_1^2 \cdot I_2^2 - 3 \cdot I_1^2 - I_2^2 && \Leftrightarrow \\ 0 &= 1 + 8 \cdot I_1^2 \cdot I_2^2 + 10 \cdot I_1^2 + 12 \cdot I_2^2 \end{aligned}$$

Since R1CSs are systems of quadratic equations, we have to reformulate this expression into a system of quadratic equations. To do so, we have to introduce new variables that constrain intermediate steps in the computation and we have to decide if those variables should be instance or witness variable. We decide to declare all new variables as witness variables and get the following constraints

$$\begin{aligned} I_1 \cdot I_1 &= W_1 && \text{constraint 1} \\ I_2 \cdot I_2 &= W_2 && \text{constraint 2} \\ (8 \cdot W_1) \cdot W_2 &= W_3 && \text{constraint 3} \\ (12 \cdot W_2 + W_3 + 10 \cdot W_1 + 1) \cdot 1 &= 0 && \text{constraint 4} \end{aligned}$$

To see that these four quadratic equations qualify as a Rank-1 Constraint System according to equation ??, choose the parameter $n = 2$, $m = 3$ and $k = 4$:

$$\begin{array}{llllll} a_0^1 = 0 & a_1^1 = 1 & a_2^1 = 0 & a_3^1 = 0 & a_4^1 = 0 & a_5^1 = 0 \\ a_0^2 = 0 & a_1^2 = 0 & a_2^2 = 1 & a_3^2 = 0 & a_4^2 = 0 & a_5^2 = 0 \\ a_0^3 = 0 & a_1^3 = 0 & a_2^3 = 0 & a_3^3 = 8 & a_4^3 = 0 & a_5^3 = 0 \\ a_0^4 = 1 & a_1^4 = 0 & a_2^4 = 0 & a_3^4 = 10 & a_4^4 = 12 & a_5^4 = 1 \end{array}$$

$$\begin{array}{llllll} b_0^1 = 0 & b_1^1 = 1 & b_2^1 = 0 & b_3^1 = 0 & b_4^1 = 0 & b_5^1 = 0 \\ b_0^2 = 0 & b_1^2 = 0 & b_2^2 = 1 & b_3^2 = 0 & b_4^2 = 0 & b_5^2 = 0 \\ b_0^3 = 0 & b_1^3 = 0 & b_2^3 = 0 & b_3^3 = 0 & b_4^3 = 1 & b_5^3 = 0 \\ b_0^4 = 1 & b_1^4 = 0 & b_2^4 = 0 & b_3^4 = 0 & b_4^4 = 0 & b_5^4 = 0 \end{array}$$

$$\begin{array}{llllll} c_0^1 = 0 & c_1^1 = 0 & c_2^1 = 0 & c_3^1 = 1 & c_4^1 = 0 & c_5^1 = 0 \\ c_0^2 = 0 & c_1^2 = 0 & c_2^2 = 0 & c_3^2 = 0 & c_4^2 = 1 & c_5^2 = 0 \\ c_0^3 = 0 & c_1^3 = 0 & c_2^3 = 0 & c_3^3 = 0 & c_4^3 = 0 & c_5^3 = 1 \\ c_0^4 = 0 & c_1^4 = 0 & c_2^4 = 0 & c_3^4 = 0 & c_4^4 = 0 & c_5^4 = 0 \end{array}$$

With this choice, the Rank-1 Constraint System of our tiny-jubjub curve point problem can be

written in its most general form as follows:

$$\begin{aligned} (a_0^1 + a_1^1 I_1 + a_2^1 I_2 + a_3^1 W_1 + a_4^1 W_2 + a_5^1 W_3) \cdot (b_0^1 + b_1^1 I_1 + b_2^1 I_2 + b_3^1 W_1 + b_4^1 W_2 + b_5^1 W_3) &= (c_0^1 + c_1^1 I_1 + c_2^1 I_2 + c_3^1 W_1 + c_4^1 W_2 + c_5^1 W_3) \\ (a_0^2 + a_1^2 I_1 + a_2^2 I_2 + a_3^2 W_1 + a_4^2 W_2 + a_5^2 W_3) \cdot (b_0^2 + b_1^2 I_1 + b_2^2 I_2 + b_3^2 W_1 + b_4^2 W_2 + b_5^2 W_3) &= (c_0^2 + c_1^2 I_1 + c_2^2 I_2 + c_3^2 W_1 + c_4^2 W_2 + c_5^2 W_3) \\ (a_0^3 + a_1^3 I_1 + a_2^3 I_2 + a_3^3 W_1 + a_4^3 W_2 + a_5^3 W_3) \cdot (b_0^3 + b_1^3 I_1 + b_2^3 I_2 + b_3^3 W_1 + b_4^3 W_2 + b_5^3 W_3) &= (c_0^3 + c_1^3 I_1 + c_2^3 I_2 + c_3^3 W_1 + c_4^3 W_2 + c_5^3 W_3) \\ (a_0^4 + a_1^4 I_1 + a_2^4 I_2 + a_3^4 W_1 + a_4^4 W_2 + a_5^4 W_3) \cdot (b_0^4 + b_1^4 I_1 + b_2^4 I_2 + b_3^4 W_1 + b_4^4 W_2 + b_5^4 W_3) &= (c_0^4 + c_1^4 I_1 + c_2^4 I_2 + c_3^4 W_1 + c_4^4 W_2 + c_5^4 W_3) \end{aligned}$$

4271 To see that solutions to this constraints system are in 1:1 correspondence with words in $L_{tiny.jj.1}$,
 4272 let $\langle I_1, I_2 \rangle; \langle W_1, W_2, W_3 \rangle$ be a solution, then $\langle I_1, I_2 \rangle$ is a word in $L_{tiny.jj.1}$, since the
 4273 defining R1CS implies that I_1 and I_2 satisfy the twisted Edwards equation of the tiny-jubjub
 4274 curve. On the other hand, let $\langle I_1, I_2 \rangle$ be a word in $L_{tiny.jj.1}$. Then $\langle I_1, I_2 \rangle; \langle I_1^2, I_2^2, 8 \cdot I_1^2 \cdot$
 4275 $I_2^2 \rangle$ is a solution to our R1CS.

4276 *Exercise 86.* Consider the language L_{add} from exercise 85. Define an R1CS, such that solutions
 4277 to this R1CS are in 1:1 correspondence with words in L_{add} .

4278 **6.2.1.0.2 R1CS Satisfiability** To understand how Rank-1 Constraint Systems define formal
 4279 languages, observe that every R1CS over a field \mathbb{F} defines a decision function over the alphabet
 4280 $\Sigma_I \times \Sigma_W = \mathbb{F} \times \mathbb{F}$ in the following way:

$$R_{R1CS} : (\mathbb{F})^* \times (\mathbb{F})^* \rightarrow \{true, false\} ; (I; W) \mapsto \begin{cases} true & (I; W) \text{ satisfies R1CS} \\ false & \text{else} \end{cases} \quad (6.7)$$

4281 Every R1CS therefore defines a formal language. The grammar of this language is encoded
 4282 in the constraints, words are solutions to the equations and a **statement** is a knowledge claim
 4283 “Given instance I , there is a witness W such that $(I; W)$ is a solution to the Rank-1 Constraint
 4284 System”. A constructive proof to this claim is therefore an assignment of a field element to
 4285 every witness variable, which is verified whenever the set of all instance and witness variables
 4286 solves the R1CS.

Remark 5 (R1CS satisfiability). It should be noted that in our definition, every R1CS defines its own language. However, in more theoretical approaches, another language usually called **R1CS satisfiability** is often considered, which is useful when it comes to more abstract problems like expressiveness or the computational complexity of the class of **all** R1CS. From our perspective, the R1CS satisfiability language is obtained by the union of all R1CS languages that are in our definition. To be more precise, let the alphabet $\Sigma = \mathbb{F}$ be a field. Then

$$L_{R1CS_SAT(\mathbb{F})} = \{(i; w) \in \Sigma^* \times \Sigma^* \mid \text{there is a R1CS } R \text{ such that } R(i; w) = true\}$$

4287 *Example 118* (3-Factorization). Consider the language $L_{3.fac_zk}$ from example 114 and the
 4288 R1CS defined in example 116. As we have seen in 116, solutions to the R1CS are in 1:1 cor-
 4289 respondence with solutions to the decision function of $L_{3.fac_zk}$. Both languages are therefore
 4290 equivalent in the sense that there is a 1:1 correspondence between words in both languages.

To give an intuition of what constructive R1CS based proofs in $L_{3.fac_zk}$ look like, consider the instance $I_1 = 11$. To prove the statement “There exists a witness W such that $(I_1; W)$ is a word in $L_{3.fac_zk}$ ” constructively, a proof has to provide a solution to the R1CS from example 116, that is an assignments to all witness variables W_1, W_2, W_3 and W_4 . Since the alphabet is \mathbb{F}_{13} , an example assignment is given by $W = \langle 2, 3, 4, 6 \rangle$ since $(I_1; W)$ satisfies the R1CS

$$\begin{aligned} W_1 \cdot W_2 &= W_4 & \# 2 \cdot 3 &= 6 \\ W_4 \cdot W_3 &= I_1 & \# 6 \cdot 4 &= 11 \end{aligned}$$

4291 A proper constructive proof is therefore given by $\pi = \langle 2, 3, 4, 6 \rangle$. Of course, π is not the only
 4292 possible proof for this statement. Since factorization is not unique in a field in general, another
 4293 constructive proof is given by $\pi' = \langle 3, 5, 12, 2 \rangle$.

Example 119 (The tiny-jubjub curve). Consider the language $L_{\text{tiny.jj.1}}$ from example 115 and its associated R1CS from example 117. To see how constructive proofs in $L_{\text{tiny.jj.1}}$ using the R1CS from example 117 look like, consider the instance $\langle I_1, I_2 \rangle = \langle 11, 6 \rangle$. To prove the statement “There exists a witness W such that $(\langle I_1, I_2 \rangle; W)$ is a word in $L_{\text{tiny.jj.1}}$ ” constructively, a proof has to provide a solution to the R1CS 117, which is an assignments to all witness variables W_1 , W_2 and W_3 . Since the alphabet is \mathbb{F}_{13} , an example assignment is given by $W = \langle 4, 10, 8 \rangle$ since $(\langle I_1, I_2 \rangle; W)$ satisfies the R1CS

$$\begin{array}{ll} I_1 \cdot I_1 = W_1 & 11 \cdot 11 = 4 \\ I_2 \cdot I_2 = W_2 & 6 \cdot 6 = 10 \\ (8 \cdot W_1) \cdot W_2 = W_3 & (8 \cdot 4) \cdot 10 = 8 \\ (12 \cdot W_2 + W_3 + 10 \cdot W_1 + 1) \cdot 1 = 0 & 12 \cdot 10 + 8 + 10 \cdot 4 + 1 = 0 \end{array}$$

4294 A proper constructive proof is therefore given by $\pi = \langle 4, 10, 8 \rangle$, which shows that the instance
 4295 $\langle 11, 6 \rangle$ is a point on the tiny-jubjub curve.

4296 **6.2.1.0.3 Modularity** As we discussed in 6.1.0.0.3, it is often useful to construct complex
 4297 statements and their representing languages from simple ones. Rank-1 Constraint Systems are
 4298 particularly useful for this, as the intersection of two R1CS over the same alphabet results in a
 4299 new R1CS over that same alphabet.

4300 To be more precise, let S_1 and S_2 be two R1CS over \mathbb{F} , then a new R1CS S_3 is obtained
 4301 by the intersection $S_3 = S_1 \cap S_2$ of S_1 and S_2 . In this context, intersection means that both the
 4302 equations of S_1 **and** the equations of S_2 have to be satisfied in order to provide a solution for the
 4303 system S_3 .

4304 As a consequence, developers are able to construct complex R1CS from simple ones and
 4305 this modularity provides the theoretical foundation for many R1CS compilers, as we will see in
 4306 chapter 7.

4307 6.2.2 Algebraic Circuits

4308 As we have seen in the previous paragraphs, Rank-1 Constraint Systems are quadratic equations
 4309 such that solutions are knowledge proofs for the existence of words in associated languages.
 4310 From the perspective of a prover, it is therefore important to solve those equations efficiently.

4311 However, in contrast to systems of linear equations, no general methods are known that solve
 4312 systems of quadratic equations efficiently. Rank-1 Constraint Systems are therefore impractical
 4313 from a provers perspective and auxiliary information is needed that helps to compute solutions
 4314 efficiently.

4315 Methods which compute R1CS solutions are sometimes called **witness generator func-**
 4316 **tions**. To provide a common example, we introduce another class of decision functions called
 4317 **algebraic circuits**. As we will see, every algebraic circuit defines an associated R1CS and also
 4318 provides an efficient way to compute solutions for that R1CS.

4319 It can be shown that every space- and time-bounded computation is expressible as an alge-
 4320 braic circuit. Transforming high-level computer programs into those circuits is a process often
 4321 called **flattening**. We will look at those transformations in chapter 7.

In this section we will introduce our model for algebraic circuits and look at the concept of circuit execution and valid assignments. After that, we will show how to derive Rank-1 Constraint Systems from circuits and how circuits are useful to compute solutions to associated R1CS efficiently.

6.2.2.0.1 Algebraic circuit representation To see what algebraic circuits are, let \mathbb{F} be a field. An algebraic circuit is then a directed acyclic (multi)graph that computes a polynomial function over \mathbb{F} . Nodes with only outgoing edges (source nodes) represent the variables and constants of the function and nodes with only incoming edges (sink nodes) represent the outcome of the function. All other nodes have exactly two incoming edges and represent the field operations **addition** as well as **multiplication**. Graph edges are directed and represent the flow of the computation along the nodes.

To be more precise, in this book, we call a directed acyclic multi-graph $C(\mathbb{F})$ an **algebraic circuit** over \mathbb{F} if the following conditions hold:

- The set of edges has a total order.
- Every source node has a label that represents either a variable or a constant from the field \mathbb{F} .
- Every sink node has exactly one incoming edge and a label that represents either a variable or a constant from the field \mathbb{F} .
- Every node that is neither a source nor a sink has exactly two incoming edges and a label from the set $\{+, *\}$ that represents either addition or multiplication in \mathbb{F} .
- All outgoing edges from a node have the same label.
- Outgoing edges from a node with a label that represents a variable have a label.
- Outgoing edges from a node with a label that represents multiplication have a label, if there is at least one labeled edge in both input path.
- All incoming edges to sink nodes have a label.
- If an edge has two labels S_i and S_j it gets a new label $S_i = S_j$.
- No other edge has a label.
- Incoming edges to labeled sink nodes, where the label is a constant $c \in \mathbb{F}$ are labeled with the same constant. Every other edge label is taken from the set $\{W, I\}$ and indexed compatible with the order of the edge set.

It should be noted that the details in the definitions of algebraic circuits vary between different sources. We use this definition as it is conceptually straightforward and well-suited for pen-and-paper computations.

To get a better intuition of our definition, let $C(\mathbb{F})$ be an algebraic circuit. Source nodes are the inputs to the circuit and either represent variables or constants. In a similar way, sink nodes represent termination points of the circuit and are either output variables or constants. Constant sink nodes enforce computational outputs to take on certain values.

Nodes that are neither source nodes nor sink nodes are called **arithmetic gates**. Arithmetic gates that are decorated with the “+”-label are called **addition-gates** and arithmetic gates that

are decorated with the “.”-label are called **multiplication-gates**. Every arithmetic gate has exactly two inputs, represented by the two incoming edges.

Since the set of edges is ordered, we can write it as a string $\langle E_1, E_2, \dots, E_n \rangle$ for some $n \in \mathbb{N}$ and we use those indices to index the edge labels, too. Edge labels are therefore either constants or symbols like I_j , W_j , where j is an index compatible with the edge order. Labels I_j represent instance variables, labels W_j witness variables. Labels on the outgoing edges of input variables constrain the associated variable to that edge.

Notation and Symbols 16. In synthesizing algebraic circuits, assigning instance I_j or witness W_j labels to appropriate edges is often the final step. It is therefore convenient to not distinguish these two types of edges in previous steps. To account for that, we often simply write S_j for an edge label, indicating that the instance/witness property of the label is unspecified and it might represent both an instance or a witness label.

Example 120 (Generalized factorization SNARK). To give a simple example of an algebraic circuit, consider our 3-factorization problem from example 114 again. To express the problem in the algebraic circuit model, consider the following function


$$f_{3.fac} : \mathbb{F}_{13} \times \mathbb{F}_{13} \times \mathbb{F}_{13} \rightarrow \mathbb{F}_{13}; (x_1, x_2, x_3) \mapsto x_1 \cdot x_2 \cdot x_3$$

Using this function, we can describe the zero-knowledge 3-factorization problem from 114, in the following way: Given instance $I_1 \in \mathbb{F}_{13}$, a valid witness is a preimage of $f_{3.fac}$ at the point I_1 , i.e., a valid witness consists of three values W_1 , W_2 and W_3 from \mathbb{F}_{13} such that $f_{3.fac}(W_1, W_2, W_3) = I_1$.

To see how this function can be transformed into an algebraic circuit over \mathbb{F}_{13} , it is a common first step to introduce brackets into the function’s definition and then write the operations as binary operators, in order to highlight how exactly every field operation acts on its two inputs. Due to the associativity laws in a field, we have several choices. We choose

$$\begin{aligned} f_{3.fac}(x_1, x_2, x_3) &= x_1 \cdot x_2 \cdot x_3 && \# \text{ bracket choice} \\ &= (x_1 \cdot x_2) \cdot x_3 && \# \text{ operator notation} \\ &= MUL(MUL(x_1, x_2), x_3) \end{aligned}$$

Using this expression, we can write an associated algebraic circuit by first constraining the variables to edge labels $W_1 = x_1$, $W_2 = x_2$ and $W_3 = x_3$ as well as $I_1 = f_{3.fac}(x_1, x_2, x_3)$, taking the distinction between witness and instance inputs into account. We then rewrite the operator representation of $f_{3.fac}$ into circuit nodes and get the following:

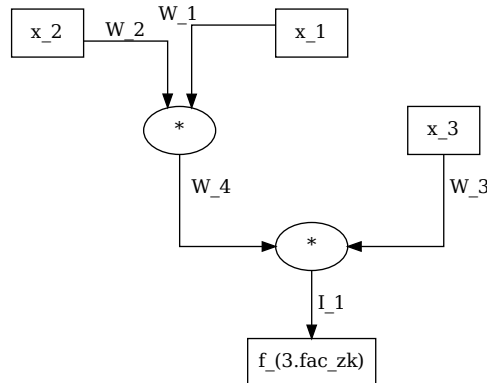

4385 In this case, the directed acyclic multi-graph is a binary tree with three leaves (the source
 4386 nodes) labeled by x_1, x_2 and x_3 , one root (the single sink node) labeled by $f_{3, fac}(x_1, x_2, x_3)$ and
 4387 two internal nodes, which are labeled as multiplication gates.

4388 The order we use to label the edges is chosen to make the edge labeling consistent with
 4389 the choice of W_4 as defined in definition 6.2.2.0.1. This order can be obtained by a depth-first
 4390 right-to-left-first traversal algorithm.

Example 121. To give a more realistic example of an algebraic circuit, look at the defining equation of the tiny-jubjub curve 69 again. A pair of field elements $(x, y) \in \mathbb{F}_{13}^2$ is a curve point, precisely if the following equation holds:

$$3 \cdot x^2 + y^2 = 1 + 8 \cdot x^2 \cdot y^2$$

To understand how one might transform this identity into an algebraic circuit, we first rewrite this equation by shifting all terms to the right. We get the following:

$$\begin{aligned} 3 \cdot x^2 + y^2 &= 1 + 8 \cdot x^2 \cdot y^2 && \Leftrightarrow \\ 0 &= 1 + 8 \cdot x^2 \cdot y^2 - 3 \cdot x^2 - y^2 && \Leftrightarrow \\ 0 &= 1 + 8 \cdot x^2 \cdot y^2 + 10 \cdot x^2 + 12 \cdot y^2 \end{aligned}$$

Then we use this expression to define a function such that all points of the tiny-jubjub curve are characterized as the function preimages at 0.


$$f_{tiny-jj} : \mathbb{F}_{13} \times \mathbb{F}_{13} \rightarrow \mathbb{F}_{13} ; (x, y) \mapsto 1 + 8 \cdot x^2 \cdot y^2 + 10 \cdot x^2 + 12 \cdot y^2$$

4391 Every pair of field elements $(x, y) \in \mathbb{F}_{13}^2$ with $f_{tiny-jj}(x, y) = 0$ is a point on the tiny-jubjub
 4392 curve, and there are no other curve points. The preimage $f_{tiny-jj}^{-1}(0)$ is therefore a complete
 4393 description of the tiny-jubjub curve.

We can transform this function into an algebraic circuit over \mathbb{F}_{13} . We first introduce brackets into potentially ambiguous expressions and then rewrite the function in terms of binary operators. We get the following:

$$\begin{aligned} f_{tiny-jj}(x, y) &= 1 + 8 \cdot x^2 \cdot y^2 + 10 \cdot x^2 + 12y^2 && \Leftrightarrow \\ &= ((8 \cdot ((x \cdot x) \cdot (y \cdot y))) + (1 + 10 \cdot (x \cdot x))) + (12 \cdot (y \cdot y)) && \Leftrightarrow \\ &= \text{ADD}(\text{ADD}(\text{MUL}(8, \text{MUL}(\text{MUL}(x, x), \text{MUL}(y, y))), \text{ADD}(1, \text{MUL}(10, \text{MUL}(x, x)))), \text{MUL}(12, \text{MUL}(y, y))) \end{aligned}$$

4394 Since we haven't decided which part of the computation should be instance and which part
 4395 should be witness, we use the unspecified symbol S to represent edge labels. Constraining all
 4396 variables to edge labels $S_1 = x$, $S_2 = y$ and $S_6 = f_{tiny-jj}$, we get the following circuit, representing the function $f_{tiny-jj}$, by inductively replacing binary operators with their associated
 4397 arithmetic gates:
 4398

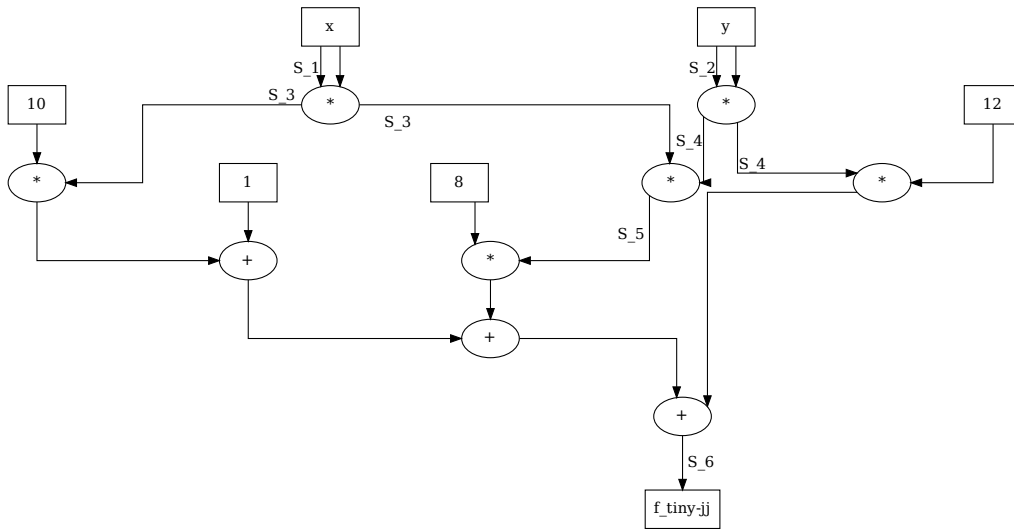


4399

4400 This circuit is not a graph, but a multigraph, since there is more than one edge between some of
 4401 the nodes.

4402 In the process of designing of circuits from functions, it should be noted that circuit rep-
 4403 resentations are not unique in general. In case of the function $f_{\text{tiny-jj}}$, the circuit shape is
 4404 dependent on our choice of bracketing in $??$. An alternative design is for example, given by the
 4405 following circuit, which occurs when the bracketed expression $8 \cdot ((x \cdot x) \cdot (y \cdot y))$ is replaced by
 4406 the expression $(x \cdot x) \cdot (8 \cdot (y \cdot y))$.

4407

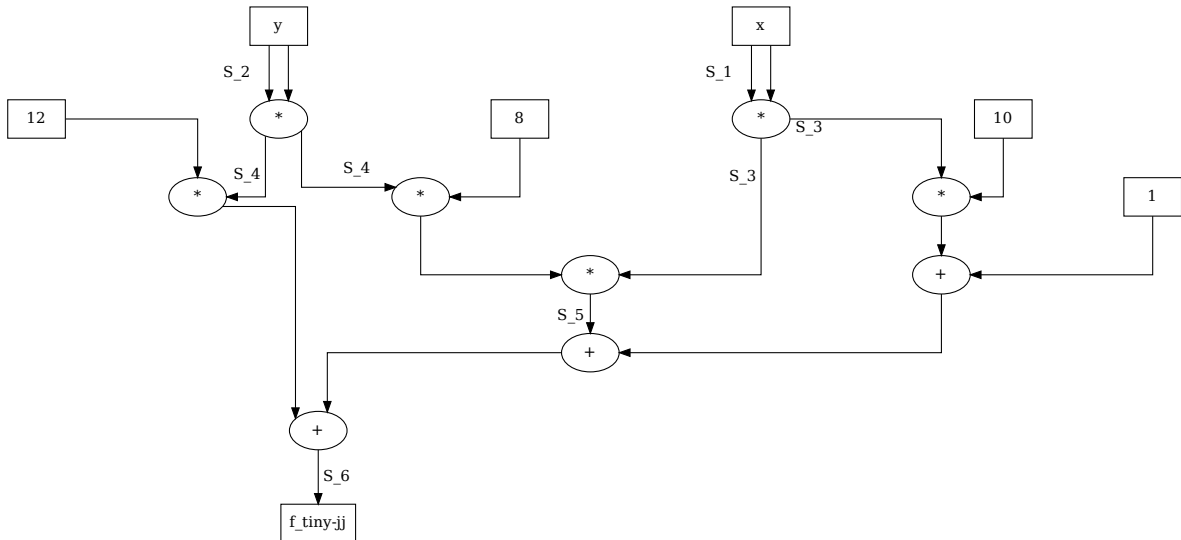

4408


4409

4410 Of course, both circuits represent the same function, due to the associativity and commutativity
 4411 laws that hold true in any field.

4412 With a circuit that represents the function $f_{\text{tiny-jj}}$, we can now proceed to derive a circuit
 4413 that constrains arbitrary pairs (x, y) of field elements to be points on the tiny-jubjub curve. To do
 4414 so, we have to constrain the output to be zero, that is, we have to constrain $S_6 = 0$. To indicate

4415 this in the circuit, we replace the output variable by the constant 0 and constrain the related edge
 4416 label accordingly. We get the following:

4417

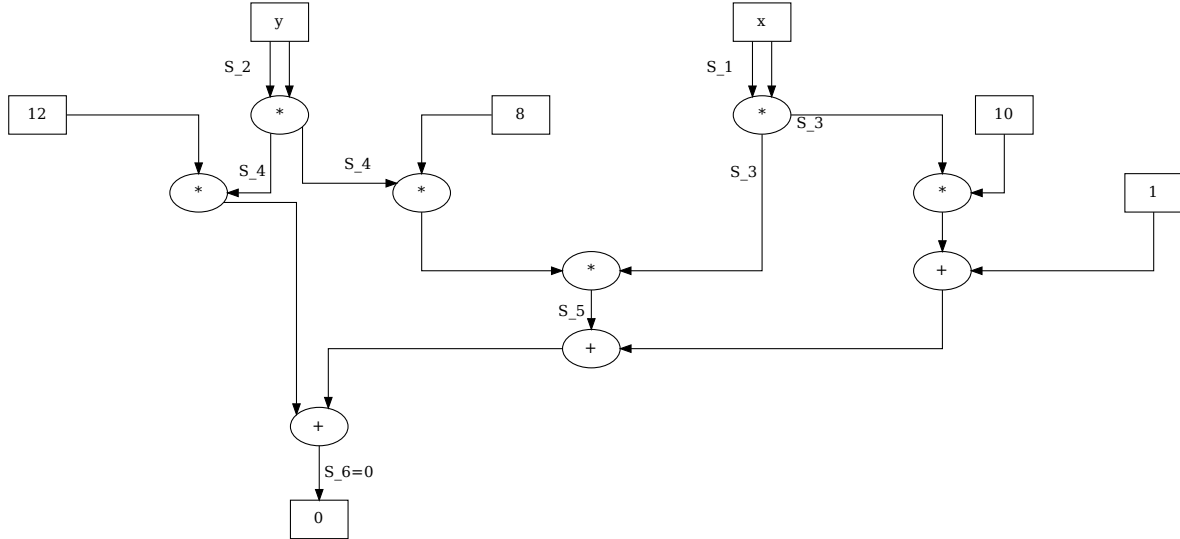


4418

4419

4420 The previous circuit enforces input values assigned to the labels S_1 and S_2 to be points on the
 4421 tiny-jubjub curve. However, it does not specify which labels are considered instance and which
 4422 are considered witness. The following circuit defines the inputs to be instances, while all other
 4423 labels represent witnesses:

4424

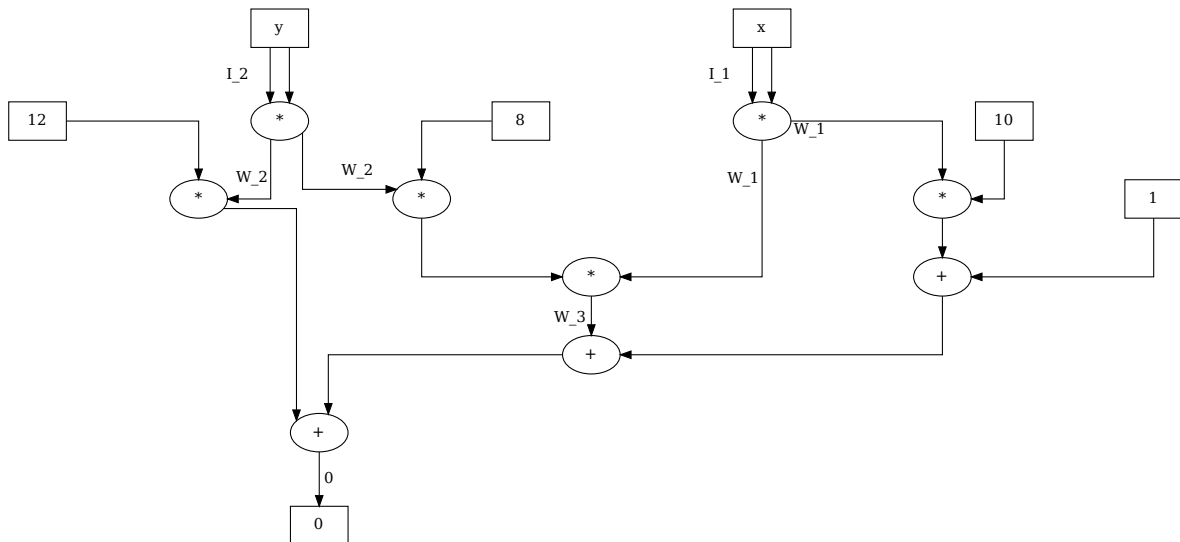

4425

4426

4427 It can be shown that every space- and time-bounded computation can be transformed into
 4428 an algebraic circuit. We call any process that transforms a bounded computation into a circuit
 4429 **flattening**.

6.2.2.0.2 Circuit Execution Algebraic circuits are directed, acyclic multi-graphs, where nodes represent variables, constants, or addition and multiplication gates. In particular, every algebraic circuit with n input nodes decorated with variable symbols and m output nodes decorated with variables can be seen as a function that transforms an input string (x_1, \dots, x_n) from \mathbb{F}^n into an output string (f_1, \dots, f_m) from \mathbb{F}^m . The transformation is done by sending values associated to nodes along their outgoing edges to other nodes. If those nodes are gates, then the values are transformed according to the gate label and the process is repeated along all edges until a sink node is reached. We call this computation **circuit execution**.

When executing a circuit, it is possible to not only compute the output values of the circuit but to derive field elements for all edges, and, in particular, for all edge labels in the circuit. The result is a string $\langle S_1, S_2, \dots, S_n \rangle$ of field elements associated to all labeled edges, which we call a **valid assignment** to the circuit. In contrast, any assignment $\langle S'_1, S'_2, \dots, S'_n \rangle$ of field elements to edge labels that can not arise from circuit execution is called an **invalid assignment**.

Valid assignments can be interpreted as **proofs for proper circuit execution** because they keep a record of the computational result as well as intermediate computational steps.


Example 122 (3-factorization). Consider the 3-factorization problem from example 114 and its representation as an algebraic circuit from example 120. We know that the string of edge labels is given by $S := \langle I_1; W_1, W_2, W_3, W_4 \rangle$.

To understand how this circuit is executed, consider the variables $x_1 = 2$, $x_2 = 3$ as well as $x_3 = 4$. Following all edges in the graph, we get the assignments $W_1 = 2$, $W_2 = 3$ and $W_3 = 4$. Then the assignments of W_1 and W_2 enter a multiplication gate and the output of the gate is $2 \cdot 3 = 6$, which we assign to W_4 , i.e. $W_4 = 6$. The values W_4 and W_3 then enter the second multiplication gate and the output of the gate is $6 \cdot 4 = 11$, which we assign to I_1 , i.e. $I_1 = 11$.


A valid assignment to the 3-factorization circuit $C_{3, \text{fac}}(\mathbb{F}_{13})$ is therefore given by the following string of field elements from \mathbb{F}_{13} :

$$S_{\text{valid}} := \langle 11; 2, 3, 4, 6 \rangle \quad (6.8)$$

We can visualise this assignment by assigning every computed value to its associated label in the circuit as follows:

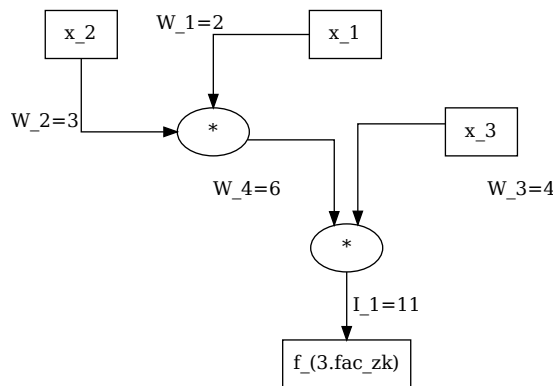

To see what an invalid assignment looks like, consider the assignment $S_{\text{err}} := \langle 8; 2, 3, 4, 7 \rangle$. In this assignment, the input values are the same as in the previous case. The associated circuit is:

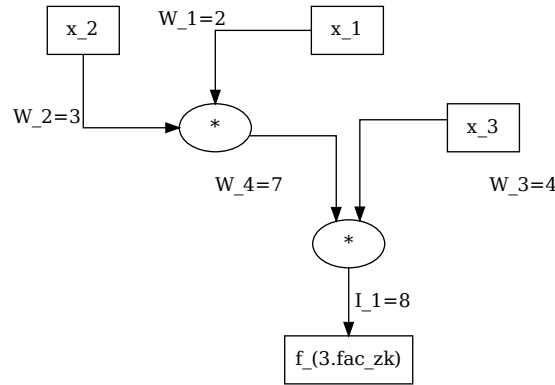


4461

4462 This assignment is invalid, as the assignments of I_1 and W_4 cannot be obtained by executing the
 4463 circuit.

4464 *Example 123.* To compute a more realistic algebraic circuit execution, consider the defining
 4465 circuit $C_{\text{tiny-jj}}(\mathbb{F}_{13})$ from example 121 again. We already know from the way this circuit is
 4466 constructed that any valid assignment with $S_1 = x$, $S_2 = y$ and $S_6 = 0$ will ensure that the pair
 4467 (x, y) is a point on the tiny-jubjub curve in its Edwards representation (equation 5.36).

4468 From example 5.36, we know that the pair $(11, 6)$ is a proper point on the tiny-jubjub curve
 4469 and we use this point as input to a circuit execution. We get the following:

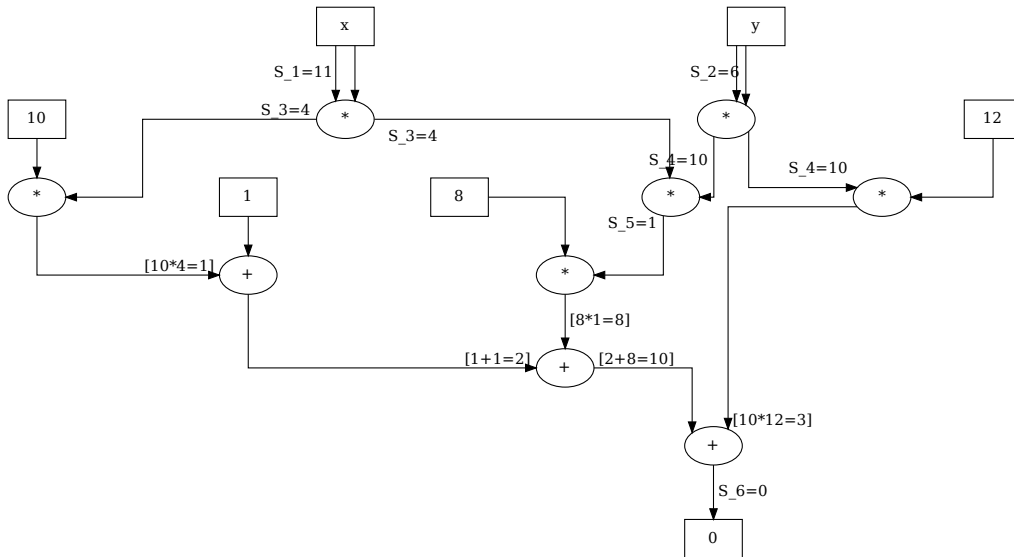

4470

Executing the circuit, we indeed compute $S_6 = 0$ as expected, which proves that $(11, 6)$ is a point on the tiny-jubjub curve in its Edwards representation. A valid assignment of $C_{\text{tiny-jj}}(\mathbb{F}_{13})$ is therefore given by the following string:

$$S_{\text{tiny-jj}} = \langle S_1, S_2, S_3, S_4, S_5, S_6 \rangle = \langle 11, 6, 4, 10, 1, 0 \rangle$$

4471 **6.2.2.0.3 Circuit Satisfiability** To understand how algebraic circuits give rise to formal lan-
 4472 guages, observe that every algebraic circuit $C(\mathbb{F})$ over a fields \mathbb{F} defines a decision function over

the alphabet $\Sigma_I \times \Sigma_W = \mathbb{F} \times \mathbb{F}$ in the following way:

$$R_{C(\mathbb{F})} : \mathbb{F}^* \times \mathbb{F}^* \rightarrow \{true, false\} ; (I; W) \mapsto \begin{cases} true & (I; W) \text{ is valid assignment to } C(\mathbb{F}) \\ false & \text{else} \end{cases} \quad (6.9)$$

Every algebraic circuit therefore defines a formal language. The grammar of this language is encoded in the shape of the circuit, words are assignments to edge labels that are derived from circuit execution, and **statements** are knowledge claims “Given instance I , there is a witness W such that $(I; W)$ is a valid assignment to the circuit”. A constructive proof to this claim is therefore an assignment of a field element to every witness variable, which is verified by executing the circuit to see if the assignment of the execution meets the assignment of the proof.

In the context of zero-knowledge proof systems, executing circuits is also often called **witness generation**, since in applications the instance part is usually public, while its the task of a prover to compute the witness part.

Remark 6 (Circuit satisfiability). Similar to 5, it should be noted that, in our definition, every circuit defines its own language. However, in more theoretical approaches another language usually called **circuit satisfiability** is often considered, which is useful when it comes to more abstract problems like expressiveness, or computational complexity of the class of **all** algebraic circuits over a given field. From our perspective the circuit satisfiability language is obtained by union of all circuit languages that are in our definition. To be more precise, let the alphabet $\Sigma = \mathbb{F}$ be a field. Then

$$L_{CIRCUIT_SAT(\mathbb{F})} = \{(i; w) \in \Sigma^* \times \Sigma^* \mid \text{there is a circuit } C(\mathbb{F}) \text{ such that } (i; w) \text{ is valid assignment}\}$$

Example 124 (3-Factorization). Consider the circuit $C_{3.fac}$ from example 120 again. We call the associated language $L_{3.fac_circ}$.

To understand how a constructive proof of a statement in $L_{3.fac_circ}$ looks like, consider the instance $I_1 = 11$. To provide a proof for the statement “There exist a witness W such that $(I_1; W)$ is a word in $L_{3.fac_circ}$ ” a proof therefore has to consists of proper values for the variables W_1 , W_2 , W_3 and W_4 . Any prover therefore has to find input values for W_1 , W_2 and W_3 and then execute the circuit to compute W_4 under the assumption $I_1 = 11$.

Example 122 implies that $\langle 2, 3, 4, 6 \rangle$ is a proper constructive proof and in order to verify the proof a verifier needs to execute the circuit with instance $I_1 = 11$ and inputs $W_1 = 2$, $W_2 = 3$ and $W_3 = 4$ to decide whether the proof is a valid assignment or not.

Exercise 87. Consider the circuit $C_{tiny-jj}(\mathbb{F}_{13})$ from example 121, with its associated language $L_{tiny-jj}$. Construct a proof π for the instance $\langle 11, 6 \rangle$ and verify the proof.

6.2.2.0.4 Associated Constraint Systems As we have seen in 6.2.1, Rank-1 Constraint Systems define a way to represent statements in terms of a system of quadratic equations over finite fields, suitable for pairing-based zero-knowledge proof systems. However, those equations provide no practical way for a prover to actually compute a solution. On the other hand, algebraic circuits can be executed in order to derive valid assignments efficiently.

In this paragraph, we show how to transform any algebraic circuit into a Rank-1 Constraint System such that valid circuit assignments are in 1:1 correspondence with solutions to the associated RICS.

To see this, let $C(\mathbb{F})$ be an algebraic circuit over a finite field \mathbb{F} , with a string of edge labels $\langle S_1, S_2, \dots, S_n \rangle$. Then we start with an empty RICS and one of the following steps is executed for every edge label S_j from that set:

- If the edge label S_j is an outgoing edge of a multiplication gate, the R1CS gets a new quadratic constraint

$$(\text{left input}) \cdot (\text{right input}) = S_j \quad (6.10)$$

In this expression (left input) is the output from the symbolic execution of the subgraph that consists of the left input edge of this gate and all edges and nodes that have this edge in their path, starting with constant inputs or labeled outgoing edges of other nodes.

In the same way (right input) is the output from the symbolic execution of the subgraph that consists of the right input edge of this gate and all edges and nodes that have this edge in their path, starting with constant inputs or labeled outgoing edges of other nodes.

- If the edge label S_j is an outgoing edge of an addition gate, the R1CS gets a new quadratic constraint

$$(\text{left input} + \text{right input}) \cdot 1 = S_j \quad (6.11)$$

In this expression (left input) is the output from the symbolic execution of the subgraph that consists of the left input edge of this gate and all edges and nodes that have this edge in their path, starting with constant inputs or labeled outgoing edges of other nodes.

In the same way (right input) is the output from the symbolic execution of the subgraph that consists of the right input edge of this gate and all edges and nodes that have this edge in their path, starting with constant inputs or labeled outgoing edges of other nodes.


- No other edge label adds a constraint to the system.

If an algebraic circuit $C(\mathbb{F})$ is constructed according to the rules from 6.2.2.0.1, the result of this method is a Rank-1 Constraint System, and, in this sense, every algebraic circuit $C(\mathbb{F})$ generates a R1CS R , which we call the **associated R1CS** of the circuit. It can be shown that a string of field elements $\langle S_1, S_2, \dots, S_n \rangle$ is a valid assignment to a circuit if and only if the same string is a solution to the associated R1CS. Circuit executions therefore compute solutions to Rank-1 constraint Systems efficiently.

To understand the contribution of algebraic gates to the number of constraints, note that, according to construction 6.2.2.0.1, multiplication gates have labels on their outgoing edges if and only if there is at least one labeled edge in both input paths, or if the outgoing edge is an input to a sink node. This implies that multiplication with a constant is essentially free in the sense that it doesn't add a new constraint to the system, as long as that multiplication gate is not an input to an output node.

Moreover, addition gates have labels on their outgoing edges if and only if they are inputs to sink nodes. This implies that addition is essentially free in the sense that it doesn't add a new constraint to the system, as long as that addition gate is not an input to an output node.

Example 125 (3-factorization). Consider our 3-factorization problem from example 114 and the associated circuit $C_{3.fac}(\mathbb{F}_{13})$ from example 120. Our task is to transform this circuit into an equivalent Rank-1 Constraint System.

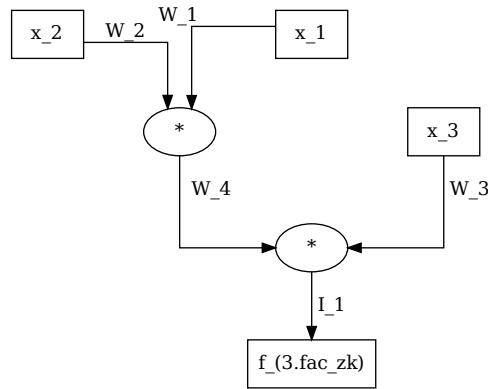

4542

4543 We start with an empty R1CS, and, in order to generate all constraints, we have to iterate over
 4544 the set of edge labels $\langle I_1; W_1, W_2, W_3, W_4 \rangle$.

Starting with the edge label I_1 , we see that it is an outgoing edge of a multiplication gate, and, since both input edges are labeled, we have to add the following constraint to the system:

$$\begin{aligned} (\text{left input}) \cdot (\text{right input}) &= I_1 && \Leftrightarrow \\ W_4 \cdot W_3 &= I_1 \end{aligned}$$

4545 Next, we consider the edge label W_1 and, since, it's not an outgoing edge of a multiplication or
 4546 addition gate, we don't add a constraint to the system. The same holds true for the labels W_2
 4547 and W_3 .

For edge label W_4 , we see that it is an outgoing edge of a multiplication gate, and, since both input edges are labeled, we have to add the following constraint to the system:

$$\begin{aligned} (\text{left input}) \cdot (\text{right input}) &= W_4 && \Leftrightarrow \\ W_2 \cdot W_1 &= W_4 \end{aligned}$$


Since there are no more labeled edges, all constraints are generated, and we have to combine them to get the associated R1CS of $C_{3, \text{fac}}(\mathbb{F}_{13})$:

$$\begin{aligned} W_4 \cdot W_3 &= I_1 \\ W_2 \cdot W_1 &= W_4 \end{aligned}$$

4548 This system is equivalent to the R1CS we derived in example 116. The languages $L_{3, \text{fac_zk}}$ and
 4549 $L_{3, \text{fac_circ}}$ are therefore equivalent and both the circuit as well as the R1CS are just two different
 4550 ways of expressing the same language.

4551 *Example 126.* To consider a more general transformation, we consider the tiny-jubjub circuit
 4552 from example 123 again. A proper circuit is given by the following graph, where we highlighted
 4553 all nodes that contribute a constraint to the R1CS:

4554

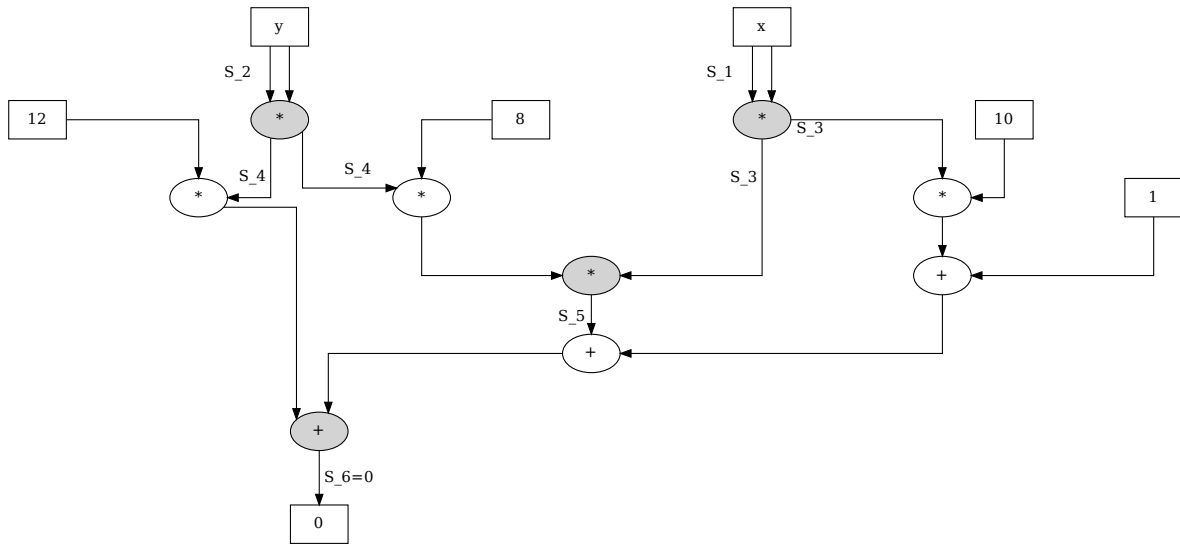

4555


4556

4557 To compute the number of constraints, observe that we have 3 multiplication gates that have
 4558 labels on their outgoing edges and 1 addition gate that has a label on its outgoing edge. We
 4559 therefore have to compute 4 quadratic constraints.

4560 In order to derive the associated R1CS, we have start with an empty R1CS and then iterate
 4561 over the set $\langle S_1, S_2, S_3, S_4, S_5, S_6 = 0 \rangle$ of all edge labels, in order to generate the constraints.

4562 Considering edge label S_1 , we see that the associated edges are not outgoing edges of any
 4563 algebraic gate, and we therefore have to add no new constraint to the system. The same holds
 4564 true for edge label S_2 . Looking at edge label S_3 , we see that the associated edges are outgoing
 4565 edges of a multiplication gate and that the associated subgraph is given by:

4566

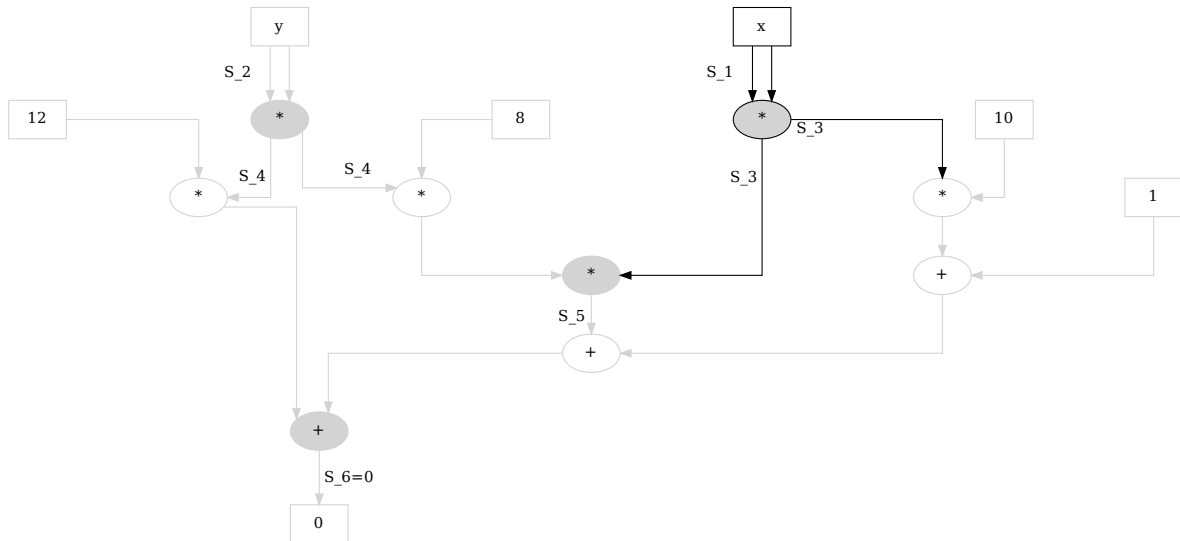

4567


4568

Both the left and the right input to this multiplication gate are labeled by S_1 . We therefore have

to add the following constraint to the system:

$$S_1 \cdot S_1 = S_3$$


Looking at edge label S_4 , we see that the associated edges are outgoing edges of a multiplication gate and that the associated subgraph is given by:

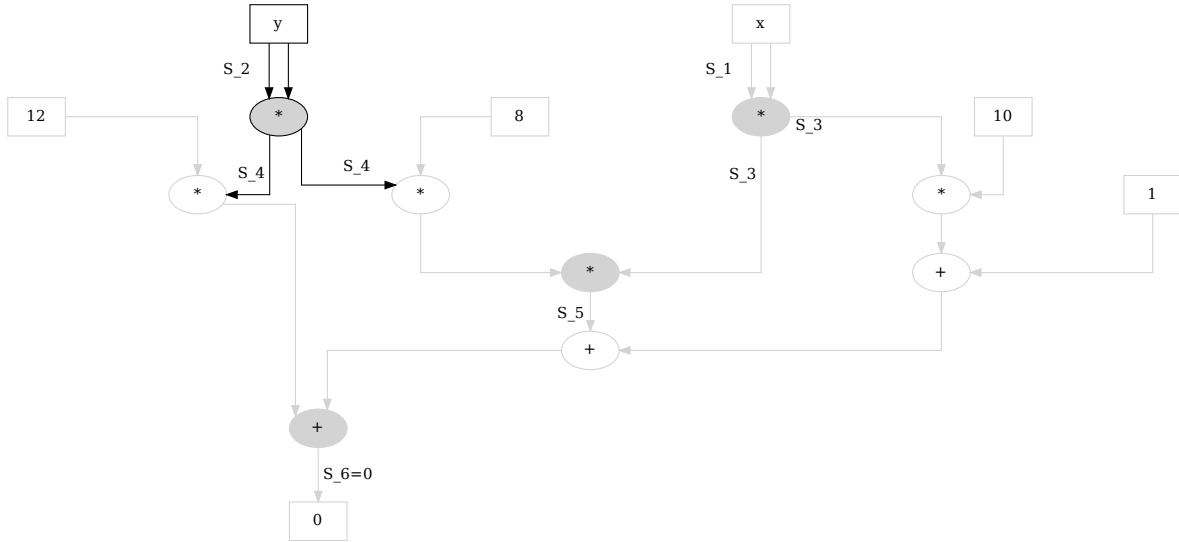

Both the left and the right input to this multiplication gate are labeled by S_2 and we therefore have to add the following constraint to the system:

$$S_2 \cdot S_2 = S_4$$


Edge label S_5 is more interesting. To see how it implies a constraint, we have to construct the associated subgraph first, which consists of all edges, nodes, and paths, starting either at a constant input or a labeled edge. We get

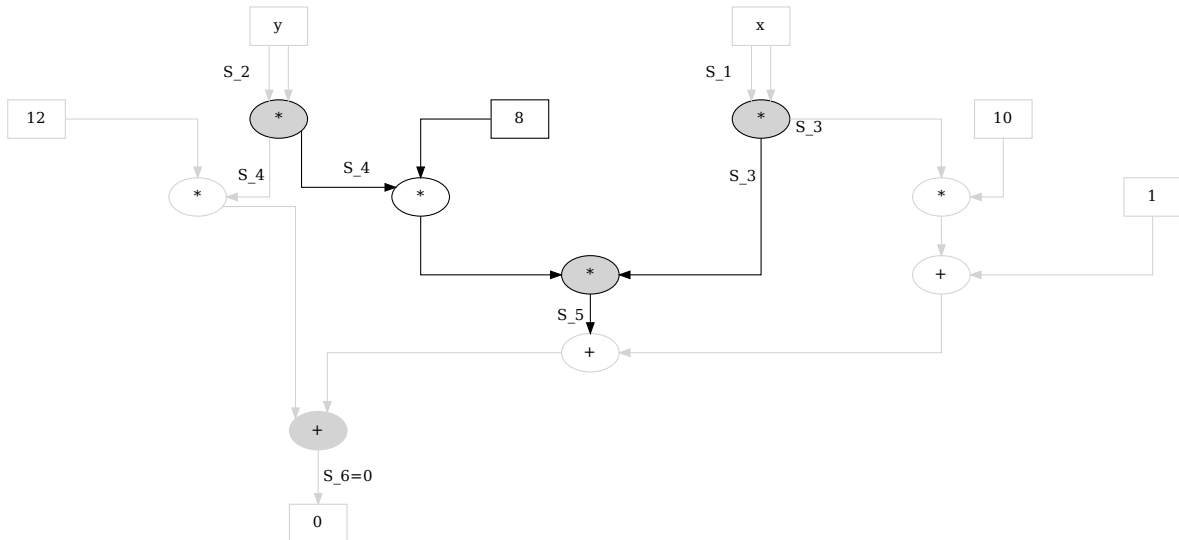

The right input to the associated multiplication gate is given by the labeled edge S_3 . However, the left input is not a labeled edge, but has a labeled edge in one of its path. To compute the left factor of that constraint, we have to compute the output of the subgraph associated to the left edge, which is $S_4 \cdot 8$. This gives the constraint

$$(S_4 \cdot 8) \cdot S_3 = S_5$$

The last edge label is the constant $S_6 = 0$. To see how it implies a constraint, we have to construct the associated subgraph, which consists of all edges, nodes, and paths, starting either at a constant input or a labeled edge. We get

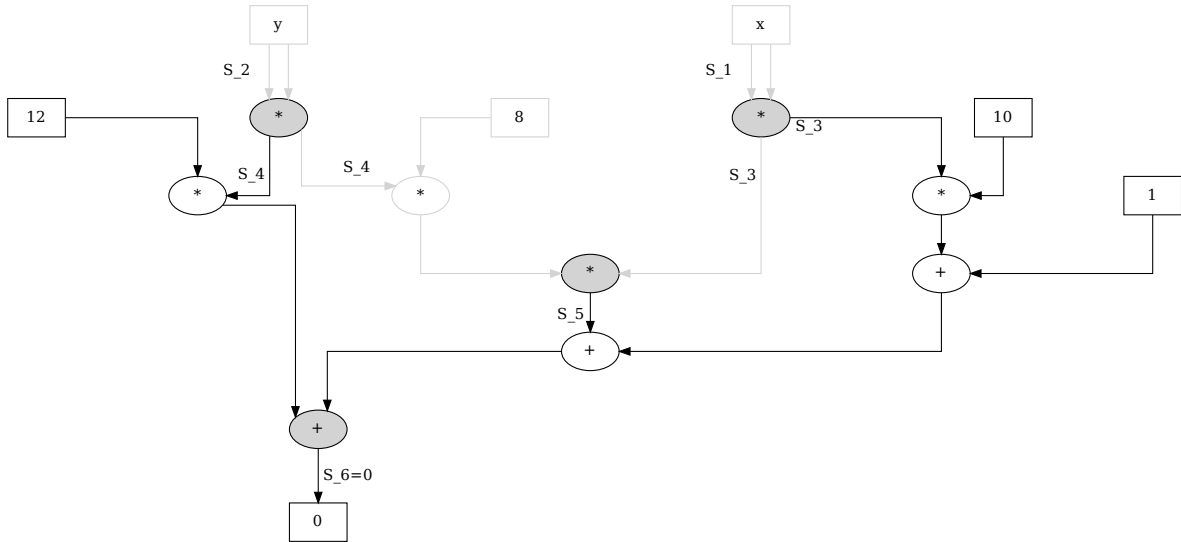

Both the left and the right input are unlabeled, but have a labeled edges in their path. Since the gate is an addition gate, the right factor in the quadratic constraint is always 1 and the left factor is computed by symbolically executing all inputs to all gates in the sub-circuit. We get

$$(12 \cdot S_4 + S_5 + 10 \cdot S_3 + 1) \cdot 1 = 0$$

Since there are no more labeled outgoing edges, we are done deriving the constraints. Combining all constraints together, we get the following R1CS:

$$\begin{aligned} S_1 \cdot S_1 &= S_3 \\ S_2 \cdot S_2 &= S_4 \\ (S_4 \cdot 8) \cdot S_3 &= S_5 \\ (12 \cdot S_4 + S_5 + 10 \cdot S_3 + 1) \cdot 1 &= 0 \end{aligned}$$

which is equivalent to the R1CS we derived in example 117 both the circuit as well as the R1CS are just two different ways to express the same language.

6.2.3 Quadratic Arithmetic Programs

We have introduced algebraic circuits and their associated Rank-1 Constraint Systems as two particular models able to represent bounded computation. Both models define formal languages,

and associated membership as well as knowledge claims can be proofed in a constructive way by executing the circuit in order to compute solutions to its associated R1CS.

One reason why those systems are useful in the context of succinct zero-knowledge proof systems is because any R1CS can be transformed into another computational model called a **Quadratic Arithmetic Program** [QAP], which serves as the basis for some of the most efficient succinct non-interactive zero-knowledge proof generators that currently exist.

As we will see, proving statements for languages that have decision functions defined by Quadratic Arithmetic Programs can be achieved by providing certain polynomials, and those proofs can be verified by checking a particular divisibility property of those polynomials.

6.2.3.0.1 QAP representation To understand what Quadratic Arithmetic Programs are in detail, let \mathbb{F} be a field and R a Rank-1 Constraint System over \mathbb{F} such that the number of non-zero elements in \mathbb{F} is strictly larger than the number k of constraints in R . Moreover, let a_j^i, b_j^i and $c_j^i \in \mathbb{F}$ for every index $0 \leq j \leq n+m$ and $1 \leq i \leq k$, be the defining constants of the R1CS and m_1, \dots, m_k be arbitrary, invertible and distinct elements from \mathbb{F} .

Then a **Quadratic Arithmetic Program** associated to the R1CS R is the following set of polynomials over \mathbb{F} :

$$QAP(R) = \left\{ T \in \mathbb{F}[x], \{A_j, B_j, C_j \in \mathbb{F}[x]\}_{h=0}^{n+m} \right\} \quad (6.12)$$

Here $T(x) := \prod_{i=1}^k (x - m_i)$ is a polynomial of degree k , called the **target polynomial** of the QAP and A_j, B_j as well as C_j are the unique degree $k-1$ polynomials defined by the following equation:

$$A_j(m_i) = a_j^i, \quad B_j(m_i) = b_j^i, \quad C_j(m_i) = c_j^i \quad \text{for all } j = 1, \dots, n+m+1, i = 1, \dots, k \quad (6.13)$$

Given some Rank-1 Constraint System, an associated Quadratic Arithmetic Program is therefore nothing but a set of polynomials, computed from the constants in the R1CS. To see that the polynomials A_j, B_j and C_j are uniquely defined by the equations 6.13, recall that a polynomial of degree $k-1$ is completely determined by k evaluation points and it can be computed for example by Lagrange interpolation 4.

Computing a QAP from any given R1CS can be achieved in the following three steps. If the R1CS consists of k constraints, first choose k different, invertible element from the field \mathbb{F} . Every choice defines a different QAP for the same R1CS. Then compute the target polynomial T according to its definition 6.12. After that use Lagrange's method 4 to compute the polynomials A_j for every $1 \leq j \leq k$ from the set

$$S_{A_j} = \{(m_1, a_j^1), \dots, (m_k, a_j^k)\} \quad (6.14)$$

After that is done, execute the analog computation for the polynomials B_j and C_j for every $1 \leq j \leq k$.

Example 127 (Generalized factorization SNARK). To provide a better intuition of Quadratic Arithmetic Programs and how they are computed from their associated Rank-1 Constraint Systems, consider the language $L_{3, \text{fac_zk}}$ from example 114 and its associated R1CS from example 116:

$$\begin{array}{ll} W_1 \cdot W_2 = W_4 & \text{constraint 1} \\ W_4 \cdot W_3 = I_1 & \text{constraint 2} \end{array}$$

In this example we want to transform this R1CS into an associated QAP. According to example 116 the defining constants a_j^i , b_j^i and c_j^i of the R1CS are given as follows:

$$\begin{array}{llllll} a_0^1 = 0 & a_1^1 = 0 & a_2^1 = 1 & a_3^1 = 0 & a_4^1 = 0 & a_5^1 = 0 \\ a_0^2 = 0 & a_1^2 = 0 & a_2^2 = 0 & a_3^2 = 0 & a_4^2 = 0 & a_5^2 = 1 \\ \\ b_0^1 = 0 & b_1^1 = 0 & b_2^1 = 0 & b_3^1 = 1 & b_4^1 = 0 & b_5^1 = 0 \\ b_0^2 = 0 & b_1^2 = 0 & b_2^2 = 0 & b_3^2 = 0 & b_4^2 = 1 & b_5^2 = 0 \\ \\ c_0^1 = 0 & c_1^1 = 0 & c_2^1 = 0 & c_3^1 = 0 & c_4^1 = 0 & c_5^1 = 1 \\ c_0^2 = 0 & c_1^2 = 1 & c_2^2 = 0 & c_3^2 = 0 & c_4^2 = 0 & c_5^2 = 0 \end{array}$$

Since the R1CS is defined over the field \mathbb{F}_{13} and since it has two constraints, we need to choose two arbitrary but invertible and distinct elements m_1 and m_2 from \mathbb{F}_{13} . We choose $m_1 = 5$, and $m_2 = 7$ and with this choice we get the target polynomial

$$\begin{array}{ll} T(x) = (x - m_1)(x - m_2) & \# \text{ Definition of } T \\ = (x - 5)(x - 7) & \# \text{ Insert our choice} \\ = (x + 8)(x + 6) & \# \text{ Negatives in } \mathbb{F}_{13} \\ = x^2 + x + 9 & \# \text{ expand} \end{array}$$

4622 Then we have to compute the polynomials A_j , B_j and C_j by their defining equation from the
4623 R1CS coefficients. Since the R1CS has two constraining equations, those polynomials are of
4624 degree 1 and they are defined by their evaluation at the point $m_1 = 5$ and the point $m_2 = 7$.

At point m_1 , each polynomial A_j is defined to be a_j^1 and at point m_2 , each polynomial A_j is defined to be a_j^2 . The same holds true for the polynomials B_j as well as C_j . Writing all these equations down, we get:

$$\begin{array}{llllll} A_0(5) = 0, & A_1(5) = 0, & A_2(5) = 1, & A_3(5) = 0, & A_4(5) = 0, & A_5(5) = 0 \\ A_0(7) = 0, & A_1(7) = 0, & A_2(7) = 0, & A_3(7) = 0, & A_4(7) = 0, & A_5(7) = 1 \\ \\ B_0(5) = 0, & B_1(5) = 0, & B_2(5) = 0, & B_3(5) = 1, & B_4(5) = 0, & B_5(5) = 0 \\ B_0(7) = 0, & B_1(7) = 0, & B_2(7) = 0, & B_3(7) = 0, & B_4(7) = 1, & B_5(7) = 0 \\ \\ C_0(5) = 0, & C_1(5) = 0, & C_2(5) = 0, & C_3(5) = 0, & C_4(5) = 0, & C_5(5) = 1 \\ C_0(7) = 0, & C_1(7) = 1, & C_2(7) = 0, & C_3(7) = 0, & C_4(7) = 0, & C_5(7) = 0 \end{array}$$

4625 Lagrange's interpolation implies that a polynomial of degree k , that is zero on $k + 1$ points has
4626 to be the zero polynomial. Since our polynomials are of degree 1 and determined on 2 points,
4627 we therefore know that the only non-zero polynomials in our QAP are A_2 , A_5 , B_3 , B_4 , C_1 and
4628 C_5 , and that we can use Lagrange's interpolation to compute them.

To compute A_2 we note that the set S_{A_2} in our version of Lagrange's interpolation is given by $S_{A_2} = \{(m_1, a_2^1), (m_2, a_2^2)\} = \{(5, 1), (7, 0)\}$. Using this set we get:

$$\begin{array}{ll} A_2(x) = a_2^1 \cdot \left(\frac{x - m_2}{m_1 - m_2}\right) + a_2^2 \cdot \left(\frac{x - m_1}{m_2 - m_1}\right) = 1 \cdot \left(\frac{x - 7}{5 - 7}\right) + 0 \cdot \left(\frac{x - 5}{7 - 5}\right) \\ = \frac{x - 7}{-2} = \frac{x - 7}{11} & \# 11^{-1} = 6 \\ = 6(x - 7) = 6x + 10 & \# -7 = 6 \text{ and } 6 \cdot 6 = 10 \end{array}$$

To compute A_5 , we note that the set S_{A_5} in our version of Lagrange's method is given by $S_{A_5} = \{(m_1, a_5^1), (m_2, a_5^2)\} = \{(5, 0), (7, 1)\}$. Using this set we get:

$$\begin{aligned} A_5(x) &= a_5^1 \cdot \left(\frac{x - m_2}{m_1 - m_2} \right) + a_5^2 \cdot \left(\frac{x - m_1}{m_2 - m_1} \right) = 0 \cdot \left(\frac{x - 7}{5 - 7} \right) + 1 \cdot \left(\frac{x - 5}{7 - 5} \right) \\ &= \frac{x - 5}{2} \quad \# 2^{-1} = 7 \\ &= 7(x - 5) = 7x + 4 \quad \# -5 = 8 \text{ and } 7 \cdot 8 = 4 \end{aligned}$$

4629 Using Lagrange's interpolation, we can deduce that $A_2 = B_3 = C_5$ as well as $A_5 = B_4 = C_1$,
 4630 since they are polynomials of degree 1 that evaluate to same values on 2 points. Using this, we
 4631 get the following set of polynomials

$A_0(x) = 0$	$B_0(x) = 0$	$C_0(x) = 0$
$A_1(x) = 0$	$B_1(x) = 0$	$C_1(x) = 7x + 4$
$A_2(x) = 6x + 10$	$B_2(x) = 0$	$C_2(x) = 0$
$A_3(x) = 0$	$B_3(x) = 6x + 10$	$C_3(x) = 0$
$A_4(x) = 0$	$B_4(x) = 7x + 4$	$C_4(x) = 0$
$A_5(x) = 7x + 4$	$B_5(x) = 0$	$C_5(x) = 6x + 10$

4633 We can invoke Sage to verify our computation. In sage every polynomial ring has a function
 4634 `lagrange_polynomial` that takes the defining points as inputs and the associated Lagrange
 4635 polynomial as output.

```

4636 sage: F13 = GF(13)                                     643
4637 sage: F13t.<t> = F13[]                                   644
4638 sage: T = F13t((t-5)*(t-7))                             645
4639 sage: A2 = F13t.lagrange_polynomial([(5,1),(7,0)])       646
4640 sage: A5 = F13t.lagrange_polynomial([(5,0),(7,1)])       647
4641 sage: T == F13t(t^2 + t + 9)                             648
4642 True                                                    649
4643 sage: A2 == F13t(6*t + 10)                               650
4644 True                                                    651
4645 sage: A5 == F13t(7*t + 4)                                652
4646 True                                                    653

```

4647 Combining this computation with the target polynomial we derived earlier, a Quadratic
 4648 Arithmetic Program associated to the Rank-1 Constraint System $R_{3.fac_zk}$ is given as follows:

$$\begin{aligned} QAP(R_{3.fac_zk}) &= \{x^2 + x + 9, \\ &\quad \{0, 0, 6x + 10, 0, 0, 7x + 4\}, \{0, 0, 0, 6x + 10, 7x + 4, 0\}, \{0, 7x + 4, 0, 0, 0, 6x + 10\}\} \end{aligned}$$

4649 *Exercise 88.* Consider the Rank-1 Constraint System for points on the tiny-jubjub curve from
 4650 example 117. Compute an associated QAP for this R1CS and double check your computation
 4651 using sage.

4652 **6.2.3.0.2 QAP Satisfiability** One of the major points of Quadratic Arithmetic Programs
 4653 in proving systems is that solutions of their associated Rank-1 Constraint Systems are in 1:1
 4654 correspondence with certain polynomials P divisible by the target polynomial T of the QAP.

Verifying solutions to the R1CS and hence, checking proper circuit execution is then achievable by polynomial division of P by T .

To be more specific, let R be some Rank-1 Constraint System with associated variables $(\langle I_1, \dots, I_n \rangle; \langle W_1, \dots, W_m \rangle)$ and let $QAP(R)$ be a Quadratic Arithmetic Program of R . Then the string $(\langle I_1, \dots, I_n \rangle; \langle W_1, \dots, W_m \rangle)$ is a solution to the R1CS if and only if the following polynomial is divisible by the target polynomial T :

$$P_{(I;W)} = (A_0 + \sum_j^n I_j \cdot A_j + \sum_j^m W_j \cdot A_{n+j}) \cdot (B_0 + \sum_j^n I_j \cdot B_j + \sum_j^m W_j \cdot B_{n+j}) - (C_0 + \sum_j^n I_j \cdot C_j + \sum_j^m W_j \cdot C_{n+j}) \quad (6.15)$$

To understand how Quadratic Arithmetic Programs define formal languages, observe that every QAP over a field \mathbb{F} defines a decision function over the alphabet $\Sigma_I \times \Sigma_W = \mathbb{F} \times \mathbb{F}$ in the following way:

$$R_{QAP} : (\mathbb{F})^* \times (\mathbb{F})^* \rightarrow \{true, false\} ; (I;W) \mapsto \begin{cases} true & P_{(I;W)} \text{ is divisible by } T \\ false & \text{else} \end{cases} \quad (6.16)$$

This means that every QAP defines a formal language L_{QAP} , and, if the QAP is associated to an R1CS, the language generated by the QAP and the language generated by the R1CS are equivalent. In the context of languages generated by Quadratic Arithmetic Programs, a **statement** is then a membership claim “There is a word $(I;W)$ in L_{QAP} ”. A proof to this claim is therefore given by a polynomial $P_{(I;W)}$, which is verified by dividing $P_{(I;W)}$ by T .

Note the structural similarities and differences in the definition of an R1CS and its associated language in ??, of circuits and their associated languages in 6.2.2 and of QAPs and their associated languages as explained in this part. For circuits and their associated Rank-1 Constraint Systems, a constructive proof consists of a valid assignment of field elements to the edges of the circuit, or the variables in the R1CS. However, in the case of QAPs, a valid proof consists of a polynomial $P_{(I;W)}$.

To compute a constructive proof for a statement in L_{QAP} given some instance I , a prover first needs to compute a constructive proof W of the associated R1CS, e.g. by executing the circuit of the R1CS. With $(I;W)$ at hand, the prover can then compute the polynomial $P_{(I;W)}$ and publish the polynomial as proof.

Verifying a constructive proof in the case of a circuit is achieved by executing the circuit and then by comparing the result against the given proof. Verifying the same proof in the R1CS picture means checking if the elements of the proof satisfy the R1CS equations. In contrast, verifying a proof in the QAP picture is done by polynomial division of the proof P by the target polynomial T . The proof is verified if and only if P is divisible by T .

Example 128. Consider the Quadratic Arithmetic Program $QAP(R_{3, fac_zk})$ from example 127 and its associated R1CS from equation 116. To give an intuition of how proofs in the language $L_{QAP(R_{3, fac_zk})}$ look like, let's consider the instance $I_1 = 11$. As we know from example 122, $(W_1, W_2, W_3, W_5) = (2, 3, 4, 6)$ is a proper witness, since $(\langle I_1 \rangle; \langle W_1, W_2, W_3, W_5 \rangle) = (\langle 11 \rangle; \langle 2, 3, 4, 6 \rangle)$ is a valid circuit assignment and hence, a solution to R_{3, fac_zk} and a constructive proof for language $L_{R_{3, fac_zk}}$.

In order to transform this constructive proof into a knowledge proof in language $L_{QAP(R_{3, fac_zk})}$, a prover has to use the elements of the constructive proof, to compute the polynomial $P_{(I;W)}$.

In the case of $(\langle I_1 \rangle; \langle W_1, W_2, W_3, W_5 \rangle) = (\langle 11 \rangle; \langle 2, 3, 4, 6 \rangle)$, the associated proof

is computed as follows:

$$\begin{aligned}
P_{(I;W)} &= (A_0 + \sum_j^n I_j \cdot A_j + \sum_j^m W_j \cdot A_{n+j}) \cdot (B_0 + \sum_j^n I_j \cdot B_j + \sum_j^m W_j \cdot B_{n+j}) - (C_0 + \sum_j^n I_j \cdot C_j + \sum_j^m W_j \cdot C_{n+j}) \\
&= (2(6x + 10) + 6(7x + 4)) \cdot (3(6x + 10) + 4(7x + 4)) - (11(7x + 4) + 6(6x + 10)) \\
&= ((12x + 7) + (3x + 11)) \cdot ((5x + 4) + (2x + 3)) - ((12x + 5) + (10x + 8)) \\
&= (2x + 5) \cdot (7x + 7) - (9x) \\
&= (x^2 + 2 \cdot 7x + 5 \cdot 7x + 5 \cdot 7) - (9x) \\
&= (x^2 + x + 9x + 9) - (9x) \\
&= x^2 + x + 9
\end{aligned}$$

4692 Given instance $I_1 = 11$ a prover therefore provides the polynomial $x^2 + x + 9$ as proof. To verify
4693 this proof, any verifier can then look up the target polynomial T from the QAP and divide $P_{(I;W)}$
4694 by T . In this particular example, $P_{(I;W)}$ is equal to the target polynomial T , and hence, it is
4695 divisible by T with $P/T = 1$. The verifier therefore verifies the proof.

```

4696 sage: F13 = GF(13) 654
4697 sage: F13t.<t> = F13[] 655
4698 sage: T = F13t(t^2 + t + 9) 656
4699 sage: P = F13t((2*(6*t+10)+6*(7*t+4))*(3*(6*t+10)+4*(7*t+4)) 657
4700              -(11*(7*t+4)+6*(6*t+10)))
4701 sage: P == T 658
4702 True 659
4703 sage: P % T # remainder 660
4704 0 661

```

To give an example of a false proof, consider the string $(\langle I_1 \rangle; \langle W_1, W_2, W_3, W_4 \rangle) = (\langle 11 \rangle, \langle 2, 3, 4, 8 \rangle)$. Executing the circuit, we can see that this is not a valid assignment and not a solution to the R1CS, and hence, not a constructive knowledge proof in $L_{3, \text{fac_zk}}$. However, a prover might use these values to construct a false proof $P'_{(I;W)}$:

$$\begin{aligned}
P'_{(I;W)} &= (A_0 + \sum_j^n I_j \cdot A_j + \sum_j^m W_j \cdot A_{n+j}) \cdot (B_0 + \sum_j^n I_j \cdot B_j + \sum_j^m W_j \cdot B_{n+j}) - (C_0 + \sum_j^n I_j \cdot C_j + \sum_j^m W_j \cdot C_{n+j}) \\
&= (2(6x + 10) + 8(7x + 4)) \cdot (3(6x + 10) + 4(7x + 4)) - (8(6x + 10) + 11(7x + 4)) \\
&= 8x^2 + 6
\end{aligned}$$

Given instance $I_1 = 11$, a prover therefore provides the polynomial $8x^2 + 6$ as proof. To verify this proof, any verifier can look up the target polynomial T from the QAP and divide $P'_{(I;W)}$ by T . However, polynomial division has the following remainder:

$$(8x^2 + 6)/(x^2 + x + 9) = 8 + \frac{5x + 12}{x^2 + x + 9}$$

4705 This implies that $P'_{(I;W)}$ is not divisible by T , and hence, the verifier does not verify the proof.
4706 Any verifier can therefore show that the proof is false.

```

4707 sage: F13 = GF(13) 662
4708 sage: F13t.<t> = F13[] 663
4709 sage: T = F13t(t^2 + t + 9) 664
4710 sage: P = F13t((2*(6*t+10)+8*(7*t+4))*(3*(6*t+10)+4*(7*t+4))-( 665
4711              8*(6*t+10)+11*(7*t+4)))

```

4712	sage: $P == F13t(8*t^2 + 6)$	666
4713	True	667
4714	sage: $P \% T$ # remainder	668
4715	$5*t + 12$	669

Chapter 7

Circuit Compilers

As we have seen in the previous chapter, statements can be formalized as membership or knowledge claims in formal languages, and algebraic circuits as well as Rank-1 Constraint Systems are two practically important ways to define those languages.

However, both algebraic circuits and Rank-1 Constraint Systems are not ideal from a developers point of view, because they deviate substantially from common programming paradigms. Writing real-world applications as circuits and the associated verification in terms of Rank-1 Constraint Systems is at least as troublesome as writing any other low-level language like assembler code. To allow for complex statement design, it is therefore necessary to have some kind of compiler framework, capable of transforming high-level languages into arithmetic circuits and associated Rank-1 Constraint Systems.

As we have seen in chapter 6 and in 6.2.1 as well as 6.2.2, both arithmetic circuits and Rank-1 Constraint Systems have a modularity property 6.2.1.0.3 by which it is possible to synthesize complex circuits from simple ones. A basic approach taken by many circuit/R1CS compilers is therefore to provide a library of atomic and simple circuits and then define a way to combine those basic building blocks into arbitrary complex systems.

In this chapter, we provide an introduction to basic concepts of so-called **circuit compilers** and derive a toy language which we can “compile” in a pen-and-paper approach into graphical representations of algebraic circuits and their associated Rank-1 Constraint Systems.

We start with a general introduction to our toy programming language, and then introduce atomic types like booleans and unsigned integers. Then we define the fundamental control flow primitives like the if-then-else conditional and the bounded loop. We will look at basic functionality primitives like elliptic curve cryptography. Primitives like these are often called **gadgets** in the literature.

7.1 A Pen-and-Paper Language

To explain basic concepts of circuit compilers and their associated high-level languages, we derive an informal toy language and associated “brain-compiler” which we name **PAPER (Pen-And-Paper Execution Rules)**. **PAPER** allows programmers to define statements in Rust-like pseudo-code. The language is inspired by [zokrates](#) and [circom](#).

7.1.1 The Grammar

In **PAPER**, any statement is defined as an ordered list of functions, where any function has to be declared in the list before it is called in another function of that list. The last entry in a statement

add references to these languages?

has to be a special function, called `main`. Functions take a list of typed parameters as inputs and compute a tuple of typed variables as output, where `type_functions` are special functions that define how to transform one type into another type, ultimately transforming any type into elements of the base field where the circuit is defined over.

Any statement is parameterized over the field that the circuit will be defined on, and has additional optional parameters of unsigned type, needed to define the size of arrays or the counter of bounded loops. The following definition makes the grammar of a statement precise using a command line language like description:

```
statement <Name> {F:<Field> [ , <N_1: unsigned>, ... ] } {
  [fn <Name> ([[pub]<Arg>:<Type>, ...]) -> (<Type>, ...)] {
    [let [pub] <Var>:<Type> ; ... ]
    [let const <Const>:<Type>=<Value> ; ... ]
    Var<==>(fn ([<Arg>|<Const>|<Var>, ...]) | (<Arg>|<Const>|<Var>)) ;
    return (<Var>, ...) ;
  } ; ... ]
  fn main([ [pub]<Arg>:<Type>, ... ] -> (<Type>, ...)) {
    [let [pub] <Var>:<Type> ; ... ]
    [let const <Const>:<Type>=<Value> ; ... ]
    Var<==>(fn ([<Arg>|<Const>|<Var>, ...]) | (<Arg>|<Const>|<Var>)) ;
    return (<Var>, ...) ;
  } ;
}
```

Function arguments and variables are witness variables by default, but can be declared as instance by the `pub` specifier. Declaring arguments and variables as instances always overwrites any previous or conflicting witness declarations. Every argument, constant or variable has a type, and every type is defined as a function that transforms that type into another type. In order for a PAPER program to compile successfully, all type transformations must be composed in such a way that the final type is the base field where the circuit is defined over:

```
type_function <TYPE>( t1 : <TYPE_1>) -> TYPE_2{
  let t2: TYPE_2 <==> fn(TYPE_1)
  return t2
}
```

Many real-world circuit languages are based on a similar, but of course more sophisticated approach than PAPER. The purpose of PAPER is to show basic principles of circuit compilers and their associated high-level languages.

Example 129. To get a better understanding of the grammar of PAPER, the following constitutes proper high-level code that follows the grammar of the PAPER language, assuming that all types in that code have been defined elsewhere.

```
statement MOCK_CODE {F: F_43, N_1 = 1024, N_2 = 8} {
  fn foo(in_1 : F, pub in_2 : TYPE_2) -> F {
    let const c_1 : F = 0 ;
    let const c_2 : TYPE_2 = SOME_VALUE ;
    let pub out_1 : F ;
    out_1<==> c_1 ;
    return out_1 ;
  } ;
  fn bar(pub in_1 : F) -> F {
```

```

4797     let out_1 : F ;
4798     out_1<==foo(in_1);
4799     return out_1 ;
4800 } ;
4801
4802 fn main(in_1 : TYPE_1)->(F, TYPE_2){
4803     let const c_1 : TYPE_1  = SOME_VALUE ;
4804     let const c_2 : F = 2;
4805     let const c_3 : TYPE_2  = SOME_VALUE  ;
4806     let pub out_1 : F ;
4807     let out_2 : TYPE_2 ;
4808     c_1 <== in_1 ;
4809     out_1 <== foo(c_2) ;
4810     out_2 <== TYPE_2 ;
4811     return (out_1,out_2) ;
4812 } ;
4813 }

```

7.1.2 The Execution Phases

In contrast to normal executable programs, programs for circuit compilers have two modes of execution. The first mode, usually called the **setup phase**, is executed in order to generate the circuit and its associated Rank-1 Constraint System, the latter of which is then usually used as input to some zero-knowledge proof system as explained in 8.

The second mode of execution is usually called the **prover phase**. In this phase, some assignment to all instance variables of the circuit is usually given as input and the task of a prover is to compute a valid assignment to all witness variables of the circuit. Depending on the use case, this valid assignment is then either directly used as constructive proof for proper circuit execution or is transferred as input to the proof generation algorithm of some zero-knowledge proof system, where the full-sized, non hiding constructive proof is processed into a succinct proof with various levels of zero knowledge.

Modern circuit languages and their associated compilers abstract over those two phases and provide a unified **interphase** to the developer, who then writes a single program that can be used in both phases.

To give the reader a clear, conceptual distinction between the two phases, PAPER keeps them separated. PAPER-code can be “brain-compiled” during the **setup-phase** in a pen-and-paper approach into a graphical circuit representation. Once a circuit is derived, it can be executed in a **prover phase** to generate a valid assignment. The valid assignment is then interpreted as a constructive proof for a knowledge claim in the associated language.

7.1.2.0.1 The Setup Phase

In PAPER, the task of the setup phase is to compile code in the PAPER language into a visual representation of an algebraic circuit. Deriving the circuit from the code in a pen-and-paper style is what we call **brain-compiling**.

Given some statement description that adheres to the correct grammar, we start the graphical circuit compilation process with an empty circuit, compile the main function first and then inductively compile all other functions as they are called during the process.

For every function that we currently compile, we draw a box-node for every input argument, every variable and every constant of that function. If the node represents a variable, we label it with that variable’s name, and if it represents a constant, we label it with that constant’s value.

We group arguments into a subgraph labeled “inputs” and return values into a subgraph labeled “outputs”. We then group everything into a subgraph and label that subgraph with the function’s name.

After this is done, we have to do a consistency and type check for every occurrence of the assignment operator `<==`. We have to ensure that the expression on the right side of the operator is well defined and that the types of both side match.

Then we compile the right side of every occurrence of the assignment operator `<==`. If the right side is a constant or variable defined in this function, we draw a dotted line from the box-node that represents the left side of `<==` to the box node that represents the right side of the same operator. If the right side represents an argument of that function we draw a line from the box-node that represents the left side of `<==` to the box node that represents the right side of the same operator.

If the right side of the `<==` operator is a function, we look into our database, find its associated circuit and draw it. If no circuit is associated to that function yet, we repeat the compilation process for that function, drawing edges from the function’s argument to its input nodes and from the functions output nodes to the nodes on the right side of `<==`.

During that process, edge labels are drawn according to the defining rules of algebraic circuits from 6.2.2.0.1. If the associated variable represents a witness variable, we use the *W* label to indicate a witness, and if it represents a instance variable, we use the *I* label to indicate an instance. Variables are witnesses by default and the *pub* specifier indicates that the variable is an instance.

Once this is done, we compile all occurring types of all variables in a function, by compiling the `type_function` of each type. We do this inductively until we reach the type of the base field. Circuits have no notion of types, only of field elements; hence, every type needs to be compiled to the field type in a sequence of compilation steps.

The compilation stops once we have inductively replaced all functions by their circuits. The result is a circuit that contains many unnecessary box nodes. In a final **optimization step**, all box nodes that are directly linked to each other are collapsed into a single node, and all box nodes that represent the same constants are collapsed into a single node.

Of course, PAPER’s brain-compiler is not properly defined in any formal manner. Its purpose is to highlight important steps that real-world compilers undergo in their setup phases.

Example 130 (A trivial Circuit). To give an intuition of how to write and compile circuits in the PAPER language, consider the following statement description:


```
statement trivial_circuit {F:F_13} {
  fn main{F}{in1 : F, pub in2 : F} -> (F,F){
    let const outc1 : F = 0 ;
    let const incl : F = 7 ;
    let out1 : F ;
    let out2 : F ;
    out1 <== incl;
    out2 <== in1;
    outc1 <== in2;
    return (out1, out2) ;
  }
}
```

To brain-compile this statement into an algebraic circuit with PAPER, we start with an empty circuit and evaluate function `main`, which is the only function in this statement.

We draw box-nodes for every argument, every constant and every variable of the function

and label them with their names or values, respectively. Then we do a consistency and type check for every \leq operator in the function. Since the circuit only wires inputs to outputs and all elements have the same type, the check is valid.

Then we evaluate the right side of the assignment operators. Since, in our case, the right side of each operator is not a function, we draw edges from the box-nodes on the right side to the associated box node on the left side. To label those edges, we use the general rules of algebraic circuits as defined in 6.2.2.0.1. According to those rules, every incoming edge of a sink node has a label and every outgoing edge of a source node has a label, if the node is labeled with a variable. Since nodes that represent constants are implicitly assumed to be private, and since the public specifier determines if an edge is labeled with W or I , we get the following circuit:

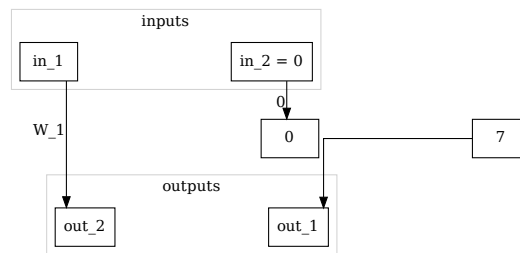

7.1.2.0.2 The Prover Phase In PAPER, a so-called **prover phase** can be executed once the setup phase has generated a graphic circuit representation from its associated high-level code. This is done by executing the circuit while assigning proper values to all input nodes of the circuit. However, in contrast to most real-world compilers, PAPER does not tell the prover how to find proper input values to a given circuit. Real-world programming languages usually provide this data by computations that are done outside of the circuit.

Example 131. Consider the circuit from example 123. Valid assignments to this circuit are constructive proofs that the pair of inputs $\langle I_1, I_2 \rangle$ is a point on the tiny-jubjub curve. However, the circuit does not provide a way to actually compute proper values for I_1 and I_2 . Any real-world system therefore needs an auxiliary computation that provides those values.

7.2 Common Programing concepts

In this section, we cover concepts that appear in almost every programming language, and see how they can be implemented in circuit compilers.

7.2.1 Primitive Types

Primitive data types like booleans, (unsigned) integers, or strings are the most basic building blocks one can expect to find in every general high-level programming language. In order to write statements as computer programs that compile into circuits, it is therefore necessary to implement primitive types as constraint systems, and define their associated operations as circuits.

In this section, we look at some common ways to achieve this. After a recapitulation of the atomic type for the base field where the circuit is defined on, we start with an implementation of the boolean type and its associated boolean algebra as circuits. After that, we define unsigned integers based on the boolean type, and leave the implementation of signed integers as an exercise to the reader.

7.2.1.1 The base-field type

Since both algebraic circuits and their associated Rank-1 Constraint Systems are defined over a finite field, elements from that field are the atomic informational units in those models. In this sense, field elements $x \in \mathbb{F}$ are for algebraic circuits what bits are for computers.

In PAPER, we write \mathbb{F} for this type and specify the actual instance of the field type in curly brackets after the name of a given statement. Two functions are associated to this type, which are induced by the **addition** and **multiplication** law in the field \mathbb{F} . We write

$$\text{MUL} : \mathbb{F} \times \mathbb{F} \rightarrow \mathbb{F} ; (x, y) \mapsto \text{MUL}(x, y) \quad (7.1)$$

$$\text{ADD} : \mathbb{F} \times \mathbb{F} \rightarrow \mathbb{F} ; (x, y) \mapsto \text{ADD}(x, y) \quad (7.2)$$


Circuit compilers have to compile these functions into arithmetic gates, as explained in 6.2.2.0.4. Every other function has to be expressed in terms of these two atomic functions.

To represent addition and multiplication in the PAPER language, we define the following two functions:

```
fn MUL(x : F, y : F) -> F{}
```

```
fn ADD(x : F, y : F) -> F{}
```

The compiler then compiles every occurrence of the MUL or the ADD function into the following graphical circuit representations:

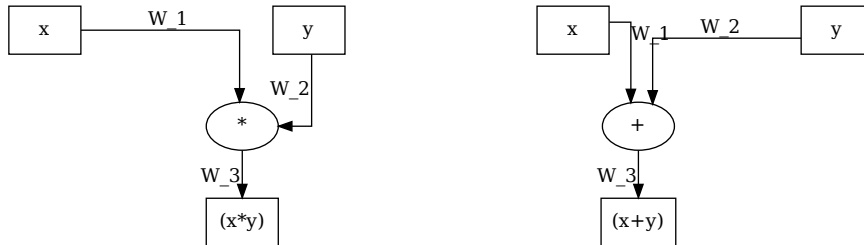

Example 132 (Basic gates). To give an intuition of how a real-world compiler might transform addition and multiplication in algebraic expressions into a circuit, consider the following PAPER statement:

```
statement basic_ops {F:F_13} {
  fn main(in_1 : F, pub in_2 : F) -> (F, F){
    let out_1 : F ;
    let out_2 : F ;
    out_1 <== MUL(in_1, in_2) ;
    out_2 <== ADD(in_1, in_2) ;
    return (out_1, out_2) ;
  }
}
```


To compile this into an algebraic circuit, we start with an empty circuit and evaluate the function `main`, which is the only function in this statement. We draw an inputs subgraph containing box-nodes for every argument of the function, and an outputs subgraph containing box-nodes

for every factor in the return value. Since all of these nodes represent variables of the `field` type, we don't have to add any type constraints to the circuit.

We check the validity of every expression on the right side of every `<==` operator including a type check. In our case, every variable is of the `field` type and hence the types match the types of the `MUL` as well as the `ADD` function and the type of the left sides of `<==` operators.


We evaluate the expressions on the right side of every `<==` operator inductively, replacing every occurrence of a function with a subgraph that represents its associated circuit.

According to `PAPER`, every occurrence of the instance specifier `pub` overwrites the associate witness default value. Using the appropriate edge labels we get:

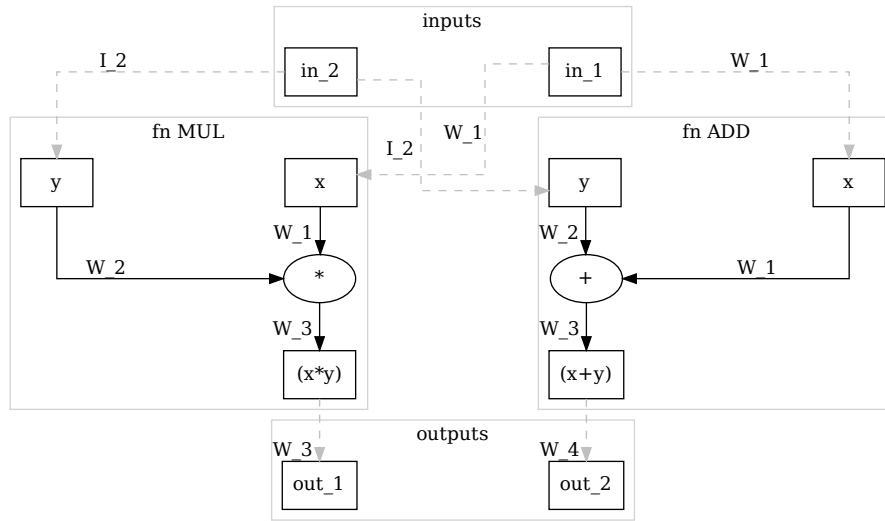

Any real-world compiler might process its associated high-level language in a similar way, replacing functions, or gadgets by predefined associated circuits. This process is often followed by various optimization steps that try to reduce the number of constraints as much as possible.

In `PAPER`, we optimize this circuit by collapsing all box nodes that are directly connected to other box nodes, adhering to the rule that a variable's `pub` specifier overwrites any witness specifier. Reindexing edge labels, we get the following circuit as our pen and paper compiler output:

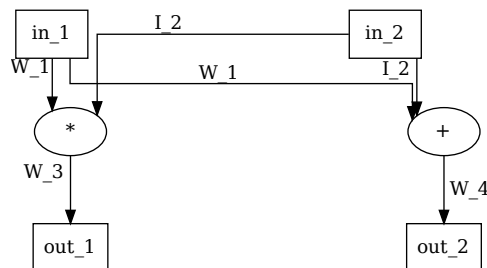

Example 133 (3-factorization). Consider our 3-factorization problem from example 111 and the associated circuit $C_{3, fac_zk}(\mathbb{F}_{13})$ we provided in example 121. To understand the process of replacing high-level functions by their associated circuits inductively, we want define a `PAPER` statement that we brain-compile into an algebraic circuit equivalent to $C_{3, fac_zk}(\mathbb{F}_{13})$:

```


4979 statement 3_fac_zk {F:F_13} {
4980   fn main(x_1 : F, x_2 : F, x_3 : F) -> F{
4981     let pub 3_fac_zk : F ;
4982     f_3.fac_zk <== MUL( MUL( x_1 , x_2 ) , x_3 ) ;
4983     return 3_fac_zk ;
4984   }
4985 }

```

Using PAPER, we start with an empty circuit and then add 3 input nodes to the input subgraph as well as 1 output node to the output subgraph. All these nodes are decorated with the associated variable names. Since all of these nodes represent variables of the `field` type, we don't have to add any type constraints to the circuit.


We check the validity of every expression on the right side of the single `<==` operator including a type check.

We evaluate the expressions on the right side of every `<==` operator inductively. We have two nested multiplication functions and we replace them by the associated multiplication circuits, starting with the most outer function. We get:

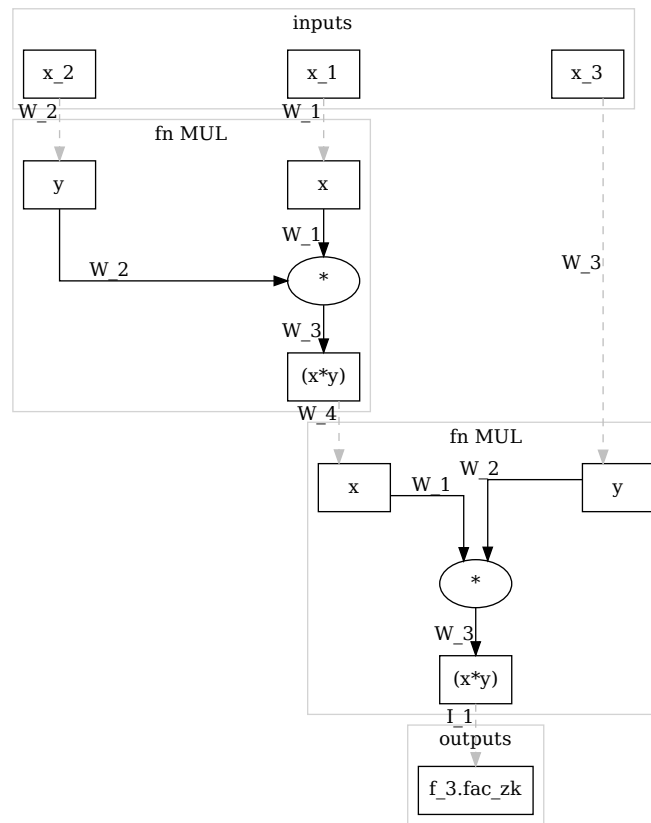

4995


In a final optimization step, we collapse all box nodes directly connected to other box nodes, adhering to the rule that a variable's `public` specifier overwrites any `private` specifier. Reindexing edge labels we get the following circuit:

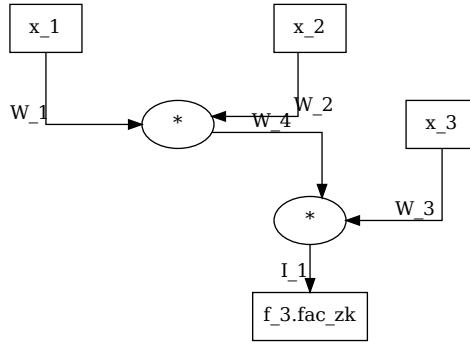

4999

7.2.1.1.1 The Subtraction Constraint System By definition, algebraic circuits only contain addition and multiplication gates, and it follows that there is no single gate for field subtraction, despite the fact that subtraction is a native operation in every field.

High-level languages and their associated circuit compilers, therefore, need another way to deal with subtraction. To see how this can be achieved, recall that subtraction is defined by addition with the additive inverse, and that the inverse can be computed efficiently by multiplication with -1 . A circuit for field subtraction is therefore given by

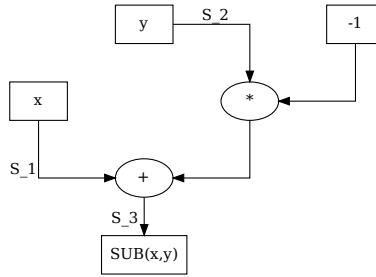

5007

Using the general method from 6.2.2.0.4, the circuits associated Rank-1 Constraint System is given by:

$$(S_1 + (-1) \cdot S_2) \cdot 1 = S_3 \quad (7.3)$$

Any valid assignment $\langle S_1, S_2, S_3 \rangle$ to this circuit therefore enforces the value S_3 to be the difference $S_1 - S_2$.

Real-world compilers usually provide a gadget or a function to abstract over this circuit such that programmers can use subtraction as if it were native to circuits. In PAPER, we define the following subtraction function that compiles to the previous circuit:

```

fn SUB(x : F, y : F) -> F{
  let rslt : F ;
  constant c : F = -1 ;
  rslt <== ADD(x , MUL( y , c) );
  return rslt ;
}
```

In the setup phase of a statement, we compile every occurrence of the SUB function into an instance of its associated subtraction circuit, and edge labels are generated according to the rules from 6.2.2.0.1.


7.2.1.1.2 The Inversion Constraint System By definition, algebraic circuits only contain addition and multiplication gates, and it follows that there is no single gate for field inversion, despite the fact that inversion is a native operation in every field.

If the underlying field is a prime field, one approach would be to use Fermat’s little theorem 3.16 to compute the multiplicative inverse inside the circuit. To see how this works, let \mathbb{F}_p be the prime field. The multiplicative inverse x^{-1} of a field element $x \in \mathbb{F}$ with $x \neq 0$ is then given by $x^{-1} = x^{p-2}$, and computing x^{p-2} in the circuit therefore computes the multiplicative inverse.

Unfortunately, real-world primes p are large and computing x^{p-2} by repeated multiplication of x with itself is infeasible. A “square and multiply” approach is faster, as it computes the power in roughly $\log_2(p)$ steps, but still adds a lot of constraints to the circuit.

Computing inverses in the circuit makes no use of the fact that inversion is a native operation in any field. A more constraints friendly approach is therefore to compute the multiplicative inverse outside of the circuit and then only enforce correctness of the computation in the circuit.

To understand how this can be achieved, observe that a field element $y \in \mathbb{F}$ is the multiplicative inverse of a field element $x \in \mathbb{F}$ if and only if $x \cdot y = 1$ in \mathbb{F} . We can use this, and define a circuit that has two inputs, x and y , and enforces $x \cdot y = 1$. It is then guaranteed that y is the multiplicative inverse of x . The price we pay is that we can not compute y by circuit execution, but auxiliary data is needed to tell any prover which value of y is needed for a valid circuit assignment. The following circuit defines the constraint



Using the general method from 6.2.2.0.4, the circuit is transformed into the following Rank-1 Constraint System:

$$S_1 \cdot S_2 = 1 \quad (7.4)$$

Any valid assignment $\langle S_1, S_2 \rangle$ to this circuit enforces that S_2 is the multiplicative inverse of S_1 , and, since there is no field element S_2 such that $0 \cdot S_2 = 1$, it also handles the fact that the multiplicative inverse of 0 is not defined in any field.

Real-world compilers usually provide a gadget or a function to abstract over this circuit, and those functions compute the inverse x^{-1} as part of their witness generation process. Programmers then don’t have to care about providing the inverse as auxiliary data to the circuit. In PAPER, we define the following inversion function that compiles to the previous circuit:

```


fn INV(x : F, y : F) -> F {
  let x_inv : F ;
  constant c : F = 1 ;
  c <== MUL( x , y ) ;
  x_inv <== y ;
  return x_inv ;
}
```

As we see, this functions takes two inputs, the field value and its inverse. It therefore does not handle the computation of the inverse by itself. This is to keep PAPER as simple as possible.

In the setup phase, we compile every occurrence of the INV function into an instance of the inversion circuit 7.2.1.1.2, and edge labels are generated according to the rules from 6.2.2.0.1.

7.2.1.1.3 The Division Constraint System By definition, algebraic circuits only contain addition and multiplication gates, and it follows that there is no single gate for field division, despite the fact that division is a native operation in every field.

Implementing division as a circuit, we use the fact that division is multiplication with the multiplicative inverse. We therefore define division as a circuit using the inversion circuit and constraint system from the previous paragraph. Expensive inversion is computed outside of the circuit and then provided as circuit input. We get

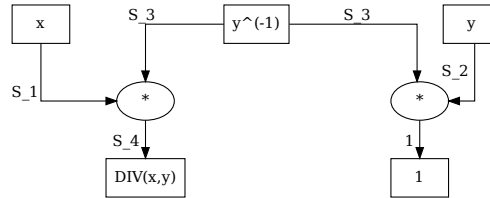

Using the method from 6.2.2.0.4, we transform this circuit into the following Rank-1 Constraint System:

$$\begin{aligned} S_2 \cdot S_3 &= 1 \\ S_1 \cdot S_3 &= S_4 \end{aligned}$$

Any valid assignment $\langle S_1, S_2, S_3, S_4 \rangle$ to this circuit enforces S_4 to be the field division of S_1 by S_2 . It handles the fact that division by 0 is not defined, since there is no valid assignment in case $S_2 = 0$.

In PAPER, we define the following division function that compiles to the previous circuit:

```
fn DIV(x : F, y : F, y_inv : F) -> F {
  let DIV : F ;
  DIV <== MUL( x , INV( y, y_inv ) ) ;
  return DIV
}
```

In the setup phase, we compile every occurrence of the binary DIV operator into an instance of the inversion circuit.

Exercise 89. Let F be the field \mathbb{F}_5 of modular 5 arithmetics from example 14. Brain-compile the following PAPER statement into an algebraic circuit:

```
statement STUPID_CIRC {F: F_5} {
  fn foo(in_1 : F, in_2 : F)->(out_1 : F, out_2 : F){
    constant c_1 : F = 3 ;
    out_1<== ADD( MUL( c_1 , in_1 ) , in_1 ) ;
    out_2<== INV( c_1 , in_2 ) ;
  } ;

  fn main(in_1 : F, in_2 : F)->(out_1 : F, out_2 : TYPE_2){
    constant (c_1,c_2) : (F,F) = (3,2) ;
    (out_1,out_2) <== foo(in_1, in_2) ;
  } ;
}
```


Exercise 90. Consider the tiny-jubjub curve from example 69 and its associated circuit 120. Write a statement in PAPER that brain-compiles the statement into a circuit equivalent to the one derived in 120, assuming that curve point is the instance and every other assignment is a witness.

Exercise 91. Let $F = \mathbb{F}_{13}$ be the modular 13 prime field and $x \in F$ some field element. Define a statement in PAPER such that given instance x a field element $y \in F$ is a witness for the statement if and only if y is the square root of x .

Brain-compile the statement into a circuit and derive its associated Rank-1 Constraint System. Consider the instance $x = 9$ and compute a constructive proof for the statement.

7.2.1.2 The boolean Type


Booleans are a classical primitive type, implemented by virtually every higher programming language. It is therefore important to implement booleans in circuits. One of the most common ways to do this is by interpreting the additive and multiplicative neutral element $\{0, 1\} \subset \mathbb{F}$ as the two boolean values such that 0 represents *false* and 1 represents *true*. Boolean operators like *and*, *or*, or *xor* are then expressible as algebraic circuits over \mathbb{F} .

Representing booleans this way is convenient, because the elements 0 and 1 are defined in any field. The representation is therefore independent of the actual field in consideration.

To fix boolean algebra notation, we write 0 to represent *false* and 1 to represent *true*, and we write \wedge to represent the boolean AND as well as \vee to represent the boolean OR operator. The boolean NOT operator is written as \neg .

7.2.1.2.1 The boolean Constraint System To represent booleans by the additive and multiplicative neutral elements of a field, a constraint is required to actually enforce variables of boolean type to be either 1 or 0. In fact, many of the following circuits that represent boolean functions are only correct under the assumption that their input variables are constrained to be either 0 or 1. Not constraining boolean variables is a common problem in circuit design.

In order to constrain an arbitrary field element $x \in \mathbb{F}$ to be 1 or 0, the key observation is that the equation $x \cdot (1 - x) = 0$ has only the two solutions 0 and 1 in any field. Implementing this equation as a circuit therefore generates the correct constraint:

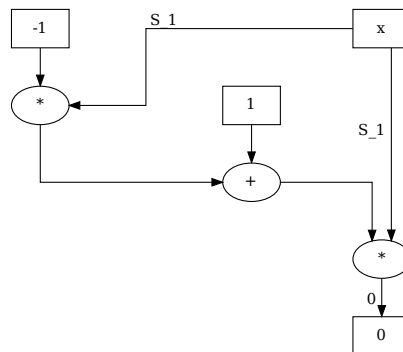

Using the method from 6.2.2.0.4, we transform this circuit into the following Rank-1 Constraint System:

$$S_1 \cdot (1 - S_1) = 0$$

5126 Any valid assignment $\langle S_1 \rangle$ to label of this circuit therefore enforces S_1 to be either the field
 5127 element 0 or 1.

5128 Some real-world circuit compilers (like ZOKRATES or BELLMAN) are typed, while others
 5129 (like circom) are not. However, all of them have their way of dealing with the binary con-
 5130 straint. In PAPER, we define the boolean type by its type_function that compiles to the previous
 5131 circuit:


```

5132 type_function BOOL(b : BOOL) -> F {
5133     let x : F ;
5134     let const c1 : F = 0 ;
5135     let const c2 : F = 1 ;
5136     let const c3 : F = -1 ;
5137     c1 <== MUL( b , ADD( c2 , MUL( b , c3 ) ) ) ;
5138     x <== b ;
5139     return x ;
5140 }
```

5141 In the setup phase of a statement, we compile every occurrence of a variable of boolean type
 5142 into an instance of its associated boolean circuit.

5143 **7.2.1.2.2 The AND operator constraint system** Given two field elements b_1 and b_2 from
 5144 \mathbb{F} that are constrained to represent boolean variables, we want to find a circuit that computes
 5145 the logical **and** operator $AND(b_1, b_2)$ as well as its associated R1CS that enforces b_1, b_2 ,
 5146 $AND(b_1, b_2)$ to satisfy the constraint system if and only if $b_1 \wedge b_2 = AND(b_1, b_2)$ holds true.

5147 The key insight here is that, given three boolean constraint variables b_1, b_2 and b_3 , the
 5148 equation $b_1 \cdot b_2 = b_3$ is satisfied in \mathbb{F} if and only if the equation $b_1 \wedge b_2 = b_3$ is satisfied in
 5149 boolean algebra. The logical operator \wedge is therefore implementable in \mathbb{F} by field multiplication
 5150 of its arguments and the following circuit computes the \wedge operator in \mathbb{F} , assuming all inputs are
 5151 restricted to be 0 or 1:



5152

5153 The associated Rank-1 Constraint System can be deduced from the general process 6.2.2.0.4
 5154 and consists of the following constraint:

$$S_1 \cdot S_2 = S_3 \quad (7.5)$$

5155 Common circuit languages typically provide a gadget or a function to abstract over this circuit
 5156 such that programers can use the \wedge operator without caring about the associated circuit. In
 5157 PAPER, we define the following function that compiles to the \wedge -operator's circuit:


```

5158 fn AND(b_1 : BOOL, b_2 : BOOL) -> BOOL{
5159     let AND : BOOL ;
5160     AND <== MUL( b_1 , b_2 ) ;
5161     return AND ;
5162 }
```

5163 In the setup phase of a statement, we compile every occurrence of the AND function into an
 5164 instance of its associated \wedge -operator's circuit.

5165 **7.2.1.2.3 The OR operator constraint system** Given two field elements b_1 and b_2 from \mathbb{F}
 5166 that are constrained to represent boolean variables, we want to find a circuit that computes the
 5167 logical **or** operator $OR(b_1, b_2)$ as well as its associated R1CS that enforces $b_1, b_2, OR(b_1, b_2)$ to
 5168 satisfy the constraint system if and only if $b_1 \vee b_2 = OR(b_1, b_2)$ holds true.

5169 Assuming that three variables b_1, b_2 and b_3 are boolean constraint, the equation $b_1 + b_2 - b_1 \cdot$
 5170 $b_2 = b_3$ is satisfied in \mathbb{F} if and only if the equation $b_1 \vee b_2 = b_3$ is satisfied in boolean algebra.
 5171 The logical operator \vee is therefore implementable in \mathbb{F} by the following circuit, assuming all
 5172 inputs are restricted to be 0 or 1:

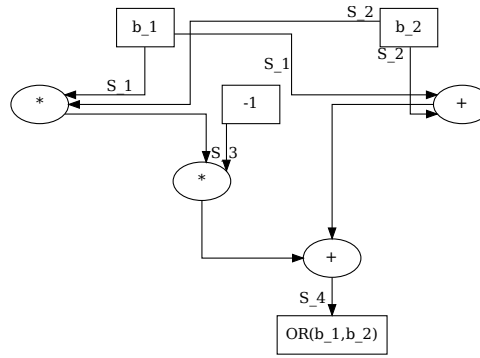

5173

The associated Rank-1 Constraint System can be deduced from the general process 6.2.2.0.4 and consists of the following constraints:

$$S_1 \cdot S_2 = S_3$$

$$(S_1 + S_2 - S_3) \cdot 1 = S_4$$

5174 Common circuit languages typically provide a gadget or a function to abstract over this circuit
 5175 such that programers can use the \vee operator without caring about the associated circuit. In
 5176 PAPER, we define the following function that compiles to the \vee -operator's circuit:

```

5177 fn OR(b_1 : BOOL, b_2 : BOOL) -> BOOL {
5178   let OR : BOOL ;
5179   let const c1 : F = -1 ;
5180   OR <== ADD (ADD (b_1, b_2), MUL (c1, MUL (b_1, b_2))) ;
5181   return OR ;
5182 }
```

5183 In the setup phase of a statement, we compile every occurrence of the OR function into an
 5184 instance of its associated \vee -operator's circuit.


5185 *Exercise 92.* Let \mathbb{F} be a finite field and let b_1 as well as b_2 two boolean constrained variables
 5186 from \mathbb{F} . Show that the equation $OR(b_1, b_2) = 1 - (1 - b_1) \cdot (1 - b_2)$ holds true.

5187 Use this equation to derive an algebraic circuit with ingoing variables b_1 and b_2 and outgoing
 5188 variable $OR(b_1, b_2)$ such that b_1 and b_2 are boolean constrained and the circuit has a valid
 5189 assignment, if and only if $OR(b_1, b_2) = b_1 \vee b_2$.

5190 Use the technique from 6.2.2.0.4 to transform this circuit into a Rank-1 Constraint System
 5191 and find its full solution set. Define a PAPER function that brain-compiles into the circuit.

7.2.1.2.4 The NOT operator constraint system Given a field element b from \mathbb{F} that is constrained to represent a boolean variable, we want to find a circuit that computes the logical NOT operator $NOT(b)$ as well as its associated R1CS that enforces $b, NOT(b)$ to satisfy the constraint system if and only if $\neg b = NOT(b)$ holds true.

Assuming that two variables b_1 and b_2 are boolean constrained, the equation $(1 - b_1) = b_2$ is satisfied in \mathbb{F} if and only if the equation $\neg b_1 = b_2$ is satisfied in boolean algebra. The logical operator \neg is therefore implementable in \mathbb{F} by the following circuit, assuming all inputs are restricted to be 0 or 1:

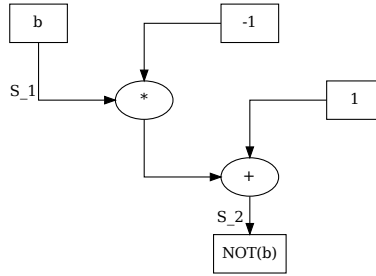

The associated Rank-1 Constraint System can be deduced from the general process 6.2.2.0.4 and consists of the following constraints

$$(1 - S_1) \cdot 1 = S_2$$

Common circuit languages typically provide a gadget or a function to abstract over this circuit such that programers can use the \neg operator without caring about the associated circuit. In PAPER, we define the following function that compiles to the \neg -operator's circuit:

```
fn NOT(b : BOOL -> BOOL{
  let NOT : BOOL ;
  let const c1 = 1 ;
  let const c2 = -1 ;
  NOT <== ADD( c1 , MUL( c2 , b) ) ;
  return NOT ;
}
```

In the setup phase of a statement, we compile every occurrence of the NOT function into an instance of its associated \neg -operator's circuit.

Exercise 93. Let \mathbb{F} be a finite field. Derive algebraic circuits and associated Rank-1 Constraint Systems for the following operators: NOR, XOR, NAND, EQU.

7.2.1.2.5 Modularity As we have seen in chapter 6, both algebraic circuits and R1CS have a modularity property, and as we have seen in this section, all basic boolean functions are expressible in circuits. Combining those two properties shows that it is possible to express arbitrary boolean functions as algebraic circuits.

The expressiveness of algebraic circuits and therefore Rank-1 Constraint Systems is as general as the expressiveness of boolean circuits. An important implication is that the languages $L_{R1CS-SAT}$ and $L_{Circuit-SAT}$ as defined in 5 and 6.2.2.0.3, are as general as the famous language L_{3-SAT} , which is known to be \mathcal{NP} -complete.

5223 *Example 134.* To give an example of how a compiler might construct complex boolean ex-
 5224 pressions in algebraic circuits from simple ones and how we derive their associated Rank-1
 5225 Constraint Systems, let's look at the following PAPER statement:

```

5226 statement BOOLEAN_STAT {F: F_p} {
5227   fn main(b_1:BOOL,b_2:BOOL,b_3:BOOL,b_4:BOOL )-> BOOL {
5228     let pub b_5 : BOOL ;
5229     b_5 <== AND( OR( b_1 , b_2 ) , AND( b_3 , NOT( b_4 ) ) ) ;
5230     return b_5 ;
5231   } ;
5232 }
```


The code describes a circuit that takes four witness input variables b_1, b_2, b_3 and b_4 of boolean type and computes an instance variable output b_5 such that the following boolean expression holds true:

$$(b_1 \vee b_2) \wedge (b_3 \wedge \neg b_4) = b_5$$

5233 During a setup-phase, a circuit compiler transforms this high-level language statement into a
 5234 circuit and associated Rank-1 Constraint Systems and hence defines a language $L_{BOOLEAN_STAT}$.

5235 To see how this might be achieved, we use PAPER as an example to execute the setup-phase
 5236 and compile `BOOLEAN_STAT` into a circuit. Taking the definition of the boolean constraint
 5237 7.2.1.2.1 as well as the definitions of the appropriate boolean operators into account, we get the
 5238 following circuit:

5239

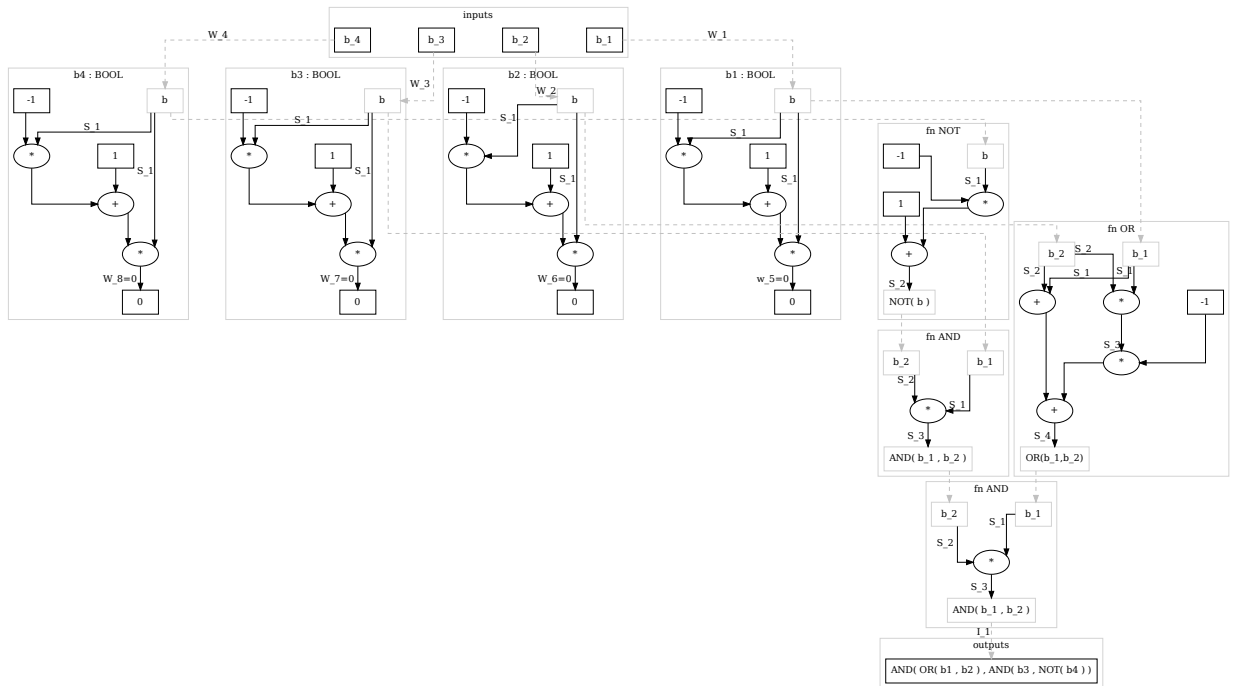


5240

5241

5242

5243 Simple optimization then collapses all box-nodes that are directly linked and all box nodes
 5244 that represent the same constants. After relabeling the edges, the following circuit represents
 5245 the circuit associated to the `BOOLEAN_STAT` statement:

can we
rotate this
by 90°?
Good
question.
IDK

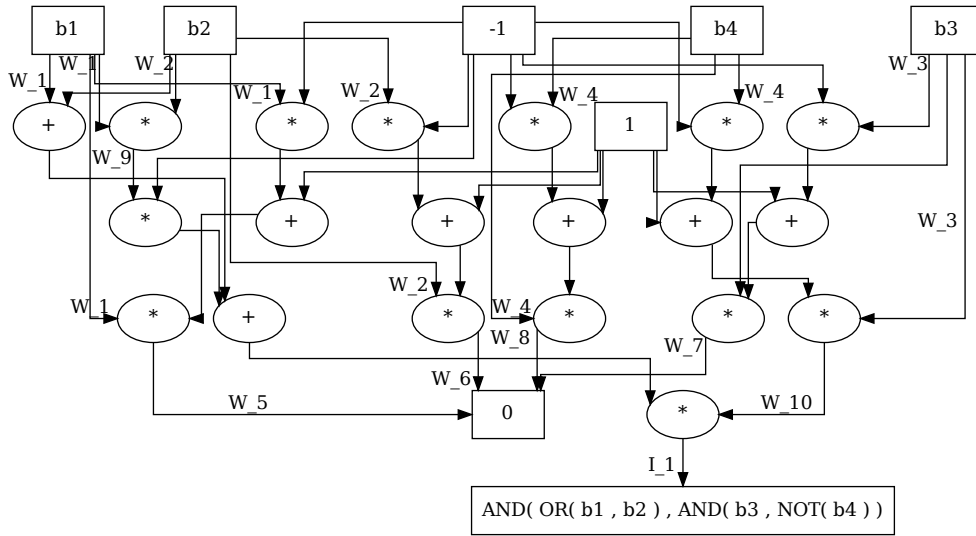

5246

5247 Given some instance variable I_1 from \mathbb{F}_{13} , a valid assignment to this circuit consists of witness
 5248 variables W_1, W_2, W_3, W_4 from \mathbb{F}_{13} such that the equation $I_1 = (W_1 \vee W_2) \wedge (W_3 \wedge \neg W_4)$ holds
 5249 true. In addition, a valid assignment also has to contain witness variables W_5, W_6, W_7, W_8, W_9
 5250 and W_{10} , which can be derived from circuit execution. The variables W_5, \dots, W_8 ensure that the
 5251 first four witnesses are constrained to be either 0 or 1 but not any other field element, and the
 5252 others enforce the boolean operations in the expression.

To compute the associated R1CS, we can use the general method from 6.2.2.0.4 and look at every labeled outgoing edge not coming from a source node in the optimized circuit. We declare the edge going to the single output node as instance, and every other edge as witness. In this case we get:

$$\begin{aligned}
 W_5 : W_1 \cdot (1 - W_1) &= 0 && \text{boolean constraints} \\
 W_6 : W_2 \cdot (1 - W_2) &= 0 \\
 W_7 : W_3 \cdot (1 - W_3) &= 0 \\
 W_8 : W_4 \cdot (1 - W_4) &= 0 \\
 W_9 : W_1 \cdot W_2 &= W_9 && \text{first OR-operator constraint} \\
 W_{10} : W_3 \cdot (1 - W_4) &= W_{10} && \text{AND(.,NOT(.))-operator constraints} \\
 I_1 : (W_1 + W_2 - W_9) \cdot W_{10} &= I_1 && \text{AND-operator constraints}
 \end{aligned}$$

5253 The reason why this R1CS only contains a single constraint for the multiplication gate in the
 5254 OR-circuit, while the general definition 7.2.1.2.3 requires two constraints, is that the second
 5255 constraint in ?? only appears because the final addition gate is connected to an output node. In
 5256 this case, however, the final addition gate from the OR-circuit is enforced in the left factor of
 5257 the I_1 constraint. Something similar holds true for the negation circuit.

During a prover-phase, some public instance I_5 must be given. To compute a constructive proof for the statement of the associated languages with respect to instance I_5 , a prover has to find four boolean values W_1, W_2, W_3 and W_4 such that

$$(W_1 \vee W_2) \wedge (W_3 \wedge \neg W_4) = I_5$$

holds true. In our case neither the circuit nor the PAPER statement specifies how to find those values, and it is a problem that any prover has to solve outside of the circuit. This might or might not be true for other problems, too. In any case, once the prover found those values, they can execute the circuit to find a valid assignment.

To give a concrete example, let $I_1 = 1$ and assume $W_1 = 1$, $W_2 = 0$, $W_3 = 1$ and $W_4 = 0$. Since $(1 \vee 0) \wedge (1 \wedge \neg 0) = 1$, those values satisfy the problem and we can use them to execute the circuit. We get

$$\begin{aligned} W_5 &= W_1 \cdot (1 - W_1) = 0 \\ W_6 &= W_2 \cdot (1 - W_2) = 0 \\ W_7 &= W_3 \cdot (1 - W_3) = 0 \\ W_8 &= W_4 \cdot (1 - W_4) = 0 \\ W_9 &= W_1 \cdot W_2 = 0 \\ W_{10} &= W_3 \cdot (1 - W_4) = 1 \\ I_1 &= (W_1 + W_2 - W_9) \cdot W_{10} = 1 \end{aligned}$$

A constructive proof of knowledge of a witness, for instance, $I_1 = 1$, is therefore given by the string $\pi = \langle W_5, W_6, W_7, W_8, W_9, W_{10} \rangle = \langle 0, 0, 0, 0, 0, 1 \rangle$.

7.2.1.3 Arrays

The array type represents a fixed-size collection of elements of equal type, each selectable by one or more indices that can be computed at run time during program execution.

Arrays are a classical type, implemented by many higher programing languages that compile to circuits or Rank-1 Constraint Systems. However, most high-level circuit languages support **static** arrays, i.e., arrays whose length is known at compile time only.

The most common way to compile arrays to circuits is to transform any array of a given type τ and size N into N circuit variables of type τ . Arrays are therefore **syntactic sugar**, with the purpose to make code easier for humans to read, and write. In PAPER, we define the following array type_function:


```
type_function <Name>: <Type>[N : unsigned] -> (Type, ...) {
  return (<Name>[0], ...)
}
```

In the setup phase of a statement, we compile every occurrence of an array of size N that contains elements of type Type into N variables of type Type .

Example 135. To give an intuition of how a real-world compiler might transform arrays into circuit variables, consider the following PAPER statement:

```
statement ARRAY_TYPE {F: F_5} {
  fn main(x: F[2]) -> F {
    let constant c: F[2] = [2, 4] ;
    let out : F <== MUL(ADD(x[1], c[0]), ADD(x[0], c[1])) ;
    return out ;
  } ;
}
```

During a setup phase, a circuit compiler might then replace any occurrence of the array type by a tuple of variables of the underlying type, and then use those variables in the circuit synthesis process instead. To see how this can be achieved, we use PAPER as an example. Abstracting over the sub-circuit of the computation, we get the following circuit:

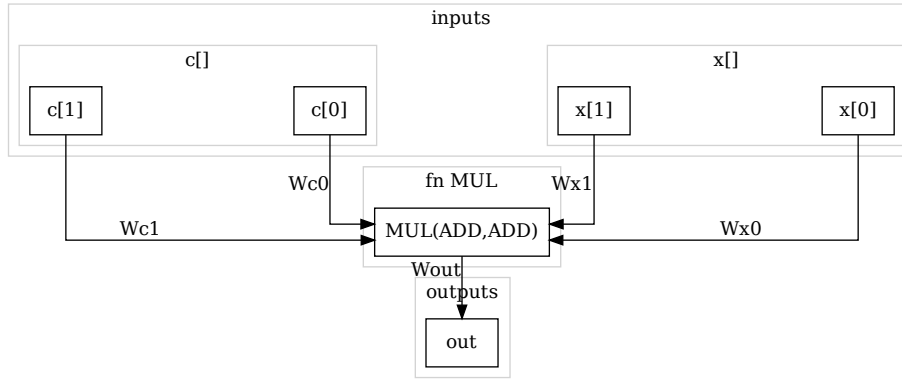

5292

5293 7.2.1.4 The Unsigned Integer Type

5294 Unsigned integers of size N , where N is usually a power of two, represent non-negative integers
 5295 in the range $0 \dots 2^N - 1$. They have a notion of addition, subtraction and multiplication, defined
 5296 by modular 2^N arithmetics. If some N is given, we write uN for the associated type.

5297 **7.2.1.4.1 The uN Constraint System** Many high-level circuit languages define the various
 5298 uN types as arrays of size N , where each element is of boolean type. This parallels their repre-
 5299 sentation on common computer hardware and allows for efficient and straightforward definition
 5300 of common operators, like the various shift operators, or the logical operators.

5301 Assuming that some unsigned integer N is known at compile time in PAPER, we define
 5302 the following uN type_function, which casts a an unsigned integer into an array of boolean
 5303 variables:

```

5304 type_function uN -> BOOL[N] {
5305   let base2 : BOOL[N] ;
5306   base2[0] <== uN[0] ;
5307   base2[1] <== uN[1] ;
5308   ...
5309   base2[N] <== uN[N] ;
5310   return base2 ;
5311 }
```

To enforce an N -tuple of field elements $\langle b_0, \dots, b_{N-1} \rangle$ to represent an element of type uN we therefore need N boolean constraints

$$\begin{aligned}
 S_0 \cdot (1 - S_0) &= 0 \\
 S_1 \cdot (1 - S_1) &= 0 \\
 &\dots \\
 S_{N-1} \cdot (1 - S_{N-1}) &= 0
 \end{aligned}$$


5312 *Remark 7.* Representing the uN type as boolean arrays is conceptually clean and works over
 5313 generic base fields. However, representing unsigned integers in this way requires a lot of space
 5314 as every bit is represented as a field element and if the base field is large, those field elements
 5315 require considerable space in hardware.

It should be noted that, in some cases, there is another, more space- and Constraint System efficient approach for representing unsigned integers that can be used whenever the underlying base field is sufficiently large. To understand this, recall that addition and multiplication in a prime field \mathbb{F}_p is equal to addition and multiplication of integers, as long as the sum or the product does exceed neither the modulus p of the base field nor the modulus 2^N of the unsigned integer type. Under those limitations it is possible to represent the uN type inside the base-field type whenever N is small enough. This however is not safe and care has to be taken to never overflow any of those moduli, or underflow 0.

Example 136. To give an intuition of how a real-world compiler might transform unsigned integers into circuit variables, consider the following PAPER statement, which implement the classical ring-shift operator on the u4 type as a circuit:

```
statement RING_SHIFT{F: F_p, N=4} {
  fn main(x: uN)-> uN {
    let y : uN ;
    y <== [x[1],x[2],x[3],x[0]] ;
    return y ;
  } ;
}
```

During the setup-phase, a circuit compiler might then replace any occurrence of the uN type by N variables of boolean type. Using the definition of booleans, each of these variables is then transformed into the field type and a boolean constraint system. To see how this can be achieved, we use PAPER as an example and get the following circuit:

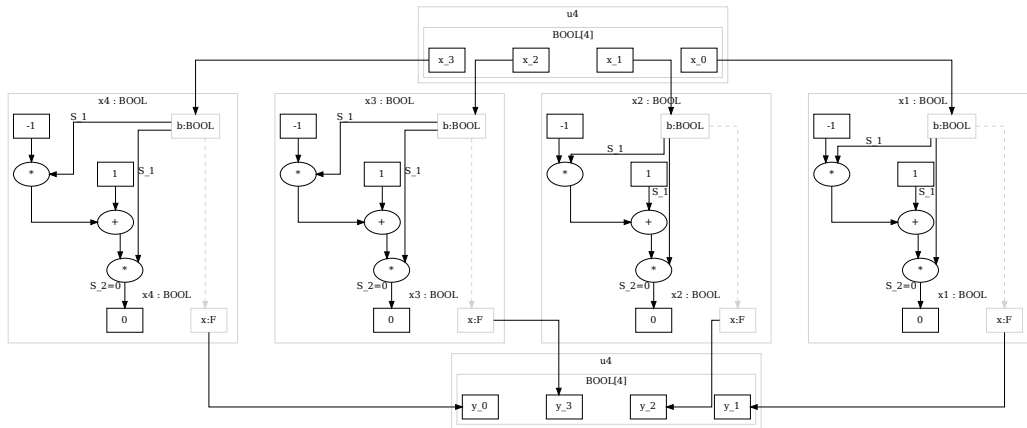

During the prover phase, the function `main` is called with an actual input of u4 type, say $x=14$. The Prover then has to transform the decimal value 14 into its 4-bit binary representation $\text{Bits}(14)_2 = \langle 0, 1, 1, 1 \rangle$ outside of the circuit. Then the array of field values $x[4] = [0, 1, 1, 1]$ is used as an input to the circuit. Since all 4 field elements are either 0 or 1, the four boolean constraints are satisfied and the output is a ring shift of the input array of the four field elements given by $[1, 1, 1, 0]$, which represents the u4 element 7.

7.2.1.4.2 The Unsigned Integer Operators Since elements of uN type are represented as boolean arrays, shift operators are implemented in circuits simply by rewiring the boolean input variables to the output variables accordingly.

Logical operators, like AND, OR, or NOT are defined on the uN type by invoking the appropriate boolean operators bitwise to every bit in the boolean array that represents the uN element.

Addition and multiplication can be represented similarly to how machines represent those operations. Addition can be implemented by first defining the **full adder** circuit and then combining N of these circuits into a circuit that adds two elements from the uN type.

Exercise 94. Let $F = \mathbb{F}_{13}$ and $N=4$ be fixed and let x be of uN type. Define circuits and associated R1CS for the left and right bit-shift operators $x \ll 2$ as well as $x \gg 2$. Execute the associated circuit for $x : u4 = 11$ and generate a constructive proof for R1CS satisfyability.

Exercise 95. Let $F = \mathbb{F}_{13}$ and $N=2$ be fixed. Define a circuit and associated R1CS for the addition operator $ADD : uN \times uN \rightarrow uN$. Execute the associated circuit to compute $ADD(2, 7)$ for $2, 7 \in uN$.

Exercise 96. Execute the setup phase for the following PAPER code (That is brain compile the code into a circuit and derive the associated R1CS).

```
statement MASK_MERGE {F:F_5, N=4} {
  fn main(pub a : uN, pub b : uN) -> uN {
    let constant mask : uN = 10 ;
    let r : uN ;
    r <== XOR(a, AND(XOR(a, b), mask)) ;
    return r ;
  }
}
```

Let L_{mask_merge} be the language defined by the circuit. Provide a constructive knowledge proof in L_{mask_merge} for the instance $I = (I_a, I_b) = (14, 7)$.

7.2.2 Control Flow

Most programming languages of the imperative or functional style have some notion of basic control structures to direct the order in which instructions are evaluated. Contemporary circuit compilers usually provide a single thread of execution and provide basic flow constructs that implement control flow in circuits. In this part we look at some basic control flow constructions and their implementation in circuits.

7.2.2.1 The Conditional Assignment

Writing high-level code that compiles to circuits, it is often necessary to have a way for conditional assignment of values or computational output to variables. One way to realize this in many programming languages is in terms of the conditional ternary assignment operator $?:$ that branches the control flow of a program according to some condition and then assigns the output of the computed branch to some variable:

```
variable = condition ? value_if_true : value_if_false
```

In this description, *condition* is a boolean expression and *value_if_true* as well as *value_if_false* are expressions that evaluate to the same type as *variable*.

In programming languages like Rust, another way to write the conditional assignment operator that is more familiar to many programmers is given by

```
variable = if condition then {
  value_if_true
```

```

5390 } else {
5391     value_if_false
5392 }


```

In most programming languages, it is a key property of the ternary assignment operator that the expression `value_if_true` is only evaluated if `condition` evaluates to true and the expression `value_if_false` is only evaluated if `condition` evaluates to false. In fact, computer programs would turn out to be very inefficient if the ternary operator would evaluate both expressions regardless of the value of `condition`.

A simple way to implement conditional assignment operator as a circuit can be achieved if the requirement that only one branch of the conditional operator is executed is dropped. To see that, let b , c and d be field elements such that b is boolean constrained. In this case, the following equation enforces a field element x to be the result of the conditional assignment operator:

$$x = b \cdot c + (1 - b) \cdot d \quad (7.6)$$

Expressing this equation in terms of the addition and multiplication operators from 7.2.1.1, we can flatten 7.6 into the following algebraic circuit:

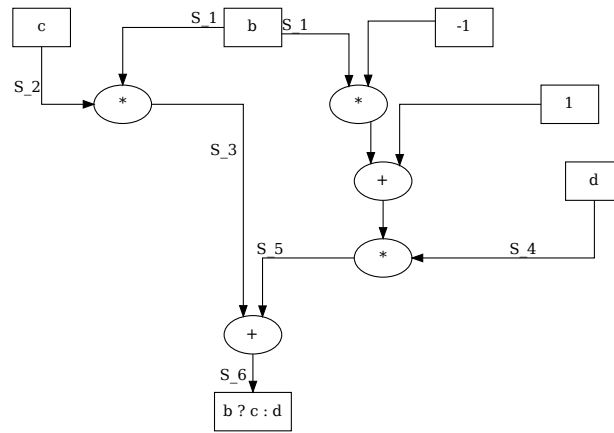

5405

Note that, in order to compute a valid assignment to this circuit, both S_2 as well as S_4 are necessary. If the inputs to the nodes c and d are circuits themselves, both circuits need valid assignments and therefore have to be executed. As a consequence, this implementation of the conditional assignment operator has to execute all branches of all circuits, which is very different from the execution of common computer programs and contributes to the increased computational effort any prover has to invest, in contrast to the execution in other programming models.

We can use the general technique from 6.2.2.0.4 to derive the associated Rank-1 Constraint System of the conditional assignment operator. We get the following:

$$\begin{aligned}
 S_1 \cdot S_2 &= S_3 \\
 (1 - S_1) \cdot S_4 &= S_5 \\
 (S_3 + S_5) \cdot 1 &= S_6
 \end{aligned}$$


Example 137. To give an intuition of how a real-world circuit compiler might transform any high-level description of the conditional assignment operator into a circuit, consider the following PAPER code:

```

5416 statement CONDITIONAL_OP {F:F_p} {
5417   fn main(x : F, y : F, b : BOOL) -> F {
5418     let z : F
5419     z <== if b then {
5420       ADD(x,y)
5421     } else {
5422       MUL(x,y)
5423     } ;
5424     return z ;
5425   }
5426 }

```

Brain-compiling this code into a circuit, we first draw box nodes for all input and output variables, and then transform the boolean type into the field type together with its associated constraint. Then we evaluate the assignments to the output variables. Since the conditional assignment operator is the top level function, we draw its circuit and then draw the circuits for both conditional expressions. We get the following:

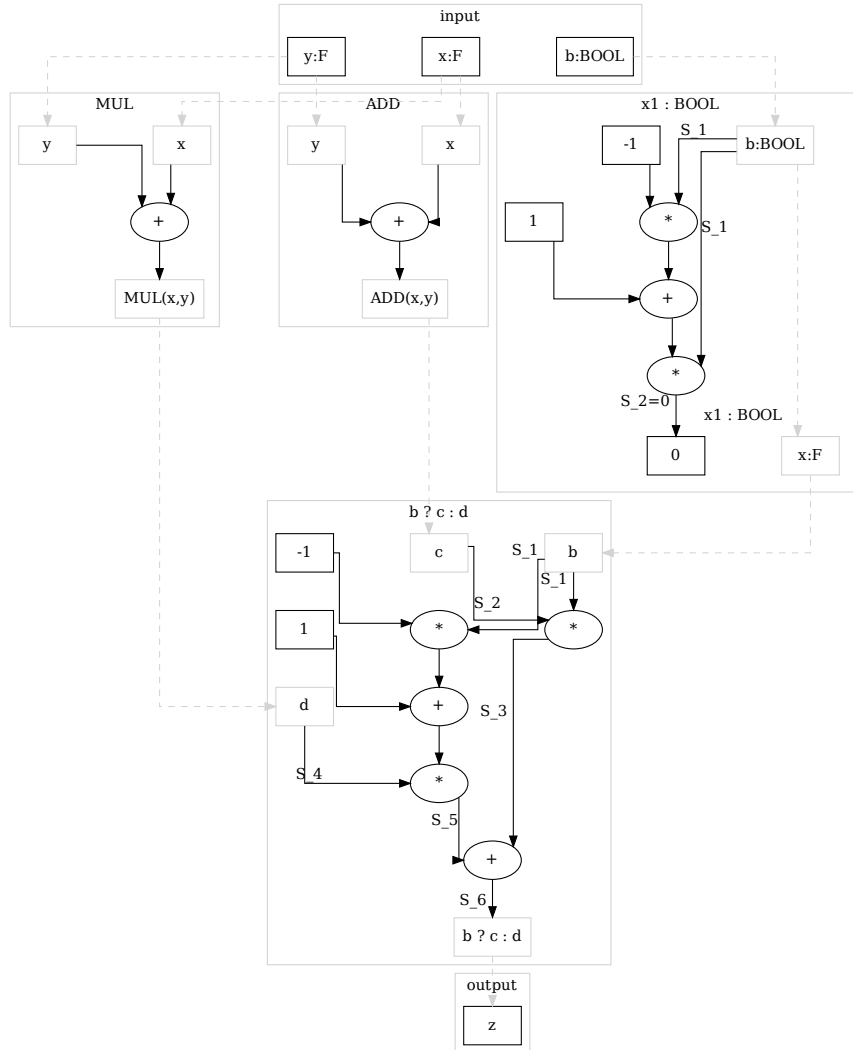

5432

7.2.2.2 Loops

In many programming languages, various loop control structures are defined that allow developers to execute expressions with a specified number of repetitions. In particular, it is often possible to implement unbounded loops like the loop structure give below:

```
while true do { }
```

In addition it is often possible to implement loop structures, where the number of execution steps in the loop depends on execution inputs or intermediate computational steps and is therefore unknown at compile time:

```
x = 0.5
while x != 0 do {
  x = 4*x*(1-x)
}
```

In contrast to this, algebraic circuits and Rank-1 Constraint Systems are not general enough to express arbitrary computation, but bounded computation only. As a consequence, it is not possible to implement unbounded loops, or loops with bounds that are unknown at compile time in those models. This can be easily seen since circuits are acyclic by definition, and implementing an unbounded loop as an acyclic graph requires a circuits of unbounded size. However, circuits are general enough to express bounded loops, where the upper bound on its execution is known at compile time. Those loop can be implemented in circuits by enrolling the loop.


As a consequence, any programing language that compiles to algebraic circuits can only provide loop structures where the bound is a constant known at compile time. This implies that loops cannot depend on execution inputs, but on compile time parameters only.

Example 138. To give an intuition of how a real-world circuit compiler might transform any high-level description of a bounded `for` loop into a circuit, consider the following PAPER code:

```
statement FOR_LOOP {F:F_p, N: unsigned = 4} {
  fn main(fac : F[N]) -> F {
    let prod[N] : F ;
    prod[0] <== fac[0] ;
    for unsigned i in 1..N do [{
      prod[i] <== MUL(fac[i], prod[i-1]) ;
    }]
    return prod[N] ;
  }
}
```

Note that, in a program like this, the loop counter `i` has no expression in the derived circuit. It is a high level parameter that tells the compiler how to unroll the loop.

Brain-compiling this code into a circuit, we first draw box nodes for all input and output variables, noting that the loop counter is not represented in the circuit. Since all variables are of `field` type, we don't have to compile any type constraints. Then we evaluate the assignments to the output variables by unrolling the loop into 3 individual assignment operators. We get:

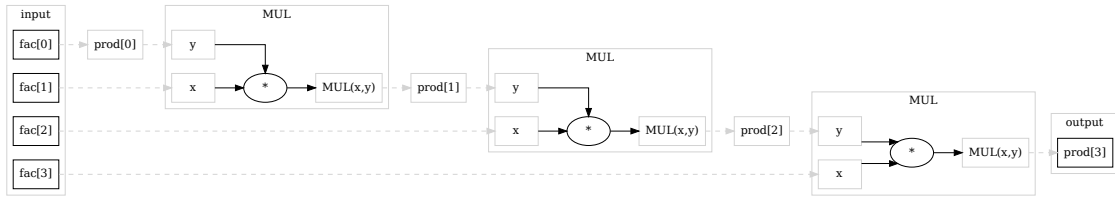

5475

7.2.3 Binary Field Representations


5476

5477 In applications, it is often necessary to enforce a binary representation of elements from the
 5478 field type. To derive an appropriate circuit over a prime field \mathbb{F}_p , let $m = |p|_2$ be the smallest
 5479 number of bits necessary to represent the prime modulus p . Then a bitstring $\langle b_0, \dots, b_{m-1} \rangle \in$
 5480 $\{0, 1\}^m$ is a binary representation of a field element $x \in \mathbb{F}_p$, if and only if

$$x = b_0 \cdot 2^0 + b_1 \cdot 2^1 + \dots + b_{m-1} \cdot 2^{m-1} \quad (7.7)$$

5481 In this expression, addition and exponentiation is considered to be executed in \mathbb{F}_p , which is well
 5482 defined since all terms 2^j for $0 \leq j < m$ are elements of \mathbb{F}_p . Note, however, that in contrast to
 5483 the binary representation of unsigned integers $n \in \mathbb{N}$, this representation is not unique in general,
 5484 since the modular p equivalence class might contain more than one binary representative.

5485 Considering that the underlying prime field is fixed and the most significant bit of the prime
 5486 modulus is m , the following circuit flattens equation 7.7, assuming all inputs b_1, \dots, b_m are of
 5487 boolean type.

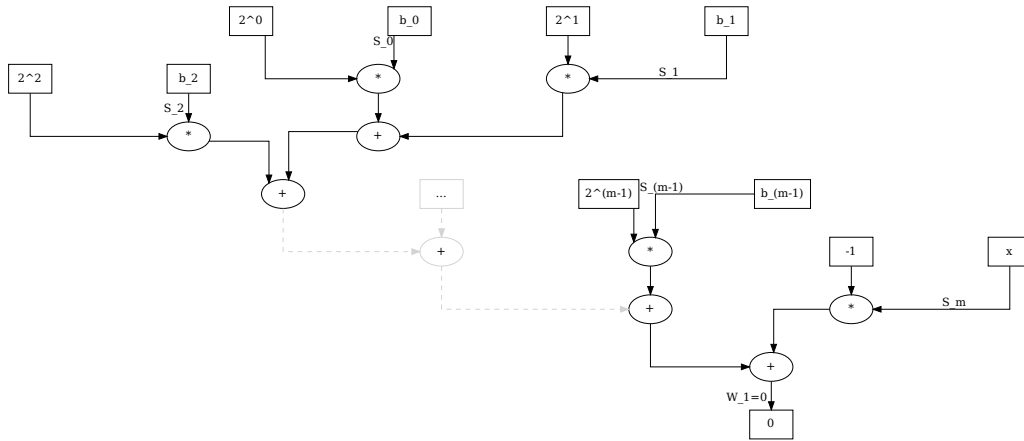

5488

Applying the general transformation rule 6.2.2.0.4 to compute the associated Rank-1 Constraint Systems, we see that we actually only need a single constraint to enforce some binary representation of any field element. We get

$$(S_0 \cdot 2^0 + S_1 \cdot 2^1 + \dots + S_{m-1} \cdot 2^{m-1} - S_m) \cdot 1 = 0$$

5489 Given an array `BOOL[N]` of N boolean constrained field elements and another field element x ,
 5490 the circuit enforces `BOOL[N]` to be one of the binary representations of x . If `BOOL[N]` is not
 5491 a binary representation of x , no valid assignment and hence no solution to the associated R1CS
 5492 can exists.

Example 139. Consider the prime field \mathbb{F}_{13} . To compute binary representations of elements from that field, we start with the binary representation of the prime modulus 13, which is $\text{Bits}(13) = \langle 1, 0, 1, 1 \rangle$ since $13 = 1 \cdot 2^0 + 0 \cdot 2^1 + 1 \cdot 2^2 + 1 \cdot 2^3$. So $m = 4$ and we need up to 4 bits to represent any element $x \in \mathbb{F}_{13}$.

To see that binary representations are not unique in general, consider the element $2 \in \mathbb{F}_{13}$. It has the following two 4-bit, binary representations $\text{Bits}(2) = \langle 0, 1, 0, 0 \rangle$ and $\text{Bits}(2) = \langle 1, 1, 1, 1 \rangle$, since in \mathbb{F}_{13} we have

$$2 = \begin{cases} 0 \cdot 2^0 + 1 \cdot 2^1 + 0 \cdot 2^2 + 0 \cdot 2^3 \\ 1 \cdot 2^0 + 1 \cdot 2^1 + 1 \cdot 2^2 + 1 \cdot 2^3 \end{cases}$$

This is because the unsigned integers 2 and 15 are both in the modular 13 remainder class of 2 and hence are both representatives of 2 in \mathbb{F}_{13} .

To see how circuit the associated circuit works, we want to enforce the binary representation of $7 \in \mathbb{F}_{13}$. Since $m = 4$ we have to enforce a 4-bit representation for 7, which is $\langle 1, 1, 1, 0 \rangle$, since $7 = 1 \cdot 2^0 + 1 \cdot 2^1 + 1 \cdot 2^2 + 0 \cdot 2^3$. A valid circuit assignment is therefore given by $\langle S_0, S_1, S_2, S_3, S_4 \rangle = \langle 1, 1, 1, 0, 7 \rangle$ and, indeed, the assignment satisfies the required 5 constraints including the 4 boolean constraints for S_0, \dots, S_3 :

$$\begin{aligned} 1 \cdot (1 - 1) &= 0 & // \text{ boolean constraints} \\ 1 \cdot (1 - 1) &= 0 \\ 1 \cdot (1 - 1) &= 0 \\ 0 \cdot (1 - 0) &= 0 \\ (1 + 2 + 4 + 0 - 7) \cdot 1 &= 0 & // \text{ binary rep. constraint} \end{aligned}$$

7.2.4 Cryptographic Primitives


In applications, it is often required to do cryptography in a circuit. To do this, basic cryptographic primitives like hash functions or elliptic curve cryptography needs to be implemented as circuits. In this section, we give a few basic examples of how to implement such primitives.

7.2.4.1 Twisted Edwards curves

Implementing elliptic curve cryptography in circuits means to implement the defining curve equations as well as the algebraic operations, like the group law or the scalar multiplication as circuits. To do this efficiently, the curve must be defined over the same base field as the field that is used in the circuit.

For efficiency reasons, it is advantageous to choose an elliptic curve such that that all required constraints and operations can be implement with as few gates as possible. Twisted Edwards curves are particularly useful for that matter, since their group law is particularly simple and the same calculation can be used for all curve points including the point at infinity. This simplifies the circuit a lot.

7.2.4.1.1 Twisted Edwards curve constraints As we have seen in 5.3, a twisted Edwards curve over a finite field F is defined as the set of all pairs of points $(x, y) \in \mathbb{F} \times \mathbb{F}$ such that x and y satisfy the equation $a \cdot x^2 + y^2 = 1 + d \cdot x^2 y^2$ and as we have seen in example 121, we can transform this equation into the following circuit:

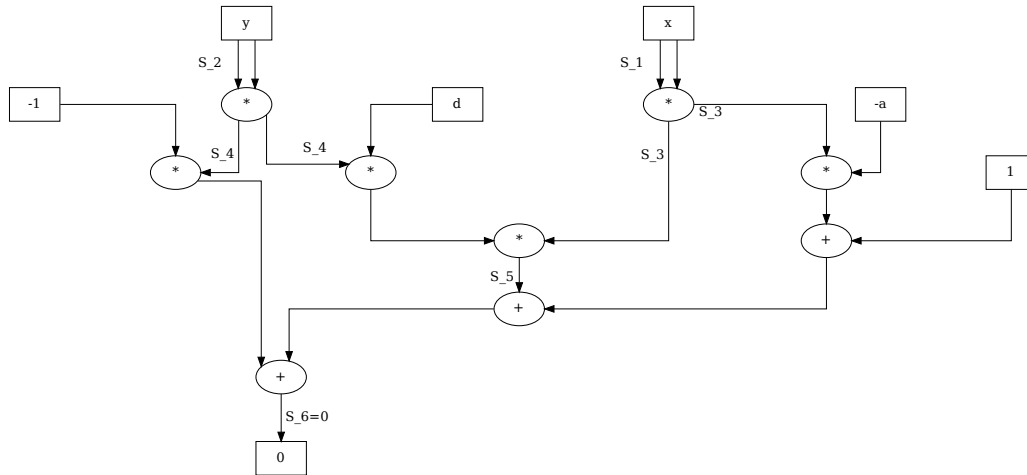

5517

The circuit enforces the two inputs of `field` type to satisfy the twisted Edwards curve equation and, as we know from example 126, the associated Rank-1 Constraint System is given by:


$$\begin{aligned}
 S_1 \cdot S_1 &= S_3 \\
 S_2 \cdot S_2 &= S_4 \\
 (S_4 \cdot d) \cdot S_3 &= S_5 \\
 (-1 \cdot S_4 + S_5 - a \cdot S_3 + 1) \cdot 1 &= 0
 \end{aligned}$$

5518 *Exercise 97.* Write the circuit and associated Rank-1 Constraint System for a Weierstrass curve
 5519 of a given field \mathbb{F} .

7.2.4.1.2 Twisted Edwards curve addition As we have seen in 5.3.1, a major advantage of twisted Edwards curves is the existence of an addition law that contains no branching and is valid for all curve points. Moreover, the neutral element is not given by any auxiliary symbol but the curve point $(0, 1)$. In fact, given two points (x_1, y_1) and (x_2, y_2) on a twisted Edwards curve, their sum is defined as

$$(x_3, y_3) = \left(\frac{x_1 y_2 + y_1 x_2}{1 + d \cdot x_1 x_2 y_1 y_2}, \frac{y_1 y_2 - a \cdot x_1 x_2}{1 - d \cdot x_1 x_2 y_1 y_2} \right)$$

5520 We can use the division circuit from 7.2.1.1.3 to flatten this equation into an algebraic circuit.
 5521 Inputs to the circuit are then not only the two curve points (x_1, y_1) and (x_2, y_2) , but also the
 5522 multiplicative inverses of the two denominators $inv_1 = (1 + d \cdot x_1 x_2 y_1 y_2)^{-1}$ as well as $inv_2 =$
 5523 $(1 - d \cdot x_1 x_2 y_1 y_2)^{-1}$, which any prover needs to compute outside of the circuit. We get

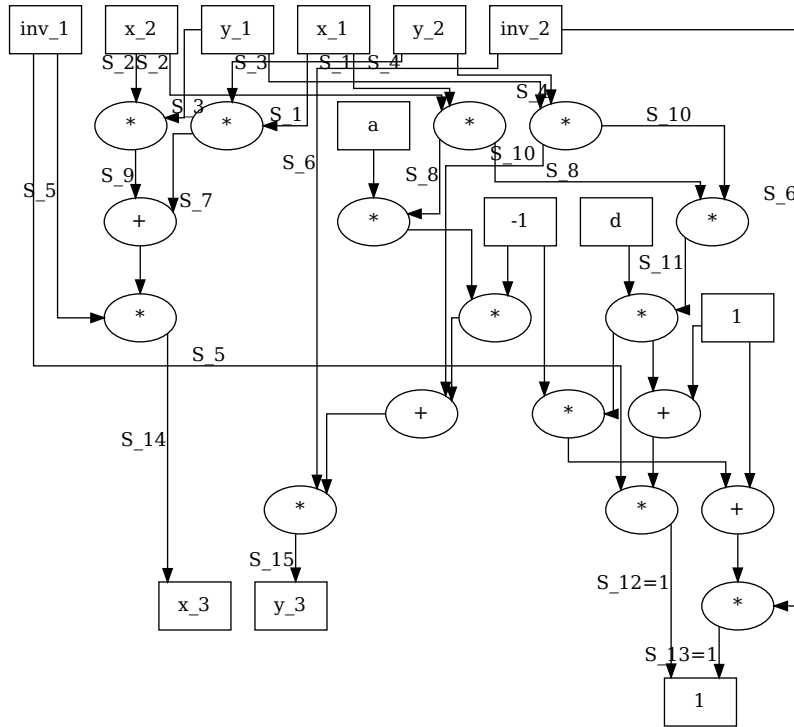

5524

Using the general technique from 6.2.2.0.4 to derive the associated Rank-1 Constraint System, we get the following result:

$$\begin{aligned}
 S_1 \cdot S_4 &= S_7 \\
 S_1 \cdot S_2 &= S_8 \\
 S_2 \cdot S_3 &= S_9 \\
 S_3 \cdot S_4 &= S_{10} \\
 S_8 \cdot S_{10} &= S_{11} \\
 S_5 \cdot (1 + d \cdot S_{11}) &= 1 \\
 S_6 \cdot (1 - d \cdot S_{11}) &= 1 \\
 S_5 \cdot (S_9 + S_7) &= S_{14} \\
 S_6 \cdot (S_{10} - a \cdot S_8) &= S_{15}
 \end{aligned}$$

5525 *Exercise 98.* Let \mathbb{F} be a field. Define a circuit that enforces field inversion for a point of a
 5526 twisted Edwards curve over \mathbb{F} .

5527 *Exercise 99.* Write the circuit and associated Rank-1 Constraint System for a Weierstrass addi-
 5528 tion law of a given field \mathbb{F} .

Chapter 8

Zero Knowledge Protocols

A so-called **zero-knowledge protocol** is a set of mathematical rules by which one party, usually called **the prover**, can convince another party, usually called **the verifier**, that given some instance, the prover knows some witness for that instance, without revealing any information about the witness.

As we have seen in chapter 6, given some language L and instance I , the knowledge claim “there is a witness W such that $(I; W)$ is a word in L ” is constructively provable by providing the witness W to the verifier. The verifier can then use the grammar of the language to verify the proof. In contrast, it’s the challenge of any zero-knowledge protocol to enable a prover to prove knowledge of a witness to any verifier, without revealing any information about the witness beyond its existence.

In this chapter, we look at various systems that exist to solve this task. We start with an introduction to the basic concepts and terminology in zero-knowledge proving systems and then introduce the so-called Groth_16 protocol as one of the most efficient systems. We will update this chapter with other zero-knowledge proof systems in future versions of this book.

8.1 Proof Systems

From an abstract point of view, a proof system is a set of rules which models the generation and exchange of messages between two parties, usually called the prover and the verifier. The purpose of a proof system is to ascertain whether a given string belongs to a formal language or not.

Proof systems are often classified by certain trust assumptions and the computational capabilities of the prover and the verifier. In its most general form, the prover usually possesses unlimited computational resources but cannot be trusted, while the verifier has bounded computational power but is assumed to be honest.

Proving membership or knowledge claims of a statement for some string as explained in chapter 6 is executed by the generation of certain messages that are sent between prover and verifier, until the verifier is convinced that the string is a word in the language in consideration.

To be more specific, let Σ be an alphabet, and let L be a formal language defined over Σ . Then a **proof system** for language L is a pair of probabilistic interactive algorithms (P, V) , where P is called the **prover** and V is called the **verifier**.

Both algorithms are able to send messages to one another, each algorithm has its own state, some shared initial state and access to the messages. The verifier is bounded to a number of steps which is polynomial in the size of the shared initial state, after which it stops and outputs either `accept` or `reject` indicating that it accepts or rejects a given string to be a word in

L or not. In contrast, in the most general form of a proof system, there are no bounds on the computational power of the prover.

When the execution of the verifier algorithm stops the following conditions are required to hold:

- (Completeness) If the string $x \in \Sigma^*$ is a word in language L and both prover and verifier follow the protocol, the verifier outputs `accept`.
- (Soundness) If the string $x \in \Sigma^*$ is not a word in language L and the verifier follows the protocol, the verifier outputs `reject`, except with some small probability.

In addition, a proof system is called **zero-knowledge** if the verifier learns nothing about x other than $x \in L$.

The previous definition of proof systems is very general, and many subclasses of proof systems are known in the field. For example, some proof systems restrict the computational power of the prover, while some proof systems assume that the verifier has access to randomness. In addition, proof systems are classified by the number of messages that can be exchanged. If the system only requires to send a single message from the prover to the verifier, the proof system is called **non-interactive**, because no interaction other than sending the actual proof is required. In contrast, any other proof system is called **interactive**.

A proof system is usually called **succinct** if the size of the proof is shorter than the witness necessary to generate the proof. Moreover, a proof system is called **computationally sound** if soundness only holds under the assumption that the computational capabilities of the prover are polynomial bound. To distinguish general proofs from computationally sound proofs, the latter are often called **arguments**.

Since the term **zk-SNARKs** is an abbreviation for "Zero-knowledge, succinct, non-interactive argument of knowledge", proof system able to generate zk-SNARKs therefore have the zero-knowledge property, are able to generate proofs that require less space than the original witness and require no interaction between prover and verifier, other than transmitting the zk-SNARK itself. However those systems are only sound under the assumption that the prover's computational capabilities are polynomial bound.

Example 140 (Constructive Proofs for Algebraic Circuits). We have seen in 6.2.2.0.3 how algebraic circuit give rise to formal languages and constructive proofs for knowledge claims.

To reformulate this notion of constructive proofs for algebraic circuits into a proof system, let \mathbb{F} be a finite field, and let $C(\mathbb{F})$ be an algebraic circuit over \mathbb{F} with associated language $L_{C(\mathbb{F})}$. A non-interactive proof system for $L_{C(\mathbb{F})}$ is given by the following two algorithms:

Prover Algorithm: The prover P is defined by circuit execution. Given some instance I the prover executes circuit $C(\mathbb{F})$ to compute a witness W such that the pair $(I; W)$ is a valid assignment to $C(\mathbb{F})$ whenever the circuit is satisfiable for I . The prover then sends the constructive proof $(I; W)$ to the verifier.

Verifier Algorithm: On receiving a message $(I; W)$, the verifier algorithm V inserts $(I; W)$ into the associated R1CS of the circuit. If $(I; W)$ is a solution to the R1CS, the verifier returns `accepts`, if not, it returns `reject`.

To see that this proof system is complete and sound, let $C(\mathbb{F})$ be a circuit of the field \mathbb{F} , and let I be an instance. The circuit may or may not have a witness W such that $(I; W)$ is a valid assignment to $C(\mathbb{F})$.

If no W exists, I is not part of any word in $L_{C(\mathbb{F})}$, and there is no way for P to generate a valid assignment. It follows that the verifier will not accept any claimed proof sent by P , since the associated R1CS has no solutions for instance I . This implies that the system is **sound**.

If, on the other hand, W exists and P is honest, P can use its unlimited computational power to compute W and send $(I; W)$ to V , which V will accept, since it is a solution to the associated R1CS. This implies that the system is **complete**.

The system is non-interactive because the prover only sends a single message to the verifier, which contains the proof itself. However the proof system is **not** succinct, since the proof is the witness. The proof system is also not zero knowledge, since the verifier has access to the witness and hence learns everything about the witness.

8.2 The “Groth16” Protocol

In chapter 6, we have introduced algebraic circuits, their associated Rank-1 Constraint Systems and their induced Quadratic Arithmetic Programs. These models define formal languages, and associated memberships and knowledge claims can be constructively proved by executing the circuit to compute a solution to its associated R1CS. As we have seen in 6.2.3 the proof can then be transformed into a polynomial such that the polynomial is divisible by another polynomial if and only if the proof is correct.

In Groth [2016], Jens Groth provides a method, capable to transform constructive proofs into zero-knowledge succinct non-interactive arguments of knowledge. Assuming that there are groups \mathbb{G}_1 , \mathbb{G}_2 and \mathbb{G}_3 and an efficiently computable pairing map 4.9

check
reference

$$e(\cdot, \cdot) : \mathbb{G}_1 \times \mathbb{G}_2 \rightarrow \mathbb{G}_3$$

Then the zk-SNARK in Groth’s protocol is of constant size and consist of 2 elements from \mathbb{G}_1 and a single element from \mathbb{G}_2 , regardless of the size of the witness. Verification is non-interactive and the verifier needs to compute a number of exponentiations proportional to the size of the instance, together with 3 group pairings in order to verify a single proof.

The generated zk-SNARK is zero-knowledge, has completeness and soundness in the generic bilinear group model, assuming the existence of a trusted third party that executes a preprocessing phase to generate a **Common Reference String** and a **simulation trapdoor**. This party must be trusted to delete the simulation trapdoor, since everyone in possession of it can simulate proofs.

To be more precise, let R be a Rank-1 Constraint System defined over some finite field \mathbb{F}_r . Then **Groth_16 parameters** for R are given by the following set:

$$\text{Groth_16} - \text{Param}(R) = (r, \mathbb{G}_1, \mathbb{G}_2, e(\cdot, \cdot), g_1, g_2) \quad (8.1)$$

Here, \mathbb{G}_1 and \mathbb{G}_2 are finite cyclic groups of order r , g_1 is a generator of \mathbb{G}_1 , g_2 is a generator of \mathbb{G}_2 and $e : \mathbb{G}_1 \times \mathbb{G}_2 \rightarrow \mathbb{G}_T$ is an efficiently computable, non-degenerate, bilinear pairing for some target group \mathbb{G}_T . In real-world applications, the parameter set is usually agreed on in advance.

Given some Groth_16 parameters, a **Groth_16 protocol** is then a quadruple of probabilistic polynomial algorithms (SETUP, PROVE, VFY, SIM) such that the following conditions hold:

- (Setup-Phase): $(CRS, \tau) \leftarrow \text{SETUP}(R)$: Algorithm SETUP takes the R1CS R as input and computes a **Common Reference String** CRS and a **simulation trapdoor** τ .
- (Prover-Phase): $\pi \leftarrow \text{PROVE}(R, CRS, I, W)$: Given a constructive proof $(I; W)$ for R , algorithm PROVE takes the R1CS R , the Common Reference String CRS and the constructive proof (I, W) as input and computes an zk-SNARK π .

- **Verify:** $\{\text{accept}, \text{reject}\} \leftarrow \text{VFY}(R, \text{CRS}, I, \pi)$: Algorithm VFY takes the R1CS R , the Common Reference String CRS , the instance I and the zk-SNARK π as input and returns `reject` or `accept`.
- $\pi \leftarrow \text{SIM}(R, \tau, \text{CRS}, I)$: Algorithm SIM takes the R1CS R , the Common Reference String CRS , the simulation trapdoor τ and the instance I as input and returns a zk-SNARK π .

We will explain these algorithms together with detailed examples in the remainder of this section.

Assuming a trusted third party for the setup, the protocol is able to compute a zk-SNARK from a constructive proof for R , provided that the group order r is sufficiently large, and, in particular, larger than the number of constraints in the associated R1CS.

Example 141 (The 3-Factorization Problem). Consider the 3-factorization problem from 111 and its associated algebraic circuit 120 as well the Rank-1 Constraint System from 116. In this example, we want to agree on a parameter set $(r, \mathbb{G}_1, \mathbb{G}_2, e(\cdot, \cdot), g_1, g_2)$ in order to use the Groth_16 protocol for our 3-factorization problem.

To find proper parameters, first observe that the circuit 120, as well as its associated R1CS $R_{3.\text{fac_zk}}$ 116 and the derived QAP 127, are defined over the field \mathbb{F}_{13} . We therefore have to choose pairing groups \mathbb{G}_1 and \mathbb{G}_2 of order 13.

We know from 5.6.4 that the moon-math curve BLS6_6 has two subgroups $\mathbb{G}_1[13]$ and $\mathbb{G}_2[13]$, which are both of order 13. The associated Weil pairing $e(\cdot, \cdot)$ 5.67 is efficiently computable, bilinear as well as non-degenerate. We therefore choose those groups and the Weil pairing together with the generators $g_1 = (13, 15)$ and $g_2 = (7v^2, 16v^3)$ of $\mathbb{G}_1[13]$ and $\mathbb{G}_2[13]$, as a parameter set:

$$\text{Groth_16} - \text{Param}(R_{3.\text{fac_zk}}) = (13, \mathbb{G}_1[13], \mathbb{G}_2[13], e(\cdot, \cdot), (13, 15), (7v^2, 16v^3))$$

It should be noted that our choice is not unique. Every pair of finite cyclic groups of order 13 that has an efficiently computable, non-degenerate, bilinear pairing qualifies as a Groth_16 parameter set. The situation is similar to real-world applications, where SNARKs with equivalent behavior are defined over different curves, used in different applications.

8.2.0.0.1 The Setup Phase To generate zk-SNARKs from constructive knowledge proofs in the Groth16 protocol, a preprocessing phase is required. This has to be executed a single time for every Rank-1 Constraint System and any associated Quadratic Arithmetic Program. The outcome of this phase is a Common Reference String that prover and verifier need in order to generate and verify the zk-SNARK. In addition, a simulation trapdoor is produced that can be used to simulate proofs.

To be more precise, let L be a language defined by some Rank-1 Constraint System R such that a constructive proof of knowledge for an instance $\langle I_1, \dots, I_n \rangle$ in L consists of a witness $\langle W_1, \dots, W_m \rangle$. Let $\text{QAP}(R) = \left\{ T \in \mathbb{F}[x], \{A_j, B_j, C_j \in \mathbb{F}[x]\}_{j=0}^{n+m} \right\}$ be a Quadratic Arithmetic Program associated to R , and let $\{\mathbb{G}_1, \mathbb{G}_2, e(\cdot, \cdot), g_1, g_2, \mathbb{F}_r\}$ be a set of Groth_16 parameters.

The setup phase then samples 5 random, invertible elements $\alpha, \beta, \gamma, \delta$ and s from the scalar field \mathbb{F}_r of the protocol and outputs the **simulation trapdoor** τ :

$$\tau = (\alpha, \beta, \gamma, \delta, s) \tag{8.2}$$

In addition, the setup phase uses those 5 random elements together with the two generators g_1 and g_2 and the Quadratic Arithmetic Program to generate a **Common Reference String**

$CRS_{QAP} = (CRS_{\mathbb{G}_1}, CRS_{\mathbb{G}_2})$ of language L :

$$CRS_{\mathbb{G}_1} = \left\{ \begin{array}{l} g_1^\alpha, g_1^\beta, g_1^\delta, \left(g_1^{s^j}, \dots \right)_{j=0}^{deg(T)-1}, \left(g_1^{\frac{\beta \cdot A_j(s) + \alpha \cdot B_j(s) + C_j(s)}{\gamma}}, \dots \right)_{j=0}^n \\ \left(g_1^{\frac{\beta \cdot A_{j+n}(s) + \alpha \cdot B_{j+n}(s) + C_{j+n}(s)}{\delta}}, \dots \right)_{j=1}^m, \left(g_1^{\frac{s^j \cdot T(s)}{\delta}}, \dots \right)_{j=0}^{deg(T)-2} \end{array} \right\}$$

$$CRS_{\mathbb{G}_2} = \left\{ g_2^\beta, g_2^\gamma, g_2^\delta, \left(g_2^{s^j}, \dots \right)_{j=0}^{deg(T)-1} \right\}$$

Common reference strings depend on the simulation trapdoor, and are therefore not unique to the problem. Any language can have more than one Common Reference String. The size of a Common Reference String is linear in the size of the instance and the size of the witness.

If a simulation trapdoor $\tau = (\alpha, \beta, \gamma, \delta, s)$ is given, we call the element s a **secret evaluation point** of the protocol, because if \mathbb{F}_r is the scalar field of the finite cyclic groups \mathbb{G}_1 and \mathbb{G}_2 , then a key feature of any Common Reference String is that it provides data to compute the evaluation of any polynomial $P \in \mathbb{F}_r[x]$ of degree $deg(P) < deg(T)$ at the point s in the exponent of the generator g_1 or g_2 , without knowing s .

To be more precise, let s be the secret evaluation point and let $P(x) = a_0 \cdot x^0 + a_1 \cdot x^1 + \dots + a_k \cdot x^k$ be a polynomial of degree $k < deg(T)$ with coefficients in \mathbb{F}_r . Then we can compute $g_1^{P(s)}$ without knowing what the actual value of s is:

$$\begin{aligned} g_1^{P(s)} &= g_1^{a_0 \cdot s^0 + a_1 \cdot s^1 + \dots + a_k \cdot s^k} \\ &= g_1^{a_0 \cdot s^0} \cdot g_1^{a_1 \cdot s^1} \cdot \dots \cdot g_1^{a_k \cdot s^k} \\ &= \left(g_1^{s^0} \right)^{a_0} \cdot \left(g_1^{s^1} \right)^{a_1} \cdot \dots \cdot \left(g_1^{s^k} \right)^{a_k} \end{aligned} \tag{8.3}$$

$$\tag{8.4}$$

In this expression, all group points $g_1^{s^j}$ are part of the Common Reference String, hence, they can be used to compute the result. The same holds true for the evaluation of $g_2^{P(s)}$, since the \mathbb{G}_2 part of the Common Reference String contains the points $g_2^{s^j}$.

In real-world applications, the simulation trapdoor is often called the **toxic waste** of the setup-phase. As we will see in 8.2.0.0.4, a simulation trapdoor can be used to generate fraud proofs, which are verifiable zk-SNARKS that can be constructed without knowledge of any witness. The Common Reference String is also-called a pair of **prover and verifier key**.

In order to make the protocol secure, the setup needs to be executed in a way that guarantees that the simulation trapdoor is deleted. The most simple approach to achieving deletion of the toxic waste is by a so-called **trusted third party**, where the trust assumption is that the party generates the Common Reference String precisely as defined and deletes the simulation trapdoor afterwards.

However, as trusted third parties are not easy to find, more sophisticated protocols for the setup phase exist in real-world applications. They execute the setup phase as a multi party computation, where the proper execution can be publicly verified and the simulation trapdoor is deleted if at least one participant deletes their individual contribution. Each participant only possesses a fraction of the simulation trapdoor, so it can only be recovered if all participants collude and share their fraction.

Example 142 (The 3-factorization Problem). To see how the setup phase of a Groth_16 zk-SNARK can be computed, consider the 3-factorization problem from 111 and the Groth_16 parameters from example 141. As we have seen in 127, an associated Quadratic Arithmetic Program is given by the following set:

$$\begin{aligned} QAP(R_{3.\text{fac_zk}}) = \{ & x^2 + x + 9, \\ & \{0, 0, 6x + 10, 0, 0, 7x + 4\}, \{0, 0, 0, 6x + 10, 7x + 4, 0\}, \{0, 7x + 4, 0, 0, 0, 6x + 10\} \} \end{aligned}$$

To transform this QAP into a Common Reference String, we choose the field elements $\alpha = 6$, $\beta = 5$, $\gamma = 4$, $\delta = 3$, $s = 2$ from \mathbb{F}_{13} . In real-world applications, it is important to sample those values randomly from the scalar field, but in our approach, we choose those non-random values to make them more memorizable, which helps in pen-and-paper computations. Our simulation trapdoor is then given as follows:

$$\tau = (6, 5, 4, 3, 2)$$

5708 We keep this secret in order to simulate proofs later on, but we are careful to hide τ from
 5709 anyone who hasn't read this book. Then we instantiate the Common Reference String 8.3 from
 5710 those values. Since our groups are subgroups of the BLS6_6 elliptic curve, we use scalar
 5711 product notation instead of exponentiation.

To compute the \mathbb{G}_1 part of the Common Reference String, we use the logarithmic order of the group \mathbb{G}_1 5.62, the generator $g_1 = (13, 15)$, as well as the values from the simulation trapdoor. Since $\deg(T) = 2$, we get the following:

$$\begin{aligned} [\alpha]g_1 &= [6](13, 15) = (27, 34) \\ [\beta]g_1 &= [5](13, 15) = (26, 34) \\ [\delta]g_1 &= [3](13, 15) = (38, 15) \end{aligned}$$

To compute the rest of the \mathbb{G}_1 part of the Common Reference String, we expand the indexed tuples and insert the secret random elements from the simulation backdoor. We get the following:

$$\begin{aligned} ([s^j]g_1, \dots)_{j=0}^1 &= ([2^0](13, 15), [2^1](13, 15)) \\ &= ((13, 15), (33, 34)) \\ \left(\left[\frac{\beta A_j(s) + \alpha B_j(s) + C_j(s)}{\gamma} \right] g_1, \dots \right)_{j=0}^1 &= \left(\left[\frac{5A_0(2) + 6B_0(2) + C_0(2)}{4} \right] (13, 15), \right. \\ &\quad \left. \left[\frac{5A_1(2) + 6B_1(2) + C_1(2)}{4} \right] (13, 15) \right) \\ \left(\left[\frac{\beta A_{j+n}(s) + \alpha B_{j+n}(s) + C_{j+n}(s)}{\delta} \right] g_1, \dots \right)_{j=1}^4 &= \left(\left[\frac{5A_2(2) + 6B_2(2) + C_2(2)}{3} \right] (13, 15), \right. \\ &\quad \left[\frac{5A_3(2) + 6B_3(2) + C_3(2)}{3} \right] (13, 15), \\ &\quad \left[\frac{5A_4(2) + 6B_4(2) + C_4(2)}{3} \right] (13, 15), \\ &\quad \left. \left[\frac{5A_5(2) + 6B_5(2) + C_5(2)}{3} \right] (13, 15) \right) \\ \left(\left[\frac{s^j \cdot T(s)}{\delta} \right] g_1 \right)_{j=0}^0 &= \left(\left[\frac{2^0 \cdot T(2)}{3} \right] (13, 15) \right) \end{aligned}$$

To compute the curve points on the right side of these expressions, we need the polynomials from the associated Quadratic Arithmetic Program and evaluate them on the secret point $s = 2$. Since $4^{-1} = 10$ and $3^{-1} = 9$ in \mathbb{F}_{13} , we get the following:

$$\begin{aligned}
 \left[\frac{5A_0(2) + 6B_0(2) + C_0(2)}{4} \right](13, 15) &= [(5 \cdot 0 + 6 \cdot 0 + 0) \cdot 10](13, 15) = [0](13, 14) \\
 &\quad \mathcal{O} \\
 \left[\frac{5A_1(2) + 6B_1(2) + C_1(2)}{4} \right](13, 15) &= [(5 \cdot 0 + 6 \cdot 0 + (7 \cdot 2 + 4)) \cdot 10](13, 15) = [11](13, 15) = \\
 &\quad (33, 9) \\
 \left[\frac{5A_2(2) + 6B_2(2) + C_2(2)}{3} \right](13, 15) &= [(5 \cdot (6 \cdot 2 + 10) + 6 \cdot 0 + 0) \cdot 9](13, 15) = [2](13, 15) = \\
 &\quad (33, 34) \\
 \left[\frac{5A_3(2) + 6B_3(2) + C_3(2)}{3} \right](13, 15) &= [(5 \cdot 0 + 6 \cdot (6 \cdot 2 + 10) + 0) \cdot 9](13, 15) = [5](13, 15) = \\
 &\quad (26, 34) \\
 \left[\frac{5A_4(2) + 6B_4(2) + C_4(2)}{3} \right](13, 15) &= [(5 \cdot 0 + 6 \cdot (7 \cdot 2 + 4) + 0) \cdot 9](13, 15) = [10](13, 15) = \\
 &\quad (38, 28) \\
 \left[\frac{5A_5(2) + 6B_5(2) + C_5(2)}{3} \right](13, 15) &= [(5 \cdot (7 \cdot 2 + 4) + 6 \cdot 0 + 6 \cdot 2 + 10) \cdot 9](13, 15) = [7](13, 15) = \\
 &\quad (27, 9) \\
 \left[\frac{2^0 \cdot T(2)}{3} \right](13, 15) &= [1 \cdot (2^2 + 2 + 9) \cdot 9](13, 15) = [5](13, 15) = \\
 &\quad (26, 34)
 \end{aligned}$$

5712 Putting all those values together, we see that the \mathbb{G}_1 part of the Common Reference String is
 5713 given by the following set of 12 points from the BLS6_6 13-torsion group \mathbb{G}_1 :

$$CRS_{\mathbb{G}_1} = \left\{ \begin{array}{l} (27, 34), (26, 34), (38, 15), \left((13, 15), (33, 34) \right), \left(\mathcal{O}, (33, 9) \right) \\ \left((33, 34), (26, 34), (38, 28), (27, 9) \right), \left((26, 34) \right) \end{array} \right\} \quad (8.5)$$

To compute the \mathbb{G}_2 part of the Common Reference String, we use the logarithmic order of the group \mathbb{G}_2 5.65, the generator $g_2 = (7v^2, 16v^3)$, as well as the values from the simulation trapdoor. Since $\deg(T) = 2$, we get the following:

$$\begin{aligned}
 [\beta]g_2 &= [5](7v^2, 16v^3) = (16v^2, 28v^3) \\
 [\gamma]g_2 &= [4](7v^2, 16v^3) = (37v^2, 27v^3) \\
 [\delta]g_2 &= [3](7v^2, 16v^3) = (42v^2, 16v^3)
 \end{aligned}$$

To compute the rest of the \mathbb{G}_2 part of the Common Reference String, we expand the indexed tuple and insert the secret random elements from the simulation trapdoor. We get the following:

$$\begin{aligned}
 \left([s^j]g_2, \dots \right)_{j=0}^1 &= \left([2^0](7v^2, 16v^3), [2^1](7v^2, 16v^3) \right) \\
 &= \left((7v^2, 16v^3), (10v^2, 28v^3) \right)
 \end{aligned}$$

Putting all these values together, we see that the \mathbb{G}_2 part of the Common Reference String is given by the following set of 5 points from the BLS_{6_6} 13-torsion group \mathbb{G}_2 :

$$\text{CRS}_{\mathbb{G}_2} = \left\{ (16v^2, 28v^3), (37v^2, 27v^3), (42v^2, 16v^3), (7v^2, 16v^3), (10v^2, 28v^3) \right\}$$

Given the simulation trapdoor τ and the Quadratic Arithmetic Program 127, the associated Common Reference String of the 3-factorization problem is as follows:

$$\begin{aligned} \text{CRS}_{\mathbb{G}_1} &= \left\{ (27, 34), (26, 34), (38, 15), \left((13, 15), (33, 34) \right), \left(\mathcal{O}, (33, 9) \right) \right\} \\ &\quad \left\{ \left((33, 34), (26, 34), (38, 28), (35, 28) \right), \left((26, 34) \right) \right\} \\ \text{CRS}_{\mathbb{G}_2} &= \left\{ (16v^2, 28v^3), (37v^2, 27v^3), (42v^2, 16v^3), (7v^2, 16v^3), (10v^2, 28v^3) \right\} \end{aligned}$$

5714 We then publish this data to everyone who wants to participate in the generation of a zk-SNARK
5715 or its verification in the 3-factorization problem.

5716 To understand how this Common Reference String can be used to evaluate polynomials at
5717 the secret evaluation point in the exponent of a generator, let's assume that we have deleted
5718 the simulation trapdoor. In that case, assuming that the discrete logarithm problem is hard in
5719 our groups, we have no way to know the secret evaluation point anymore, hence, we cannot
5720 evaluate polynomials at that point. However, we can evaluate polynomials of smaller degree
5721 than the degree of the target polynomial in the exponent of both generators at that point.

To see that, consider e.g. the polynomials $A_2(x) = 6x + 10$ and $A_5(x) = 7x + 4$ from the QAP of this problem. To evaluate these polynomials in the exponent of g_1 and g_2 at the secret point s without knowing the value of s (which is 2), we can use the Common Reference String and equation 8.2.0.0.1. Using the scalar product notation instead of exponentiation, we get the following:

$$\begin{aligned} [A_2(s)]g_1 &= [6 \cdot s^1 + 10 \cdot s^0]g_1 \\ &= [6](33, 34) + [10](13, 15) & \# [s^0]g_1 = (13, 15), [s^1]g_1 = (33, 34) \\ &= [6 \cdot 2](13, 15) + [10](13, 15) = [9](13, 15) & \# \text{logarithmic order on } \mathbb{G}_1 \\ &= (35, 15) \\ [A_5(s)]g_1 &= [7 \cdot s^1 + 4 \cdot s^0]g_1 \\ &= [7](33, 34) + [4](13, 15) \\ &= [7 \cdot 2](13, 15) + [4](13, 15) = [5](13, 15) \\ &= (26, 34) \end{aligned}$$

Indeed, we are able to evaluate the polynomials in the exponent at a secret evaluation point, because that point is encrypted in the curve point $(33, 34)$ and its secrecy is protected by the discrete logarithm assumption. Of course, in our computation, we recovered the secret point $s = 2$, but that was only possible because we know the logarithmic order of our groups with respect to the generators. Such an order is infeasible in cryptographically secure curves. We

can do the same computation on \mathbb{G}_2 and get the following:

$$\begin{aligned}
 [A_2(s)]_{g_2} &= [6 \cdot s^1 + 10 \cdot s^0]_{g_2} \\
 &= [6](10v^2, 28v^3) + [10](7v^2, 16v^3) \\
 &= [6 \cdot 2](7v^2, 16v^3) + [10](7v^2, 16v^3) = [9](7v^2, 16v^3) \\
 &= (37v^2, 16v^3) \\
 [A_5(s)]_{g_2} &= [7 \cdot s^1 + 4 \cdot s^0]_{g_1} \\
 &= [7](10v^2, 28v^3) + [4](7v^2, 16v^3) \\
 &= [7 \cdot 2](7v^2, 16v^3) + [4](7v^2, 16v^3) = [5](7v^2, 16v^3) \\
 &= (16v^2, 28v^3)
 \end{aligned}$$

5722 Apart from the target polynomial T , all other polynomials of the Quadratic Arithmetic Pro-
 5723 gram can be evaluated in the exponent this way.

5724 **8.2.0.0.2 The Prover Phase** Given some Rank-1 Constraint System R and instance $I = \langle$
 5725 $I_1, \dots, I_n \rangle$, the task of the prover phase is to convince any verifier that a prover knows a witness
 5726 W to instance I such that $(I; W)$ is a word in the language L_R of the system, without revealing
 5727 anything about W .

5728 To achieve this in the Groth_16 protocol, we assume that any prover has access to the Rank-
 5729 1 Constraint System of the problem, in addition to some algorithm that tells the prover how
 5730 to compute constructive proofs for the R1CS. In addition, the prover has access to a Common
 5731 Reference String and its associated Quadratic Arithmetic Program.

5732 In order to generate a zk-SNARK for this instance, the prover first computes a valid con-
 5733 structive proof as explained in 6.2.1.0.2, that is, the prover generates a proper witness $W = \langle$
 5734 $W_1, \dots, W_m \rangle$ such that $(\langle I_1, \dots, I_n \rangle; \langle W_1, \dots, W_m \rangle)$ is a solution to the Rank-1 Constraint
 5735 System R .

5736 The prover then uses the Quadratic Arithmetic Program and computes the polynomial $P_{(I;W)}$,
 5737 as explained in 6.15. They then divide $P_{(I;W)}$ by the target polynomial T of the Quadratic
 5738 Arithmetic Program. Since $P_{(I;W)}$ is constructed from a valid solution to the R1CS, we know
 5739 from 6.15 that it is divisible by T . This implies that polynomial division of P by T generates
 5740 another polynomial $H := P/T$, with $\deg(H) < \deg(T)$.

5741 The prover then evaluates the polynomial $(H \cdot T)/\delta$ in the exponent of the generator g_1 at
 5742 the secret point s , as explained in 8.2.0.0.1. To see how this can be achieved, let $H(x)$ be the
 5743 quotient polynomial P/T :

$$H(x) = H_0 \cdot x^0 + H_1 \cdot x^1 + \dots + H_k \cdot x^k \quad (8.6)$$

To evaluate $(H \cdot T)/\delta$ at s in the exponent of g_1 , the prover uses the Common Reference String and computes as follows:

$$g_1^{\frac{H(s) \cdot T(s)}{\delta}} = \left(g_1^{\frac{s^0 \cdot T(s)}{\delta}}\right)^{H_0} \cdot \left(g_1^{\frac{s^1 \cdot T(s)}{\delta}}\right)^{H_1} \cdots \left(g_1^{\frac{s^k \cdot T(s)}{\delta}}\right)^{H_k}$$

After this has been done, the prover samples two random field elements $r, t \in \mathbb{F}_r$, and uses the Common Reference String, the instance variables I_1, \dots, I_n and the witness variables $W_1,$

..., W_m to compute the following curve points:

$$\begin{aligned}
 g_1^W &= \left(g_1^{\frac{\beta \cdot A_{1+n}(s) + \alpha \cdot B_{1+n}(s) + C_{1+n}(s)}{\delta}} \right)^{W_1} \cdots \left(g_1^{\frac{\beta \cdot A_{m+n}(s) + \alpha \cdot B_{m+n}(s) + C_{m+n}(s)}{\delta}} \right)^{W_m} \\
 g_1^A &= g_1^\alpha \cdot g_1^{A_0(s)} \cdot \left(g_1^{A_1(s)} \right)^{I_1} \cdots \left(g_1^{A_n(s)} \right)^{I_n} \cdot \left(g_1^{A_{n+1}(s)} \right)^{W_1} \cdots \left(g_1^{A_{n+m}(s)} \right)^{W_m} \cdot \left(g_1^\delta \right)^r \\
 g_1^B &= g_1^\beta \cdot g_1^{B_0(s)} \cdot \left(g_1^{B_1(s)} \right)^{I_1} \cdots \left(g_1^{B_n(s)} \right)^{I_n} \cdot \left(g_1^{B_{n+1}(s)} \right)^{W_1} \cdots \left(g_1^{B_{n+m}(s)} \right)^{W_m} \cdot \left(g_1^\delta \right)^t \\
 g_2^B &= g_2^\beta \cdot g_2^{B_0(s)} \cdot \left(g_2^{B_1(s)} \right)^{I_1} \cdots \left(g_2^{B_n(s)} \right)^{I_n} \cdot \left(g_2^{B_{n+1}(s)} \right)^{W_1} \cdots \left(g_2^{B_{n+m}(s)} \right)^{W_m} \cdot \left(g_2^\delta \right)^t \\
 g_1^C &= g_1^W \cdot g_1^{\frac{H(s) \cdot T(s)}{\delta}} \cdot \left(g_1^A \right)^t \cdot \left(g_1^B \right)^r \cdot \left(g_1^\delta \right)^{-r \cdot t}
 \end{aligned}$$

In this computation, the group elements $g_1^{A_j(s)}$, $g_1^{B_j(s)}$ and $g_2^{B_j(s)}$ can be derived from the Common Reference String and the Quadratic Arithmetic Program of the problem, as we have seen in 8.2.0.0.1. In fact, those points only have to be computed once, and can be published and reused for multiple proof generations because they are the same for all instances and witnesses. All other group elements are part of the Common Reference String.

After all these computations have been done, a valid zero-knowledge succinct non-interactive argument of knowledge π in the Groth_16 protocol is given by the following three curve points:

$$\pi = (g_1^A, g_1^C, g_2^B) \quad (8.7)$$

As we can see, a Groth_16 zk-SNARK consists of 3 curve points, two points from \mathbb{G}_1 and 1 point from \mathbb{G}_2 . The argument is specifically designed this way because, in typical applications, \mathbb{G}_1 is a torsion group of an elliptic curve over some prime field, while \mathbb{G}_2 is a subgroup of the full torsion group over an extension field as explained in 5.4. Elements from \mathbb{G}_1 therefore need less space to be stored, and computations in \mathbb{G}_1 are typically faster than in \mathbb{G}_2 .

Since the witness is encoded in the exponent of a generator of a cryptographically secure elliptic curve, it is hidden from anyone but the prover. Moreover, since any proof is randomized by the occurrence of the random field elements r and t , proofs are not unique to any given witness.

Example 143 (The 3-factorization Problem). To see how a prover might compute a zk-SNARK, consider the 3-factorization problem from 111, our protocol parameters from 141 as well as the Common Reference String from 8.5.

Our task is to compute a zk-SNARK for the instance $I_1 = \langle 11 \rangle$ and its constructive proof $\langle W_1, W_2, W_3, W_4 \rangle = \langle 2, 3, 4, 6 \rangle$ as computed in 118. As we know from 127 the associated polynomial $P_{(I;W)}$ of the Quadratic Arithmetic Program from 127 is given as follows:

$$P_{(I;W)} = x^2 + x + 9$$

Since $P_{(I;W)}$ is identical to the target polynomial $T(x) = x^2 + x + 9$ in this example, we know from example 127 that the quotient polynomial $H = P/T$ is the constant degree 0 polynomial:

$$H(x) = H_0 \cdot x^0 = 1 \cdot x^0$$

We therefore use $\left[\frac{s^0 \cdot T(s)}{\delta} \right]_{g_1} = (26, 34)$ from our Common Reference String 8.5 of the 3-factorization problem and compute as follows:

$$\begin{aligned}
 \left[\frac{H(s) \cdot T(s)}{\delta} \right]_{g_1} &= [H_0](26, 34) = [1](26, 34) \\
 &= (26, 34)
 \end{aligned}$$

In the next step, we have to compute all group elements required for a proper Groth16 zk-SNARK 8.7. We start with g_1^W . Using scalar products instead of the exponential notation, and \oplus for the group law on the BLS6_6 curve, we have to compute the point $[W]g_1$:

$$\begin{aligned} [W]g_1 = & [W_1]g_1 \frac{\beta \cdot A_2(s) + \alpha \cdot B_2(s) + C_2(s)}{\delta} \oplus [W_2]g_1 \frac{\beta \cdot A_3(s) + \alpha \cdot B_3(s) + C_3(s)}{\delta} \oplus [W_3]g_1 \frac{\beta \cdot A_4(s) + \alpha \cdot B_4(s) + C_4(s)}{\delta} \\ & \oplus [W_4]g_1 \frac{\beta \cdot A_5(s) + \alpha \cdot B_5(s) + C_5(s)}{\delta} \end{aligned}$$

5763 To compute this point, we have to remember that a prover should not be in possession of
 5764 the simulation trapdoor, hence, they should not know what α , β , δ and s are. In order to
 5765 compute this group element, the prover therefore needs the Common Reference String. Using
 5766 the logarithmic order from 5.62 and the witness, we get the following:

$$\begin{aligned} [W]g_1 &= [2](33, 34) \oplus [3](26, 34) \oplus [4](38, 28) \oplus [6](27, 9) \\ &= [2 \cdot 2](13, 15) \oplus [3 \cdot 5](13, 15) \oplus [4 \cdot 10](13, 15) \oplus [6 \cdot 7](13, 15) \\ &= [2 \cdot 2 + 3 \cdot 5 + 4 \cdot 10 + 6 \cdot 7](13, 15) = [10](13, 15) \\ &= (38, 28) \end{aligned}$$

5767 In a next step, we compute g_1^A . We sample the random point $r = 11$ from \mathbb{F}_{13} , using scalar
 5768 products instead of the exponential notation, and \oplus for the group law on the BLS6_6 curve.
 5769 We then have to compute the following expression:

$$\begin{aligned} [A]g_1 = & [\alpha]g_1 \oplus [A_0(s)]g_1 \oplus [I_1][A_1(s)]g_1 \oplus [W_1][A_2(s)]g_1 \oplus [W_2][A_3(s)]g_1 \\ & \oplus [W_3][A_4(s)]g_1 \oplus [W_4][A_5(s)]g_1 \oplus [r][\delta]g_1 \end{aligned}$$

Since we don't know what α , δ and s are, we look up $[\alpha]g_1$ and $[\delta]g_1$ from the Common Reference String. According to example 8.5, we have $[A_2(s)]g_1 = (35, 15)$, $[A_5(s)]g_1 = (26, 34)$ and $[A_j(s)]g_1 = \mathcal{O}$ for all other indices $0 \leq j \leq 5$. Since \mathcal{O} is the neutral element on \mathbb{G}_1 , we get the following:

$$\begin{aligned} [A]g_1 &= (27, 34) \oplus \mathcal{O} \oplus [11]\mathcal{O} \oplus [2](35, 15) \oplus [3]\mathcal{O} \oplus [4]\mathcal{O} \oplus [6](26, 34) \oplus [11](38, 15) \\ &= (27, 34) \oplus [2](35, 15) \oplus [6](26, 34) \oplus [11](38, 15) \\ &= [6](13, 15) \oplus [2 \cdot 9](13, 15) \oplus [6 \cdot 5](13, 15) \oplus [11 \cdot 3](13, 15) \\ &= [6 + 2 \cdot 9 + 6 \cdot 5 + 11 \cdot 3](13, 15) = [9](13, 15) \\ &= (35, 15) \end{aligned}$$

5770 In order to compute the two curve points $[B]g_1$ and $[B]g_2$, we sample another random element
 5771 $t = 4$ from \mathbb{F}_{13} . Using the scalar product instead of the exponential notation, and \oplus for the group
 5772 law on the BLS6_6 curve, we have to compute the following expressions:

$$\begin{aligned} [B]g_1 &= [\beta]g_1 \oplus [B_0(s)]g_1 \oplus [I_1][B_1(s)]g_1 \oplus [W_1][B_2(s)]g_1 \oplus [W_2][B_3(s)]g_1 \\ &\quad \oplus [W_3][B_4(s)]g_1 \oplus [W_4][B_5(s)]g_1 \oplus [t][\delta]g_1 \\ [B]g_2 &= [\beta]g_2 \oplus [B_0(s)]g_2 \oplus [I_1][B_1(s)]g_2 \oplus [W_1][B_2(s)]g_2 \oplus [W_2][B_3(s)]g_2 \\ &\quad \oplus [W_3][B_4(s)]g_2 \oplus [W_4][B_5(s)]g_2 \oplus [t][\delta]g_2 \end{aligned}$$

Since we don't know what β , δ and s are, we look up the associated group elements from the Common Reference String. Recall from 8.5 that we can evaluate $[B_j(s)]_{g_1}$ without knowing the secret evaluation point s . Since $B_3 = A_2$ and $B_4 = A_5$, we have $[B_3(s)]_{g_1} = (35, 15)$, $[B_4(s)]_{g_1} = (26, 34)$ according to the computation in 8.5, and $[B_j(s)]_{g_1} = \mathcal{O}$ for all other indices $0 \leq j \leq 5$. Since \mathcal{O} is the neutral element on \mathbb{G}_1 , we get the following:

$$\begin{aligned} [B]_{g_1} &= (26, 34) \oplus \mathcal{O} \oplus [11]\mathcal{O} \oplus [2]\mathcal{O} \oplus [3](35, 15) \oplus [4](26, 34) \oplus [6]\mathcal{O} \oplus [4](38, 15) \\ &= (26, 34) \oplus [3](35, 15) \oplus [4](26, 34) \oplus [4](38, 15) \\ &= [5](13, 15) \oplus [3 \cdot 9](13, 15) \oplus [4 \cdot 5](13, 15) \oplus [4 \cdot 3](13, 15) \\ &= [5 + 3 \cdot 9 + 4 \cdot 5 + 4 \cdot 3](13, 15) = [12](13, 15) \\ &= (13, 28) \end{aligned}$$

$$\begin{aligned} [B]_{g_2} &= (16v^2, 28v^3) \oplus \mathcal{O} \oplus [11]\mathcal{O} \oplus [2]\mathcal{O} \oplus [3](37v^2, 16v^3) \oplus [4](16v^2, 28v^3) \oplus [6]\mathcal{O} \oplus [4](42v^2, 16v^3) \\ &= (16v^2, 28v^3) \oplus [3](37v^2, 16v^3) \oplus [4](16v^2, 28v^3) \oplus [4](42v^2, 16v^3) \\ &= [5](7v^2, 16v^3) \oplus [3 \cdot 9](7v^2, 16v^3) \oplus [4 \cdot 5](7v^2, 16v^3) \oplus [4 \cdot 3](7v^2, 16v^3) \\ &= [5 + 3 \cdot 9 + 4 \cdot 5 + 4 \cdot 3](7v^2, 16v^3) = [12](7v^2 + 16v^3) \\ &= (7v^2, 27v^3) \end{aligned}$$

In a last step, we combine the previous computations to compute the point $[C]_{g_1}$ in the group \mathbb{G}_1 as follows:

$$\begin{aligned} [C]_{g_1} &= [W]_{g_1} \oplus \left[\frac{H(s) \cdot T(s)}{\delta} \right]_{g_1} \oplus [t][A]_{g_1} \oplus [r][B]_{g_1} \oplus [-r \cdot t][\delta]_{g_1} \\ &= (38, 28) \oplus (26, 34) \oplus [4](35, 15) \oplus [11](13, 28) \oplus [-11 \cdot 4](38, 15) \\ &= [10](13, 15) \oplus [5](13, 15) \oplus [4 \cdot 9](13, 15) \oplus [11 \cdot 12](13, 15) \oplus [-11 \cdot 4 \cdot 3](13, 15) \\ &= [10 + 5 + 4 \cdot 9 + 11 \cdot 12 - 11 \cdot 4 \cdot 3](13, 15) = [12](13, 15) \\ &= (13, 28) \end{aligned}$$

5773 Given the instance $I_1 = \langle 11 \rangle$, we can now combine these computations and see that the
5774 following 3 curve points are a zk-SNARK for the witness $\langle W_1, W_2, W_3, W_4 \rangle = \langle 2, 3, 4, 6 \rangle$:

$$\pi = ((35, 15), (13, 28), (7v^2, 27v^3)) \quad (8.8)$$

5775 We can now publish this zk-SNARK, or send it to a designated verifier. Note that, if we
5776 had sampled different values for r and t , we would have computed a different zk-SNARK for
5777 the same witness. The zk-SNARK, therefore, hides the witness perfectly, which means that it
5778 is impossible to reconstruct the witness from the zk-SNARK.

5779 **8.2.0.0.3 The Verification Phase** Given some Rank-1 Constraint System R , instance $I = \langle$
5780 $I_1, \dots, I_n \rangle$ and Groth_16 zk-SNARK π 8.7, the task of the verification phase is to check that π
5781 is indeed an argument for a constructive proof. Assuming that the simulation trapdoor does not
5782 exist anymore and the verification checks the proof, the verifier is then convinced that someone
5783 knows a witness $W = \langle W_1, \dots, W_m \rangle$ such that $(I; W)$ is a word in the language of R .

To achieve this in the Groth_16 protocol, we assume that any verifier is able to compute the pairing map $e(\cdot, \cdot)$ efficiently, and has access to the Common Reference String used to produce

the zk-SNARK π . In order to verify the zk-SNARK with respect to the instance $\langle I_1, \dots, I_n \rangle$, the verifier computes the following curve point:

$$g_1^I = \left(g_1^{\frac{\beta \cdot A_0(s) + \alpha \cdot B_0(s) + C_0(s)}{\gamma}} \right) \cdot \left(g_1^{\frac{\beta \cdot A_1(s) + \alpha \cdot B_1(s) + C_1(s)}{\gamma}} \right)^{I_1} \cdots \left(g_1^{\frac{\beta \cdot A_n(s) + \alpha \cdot B_n(s) + C_n(s)}{\gamma}} \right)^{I_n}$$

5784 With this group element, the verifier is able to verify the zk-SNARK $\pi = (g_1^A, g_1^C, g_2^B)$ by check-
5785 ing the following equation using the pairing map:

$$e(g_1^A, g_2^B) = e(g_1^\alpha, g_2^\beta) \cdot e(g_1^I, g_2^\gamma) \cdot e(g_1^C, g_2^\delta) \quad (8.9)$$

5786 If the equation holds true, the verifier outputs `accept` and if the equation does not hold, the
5787 verifier outputs `reject`.

5788 *Remark 8.* We know from 5.4 that computing pairings in cryptographically secure pairing
5789 groups is computationally expensive. As we can see, in the Groth_16 protocol, 3 pairings
5790 are required to verify the zk-SNARK, because the pairing $e(g_1^\alpha, g_2^\beta)$ is independent of the proof,
5791 meaning that it can be computed once and then stored as an amendment to the verifier key.

5792 In Groth [2016], the author showed that 2 is the minimal amount of pairings that any pro-
5793 tocol with similar properties has to use. This protocol is therefore close to the theoretical mini-
5794 mum. In the same paper, the author outlined an adaptation that only uses 2 pairings. However,
5795 that reduction comes with the price of much more overhead computation. Having 3 pairings is
5796 therefore a compromise that gives the overall best performance. To date, the Groth16 protocol
5797 is the most efficient in its class.

5798 *Example 144* (The 3-factorization Problem). To see how a verifier might verify a zk-SNARK
5799 for some given instance I , consider the 3-factorization problem from 111, our protocol pa-
5800 rameters from 141, the Common Reference String from 8.5 as well as the zk-SNARK $\pi =$
5801 $((35, 15), (27, 9), (7v^2, 27v^3))$ from example 8.8, which claims to be an argument of knowledge
5802 for a witness for the instance $I_1 = \langle 11 \rangle$.

5803 In order to verify the zk-SNARK for that instance, we first compute the curve point g_1^I . Us-
5804 ing scalar products instead of the exponential notation, and \oplus for the group law on the BLS6_6
5805 curve, we have to compute the point $[I]g_1$ as follows:

$$[I]g_1 = \left[\frac{\beta \cdot A_0(s) + \alpha \cdot B_0(s) + C_0(s)}{\gamma} \right]_{g_1} \oplus [I_1] \left[\frac{\beta \cdot A_1(s) + \alpha \cdot B_1(s) + C_1(s)}{\gamma} \right]_{g_1}$$

5806 To compute this point, we have to remember that a verifier should not be in possession of the
5807 simulation trapdoor, which means that they should not know what α , β , γ and s are. In order to
5808 compute this group element, the verifier therefore needs the Common Reference String. Using
5809 the logarithmic order from 5.62 and instance I_1 , we get the following:

$$\begin{aligned} [I]g_1 &= \left[\frac{\beta \cdot A_0(s) + \alpha \cdot B_0(s) + C_0(s)}{\gamma} \right]_{g_1} \oplus [I_1] \left[\frac{\beta \cdot A_1(s) + \alpha \cdot B_1(s) + C_1(s)}{\gamma} \right]_{g_1} \\ &= \mathcal{O} \oplus [11](33, 9) \\ &= [11 \cdot 11](13, 15) = [4](13, 15) \\ &= (35, 28) \end{aligned}$$

5810 In the next step, we have to compute all the pairings involved in equation 8.9. Using the
 5811 logarithmic order on \mathbb{G}_1 5.62 and \mathbb{G}_2 5.65 as well as the bilinearity of the pairing map we get
 5812 the following:

$$\begin{aligned}
 e([A]_{g_1}, [B]_{g_2}) &= e((35, 15), (7v^2, 27v^3)) = e([9](13, 15), [12](7v^2, 16v^3)) \\
 &= e((13, 15), (7v^2, 16v^3))^{9 \cdot 12} \\
 &= e((13, 15), (7v^2, 16v^3))^{108} \\
 e([\alpha]_{g_1}, [\beta]_{g_2}) &= e((27, 34), (16v^2, 28v^3)) = e([6](13, 15), [5](7v^2, 16v^3)) \\
 &= e((13, 15), (7v^2, 16v^3))^{6 \cdot 5} \\
 &= e((13, 15), (7v^2, 16v^3))^{30} \\
 e([I]_{g_1}, [\gamma]_{g_2}) &= e((35, 28), (37v^2, 27v^3)) = e([4](13, 15), [4](7v^2, 16v^3)) \\
 &= e((13, 15), (7v^2, 16v^3))^{4 \cdot 4} \\
 &= e((13, 15), (7v^2, 16v^3))^{16} \\
 e([C]_{g_1}, [\delta]_{g_2}) &= e((13, 28), (42v^2, 16v^3)) = e([12](13, 15), [3](7v^2, 16v^3)) \\
 &= e((13, 15), (7v^2, 16v^3))^{12 \cdot 3} \\
 &= e((13, 15), (7v^2, 16v^3))^{36}
 \end{aligned}$$

5813 In order to check equation 8.9, observe that the target group \mathbb{G}_T of the Weil pairing is a
 5814 finite cyclic group of order 13. Exponentiation is therefore done in modular 13 arithmetic.
 5815 Accordingly, since $108 \bmod 13 = 4$, we evaluate the left side of equation 8.9 as follows:

$$e([A]_{g_1}, [B]_{g_2}) = e((13, 15), (7v^2, 16v^3))^{108} = e((13, 15), (7v^2, 16v^3))^4$$

5816 Similarly, we evaluate the right side of equation 8.9 using modular 13 arithmetic and the
 5817 exponential law $a^x \cdot a^y = a^{x+y}$:

$$\begin{aligned}
 e([\alpha]_{g_1}, [\beta]_{g_2}) \cdot e([I]_{g_1}, [\gamma]_{g_2}) \cdot e([C]_{g_1}, [\delta]_{g_2}) &= \\
 e((13, 15), (7v^2, 16v^3))^{30} \cdot e((13, 15), (7v^2, 16v^3))^{16} \cdot e((13, 15), (7v^2, 16v^3))^{36} &= \\
 e((13, 15), (7v^2, 16v^3))^4 \cdot e((13, 15), (7v^2, 16v^3))^3 \cdot e((13, 15), (7v^2, 16v^3))^{10} &= \\
 e((13, 15), (7v^2, 16v^3))^{4+3+10} &= \\
 e((13, 15), (7v^2, 16v^3))^4 &
 \end{aligned}$$

5818 As we can see, both the left and the right side of equation 8.9 are identical, which implies
 5819 that the verification process accepts the zk-SNARK and the verifier outputs `accept`.

5820 **8.2.0.0.4 Proof Simulation** During the execution of a setup phase, a Common Reference
 5821 String is generated, along with a simulation trapdoor 8.2, the latter of which must be deleted at
 5822 the end of the setup-phase. In this paragraph, we will show why knowledge of the simulation
 5823 trapdoor is problematic, and how it can be used to generate zk-SNARKs for a given instance
 5824 without any knowledge of an associated witness.

5825 To be more precise, let I be an instance for some R1CS language L_R . We call a zk-SNARK
 5826 for L_R **forged** or **simulated** if it passes a verification but its generation does not require the
 5827 existence of a witness W such that $(I; W)$ is a word in L_R .

5828 To see how simulated zk-SNARKs can be computed, assume that a forger has knowledge
 5829 of proper Groth_16 parameters, a Quadratic Arithmetic Program of the problem, a Common
 5830 Reference String and its associated simulation trapdoor τ :

$$\tau = (\alpha, \beta, \gamma, \delta, s) \quad (8.10)$$

5831 Given some instance I , the forger’s task is to generate a zk-SNARK for this instance that
 5832 passes the verification process, without having access to any other zk-SNARKs for this instance
 5833 and without knowledge of a valid witness W .

5834 To achieve this in the Groth_16 protocol, the forger can use the simulation trapdoor in
 5835 combination with the QAP and two arbitrary field elements A and B from the scalar field \mathbb{F}_r of
 5836 the pairing groups to compute g_1^C for the instance $\langle I_1, \dots, I_n \rangle$ as follows:

$$g_1^C = g_1^{\frac{A \cdot B}{\delta}} \cdot g_1^{-\frac{\alpha \cdot \beta}{\delta}} \cdot g_1^{-\frac{\beta A_0(s) + \alpha B_0(s) + C_0(s)}{\delta}} \cdot \left(g_1^{-\frac{\beta A_1(s) + \alpha B_1(s) + C_1(s)}{\delta}} \right)^{I_1} \cdots \left(g_1^{-\frac{\beta A_n(s) + \alpha B_n(s) + C_n(s)}{\delta}} \right)^{I_n}$$

5837 The forger then publishes the zk-SNARK $\pi_{\text{forged}} = (g_1^A, g_1^C, g_2^B)$, which will pass the verifi-
 5838 cation process and is computable without the existence of a witness $\langle W_1, \dots, W_m \rangle$.

5839 To see that the simulation trapdoor is necessary and sufficient to compute the simulated
 5840 proof π_{forged} , first observe that both generators g_1 and g_2 are known to the forger, as they are
 5841 part of the Common Reference String, encoded as $g_1^{s^0}$ and $g_2^{s^0}$. The forger is therefore able to
 5842 compute $g_1^{A \cdot B}$. Moreover, since the forger knows α, β, δ and s from the trapdoor, they are able
 5843 to compute all factors in the computation of g_1^C .

5844 If, on the other hand, the simulation trapdoor is unknown, it is not possible to compute g_1^C ,
 5845 since, for example, the computational Diffie-Hellman assumption makes the derivation of $g_1^{\alpha \cdot \beta}$
 5846 from g_1^α and g_1^β infeasible.

5847 *Example 145* (The 3-factorization Problem). To see how a forger might simulate a zk-SNARK
 5848 for some given instance I , consider the 3-factorization problem from 111, our protocol pa-
 5849 rameters from 141, the Common Reference String from 8.5 and the simulation trapdoor $\tau =$
 5850 $(6, 5, 4, 3, 2)$ of that CRS.

5851 In order to forge a zk-SNARK for instance $I_1 = \langle 11 \rangle$, we don’t need a constructive proof
 5852 for the associated Rank-1 Constraint System, which implies that we don’t have to execute the
 5853 circuit $C_{3.\text{fac}}(\mathbb{F}_{13})$ from example 120. Instead, we have to choose 2 arbitrary elements A and B
 5854 from \mathbb{F}_{13} , and compute g_1^A, g_2^B and g_1^C as defined in 8.2.0.0.4. We choose $A = 9$ and $B = 3$, and,
 5855 since $\delta^{-1} = 3$, we compute as follows:

$$\begin{aligned} [A]g_1 &= [9](13, 15) = (35, 15) \\ [B]g_2 &= [3](7v^2, 16v^3) = (42v^2, 16v^3) \\ [C]g_1 &= \left[\frac{A \cdot B}{\delta} \right]g_1 \oplus \left[-\frac{\alpha \cdot \beta}{\delta} \right]g_1 \oplus \left[-\frac{\beta A_0(s) + \alpha B_0(s) + C_0(s)}{\delta} \right]g_1 \oplus \\ &\quad [I_1] \left[-\frac{\beta A_1(s) + \alpha B_1(s) + C_1(s)}{\delta} \right]g_1 \\ &= [(9 \cdot 3) \cdot 9](13, 15) \oplus [-(6 \cdot 5) \cdot 9](13, 15) \oplus [0](13, 15) \oplus [11][-(7 \cdot 2 + 4) \cdot 9](13, 15) \\ &= [9](13, 15) \oplus [3](13, 15) \oplus [12](13, 15) = [11](13, 15) \\ &= (33, 9) \end{aligned}$$

This is all we need to generate our forged proof for the 3-factorization problem. We publish the simulated zk-SNARK:

$$\pi_{fake} = ((35, 15), (33, 9), (42v^2, 16v^3))$$

5856 Despite the fact that this zk-SNARK was generated without knowledge of a proper witness,
5857 it is indistinguishable from a zk-SNARK that proves knowledge of a proper witness.

5858 To see that, we show that our forged SNARK passes the verification process. In order
5859 to verify π_{fake} , we proceed as in 8.2.0.0.3 and compute the curve point g_1^I for the instance
5860 $I_1 = \langle 11 \rangle$. Since the instance is the same as in example 8.8, we can parallel the computation
5861 from that example:

$$\begin{aligned} [I]_{g_1} &= \left[\frac{\beta \cdot A_0(s) + \alpha \cdot B_0(s) + C_0(s)}{\gamma} \right]_{g_1} \oplus [I_1] \left[\frac{\beta \cdot A_1(s) + \alpha \cdot B_1(s) + C_1(s)}{\gamma} \right]_{g_1} \\ &= (35, 28) \end{aligned}$$

In a next step we have to compute all the pairings involved in equation 8.9. Using the logarithmic order on \mathbb{G}_1 5.62 and \mathbb{G}_2 5.65 as well as the bilinearity of the pairing map we get

$$\begin{aligned} e([A]_{g_1}, [B]_{g_2}) &= e((35, 15), (42v^2, 16v^3)) = e([9](13, 15), [3](7v^2, 16v^3)) \\ &= e((13, 15), (7v^2, 16v^3))^{9 \cdot 3} \\ &= e((13, 15), (7v^2, 16v^3))^{27} \\ e([\alpha]_{g_1}, [\beta]_{g_2}) &= e((27, 34), (16v^2, 28v^3)) = e([6](13, 15), [5](7v^2, 16v^3)) \\ &= e((13, 15), (7v^2, 16v^3))^{6 \cdot 5} \\ &= e((13, 15), (7v^2, 16v^3))^{30} \\ e([I]_{g_1}, [\gamma]_{g_2}) &= e((35, 28), (37v^2, 27v^3)) = e([4](13, 15), [4](7v^2, 16v^3)) \\ &= e((13, 15), (7v^2, 16v^3))^{4 \cdot 4} \\ &= e((13, 15), (7v^2, 16v^3))^{16} \\ e([C]_{g_1}, [\delta]_{g_2}) &= e((33, 9), (42v^2, 16v^3)) = e([11](13, 15), [3](7v^2, 16v^3)) \\ &= e((13, 15), (7v^2, 16v^3))^{11 \cdot 3} \\ &= e((13, 15), (7v^2, 16v^3))^{33} \end{aligned}$$

In order to check equation 8.9, observe that the target group \mathbb{G}_T of the Weil pairing is a finite cyclic group of order 13. Exponentiation is therefore done in modular 13 arithmetics. Using this, we evaluate the left side of the verifier equation as follows:

$$e([A]_{g_1}, [B]_{g_2}) = e((13, 15), (7v^2, 16v^3))^{27} = e((13, 15), (7v^2, 16v^3))^1$$

since $27 \bmod 13 = 1$. Similarly, we evaluate the right side of the verification equation using modular 13 arithmetics and the exponential law $a^x \cdot a^y = a^{x+y}$. We get

$$\begin{aligned} e([\alpha]_{g_1}, [\beta]_{g_2}) \cdot e([I]_{g_1}, [\gamma]_{g_2}) \cdot e([C]_{g_1}, [\delta]_{g_2}) &= \\ e((13, 15), (7v^2, 16v^3))^{30} \cdot e((13, 15), (7v^2, 16v^3))^{16} \cdot e((13, 15), (7v^2, 16v^3))^{33} &= \\ e((13, 15), (7v^2, 16v^3))^4 \cdot e((13, 15), (7v^2, 16v^3))^3 \cdot e((13, 15), (7v^2, 16v^3))^7 &= \\ e((13, 15), (7v^2, 16v^3))^{4+3+7} &= \\ e((13, 15), (7v^2, 16v^3))^1 & \end{aligned}$$

5862 As we can see, both the left and the right side of the verifier equation are identical, which
5863 implies that the verification process accepts the simulated proof. π_{fake} therefore convinces the
5864 verifier that a witness to the 3-factorization problem exists. However, no such witness was really
5865 necessary to generate the proof.

5866 **Chapter 9**

5867 **Exercises and Solutions**

5868 TODO: All exercises we provided should have a solution, which we give here in all detail.

Bibliography

- Jens Groth. On the size of pairing-based non-interactive arguments. *IACR Cryptol. ePrint Arch.*, 2016:260, 2016. URL <http://eprint.iacr.org/2016/260>.
- P.W. Shor. Algorithms for quantum computation: discrete logarithms and factoring. In *Proceedings 35th Annual Symposium on Foundations of Computer Science*, pages 124–134, 1994. doi: 10.1109/SFCS.1994.365700.
- David Fifield. The equivalence of the computational diffie–hellman and discrete logarithm problems in certain groups, 2012. URL <https://web.stanford.edu/class/cs259c/finalpapers/dlp-cdh.pdf>.
- Torben Pryds Pedersen. Non-interactive and information-theoretic secure verifiable secret sharing. In Joan Feigenbaum, editor, *Advances in Cryptology — CRYPTO '91*, pages 129–140, Berlin, Heidelberg, 1992. Springer Berlin Heidelberg. ISBN 978-3-540-46766-3. URL <https://fmouhart.epheme.re/Crypto-1617/TD08.pdf>.
- Martin Albrecht, Lorenzo Grassi, Christian Rechberger, Arnab Roy, and Tyge Tiessen. Mimc: Efficient encryption and cryptographic hashing with minimal multiplicative complexity. Cryptology ePrint Archive, Report 2016/492, 2016. <https://ia.cr/2016/492>.