REDBELLY DAO

REDBELLY DAO COMMUNITY RESEARCH · FEASIBILITY REPORT · 15 OCT 2026

Could Redbelly connect to Quant Overledger?

A feasibility report on interoperability between Redbelly Network and Quant's Overledger.

Feasibility research only. Redbelly and Quant have no announced partnership or talks S1, and nothing in this report suggests otherwise. Redbelly has not published an official position on bridging S1, so any question that no public source answers is marked Unknown.

38 SOURCES 103 QUOTED FACTS WEB VERSION OVERLEDGER.VERCEL.APP

00 SHORT ANSWER

Key findings

01 ANALYSIS

Could Overledger's Gateway reach Redbelly today, for reading data and sending signed transactions?

Possibly

Possibly, but unconfirmed. Redbelly runs Ethereum-style smart contracts, which is what EVM compatible means, and its public RPC, the address apps use to read the chain and send transactions, appears to fit Overledger's self-serve tests. But Overledger describes self-serve as for public permissionless networks, and writing to Redbelly needs a credential. We found no public test of this route, and we did not test inside Overledger. S2 S3 S4 S5

02 ANALYSIS

Can Redbelly join the Fusion Rollup, Overledger's shared layer for deposits, unified token balances and cross-chain messages?

Not yet

Not possible yet, as far as public sources show. Redbelly is not among the networks documented at testnet launch, the live list needs an API key so we could not check it, and the docs describe no self-serve way to add a network. S6 S7

03 ANALYSIS

Would Receptor credentials and Tokeniser rules travel with an asset to another chain?

No

No, not by themselves. Redbelly's access credential and Proof by Query checks run on Redbelly, and Tokeniser enforces its rules at the point of transfer on Redbelly. No public source shows these checks reaching a copy of the asset on another chain. S5 S8 S9

04 CONFIRMED

Is there any agreement between Redbelly and Quant?

None

None has been announced. S1

HOW TO READ THE LABELS

CONFIRMED

Stated in a public source. The source is linked and quoted in the source list.

TESTED

We ran the call ourselves on 15 October 2026. The full log is in evidence/tests.

ANALYSIS

Our reasoning from the confirmed facts it cites. Not a statement by Redbelly, Tokeniser or Quant.

UNKNOWN

Not answered by any public source we found. Treat as open.

Plain words

The technical terms this report uses, in one or two lines each. Where a term is Overledger's or Redbelly's own, the source is cited.

RPC

The address and interface that apps and wallets use to read a blockchain and send transactions to it. Overledger's self-serve test is about how a chain's nodes answer RPC calls S3.

Node

A computer that runs a blockchain's software and answers RPC calls. Overledger registers nodes as public or private S3.

EVM

The Ethereum Virtual Machine, the engine that runs Ethereum-style smart contracts. Redbelly can run contracts written for it S2.

Self-serve and engagement

Overledger's two ways to add a chain: self-serve, by one form or API call, or a managed project with Quant's team S3 S13.

Gateway and Connectors

Overledger's single way in, and the parts behind it that speak each chain family's protocol S13.

Fusion Rollup

Overledger's separate shared layer: deposits from connected chains become balances on it and can be withdrawn back S13.

State root

A short fingerprint of the rollup's balances, posted to every connected chain S6.

Dispute window

The wait before a rollup withdrawal is final, during which a challenger can prove the rollup's state invalid S6.

Allowlist

A list of addresses a contract lets through. Overledger turns its rules about users into allowlists S37.

Verifiable credential

A signed digital statement about a person, such as having passed identity checks, that the person holds. Receptor uses this W3C model S24.

01 CONTEXT

Why this question comes up now

CONFIRMED

On 24 September 2026 The Clearing House said it selected Quant to power its On-Chain Money Initiative, a payments network for clearing and settling tokenised deposits between financial institutions S10. Quant's technology is to provide the network's interoperability, orchestration and transaction management layer S10, with connectivity to existing payment systems such as RTP and CHIPS S10. Quant's own release says The Clearing House will use Quant's technology to bring on-chain capabilities to its tokenised deposit network S11.

CONFIRMED

The network is expected to be available to participating institutions in the first half of 2027, and details on participation and use cases are still to be announced S10.

UNKNOWN

Neither announcement names any blockchain the network will use or connect to, and neither mentions Redbelly. No public source we found says whether it will connect to Redbelly or to any other specific chain S10.

02 OVERLEDGER


What is Overledger?

CONFIRMED

Overledger is Quant's platform for building applications that span more than one blockchain S12. It has three foundations: a Gateway that authenticates clients, routes requests and is also the way in to the Fusion Rollup S13; Connectors, one for each chain family such as EVM or Solana S13, that put that family's RPC protocol behind one common interface S13; and the Fusion Rollup, a shared layer that anchors to several chains at once and supports deposits, withdrawals and cross-chain messages between them S13.

FIGURE 1

Overledger in one picture

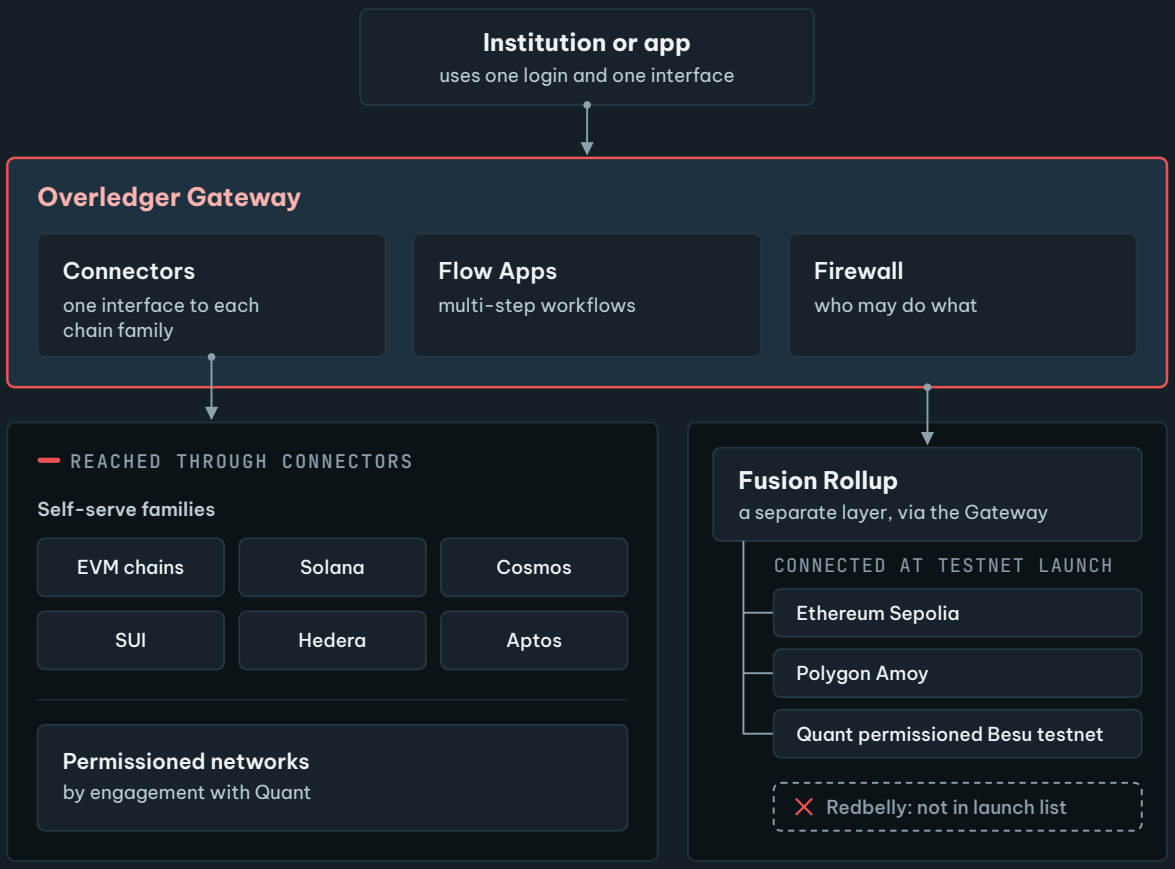

The Gateway, Connectors and Flow Apps are the switchboard S12 S13. The Fusion Rollup is a separate layer, reached through the Gateway S13, whose deposits, withdrawals and cross-chain messages run with the networks connected to it S13, and Redbelly is not among the networks documented at testnet launch S6.

● ANALYSIS

In plain terms, the Gateway and Connectors are a switchboard: one login and one interface to talk to many chains S13. The Fusion Rollup is different. It is a separate EVM-compatible layer: tokens deposited from the chains connected to it appear as balances on the rollup and can be withdrawn back to those chains S13. The rollup connects to only a subset of the networks the Gateway reaches S13, so a chain can be reachable through the switchboard without being connected to the Fusion Rollup.

CONFIRMED

Multi-step workflows such as signing or deploying a contract run as Flow Apps S12. Signing can be done with the user's own keys S14, and neither the calling Flow App nor the Gateway ever sees them S14.

03 OVERLEDGER

How chains connect to Overledger today

CONFIRMED

There are two routes. The self-serve route covers six chain families, including EVM, where an account can register a node and use the network without talking to Quant's account team S3. The self-serve EVM family is described as covering every EVM-compatible chain S3, but self-serve Connectors are for public, permissionless chain families S3, and permissioned EVM networks such as permissioned Hyperledger Besu are on the engagement route S3. The managed engagement route is for private or consortium networks, and for chain families Quant does not support yet S13.

FIGURE 2

Two ways a chain reaches Overledger

Self-serve

1. **Chain family is**
   `EVM` `Solana` `Cosmos` `SUI` `Hedera` `Aptos`
2. **Register a node**
   one API call or one form
3. **Public node**
   approved provider, API key in the URL, in a shared pool
   `alchemy.com infura.io quiknode.pro chainstack.com getblock.io blockdaemon.com ankr.com`

   Private node
   any HTTPS address, only you can use it
4. **Health check**
5. **Reachable through the Gateway**

THE SELF-SERVE TEST

- Nodes answer over HTTPS
- Nothing needed beyond an API key
- It does not matter which node you use

Managed engagement

1. **Permissioned, consortium or operator-gated networks**
2. **Project engagement with Quant**
3. **Connector set up with the network's own configuration**

BRAND-NEW CHAIN FAMILY

Health and chain identity checker
`about 2 days`

Each app that uses it
`about 1 day per app`

Self-serve covers public permissionless networks in six chain families and needs no talk with Quant's account team: one API call or form registers a node and, for a new network, the network itself `S3`. Networks where node identity matters, and new chain families, go through an engagement `S3` `S13`.

CONFIRMED

A chain family qualifies for self-serve when its nodes offer an interface over HTTPS, need nothing beyond an API key, and it does not matter which node a client uses S3. Networks where node identity matters, such as permissioned consortium chains and operator-gated public chains, are not self-serve today S3.

CONFIRMED

For public permissionless networks, a chain that is not listed yet but belongs to one of the six self-serve families is added with the same registration call that adds a node S3. The first registration creates the network, and it then becomes available to other Overledger users S3.

CONFIRMED

Each node is registered as public or private. A public node must come from an approved provider and joins the shared pool for that network S3, while a private node can be at any address but is scoped to the account that added it S3. The approved providers are Alchemy, Infura, QuickNode, Chainstack, GetBlock, Blockdaemon and Ankr S3, and a public node URL must carry the provider's API key S3. A private node can be any reachable HTTPS address S3. Every node must pass a health check before it is used S3.

CONFIRMED

When a brand-new chain family is needed, the documented effort is about 2 days for a health and chain identity checker, plus about 1 day for each app that needs to use it S3.

04 REDBELLY

The Redbelly facts that matter here

CONFIRMED

Redbelly is a layer 1 blockchain built for real world asset tokenisation S15. It is compatible with the Ethereum Virtual Machine and runs smart contracts written for it S2. Mainnet is chain ID 151 with a public RPC address S16, and Redbelly lists Ankr as a third-party public RPC provider for mainnet S16. Testnet is chain ID 153 S16.

● TESTED


On 15 October 2026 the official mainnet RPC and the Ankr RPC both answered with chain ID 151 (0x97) S4, and the official mainnet RPC returned block data S4. The method net_version, which gives a network ID to wallets and tools that predate eth_chainId S6, returned "the method net_version does not exist/is not available" S4.

● CONFIRMED

Writing to Redbelly is gated by identity. Every user must claim an access credential from an accredited issuer before their account can write to the network S5, and all participants must prove who they are before gaining access S17. Accredited issuers are listed in an on-chain registry S18. Businesses can also be verified as incorporated entities S17 S19, and even node operators need network access for their accounts S20.

FIGURE 3

Reading Redbelly is open, writing needs an access credential

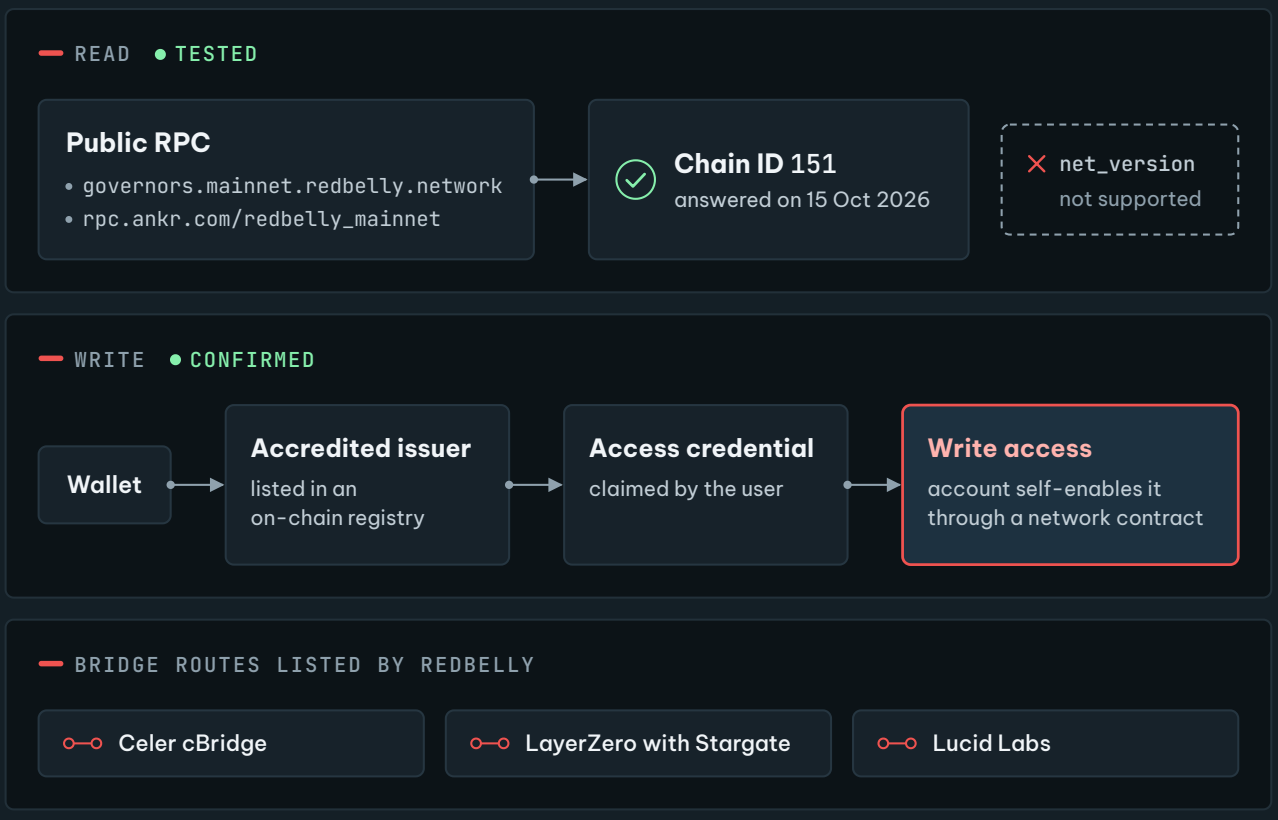

Every account must claim an access credential from an accredited issuer before it can write S5 S18. Reading through the public RPC needs no key, and both RPC addresses answered with chain ID 151 in our test S4 S16. Redbelly's developer portal lists three bridge routes S21 S22 S23.

CONFIRMED

Receptor is Redbelly's identity and verifiable credential protocol S24, built on the W3C verifiable credential data model S24. It supports two methods S25. Proof by Query uses a zero knowledge verifier smart contract S8 and publishes identity state to the chain S8. Selective Disclosure uses BBS+ signatures S26, reveals chosen details to a verifier, and can only be used off-chain S26. The documented identifiers of Averer, one authorised issuer, take the form did:receptor:redbelly S27, and apps can use eligibility checks to control who may call their contract functions S28.

CONFIRMED

Tokeniser runs on Redbelly S9 and enforces eligibility, identity and target market rules at the point of transfer, every time S9. Before any trade proceeds, identity, eligibility and limits are checked S29; transfers are recorded on the issuer's register in real time S30; and pledged units stay locked until a loan is repaid S31. Redbelly settles a transaction in a single round S9.

CONFIRMED

Redbelly already has token bridges. Its developer portal lists three routes: Celer cBridge S21, LayerZero with Stargate S22 and Lucid Labs S23. Celer launched with a pegged bridge method S32, and its RBNT route goes out from Redbelly but not back S21. Redbelly announced Wrapped RBNT on Ethereum with the contract 0xb45f...bf13 S33, which the portal lists under Lucid Labs S23. The portal lists a different Ethereum contract for the Celer route S21.

CONFIRMED

Community research for TASK-08 found LayerZero live on Redbelly mainnet S34 S35. A second TASK-08 entry found that, when it was written, no major interoperability protocol had deployed core messaging infrastructure to Redbelly testnet S35, and the selected entry built a lock-and-mint testnet bridge S34. The TASK-16 playbook says the bridges it calls official, Reddex and Lucid, then supported only bridging USDC and USDT from BNB Chain S36.


05 THE ANSWER

Can Redbelly connect now, and what is missing?

A connection can mean three different things. Each has a different answer.

FIGURE 4

Three meanings of 'connect', three answers

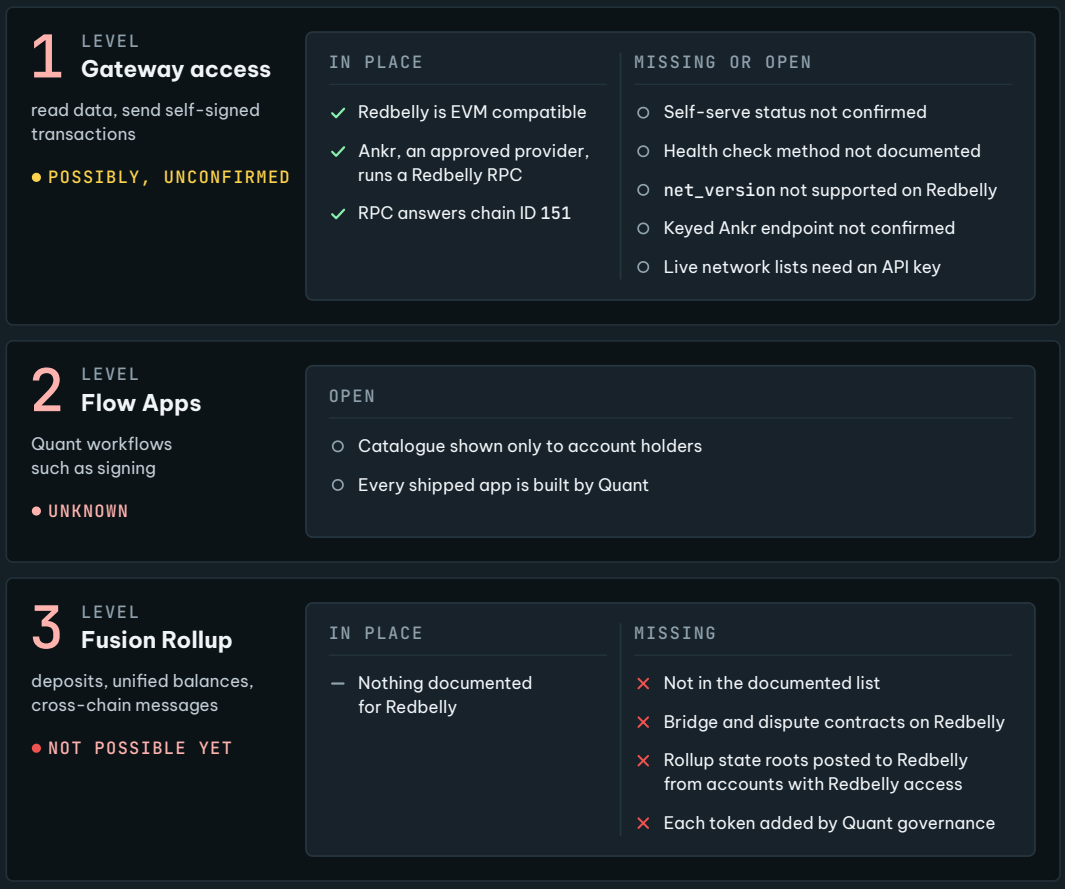

Level 1 rests on Redbelly's EVM compatibility and Overledger's self-serve EVM route S2 S3, with open points: whether self-serve applies to a network where writing needs a credential, the health check, a keyed provider endpoint and the live lists S3 S4 S7 S13. Level 2 cannot be checked from public sources, because the app catalogue is shown only to account holders S14. Level 3 is not possible yet as far as public sources show S5 S6 S37.

● ANALYSIS **Level 1: reaching Redbelly through the Overledger Gateway. Possibly, unconfirmed.**

Redbelly is EVM compatible S2, and Overledger's self-serve EVM family is described as covering EVM-compatible chains S3. An unlisted network in a self-serve family can be added by the first node registration S3. At the RPC level Redbelly appears to fit the self-serve tests S3: its RPC works over HTTPS and answered without a key, two different endpoints returned the same chain S4, and its write rule is attached to accounts S5, not to the node a client uses. Ankr, an approved provider S3, runs a Redbelly mainnet endpoint S16, and the official RPC could be added as a private node S3.

ANALYSIS

If it works, this level would give an institution one interface to read Redbelly data and send transactions it has signed itself. After its own access checks, the Gateway forwards the payload to a Redbelly node and passes back the native response unchanged S3, so Redbelly's own rules still apply. A transaction sent this way only succeeds if the sending account has Redbelly write access S5.

UNKNOWN

Four points are open. First, how Overledger would classify Redbelly. Self-serve is written for public, permissionless networks S3, Overledger's own glossary calls a network where anyone can read but only allowlisted parties can write "public permissioned" S13, and permissioned EVM networks are on the engagement route S3. The same docs send networks that need any other identity-bound configuration, and operator-gated public chains, to the engagement route S3, and Redbelly selects its node operators by application S20. Writing to Redbelly needs an access credential S5, so Redbelly could be treated as an engagement network; the docs do not say. Second, the docs say only that the health check uses the chain's standard validation S3 and that a checker does a chain identifier lookup S3, not which call the EVM check uses. If it relies on net_version, Redbelly's answer S4 could fail it. Third, a public node URL must carry a provider API key S3, and we did not confirm that Ankr's keyed service covers Redbelly. Fourth, Overledger's live network list S3 and the Fusion Rollup's list S38 both answered "Missing authorization header" without an API key S7, so we could not see whether Redbelly is already listed.

ANALYSIS **Level 2: Overledger Flow Apps on Redbelly. Unknown.**

Flow Apps are multi-step workflows run through the Gateway S12, and customers and partners can also host their own S13. The catalogue is not listed in the public docs; only account holders can see which apps are available to them S14, and every shipped app is built by Quant S14, so whether a given app accepts a self-serve EVM network such as Redbelly cannot be checked from public sources. The docs give an effort of about a day per app only for adding a brand-new chain family S3; they give no figure for a new network inside a family Overledger already supports.

CONFIRMED **Level 3: joining the Fusion Rollup.**

The networks documented as connected at testnet launch are Ethereum Sepolia, Polygon Amoy and Quant's permissioned Besu testnet S6. Each connected chain carries the rollup's bridge and dispute contracts S6 and receives the rollup's state roots S6. Token entries on the bridge are controlled by Quant's governance signers S37.

ANALYSIS **Not possible yet, as far as public sources show.**

Redbelly is not in the documented list, the live list could not be read without an API key S7, and the documentation we read describes no self-serve way to add a chain to the Fusion Rollup. Joining would also have a Redbelly side: every account that writes needs an access credential S5, so the accounts that deploy the rollup's contracts and post its state roots would each need Redbelly network access. No such work has been announced S1.


06 THE ANSWER

The technical work a connection would need

Written for a non engineer. Steps marked Level 1 are small. Steps marked Level 3 depend on Quant, because Redbelly is not among the documented Fusion Rollup networks S6 and bridge tokens are added by Quant's governance S37; the accounts involved would also need Redbelly access S5. No such work has been announced S1.

FIGURE 5

The work, step by step

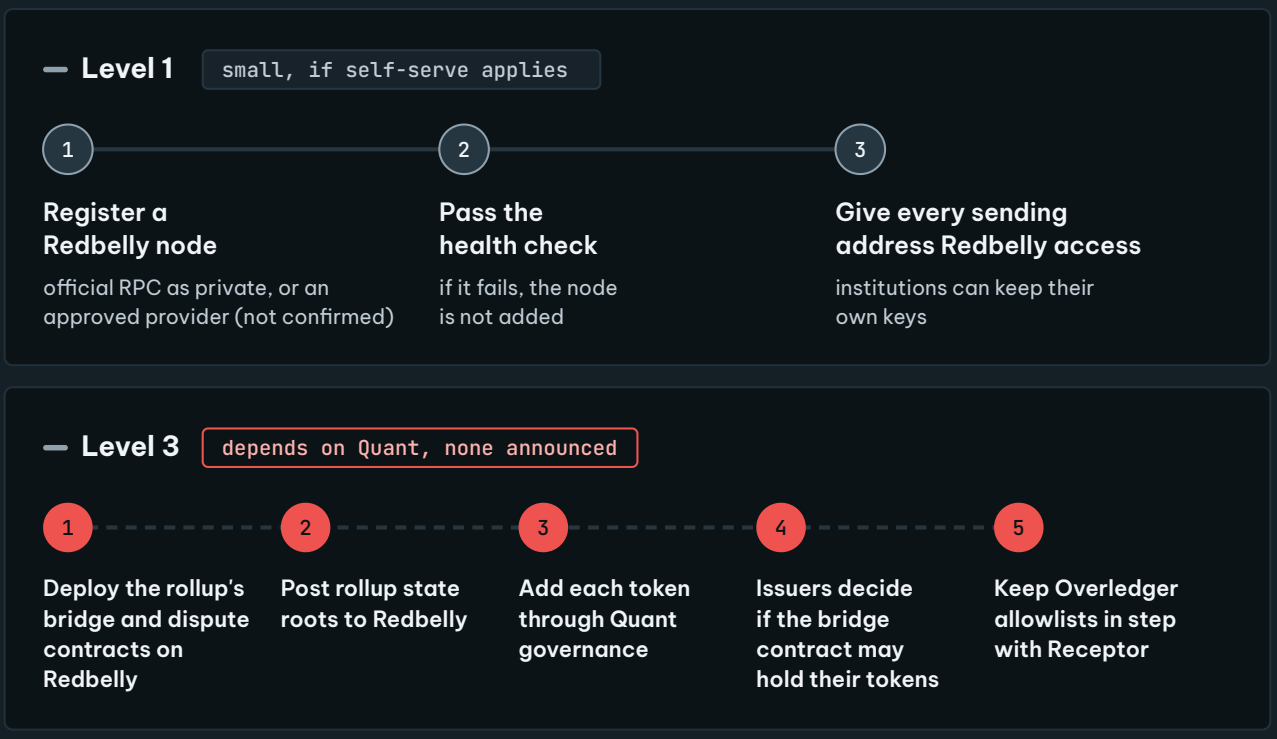

Level 1 would use the self-serve route, with no account-team conversation, only if Overledger treats Redbelly as a self-serve network, which its docs do not confirm, and the node passes the health check S3 S5. Level 3 depends on Quant, and no such work has been announced S1 S6 S9 S37.

ANALYSIS

1 LEVEL 1, STEP 1

Someone with an Overledger account registers a Redbelly node: the official RPC as a private node [S3] or, if an approved provider's keyed service covers Redbelly (not confirmed), that provider's endpoint as a public node [S3]. The first registration also adds the network [S3]. This is one form or one API call [S3].

2 LEVEL 1, STEP 2

The node has to pass Overledger's health check [S3]. If the check fails, the node is not added, and the docs do not say what would happen next. For scale, a checker for a brand-new chain family is documented at about 2 days [S3].

3 LEVEL 1, STEP 3

Every address an institution sends from needs Redbelly write access, which its user enables after claiming an access credential from an accredited issuer [S5]. The organisation can also be verified as a business [S19]. They sign with their own keys and send the signed transaction, which the Gateway forwards unchanged [S3].

1 LEVEL 3, STEP 1

The rollup's standard bridge and dispute contracts are deployed on Redbelly [S6], from accounts that hold Redbelly access [S5]. These are the contracts that hold tokens sent to the rollup and let a challenger dispute its state during the dispute window [S6].

2 LEVEL 3, STEP 2

The rollup's services start posting rollup state roots, short fingerprints of the rollup's balances, to Redbelly for settlement [S6].

3 LEVEL 3, STEP 3

Each token that should move is added to the bridge token list by Quant's governance [S37].

4 LEVEL 3, STEP 4

Issuers decide whether their asset contracts may hold or release tokens to the bridge contract, because Tokeniser checks eligibility on every transfer [S9].

5 LEVEL 3, STEP 5

Someone would have to keep Overledger's own allowlists [S37] in step with Receptor credentials [S5], because neither system's documentation describes a link to the other.

ANALYSIS

Registering a node is a technical action any Overledger account can take S3. It would not by itself mean any agreement between Redbelly and Quant.

07 INSTITUTIONS

What a connection could offer institutions

ANALYSIS

- One interface. An institution that already reaches other chains through Overledger S12 could read Redbelly and send its own signed transactions through the same Gateway and firewall checks S13, once a Redbelly node is registered S3. If an approved provider's public nodes were registered for Redbelly (not confirmed), it would not need to run its own Redbelly RPC or failover S3 S12; with only a private node, each institution would add and run its own S3.
- Rules stay on Redbelly. At Level 1 the Gateway passes each payload to a Redbelly node and passes back the native response unchanged S3, so Redbelly's access credential still applies to every sending account S5, and Tokeniser's eligibility checks still apply to every transfer of a Tokeniser asset S9.
- Key control. Institutions can keep and use their own keys in Overledger's model S14.
- Unified balances, only at Level 3. The Fusion Rollup can merge copies of the same token from several chains into one balance S6. Redbelly is not among the documented connected networks S6, so as far as public sources show this is not available to Redbelly.
- No known route to tokenised deposit networks yet. The Clearing House network will use Quant's technology for its interoperability layer S10, but the announcements do not say which chains it will use. Whether it will ever reach Redbelly, or any public chain, is unknown S10.

ANALYSIS

Limits to weigh. Redbelly's developer portal already lists bridge routes through Celer, LayerZero and Lucid Labs S21 S22 S23, and Tokeniser points to EVM compatibility as its link to other networks S9. Overledger would add an institutional access layer rather than a first route out. Level 3 would also put Quant's governance signers in the path, since they control which tokens may cross the Fusion bridge S37, and withdrawals from the rollup wait for a dispute window S6, unlike Redbelly's single round settlement S9.

08 COMPLIANCE


Receptor credentials and Tokeniser assets across chains

ANALYSIS **How Receptor credentials would behave**

A Receptor credential is a W3C verifiable credential held by the user S24. Its two methods travel differently. A Selective Disclosure proof is checked off-chain S26, so in principle any verifier could check it, including an externally hosted Overledger Flow App S13; the app catalogue is not public S14, so whether such an app exists is unknown. A Proof by Query check runs in a verifier contract against identity state published on Redbelly S8, so another chain cannot run the same check unless that setup is rebuilt there. The access credential unlocks write access on Redbelly, through a Redbelly network contract S5; no source shows another chain or Overledger reading it.

FIGURE 6

Which Receptor checks could work off Redbelly

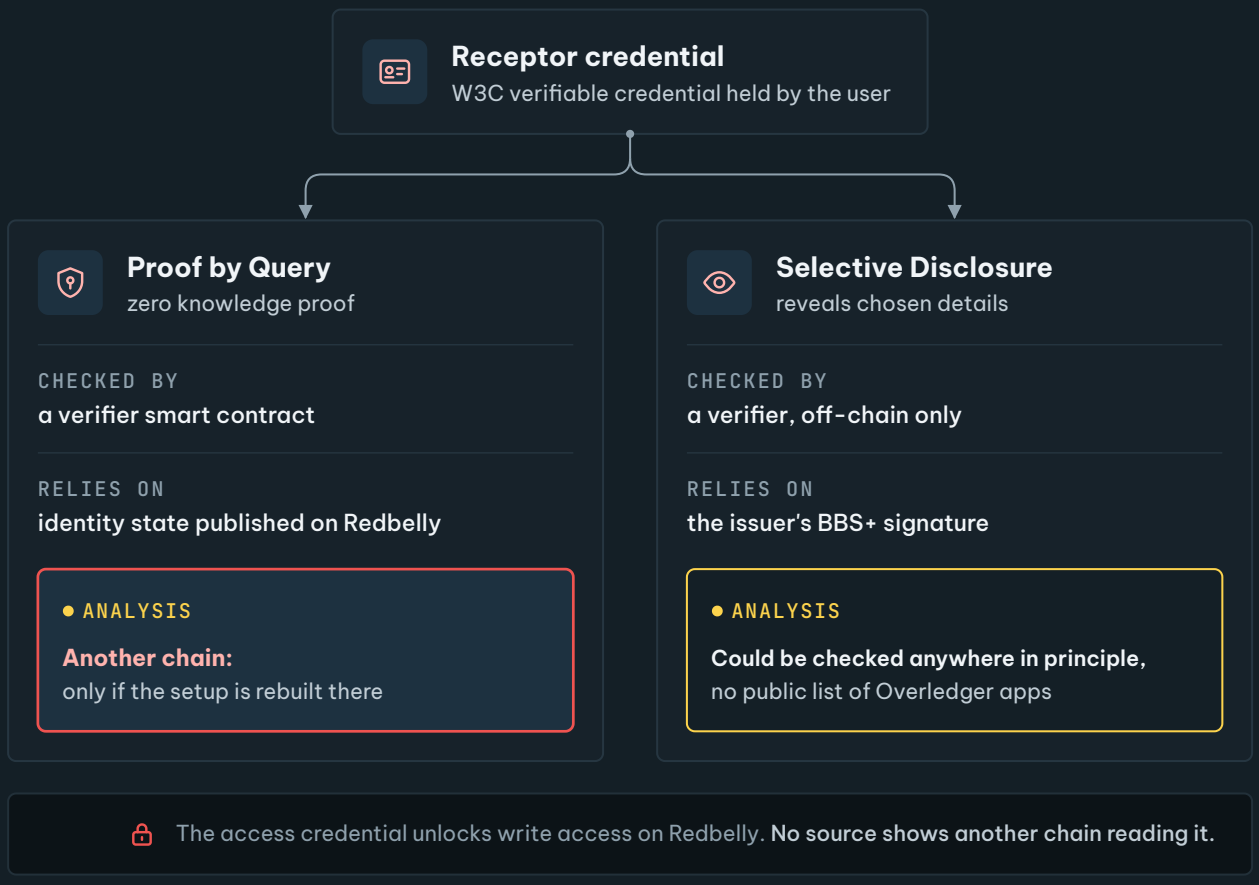


Receptor has two methods S25. Proof by Query runs in a verifier contract against identity state on Redbelly S8. Selective Disclosure uses BBS+ signatures and is checked off-chain S26, so in principle it could be checked anywhere, including by an externally hosted Overledger app S13, but the app catalogue is not public, so whether one does this is unknown S14. The access credential unlocks write access on Redbelly, and no source shows another chain reading it S5.

ANALYSIS How Tokeniser assets would behave

Tokeniser enforces a Tokeniser asset's rules on Redbelly at every transfer S9 S29. A lock-and-mint bridge, the pattern of the TASK-08 testnet bridge S34, locks the asset on one chain and issues a copy on the other. In our reading, the copy then obeys the rules of the contracts and policies on the other chain. Tokeniser says its reach to other networks can be permissioned as a mandate allows S9, but publishes no detail of how its transfer checks would apply to such a copy. Overledger's firewall decides access from its own list of users and their addresses S37, not from Receptor credentials.

FIGURE 7

Where compliance could break

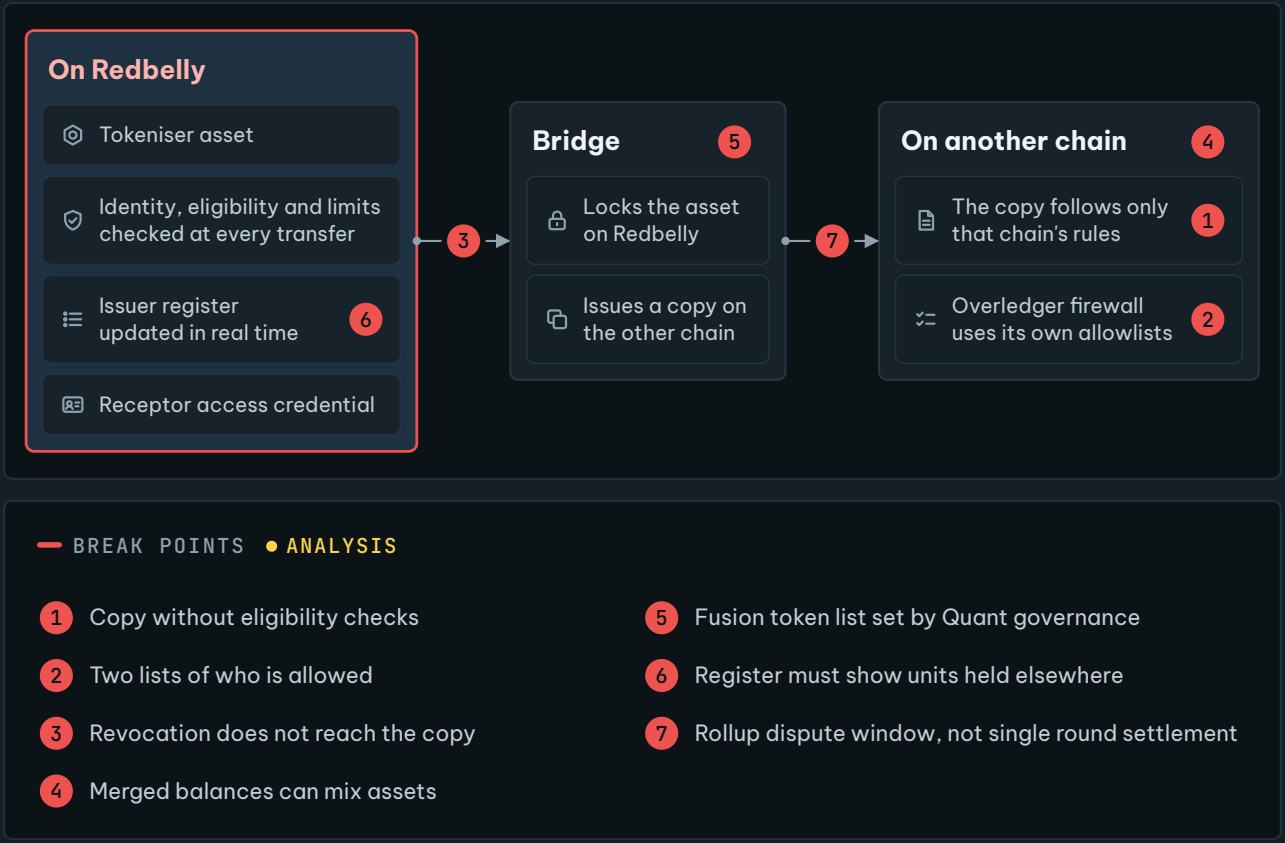

Tokeniser enforces its rules on Redbelly at every transfer S9 S29. A bridge, such as the TASK-08 lock-and-mint pattern S34 or the Fusion Rollup's bridge contracts S6, locks the asset and issues a copy elsewhere; in our analysis the copy then follows the rules on that chain. Break points 5 and 7 apply to the Fusion Rollup S6 S37. The numbers match the list below.

ANALYSIS

Where compliance could break

1. A copy on another chain without eligibility checks could be passed to someone who never proved eligibility on Redbelly S9.
2. Two lists of who is allowed: Receptor credentials on Redbelly S5 and Overledger's allowlists S37. If they drift apart, one system allows what the other refuses.
3. If a holder's credential stopped being valid on Redbelly S5, nothing documented would pass that change to a copy held elsewhere or to Overledger's allowlists S37.
4. Merged balances S6 could mix a restricted asset with an unrestricted copy of the same asset.
5. The list of tokens that may cross the Fusion bridge is set by Quant's governance S37, not by the issuer.
6. Tokeniser records every transfer on the issuer's register in real time S30, and already keeps units pledged for a loan locked until it is repaid S31. Units locked in a bridge contract, or held on another chain, would need similar clear treatment in that register.
7. Settlement timing changes: rollup withdrawals wait for a dispute window S6, while Redbelly is final in one round S9.

ANALYSIS

The lowest risk pattern is for regulated assets to stay on Redbelly and for Overledger to carry only instructions and data at Level 1, so that every transfer still meets Redbelly's checks S3 S5 S9.

09 OPEN QUESTIONS

Not possible yet, and unknown

QUESTION	ANSWER TODAY
Joining the Fusion Rollup	NOT POSSIBLE YET As far as public sources show S6 S7
Receptor credentials recognised by Overledger's firewall	NOT POSSIBLE YET No documented link S5 S37

QUESTION	ANSWER TODAY
Tokeniser rules enforced on copies held on other chains	UNKNOWN Tokeniser says other networks can be reached with permissioned access but publishes no detail for copies S9 S34
Whether Overledger treats Redbelly as self-serve or engagement	UNKNOWN Writing to Redbelly needs a credential S3 S5 S13
Whether Redbelly passes Overledger's EVM health check	UNKNOWN Needs a test with an account S3 S4
Whether Redbelly is already in Overledger's live network list	UNKNOWN The lists need an API key S7
Whether Flow Apps work with Redbelly	UNKNOWN Catalogue visible only to account holders S14
Which chains The Clearing House network will reach	UNKNOWN S10
Redbelly's position on bridging	UNKNOWN No official position published S1
Any plan by Redbelly or Quant to connect	NONE ANNOUNCED S1

10 METHOD

How this report was made and how to check it

HOW IT WAS DONE

Every source page was saved as a text snapshot on 15 October 2026, with its address, capture time and SHA-256 hash in evidence/manifest.json. The snapshots, the manifest and our test logs are published with the website under /evidence and in the project repository, https://github.com/hildecorp/overledger. Each factual claim cites a fact, and each fact quotes its source word for word. The script scripts/check.py in that repository confirms that every quote is in its snapshot, that every Confirmed paragraph cites a source, and that the text has no partnership wording, no investment language, no dashes and no emoji. We ran the RPC and API calls ourselves, and kept the full output in evidence/tests. We did not create an Overledger account, so nothing here was tested inside Overledger.

11 SHARE IT

Community summary

Plain language, ready for the DAO to share. Copy the paragraphs, a single post, or the whole thread.

A few paragraphs

Could Redbelly connect to Quant's Overledger? We looked only at public documents. Redbelly and Quant have not announced any partnership or talks, and this research does not suggest any.

Overledger is Quant's platform for reaching many blockchains through one interface. Its self-serve route covers EVM chains, and Redbelly is EVM compatible, so a basic connection, reading Redbelly and sending transactions the sender has signed, looks possible. It is untested, and Overledger describes self-serve as for public permissionless networks, while writing to Redbelly needs a credential. Every Redbelly rule would still apply.

Overledger's Fusion Rollup, its shared layer for moving tokens between chains, does not list Redbelly among its connected networks, and the docs describe no self-serve way to add a chain. As far as public sources show, that part is not possible today.

Receptor credentials and Tokeniser's eligibility rules are enforced on Redbelly. In our reading of the docs, they do not follow a token to another chain by themselves, and no public source shows how they would. Keeping regulated assets on Redbelly avoids that gap.

Open questions: whether Overledger would treat Redbelly as self-serve, whether Redbelly passes its network check, which chains The Clearing House network will reach, and Redbelly's own position on bridging. Full report with every source: https://overledger.vercel.app

As an X thread, 6 posts

Post 1 of 6 — 239 / 280

1/ The Clearing House picked Quant to power its tokenised deposit network, so people are asking: could Redbelly connect to Quant's Overledger? We read the public docs. No partnership or talks between Redbelly and Quant have been announced.

Post 2 of 6 — 232 / 280

2/ Overledger reaches many chains through one interface. Its self-serve route covers EVM chains, and Redbelly is EVM compatible. A basic connection for reading data and sending signed transactions looks possible, but it is untested.

Post 3 of 6 — 187 / 280

3/ Redbelly's rules still apply on that route. Every account that sends a transaction needs a Redbelly access credential, and Tokeniser checks eligibility on every transfer of its assets.

Post 4 of 6 — 206 / 280

4/ Overledger's Fusion Rollup, which moves tokens between connected chains, does not list Redbelly, and the docs describe no self-serve way to add a chain. As far as public sources show, not possible today.

Post 5 of 6 — 228 / 280

5/ Our reading of the docs: Receptor credentials and Tokeniser rules do not travel with a token to another chain by themselves, so a copy elsewhere follows that chain's rules. Keeping regulated assets on Redbelly avoids the gap.

Post 6 of 6 250 / 280

6/ Still unknown: whether Overledger would treat Redbelly as self-serve, since writing needs a credential, which chains The Clearing House network will reach, and Redbelly's position on bridging. Full report with every source: https://overledger.vercel.app

SOURCES

Source list

Each source with the exact words this report relies on. Saved copies of every page, with SHA-256 hashes, are at overledger.vercel.app/evidence and in the project repository, github.com/hildecorp/overledger.

S1 Redbelly DAO Task Board: TASK-29 brief: Quant Overledger and Redbelly Interoperability Research
`https://taskboard.redbellydao.network/tasks/TASK-29`

- “This is feasibility research only. Redbelly and Quant have no announced partnership or talks”
- “Redbelly has not published an official position on bridging”

S2 Vine, Redbelly Network developer portal: EVM compatibility and version details
`https://vine.redbelly.network/consensus/evm-compatibility/`

- “Redbelly is compatible with the Ethereum Virtual Machine (EVM) and can execute smart contracts written for the EVM.”

S3 Quant, Overledger documentation: Chapter 5: Connectors
`https://docs.overledger.dev/docs/connectors`

- “Six DLT families are available for self-serve onboarding today, you can register a node and call the network without an account-team conversation”
- “Covers every EVM-compatible chain”
- “A DLT family is considered eligible for self-serve if (a) its nodes expose RPC or REST over HTTPS, (b) the RPC requires no security factor beyond an API key, and (c) node identity does not matter to other tenants (so a pool of equivalent nodes can be load-balanced safely).”
- “New network within a supported DLT family, the network is not yet listed by Overledger, but its DLT family is one Overledger already supports for self-serve (EVM, Solana, Cosmos, SUI, Hedera, Aptos). The first POST /nodes call registers both the network and your node for it. This new network will then be available for Overledger users.”
- “If public is selected then the user can only add nodes from whitelisted providers. If private is selected then the user can add nodes from any domain.”
- “alchemy.com, infura.io, quiknode.pro, chainstack.com, getblock.io, blockdaemon.com, ankr.com”
- “Required, embedded in the URL path (the Gateway forwards the URL as-is), not a header.”
- “Any reachable HTTPS URL, self-hosted, custom-provider, on your own infrastructure, anywhere.”
- “The Gateway runs a health check using the DLT's standard validation from section 5.1 and, on success, adds the node to the network's load-balancing pool.”
- “For networks where node identity matters, typically permissioned DLTs used by regulated consortia and operator-gated public chains, Overledger does not self-serve currently.”
- “Implement a DLT checker (health validation + chain identifer lookup) ~2 days”
- “Add per-DLT handling in any apps that need to consume it ~1 day per app”
- “Forwards the payload, returns the native response unchanged.”
- “Self-serve Connectors for public, permissionless DLT families.”
- “For networks where it does not matter which node a client connects to, i.e. public permissionless networks”
- “Hyperledger Besu (permissioned) Permissioned EVM Used in regulated EVM deployments.”
- “Run GET /networks to retrieve the live list.”
- “For networks where it does not matter which node a client connects to, i.e. public permissionless networks, Quant Connect lets you register a managed-provider node URL via a single UI form and Overledger lets you register a managed-provider node URL via a single API call. The network then becomes immediately reachable through the Overledger Gateway.”
- “Any tenant with access to the network, the node joins the shared load-balancing pool for that network.”
- “the node is scoped to your user identity”
- “DLTs that need consortium membership, MSP enrolment, channel agreement, notary trust, privacy-group setup, or any other identity-bound configuration are onboarded through the engagement path”

S4 Test run for this report: JSON-RPC calls to Redbelly mainnet and testnet endpoints, 15 October 2026
https://overledger.vercel.app/evidence/tests/rpc-check.txt

- “https://governors.mainnet.redbelly.network eth_chainId -> {"jsonrpc":"2.0","id":1,"result":"0x97"}”
- “https://rpc.ankr.com/redbelly_mainnet eth_chainId -> {"id":1,"jsonrpc":"2.0","result":"0x97"}”
- “https://governors.mainnet.redbelly.network net_version -> {"jsonrpc":"2.0","id":1,"error":{"code":-32601,"message":"the method net_version does not exist/is not available"}}”
- “eth_getBlockByNumber -> {"jsonrpc":"2.0","id":1,"result":{”

S5 Vine, Redbelly Network developer portal: User access
https://vine.redbelly.network/identity/user-access/

- “Before being granted access to Redbelly Network, each user must claim their access credential from a network accredited issuer before they self enable their account with write access to the network through a specific network smart contract.”

S6 Quant, Overledger documentation: Chapter 8: Fusion Rollup
https://docs.overledger.dev/docs/fusion-rollup

- “Connected DLT networks on testnet launch are: Ethereum Sepolia, Polygon Amoy, Quant's permissioned Besu testnet. The full live list comes from GET /networks/fusion.”
- “The bridge and dispute contracts deployed on each connected DLT network. Standard OP Stack contracts, one deployment per chain.”
- “Compute Fusion Rollup state roots and post them to all connected DLT networks for settlement”
- “Because Fusion is an optimistic rollup, a withdrawal is not immediately final, there is a dispute window during which a challenger can prove the Fusion Rollup state root invalid.”
- “Fusion can map several token contracts to a single rollup-side ERC-20, so deposits from any of those source chains land in one unified balance.”
- “Network ID. Exposed for wallets and tools that predate eth_chainId.”

S7 Test run for this report: Calls to the public Overledger server API without an account, 15 October 2026
https://overledger.vercel.app/evidence/tests/overledger-api-check.txt

- “GET https://fusion-rollup.quant.dev/networks/fusion -> HTTP 401 {"status":401,"error":"Missing authorization header.""
- “GET https://fusion-rollup.quant.dev/networks -> HTTP 401 {"status":401,"error":"Missing authorization header.""

S8 Redbelly Network technical documentation: Proof by Query
https://docs.redbelly.network/pages/methods/proof-by-query/

- “a zero knowledge proof based verifier smart contract”
- “State verification and transition, with subsequent publication to the blockchain.”

S9 Tokeniser: Technology
https://tokeniser.com/technology

- “Eligibility, identity and your target market determination are enforced at the point of transfer, every time.”
- “Deterministic finality settles a transaction in a single round, final the moment it completes.”
- “full EVM compatibility connects you to more than 150 networks out of the box”
- “Underneath it runs Redbelly Network”
- “Full EVM compatibility gives connection to more than 150 networks out of the box, with permissioned or permissionless access as your mandate allows.”

S10 The Clearing House: The Clearing House Partners with Quant to Advance the On-Chain Money Initiative (24 September 2026)
https://www.theclearinghouse.org/payment-systems/Articles/2026/09/The-Clearing-House-Partners-with-Quant-to-Advance-the--On-Chain-Money-Initiative

- “The Clearing House announced the selection of Quant, a leading provider of programmable money infrastructure, to power its On-Chain Money Initiative, a new interoperable payments network that will enable financial institutions of all sizes to clear and settle tokenized deposit transactions.”
- “Quant's technology will enable the network's interoperability, orchestration, and transaction-management layer that coordinates the clearing and settlement of tokenized deposit transactions”
- “providing connectivity to existing fiat payment systems that financial institutions and their customers use every day, including the RTP® and CHIPS® networks”
- “The network is expected to become available to participating institutions in the first half of 2027, with additional details on participation and use cases to be announced as development progresses.”

S11 Quant: Press release: The Clearing House Partners with Quant to Advance the On-Chain Money Initiative
https://quant.network/press-releases/the-clearing-house-partners-with-quant-to-advance-the-on-chain-money-initiative/

- "The Clearing House will use Quant's technology to bring on-chain capabilities to its tokenised deposit clearing and settlement network for financial institutions."

S12 Quant, Overledger documentation: Start Here
https://docs.overledger.dev/docs/start-here

- "Overledger is Quant's multi-DLT platform for building applications that span more than one blockchain"
- "Flow Applications turn multi-step business logic (signing, smart-contract deployment, compliance check, payment"
- "You don't manage RPC providers, node failover, or chain-specific clients."

S13 Quant, Overledger documentation: Chapter 1: Overview
https://docs.overledger.dev/docs/overview

- "A Gateway that authenticates clients, routes requests, and orchestrates higher-level workflows."
- "A set of Connectors that abstract individual DLT RPC protocols behind a common interface."
- "A Multi-ledger rollup (the Fusion Rollup) that anchors to multiple blockchains simultaneously, providing one EVM-compatible execution environment with deposits, withdrawals, and cross-chain messaging across every connected L1."
- "Customers and partners can host their own Flow Apps externally, stand up an HTTPS service that implements the Flow App contract, register its URL with the Gateway, and your bespoke regulated workflow becomes a first-class app in Overledger."
- "Managed engagement: you work with Quant's team to onboard a private / consortium network (e.g. Corda, Canton, Fabric) or to add a brand-new DLT family Quant doesn't yet support."
- "A network with controlled write access; "public permissioned" means anyone can read but only allowlisted parties can write."
- "The Rollup connects to a subset of these networks."
- "It applies to every public or permissioned DLT network that the Gateway reaches"
- "Single entry point. Authenticates, routes traffic, hosts Orchestration, fronts the Fusion Rollup."
- "There is one Connector per DLT family"

S14 Quant, Overledger documentation: Chapter 6: Flow Apps
https://docs.overledger.dev/docs/flow-apps

- "today every shipped app is internal"
- "The Flow App catalogue is intentionally not enumerated in these docs"
- "The calling Flow App and the Gateway routing the sub-flow never see private keys. Key material is always under your control."
- "You hold the keys (BYO signing, see chapter 7.2)."
- "Discover what's available for your account through one of two channels"

S15 Redbelly Network technical documentation: Home
https://docs.redbelly.network

- "The Redbelly Network is a layer 1 blockchain, built and optimised for real world asset tokenisation."

S16 Vine, Redbelly Network developer portal: Redbelly Network environments
https://vine.redbelly.network/environments/

- "Network name: Redbelly Network Mainnet RPC URL: https://governors.mainnet.redbelly.network Chain ID: 151"
- "Ankr https://rpc.ankr.com/redbelly_mainnet"
- "RPC URL: https://governors.testnet.redbelly.network Chain ID: 153"

S17 Vine, Redbelly Network developer portal: Identity and participation on the network
https://vine.redbelly.network/identity/

- "all network participants MUST prove they are who they say they are before gaining access"
- "business verification is also available on the network"

S18 Vine, Redbelly Network developer portal: Accredited issuers
https://vine.redbelly.network/identity/accredited-issuers/

- "All accredited issuers are listed in an on chain registry."

S19 Vine, Redbelly Network developer portal: Business verification
https://vine.redbelly.network/business-verification/

- "To be verified, businesses need to prove they are an incorporated entity to a network accredited issuer."

S20 Vine, Redbelly Network developer portal: Becoming a node operator
https://vine.redbelly.network/nodes/become-operator/

- “Node operators MUST have network access for 2 accounts and provide their public address when applying to run a node.”
- “Applicants will be selected based upon their previous experience, location and commitment to the Redbelly Project.”

S21 Vine, Redbelly Network developer portal: Bridged tokens: Celer cBridge
https://vine.redbelly.network/bridged-tokens/celer/

- “RBNT bridges out from Redbelly to Ethereum and BNB Chain, not back.”
- “Ethereum 0x063a1D5BFEAb213c9c12f47b704fccf81D60983e wRBNT Wrapped RBNT 18”

S22 Vine, Redbelly Network developer portal: Bridged tokens: LayerZero
https://vine.redbelly.network/bridged-tokens/layerzero/

- “Tokens on Redbelly Network that can be bridged to other chains via LayerZero, using Stargate, and vice versa.”

S23 Vine, Redbelly Network developer portal: Bridged tokens: Lucid Labs
https://vine.redbelly.network/bridged-tokens/lucidlabs/

- “Tokens on Redbelly Network that can be bridged to other chains via Lucid Labs, and vice versa. Powered by Polymer and LayerZero.”
- “Ethereum 0xb45fFB51984d626Ee758b336C61Cf20990c6bF13 WRBNT Wrapped RBNT 18”

S24 Redbelly Network technical documentation: Receptor overview
https://docs.redbelly.network/pages/receptor/

- “Receptor is Redbelly's native digital identity and verifiable credential protocol.”
- “Receptor is built on the W3C verifiable credential data model, providing a standardised and interoperable foundation for identity verification and eligibility criteria assurance.”

S25 Vine, Redbelly Network developer portal: Eligibility
https://vine.redbelly.network/identity/eligibility/

- “Redbelly supports two distinct credential types, or methods, that can be used to perform eligibility criteria checks:”

S26 Redbelly Network technical documentation: Selective Disclosure
https://docs.redbelly.network/pages/methods/selective-disclosure/

- “As selective disclosure involves disclosing information to the Verifier, it can only be used off-chain.”
- “Selective Disclosure involves using credentials that implement BBS+ signatures.”

S27 Redbelly Network technical documentation: Eligibility SDK for Redbelly Network
https://docs.redbelly.network/pages/eligibility-sdk/eligibility-sdk/

- “Redbelly Mainnet did:receptor:redbelly:mainnet:31AAH8sSaGd6fpnG1TcB6yQ4UZnNeyHzTk5aM2P7rjv”

S28 Vine, Redbelly Network developer portal: Eligibility checks (smart contracts)
https://vine.redbelly.network/smart-contracts/eligibility-checks/

- “Eligibility checks can be used to control access to your dApp or smart contract's functions or when specific smart contract functions are called to help meet your compliance requirements.”

S29 Tokeniser: Automated compliance
https://tokeniser.com/product/superpowers/automated-compliance

- “Before any trade proceeds, the investor's identity, eligibility (including wholesale or sophisticated status where required) and your limits are verified automatically.”

S30 Tokeniser: Secondary transfer
https://tokeniser.com/product/superpowers/secondary-transfer

- “every transfer is recorded on your register in real time”

S31 Tokeniser: Collateral mobility
https://tokeniser.com/product/superpowers/collateral-mobility

- “Investors pledge units as security, and the units remain locked until the loan is repaid.”

S32 Celer Network blog: Celer Announces cBridge Support for Redbelly (1 August 2025)
https://blog.celer.network/2025/08/01/celer-announces-cbridge-support-for-redbelly/

- “Celer is supporting asset and token bridging initially via a pegged bridge method”

S33 Redbelly Network on X: Wrapped RBNT Token is now live on Ethereum Mainnet (14 February 2025)
https://x.com/RedbellyNetwork/status/1890340030197166112

- “Wrapped RBNT Token is now live on Ethereum Mainnet.”
- “0xb45ffb51984d626ee758b336c61cf20990c6bf13”

S34 Redbelly DAO Community Task Board: TASK-08 bridge integration guide (selected entry)
https://github.com/Redbelly-DAO-Community-Taskboard/TASK-08-bridge-integration-guide

- “Redbridge is a lock-and-mint bridge”
- “Yes, on Mainnet dedicated "Redbelly Mainnet" deployment”

S35 TASK-08 entry, public repository: Bridging Ethereum Sepolia to Redbelly Testnet: technical guide
https://github.com/tycayomide/redbelly-testnet-bridge/blob/main/TECHNICAL_GUIDE.md

- “as of this writing no major interoperability protocol has deployed core messaging infrastructure (endpoints, gateways, or guardian sets) to Redbelly Testnet specifically”
- “LayerZero went live on Redbelly Mainnet”

S36 Redbelly DAO Community Task Board: TASK-16 Cross-Chain Recovery Playbook (selected entry, PDF)
https://github.com/Redbelly-DAO-Community-Taskboard/TASK-16-cross-chain-recovery-playbook/blob/main/deliverable/Redbelly-task-16-revised.pdf

- “Because the official Redbelly bridges (Reddex and Lucid) currently only support bridging USDC and USDT from BNB Chain”

S37 Quant, Overledger documentation: Chapter 9: Overledger Firewall
https://docs.overledger.dev/docs/overledger-firewall

- “Overledger maintains the binding between each user and their authorised on-chain address(es) off-chain, so policies expressed against a user translate into on-chain address allowlists at the contracts that enforce them.”
- “Token allowlist entries are governance-controlled (Quant Safe signers), not per-deployer, they apply to all users of the bridge.”

S38 Quant, Overledger API reference: Overledger Server API reference
https://docs.overledger.dev/reference

- “List Fusion Rollup connected networks”