COMSATS University Islamabad (Lahore Campus)


MID TERM- Examination –FA22 2022

Course Title:	Web Technologies			Course Code:	CSC336	Credit Hours:	3(2,1)
Course	Muhammad Usman Akram, Shuja Akbar			Programme Name:	BCS.BSE		
Semester:	6 6	Batch:	SP20	Section	BSE-B	Date:	15-11-22
Time Allowed:	90 Minutes			Maximum Marks:		50	
Student's Name:	Mati-ul-Rehman			Reg. No.	SP20-BSE-042 /LHR		

Use provided space to answer the questions

Question 1 [15 marks]

Suppose you have an html page output shown in Figure 1. The HTML code is given below. Carefully analyze the html code and the output which its generating. The CSS properties are missing in the html code. Fill the missing properties. You are not allowed to add or remove any new selector, also you cannot add any inline CSS.

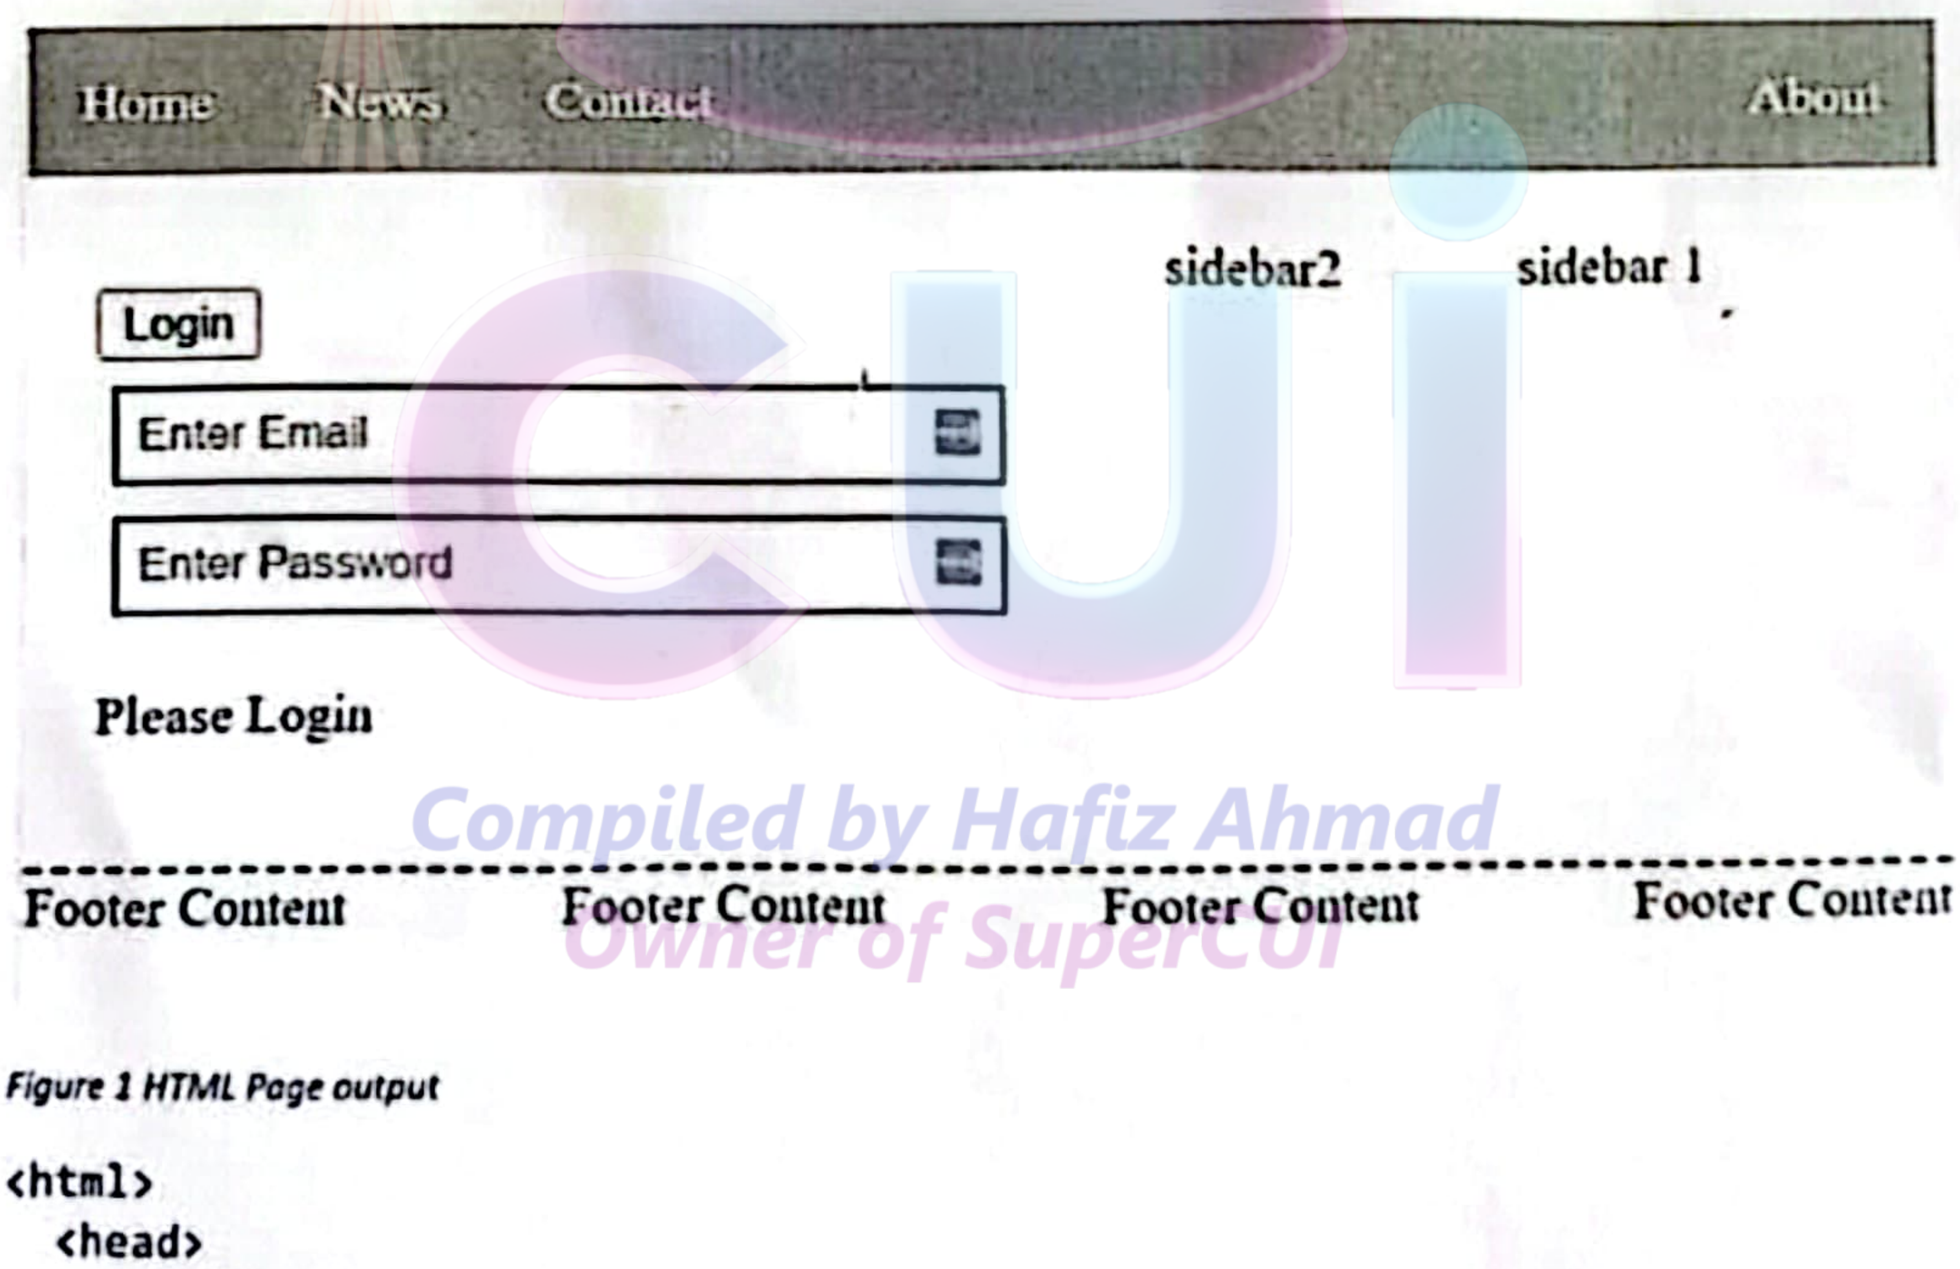

Compiled by Hafiz Ahmad
Owner of SuperCUI

Figure 1 HTML Page output

```
<html>
<head>
  <style>
    #menu {
    }

    #menu li {
    }
    #menu li.active {
```

```
}

#menu li a {

}
#content {

}
.sidebar {

}
input {

}
#loginContent {

}
#submitLoginInfo {

}
#footer {

}
</style>
</head>
<body>
<ul id="menu">
  <li><a href="#home">Home</a></li>
  <li><a href="#news">News</a></li>
  <li><a href="#contact">Contact</a></li>
  <li class="active"><a href="#about">About</a></li>
</ul>
<div id="content">
  <div class="sidebar">sidebar 1</div>
  <div class="sidebar">sidebar2</div>
  <div id="loginContent">
    <input type="text" id="email" placeholder="Enter Email" /> <br />
    <input type="password" id="password" placeholder="Enter Password" />
    <br />
    <button id="submitLoginInfo">Login</button>
    <p>Please Login</p>
  </div>
</div>
<div id="footer">
  <div>Footer Content</div>
  <div>Footer Content</div>
  <div>Footer Content</div>
  <div>Footer Content</div>
</div>
</body>
</html>
```

Compiled by Hafiz Ahmad
Owner of SuperCUI

Question 2 [5+5=10 Marks]

Consider the html page and its output from question 1. Suppose jQuery is already loaded. Attempt the following.

a) How can you bind the onclick event of the <button id="submitLoginInfo">Login</button> without using the onClick attribute of the button tag.

b) Write a function to check if email and password are provided and then submit the form to an API route http://localhost:2000/api/auth/login with post method and show an alert if the request is successfully made.

Question 3 [5 Marks]

You have a CSS written for a BOX as provided below. Create a button with value as "Change Color" Use JQUERY to change the background color of the BOX on clicking the button.

```
.box {
        background-color: #000;
        width: 100px;
        height: 100px;
        opacity: 0.8;
}
```

Question 4 [5 Marks]

Why Asynchronous Javascript is preferred over Synchronous JavaScript considering the performance of the webpage (Consider Page load Time). Explain with an example.

Question 5 [3x 5 = 15 Marks]

Explain $.ajax, $.get and $.post each with an example.

Or

Explain the usage of $ function with at least three different examples.

Compiled by Hafiz Ahmad
Owner of SuperCUI