RIFT
ONCHAIN INTELLIGENCE

See the signal. Follow the evidence.



Live Portaldot V3 finality monitoring and hash-based report investigation.

PRODUCTION → FINALITY → CHECKPOINT

Monitoring and report evidence for operators

NODE OPERATIONS & TOOLING

PORTALDOT HACKER HOUSE 2026 · 29 OCTOBER 2026

The finality pipeline

One latest-block number does not show which stage is waiting.



BEST

Latest imported head

GRANDPA

Finalized head

BEEFY

Checkpoint finalized

GRANDPA LAG = BEST − GRANDPA


BEEFY LAG = GRANDPA − BEEFY

RIFT puts lag, source freshness, thresholds, and session-local authors in one operator view.

Initial user hypothesis: Portaldot node and validator-program operators.

Live network signal

Portaldot V3 Substrate RPC · live capture from 29 October 2026

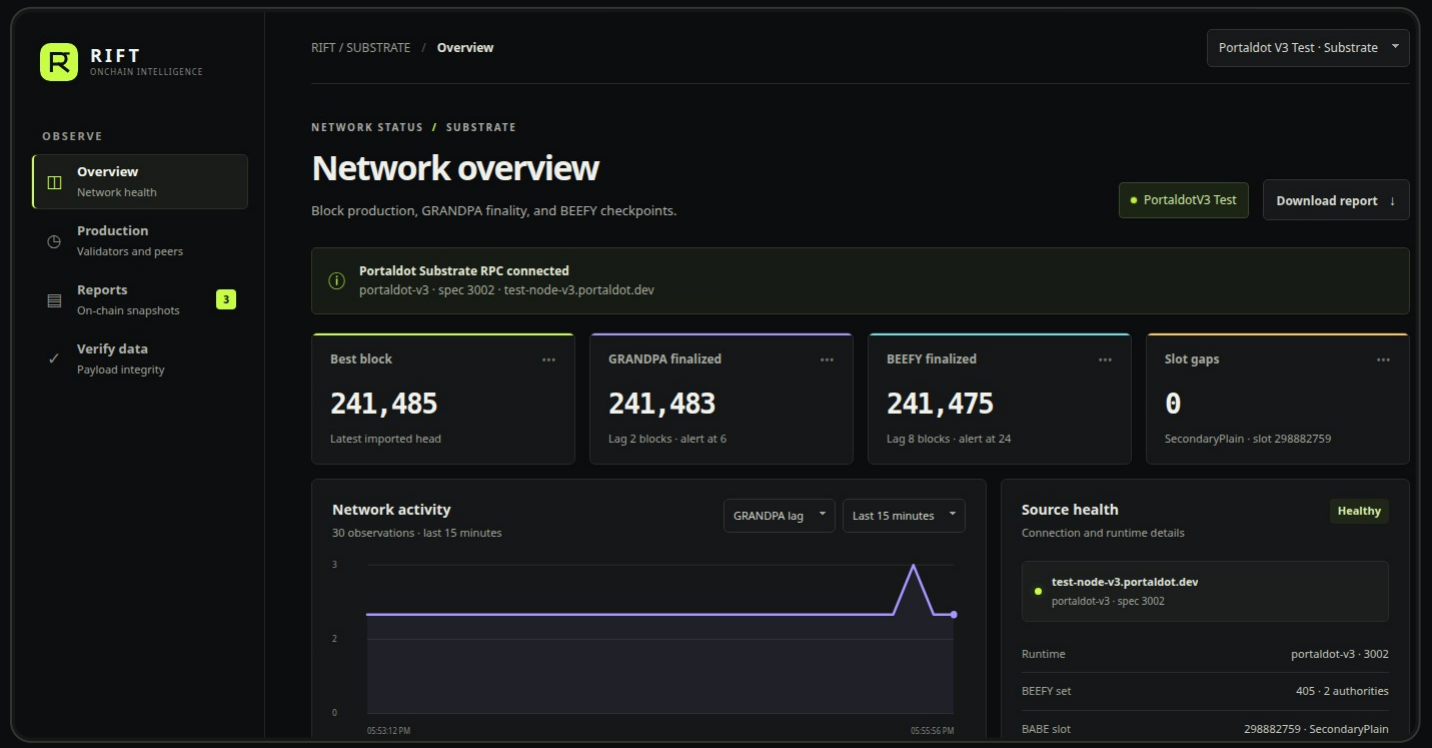

OBSERVED HEADS

BEST

241,485

GRANDPA 241,483 · lag 2


BEEFY 241,475 · lag 8

Freshness, thresholds, and the three head positions stay visible together.

The chart and author sample begin when this monitor session connects.

Investigate a report by hash

Paste a payload hash or publication transaction hash to find the on-chain record.

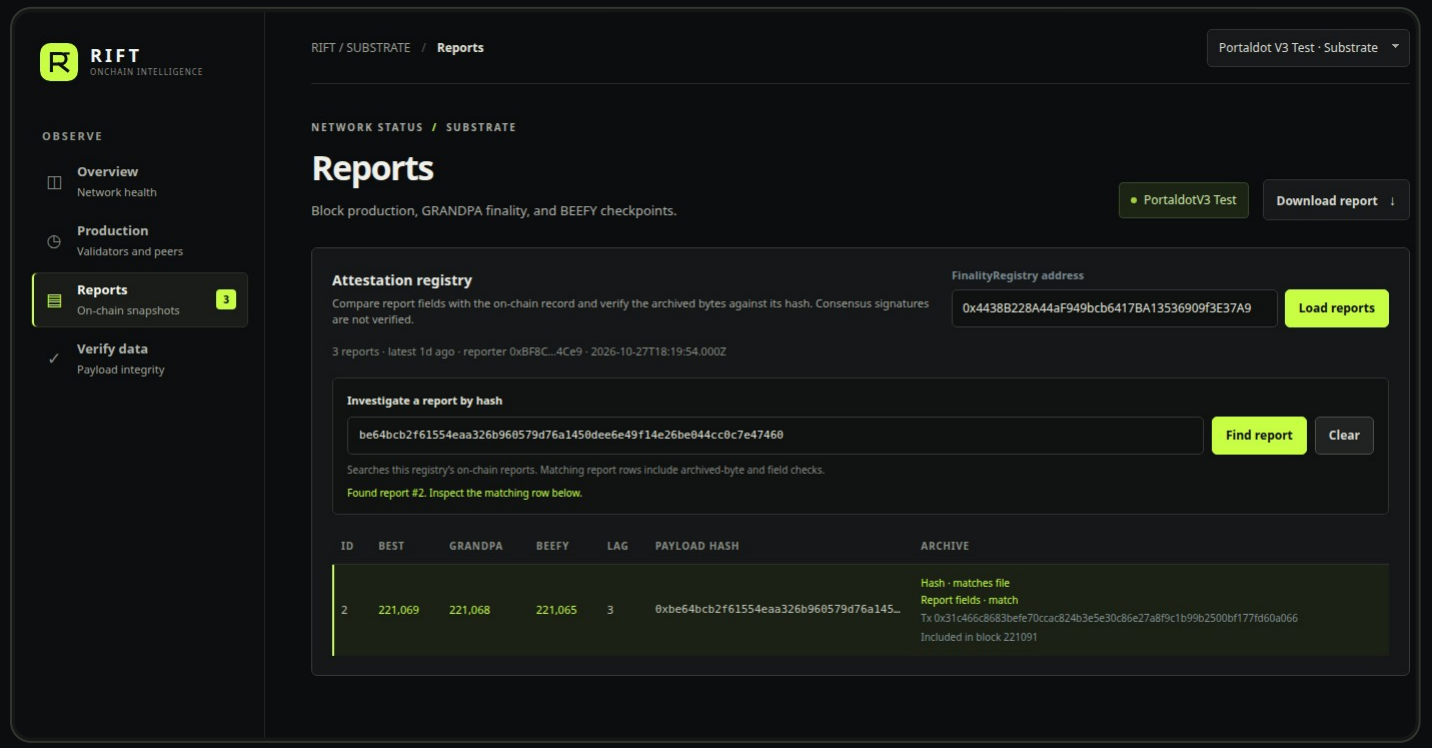

REPORT #2 · 27 OCT 2026

01 Find the report

Search by its payload hash or publishing transaction hash.

02 Check the archive


RIFT rehashes the exact archived bytes and compares six stored fields.

HASH MATCH · REPORT FIELDS MATCH

Publication included in block 221,091.

Evidence integrity is not consensus proof

The report can be checked against its archive without overstating what that proves.

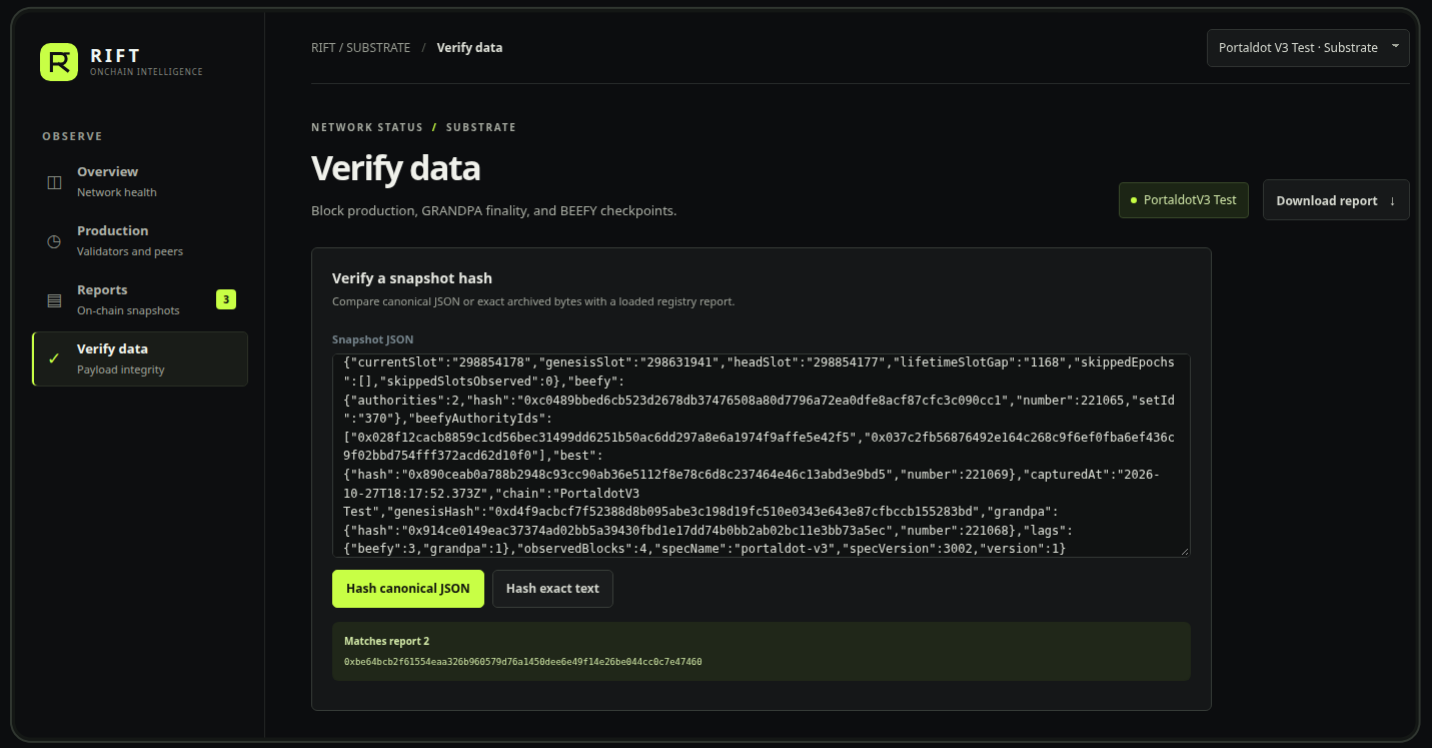

WHAT THE CHECK ESTABLISHES

Keccak of the exact archived JSON matches the payload hash.

Six archived fields match the registry record: head heights, BEEFY set, authority count, and observed slot gaps.

TRUST BOUNDARY

The registry stores reporter-submitted values. It does not validate BABE, GRANDPA, or BEEFY proofs.

PORTALDOT V3 · CHAIN 420420777 · REPORT #2

From demo to operator product

A self-hosted monitor is the first useful release. A managed service is a hypothesis to validate.

01 · TEAM USE

Keep it running

Run the collector as a supervised service.

Persist observations beyond a browser session.

Export health and lag metrics.

02 · CLOSE THE LOOP

Make alerts useful

Tune freshness and finality thresholds with operators.

Send alerts to Slack, Discord, or webhooks.

Attach the report and source context.

03 · PAID, IF PULLED

Host the workflow

Shared workspaces, alert policies, incident history, and longer retention.

Never put reporter keys in the browser.

Price only after a pilot confirms demand.

FIRST VALIDATION

One Portaldot operator team: measure alert usefulness, false alarms, and time to investigate before building a hosted tier.