PORTALDOT V3 TESTNET

Portaldot Finality

See where the block production and finality pipeline is falling behind.

NODE OPERATIONS & TOOLING

Portaldot Hacker House 2026

The operator problem

A latest block number hides where finality is waiting.

Operators need to tell whether production is moving, GRANDPA is finalizing, and BEEFY checkpoints are keeping pace.

GRANDPA LAG

Best − GRANDPA

How far the best head is ahead of finalized state.

BEEFY LAG


GRANDPA − BEEFY

How far the checkpoint trails GRANDPA.

A useful alert also needs a fresh feed and the observation behind it.

Live operator view

Current heads, lag thresholds, production and feed freshness in one view.

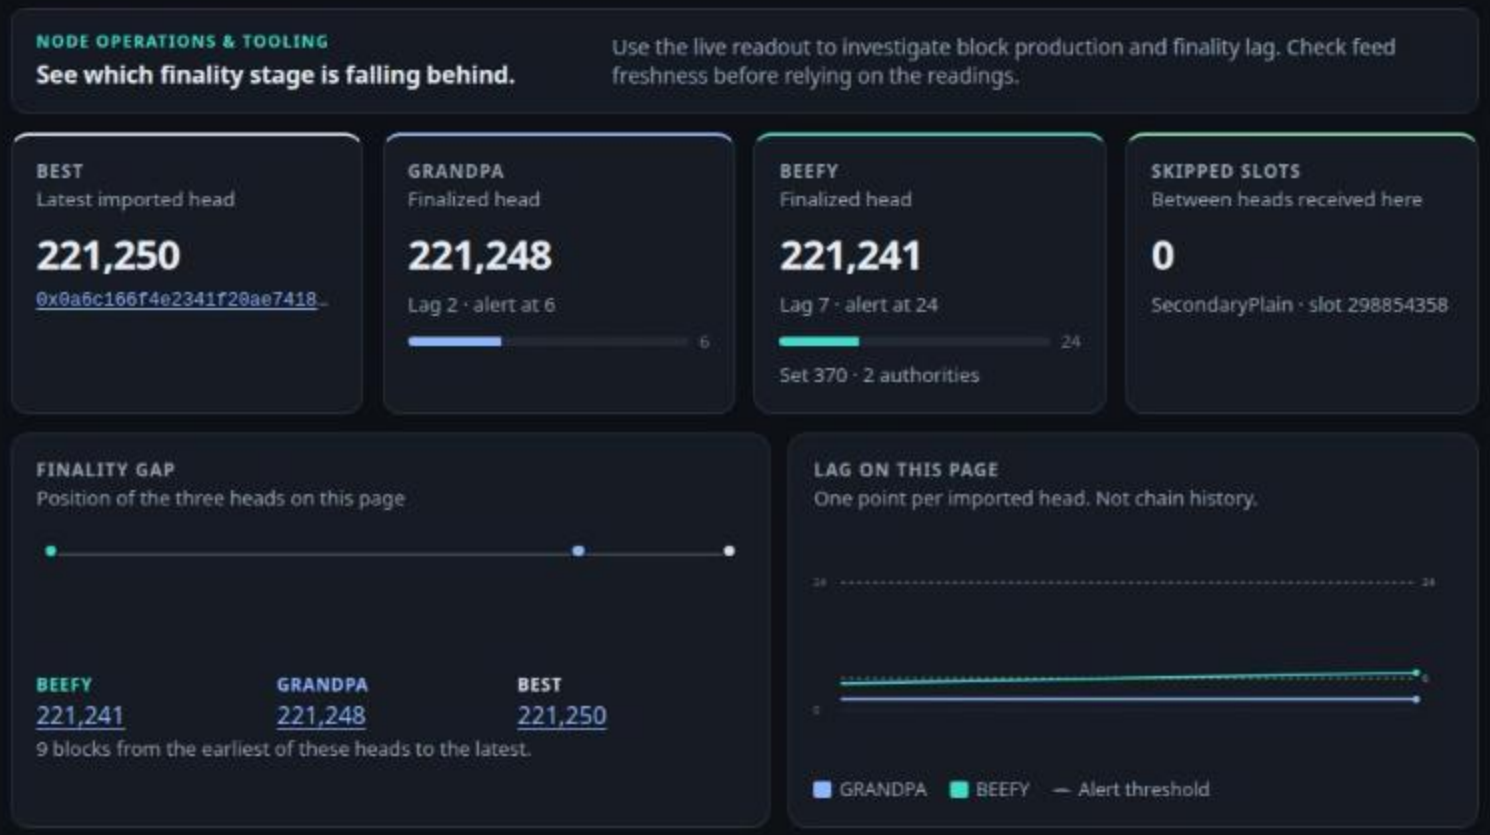

LIVE HEADS IN THE DEMO

BEST

221,250

GRANDPA

221,248

BEEFY

221,241

The live feed keeps advancing after a report is published. Author counts are scoped to this browser session.

Portaldot V3 integration

Native consensus reads become a report whose archive can be checked against the V3 registry hash.

01

Native read

BABE, GRANDPA and BEEFY Portaldot WebSocket

02

Observe

Heads, authors, lag and feed age

03

Snapshot

Canonical JSON report

04

Hash

keccak256 of UTF-8 JSON

05

Anchor

FinalityRegistry on V3 EVM

TRUST BOUNDARY

The registry stores values supplied by a reporter and their hash. It does not verify GRANDPA or BEEFY proofs.

Testnet evidence

Snapshot 2 captured and published on 27 October 2026.

BEST

221,069

GRANDPA

221,068 lag 1

BEEFY

221,065 lag 3

ON-CHAIN REPORT

Snapshot id 2

Published in block 221091

BEEFY set 370, 2 authorities
0 observed slot gaps
Archive bytes match the on-chain payload hash

PAYLOAD HASH

`0xbe64bcb2f61554eaa326b960579d76a1450dee6e49f14e26be044cc0c7e47460`

`FinalityRegistry 0x4438B228A44aF949bcb6417BA13536909f3E37A9`

The hash confirms archive bytes match the stored value. It does not prove consensus truth.

Adoption path

Self-host the first monitor for Portaldot operators.

Validate the workflow with Portaldot node and validator program teams.

01

Confirm the user

Confirm whether node operators or validator program staff need the view first.

02

Set useful thresholds

Tune BABE, GRANDPA and BEEFY alerts around real incidents.

03

Expand on demand

Keep the collector open-source. Add multi-node service only if operators ask.

Next with Portaldot: confirm the operator, useful thresholds and whether one or multiple nodes need coverage.

First-user hypothesis remains unvalidated. No adoption commitment has been secured.