


1000  
counters

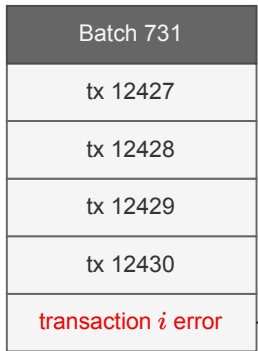

980  
counters

Memory

$tx_{i+1}$	$counters_{i+1}$
$tx_{i+2}$	$counters_{i+2}$
$tx_i$	$counters_i$

If the transaction does not fit, we upload the counter information in the list and we try with another one