

# 1 test\_sum\_to\_n — MIR Walkthrough

**Purpose:** TODO: Describe why this walkthrough exists

## 1.1 Source Context

```
let sucess = sum_to_n(n) == golden;
assert!(sucess);
}
```


## 1.2 Function Overview

- **Function:** test\_sum\_to\_n
- **Basic blocks:** 4
- **Return type:** ()
- **Notable properties:**
  - Contains panic path
  - Has conditional branches

## 1.3 Locals

Local	Type	Notes
0	()	Return place
1	bool	
2	usize	
3	usize	
4	usize	
5	!	

## 1.4 Control-Flow Overview



## 1.5 Basic Blocks

### 1.5.1 bb0 — entry

*Entry point of the function.*

MIR	Annotation
$\_3 = 10$	Load constant
$\rightarrow \_2 = \text{sum\_to\_n}(\text{move } \_3) \rightarrow \text{bb1}$	Call sum_to_n

### 1.5.2 bb1 — branch point

MIR	Annotation
-----	------------

<code>\_4 = 55</code>	Load constant
<code>\_1 = move \_2 == move \_4</code>	Equal operation
<code>→ switch(\_1) \[0→bb2; else→bb3\]</code>	Branch on <code>\_1</code>

### 1.5.3 bb2 — panic path

*Panic/diverging path.*

MIR	Annotation
<code>→ \_5 = panic(\[16 bytes\])</code>	Call panic

### 1.5.4 bb3 — return / success

*Normal return path.*

MIR	Annotation
<code>→ return</code>	Return from function

## 1.6 Key Observations

TODO: Add bullet points summarizing what this MIR teaches

- 
- 

## 1.7 Takeaways

TODO: One or two sentences to generalize this example

## 2 main — MIR Walkthrough

**Purpose:** TODO: Describe why this walkthrough exists

### 2.1 Source Context

```
fn main() {  
    test_sum_to_n();  
    return ();  
}
```


### 2.2 Function Overview

- **Function:** main
- **Basic blocks:** 2
- **Return type:** ()

### 2.3 Locals

Local	Type	Notes
0	()	Return place
1	()	

### 2.4 Control-Flow Overview



### 2.5 Basic Blocks

#### 2.5.1 bb0 — entry

*Entry point of the function.*

MIR	Annotation
→ \_1 = test\_sum\_to\_n() → bb1	Call test_sum_to_n

#### 2.5.2 bb1 — return / success

*Normal return path.*

MIR	Annotation
→ return	Return from function

### 2.6 Key Observations

TODO: Add bullet points summarizing what this MIR teaches

- 
-

## 2.7 Takeaways

TODO: One or two sentences to generalize this example

### 3 sum\_to\_n — MIR Walkthrough

**Purpose:** TODO: Describe why this walkthrough exists

#### 3.1 Source Context

```
fn sum_to_n(n:usize) -> usize {  
    let mut sum = 0;  
    let mut counter = n;  
  
    while counter > 0 {  
        sum += counter;  
        counter = counter - 1;  
    }  
    return sum;  
}
```


#### 3.2 Function Overview

- **Function:** sum\_to\_n
- **Basic blocks:** 6
- **Return type:** usize
- **Notable properties:**
  - Contains panic path
  - Uses checked arithmetic
  - Contains assertions
  - Has conditional branches

#### 3.3 Locals

Local	Type	Notes
0	usize	Return place
1	usize	
2	usize	
3	usize	
4	bool	
5	usize	
6	usize	
7	(usize, bool)	
8	usize	
9	(usize, bool)	

### 3.4 Control-Flow Overview

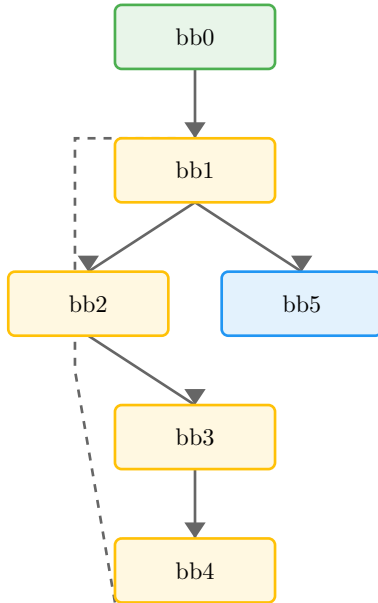

### 3.5 Basic Blocks

#### 3.5.1 bb0 — entry

Entry point of the function.

MIR	Annotation
$\_2 = 0$	Load constant
$\_3 = \_1$	Copy value
$\rightarrow \text{goto } \text{bb1}$	Jump to bb1

#### 3.5.2 bb1 — loop

MIR	Annotation
$\_5 = \_3$	Copy value
$\_4 = \text{move } \_5 \> 0$	Greater than operation
$\rightarrow \text{switch}(\text{move } \_4) \setminus [0 \rightarrow \text{bb5}; \text{else} \rightarrow \text{bb2} \setminus]$	Branch on move $\_4$

#### 3.5.3 bb2 — loop

MIR	Annotation
$\_6 = \_3$	Copy value
$\_7 = \text{checked}(\_2 + \_6)$	Checked Add (may panic)
$\rightarrow \text{assert}(\text{move } \_7.1 == \text{false}) \rightarrow \text{bb3}$	Panic if move $\_7.1$ is true

#### 3.5.4 bb3 — loop

MIR	Annotation
$\_2 = \text{move } \_7.0$	Move value
$\_8 = \_3$	Copy value
$\_9 = \text{checked}(\_8 - 1)$	Checked Subtract (may panic)
$\rightarrow \text{assert}(\text{move } \_9.1 == \text{false}) \rightarrow \text{bb4}$	Panic if move $\_9.1$ is true

### 3.5.5 bb4 — loop

MIR	Annotation
<code>\_3 = move \_9.0</code>	Move value
<code>→ goto bb1</code>	Jump to bb1

### 3.5.6 bb5 — return / success

*Normal return path.*

MIR	Annotation
<code>\_0 = \_2</code>	Copy value
<code>→ return</code>	Return from function

## 3.6 Key Observations

TODO: Add bullet points summarizing what this MIR teaches

- 
- 

## 3.7 Takeaways

TODO: One or two sentences to generalize this example

