

# 1 main — MIR Walkthrough

**Purpose:** TODO: Describe why this walkthrough exists

## 1.1 Source Context

```
fn main() {  
    let tup:(i32, i32) = (42, 99);  
  
    assert!(tup == (42, 99));  
}
```


## 1.2 Function Overview

- **Function:** main
- **Basic blocks:** 4
- **Return type:** ()
- **Notable properties:**
  - Contains panic path
  - Introduces borrows
  - Has conditional branches

## 1.3 Locals

Local	Type	Notes
0	()	Return place
1	(i32, i32)	
2	bool	
3	&(i32, i32)	
4	&(i32, i32)	
5	!	

## 1.4 Control-Flow Overview

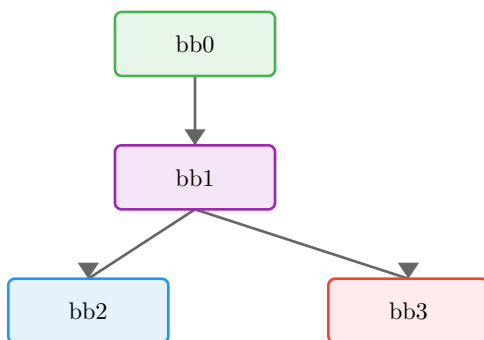

## 1.5 Basic Blocks

### 1.5.1 bb0 — entry

*Entry point of the function.*

MIR	Annotation
_1 = Tuple(42, 99)	Construct aggregate
_3 = &_1	Shared borrow
_4 = 0	Load constant

→ _2 = eq(move _3, move _4) → bb1	Call eq
-----------------------------------	---------

### 1.5.2 bb1 — branch point

MIR	Annotation
→ switch(move _2) [0→bb3; else→bb2]	Branch on move _2

### 1.5.3 bb2 — return / success

*Normal return path.*

MIR	Annotation
→ return	Return from function

### 1.5.4 bb3 — panic path

*Panic/diverging path.*

MIR	Annotation
→ _5 = panic([16 bytes])	Call panic

## 1.6 Key Observations

TODO: Add bullet points summarizing what this MIR teaches

- 
- 

## 1.7 Takeaways

TODO: One or two sentences to generalize this example

