


point/include/tpoint
_datagen.h

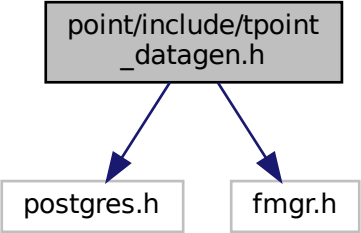

```
graph TD; A["point/include/tpoint_datagen.h"] --> B["postgres.h"]; A --> C["fmgr.h"]
```

The diagram illustrates a header file dependency. At the top, a gray box contains the text 'point/include/tpoint_datagen.h'. Two blue arrows originate from the bottom of this box and point downwards to two separate white boxes. The left box contains 'postgres.h' and the right box contains 'fmgr.h'. This indicates that the top-level header file includes both 'postgres.h' and 'fmgr.h'.

postgres.h

fmgr.h