


include/temporal\_boolops.h

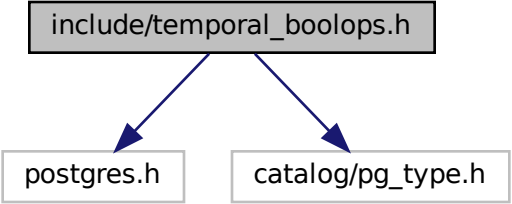

```
graph TD; A[include/temporal_boolops.h] --> B[postgres.h]; A --> C[catalog/pg_type.h];
```

The diagram illustrates a header file dependency. At the top, a box labeled 'include/temporal\_boolops.h' has two blue arrows pointing downwards to two separate boxes. The left box is labeled 'postgres.h' and the right box is labeled 'catalog/pg\_type.h'. This indicates that 'include/temporal\_boolops.h' includes both 'postgres.h' and 'catalog/pg\_type.h'.

postgres.h

catalog/pg\_type.h