Build a Personal Movie Recommender with Django



Estimated time needed: 120 minutes

Choosing an interesting movie to watch on a weekend evening is always hard. It would be great if there is a handy movie recommender to help you make a good decision.

In this guided project, you will be building such a personal movie recommender using the Django web framework. The movie recommendations will be generated based on your or your family's previously watched movies. The recommendation algorithm included in this project is extremely simple but effective so you do not need any hardcore Machine Learning knowledge to understand and complete this project.

Prerequisite

- Python
- Basic HTML/CSS
- Basic knowledge about the Set data structure

Objectives

After completing this Guide Project, you will be able to:


- 1. Describe the key components of Django web framework
- 2. Describe the basic principles of a recommendation system
- 3. Build a simple but effective personal movie recommender with Django

Django Crash

Django is a very popular Python web framework designed for rapid and full-stack web app development. Many popular apps are built on Django such as Youtube, Spotify, Dropbox, edX, and more.

Django Model-View-Template

about:blank 1/20

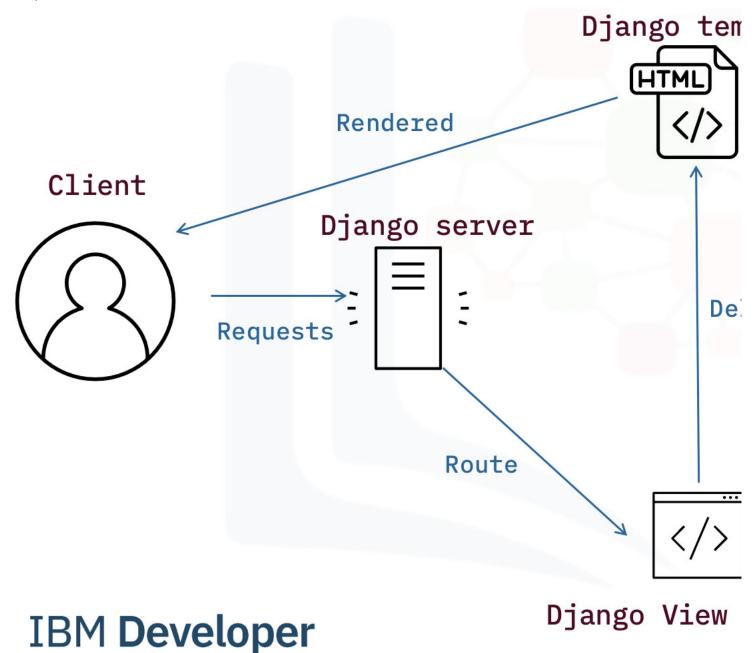

Like other web frameworks, Django splits its application logic into the following three Model-View-Controller like components:

- Django Model manages data modelling and database mapping as well as business logic to process data
- Django View describes which data is presented, but not how it is presented. Typically,
 Django View delegates and renders an HTML page, which describes how the data is presented
- Django Template generates dynamic HTML pages to present data

When a client sends a request, the Django server routes the request to the appropriate view based on the Django URL configuration and acts as a traditional Controller

Django Models


Django uses Django Models to represent database tables and map them to objects, such as process is called ORM.

Django Models tries to make the developer's life easier by abstracting databases and mapping objects and methods into tables and SQL queries automatically.

You just need to define classes as Django Models, and will be later mapped to database tables accordingly.


Then you can simply use Django Models API to perform CRUD on the database tables without writing a single line of SQL

about:blank 2/20

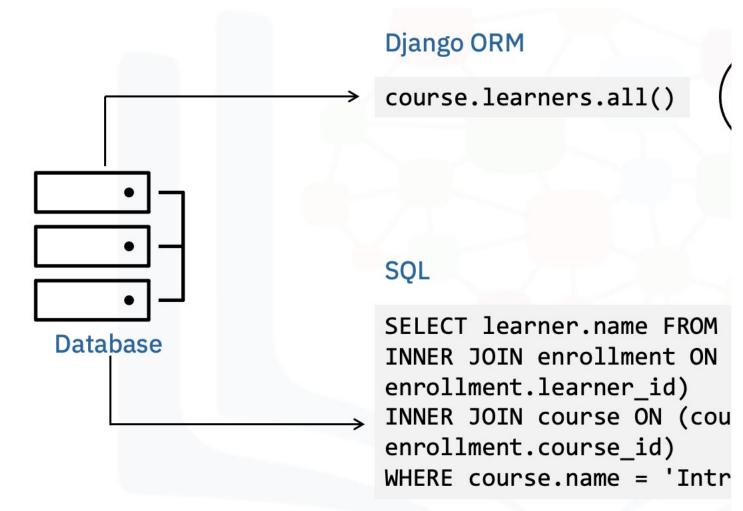

Django Views

about:blank 3/20

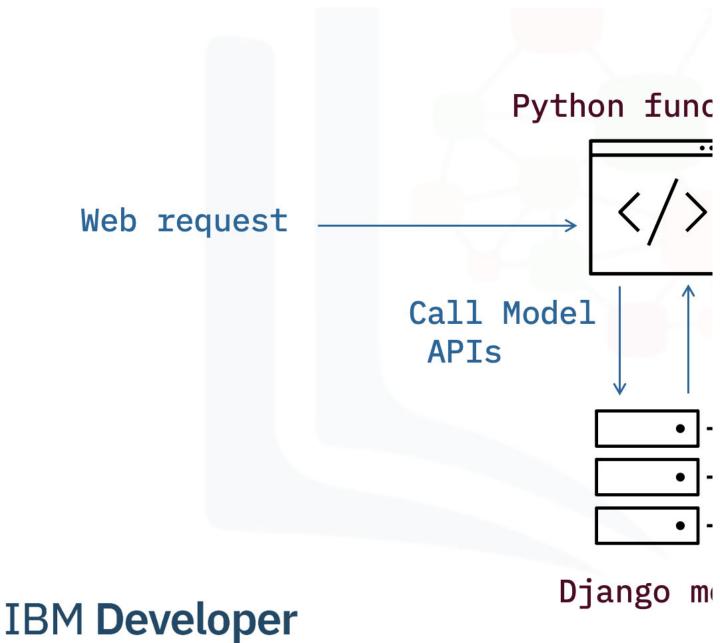


In Django, a View is essentially a Python function. Such a function takes a Web request and applies the necessary logic to generate a Web response, such as the HTML contents of a Web page, a redirect, a 404 error, an XML document, an image, or any other Web response.

Often, View interacts with Django Models to get required data in the form of QuerySet or objects to generate a Web response.

Django Template

about:blank 4/20

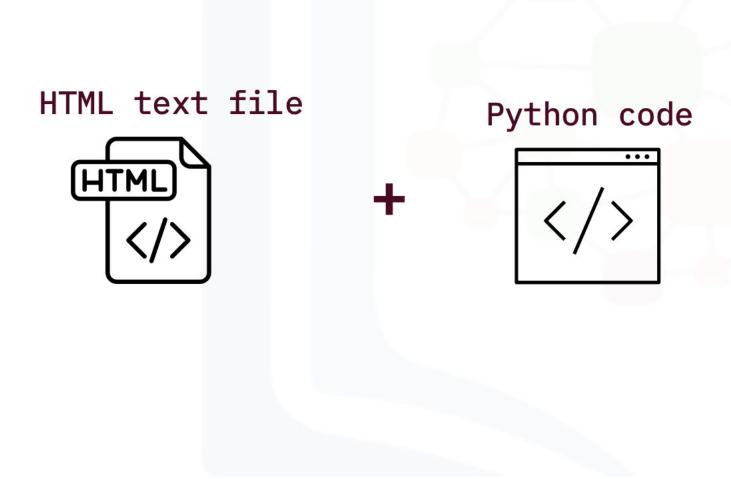


Django uses a template to generate dynamic Web pages which are sent back and rendered in a user's browser.

The Django template contains static HTML elements, as well as special Python code describing how the dynamic content of HTML pages will be generated.

Django App Development Process

about:blank 5/20

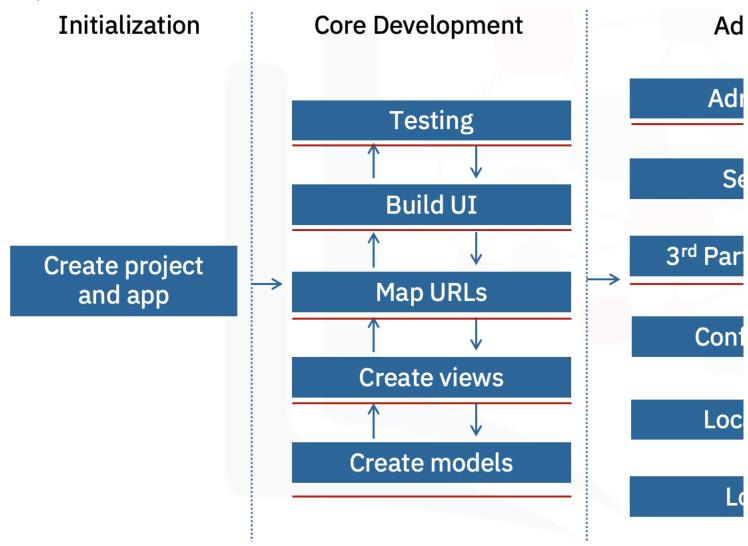

Let's look at a typical Django development process. The order of these steps may vary.

First, we create a Django project which is a container for Django apps and settings. Then we create and add one or more Django apps to the project.

In Core Development, we create Django models to model the data and create views to determine which data need to be presented to the UI. We also map the request URLs to our views so Django can forward requests to corresponding views via URLs. Then we can start designing and building the UI.

OK, by now you should have enough knowledge about Django to get you started on this Guided Project. If you have more time, you could also learn more about Django framework from many other tutorials and courses online.

Download and Run a Django Template App

Before starting the lab, make sure your current directory is /home/project.

To simplify your development process, we have provided a skeleton Django project, which you can just download using the following wget command:

- 1. 1
- 2. 2 3. 3
- 1. wget "https://cf-courses-data.s3.us.cloud-object-storage.appdomain.cloud/build-a-personal-movie-recommender-with-django/app_template/recommender.zip"
- 2. unzip recommender.zip
- rm recommender.zip

Copied! Executed!

Then, we need to install required Python packages

- CD to /recommender folder then
- Run pip install from a requirements file:
- 1. 1
- python3 -m pip install -r requirements.txt

Copied! Executed!

• If face any pillow installation error, fix the pillow installation error

Run the following commands:

```
    1. 1
    2. 2
    1. python3 -m pip install --upgrade pip
    2. python3 -m pip install --upgrade Pillow


Copied!
```

To save your works in progress, please constantly save the project files in your local computer, cloud storage, or in a Github/GitLab repository.

Review Django Project Structure

Next, let's take a look at the created Django project.

Key Project Files

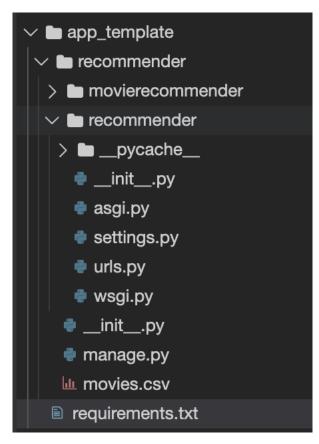


A Django project is essentially a Python package that contains all the settings for instances of Django apps.

You need to know the usage for some core files that Django creates.

- manage.py is a command-line interface used to interact with the Django project to start the server, migrate models, and so on.
- settings.py contains the settings and configurations for your Django project.
- urls.py contains the URL and routing definitions of your Django app, such as URLs for a movierecommender app

Key Application Files

about:blank 7/20

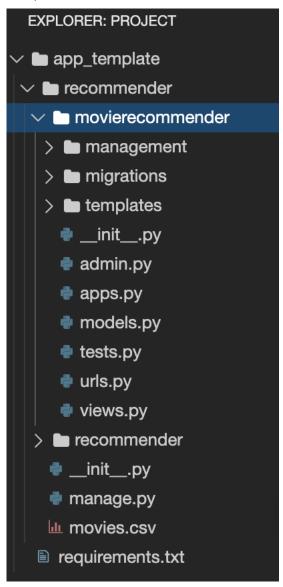

In addition to the Django project container /recommender folder, we also created a Django app in movierecommender folder, which contains the following important app files.

- admin.py includes everything you need to create and customize an admin site to manage users and content.
- · models.py contains the data models and ORM.
- views.py contains view functions
- urls.py contains the URL declarations and routing for the app.
- app.py contains the application configuration class.
- /migrations folder contains scripts for model migration.
- /management/commands contains your customized Django commands which can be evoked by manage.py file. Some useful
 commands may include load data into database or run some batch jobs

Start Django Server

Make sure you are in /home/project/recommender/ folder.

- Before starting the app, you will need to perform migrations to create necessary database tables:
- 1. 1
- python3 manage.py makemigrations

Copied! Executed!

- · and run migration
- 1. 1

about:blank 8/20

python3 manage.py migrate



and you should see many tables are created in the terminal console.

Meanwhile, a new SQLite database recommender/db.sqlite3 has been created by Django for you.

It is the default SQLite database configured in recommender/settings.py.

In case you are not familiar with SQLite, it is an embedded and file-based database. As its name suggests, it is small and fast, which makes it ideal for our guide project.

Review a Predefined Movie Model

In this template app, we have created a Movie model for you. To review this model, simply go to recommender/movierecommender/models.py and find the Movie class.

This Movie class extends from Django models. Model super class.

The Django models provides a set of Object-Relationship Mapping APIs such as mapping your sub-class into a database table, insert/update/delete database records, mapping database records into objects, etc.

The defined Movie class contains the following fields:

- imdb_id: IMDB id
- genres: Movie genres like animation, family, action science fiction, etc.
- original_language: Movie original language
- original_title: Movie title
- release_date: Movie release date, year only
- overview: The overview or short description of the movie
- vote_average: Average voting for the movie
- vote_count: Total vote counts for the movie, may reflect the popularity
- poster_path: The relative URL of movie poster image
- watched: If you have watched the movie
- · recommended: If the movie has been recommended to you

After the Django migration you executed earlier, Django Model will also create a movie table automatically in our SQLite database with corresponding columns.

Load Movie Data into an SQLite Database

Since the generated movie database table is empty, we can use a prepared load command to load movie data from /recommender/movie.csv to the database table.

The prepare load command can be found in recommender/movierecommender/management/commands/load_movies.py

If you open this Python script file, you can find a handle method to handle this command evoke with arguments such as data file path.

The logic of the handle method is very simple, it iterates the movie.csv file, get each movie row, and populate objects of Movie and call the save() method to save them into the movie database table.

Now you can run the load_movies command

- First, make sure you are in home/project/recommender folder,
- Then run the following cmd with path argument points to movies.csv in the same folder
- 1. 1
- 1. python3 manage.py load_movies --path movies.csv

Copied! Executed!

You should see movies are saved into database one by one, and the entire process may take several minutes to complete.

There will be more than 40000 movies loaded into our database so it should be a relatively comprehensive movie database for our movie recommender.

To save your works in progress, please constantly save the project files in your local computer, cloud storage, or in a GitHub/GitLab repository.

Review Movie Database with Django Admin Site

Now you may wonder where can I see these movies saved to my database. One typical way is to use some database management tool to open the db.sqite3 database and run SQL to query data from the movie table. However, this may be too troublesome and there is a much easier way to manage the content of a Django app, which is using Django Admin.

Django admin is a powerful tool provided by Django framework for users to manage both the metadata and the content of their apps.

To start using Django Admin, you need to create a super user first:

- Run createsuperuser command, and fill in the credentials for your admin user
- 1. 1

about:blank 9/20

1. python3 manage.py createsuperuser



With Username, Email, Password entered, you should see a message that indicates the super user is created:

Superuser created successfully.

Let's start our app and login with the super user.

- Then start the development server
- 1. 1
- 1. python3 manage.py runserver

Copied! Executed!


 Find and click Launch Application button on the top menu and enter the port for the development server 8000

When the browser tab opens, add the /admin path and your full URL should look like the following

https://userid-8000.theiadocker-1.proxy.cognitiveclass.ai/admin


· Login with the user name and password for the super user, then you should see

admin site with Groups, Users, and Movies created for us. These are the database tables created during the Django migration process.

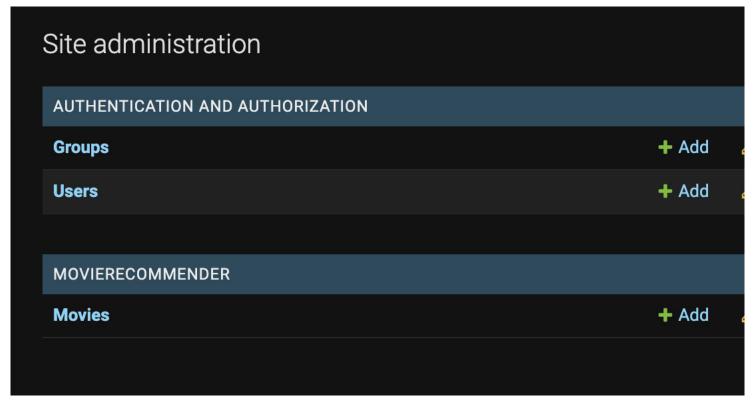

If you click the Movie entry link, you can see all your loaded movie data. You can search them by movie title, and you can also click a movie to update it. For example, you can mark a movie as watched, which will be used later to recommend you with new movies.

about:blank 10/20

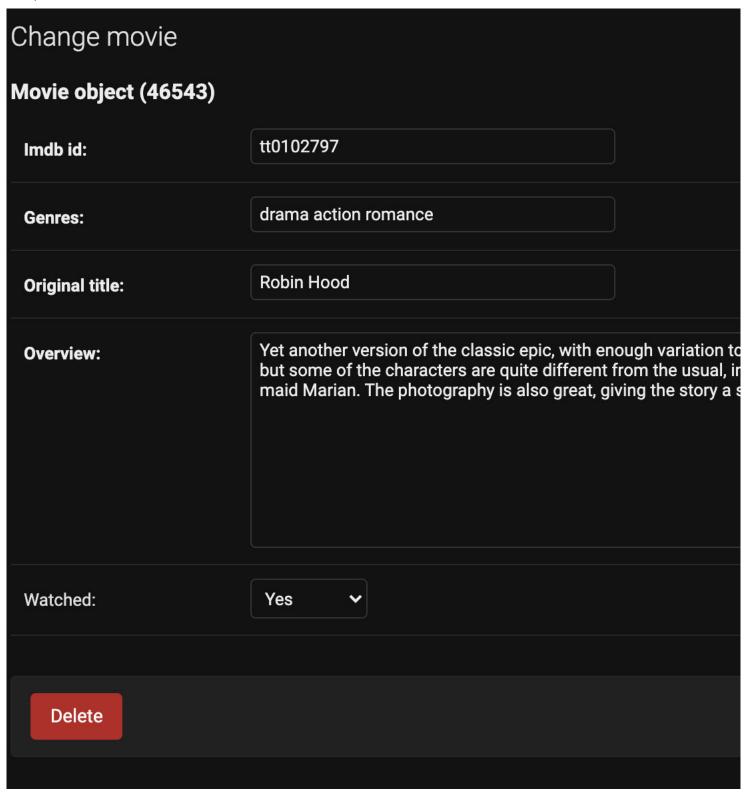

Review a Movie Recommendation Django HTML Template

Now you should have reviewed all the data as an admin but we also need to build a nice HTML page to show these movies for regular users.

Being a web framework, Django provides a convenient way to generate HTML dynamically, that is Django template. A template contains the static parts of the desired HTML output as well as some special syntax describing how dynamic content will be inserted.

To simplify your development process, we have provided a skeleton HTML template, which is located in movierecommender/templates/movierecommender/movie_list.html. You may notice we have two identical movierecommender in the path, which is a Django name space convention for the Django project to differentiate html files with the same name but in different apps.

about:blank 11/20

The movie_list.html starts with two basic elements: a navigation bar and an nearly empty HTLM body.

In the template, we use Bootstrap, which is a free and open-source CSS framework directed at responsive, mobile-first front-end web development, to help us build a stylized HTML page.

For now, let's just leave this movie_list.html untouched and work on the backend first. Once we figure out what kind of data will be presented in this template, we will revisit and update it accordingly.

Create a Movie Recommendation View

The movie list HTML page you created is just a template and static, which requires a Django view to provide data/context to render the movie list HTML page dynamically.

As we discussed earlier, a Django view is a Python function takes HTTP requests as input and generates HTTP response as output. Here we want to create a view function to generate a movie list HTML page as a response.

Let's see how to do that.

• Open movierecommender/views.py, copy the following code to add a very simple view called movie_recommendation_view

```
1. 1
  2. 2
    3
  з.
  4. 4
  1. def movie_recommendation_view(request):
         if request.method == "GET":
  3.
           # The context/data to be presented in the HTML template
           context = {}
  4.
           # Render a HTML page with specified template and context
  5.
  6.
           return render(request, 'movierecommender/movie_list.html', context)
Copied!
```

This view is very simple, it first checks if it receives a GET request, then create an empty dict called context to contain the context or data to be presented in the HTML template.

Then it calls render() method to render an HTML page with movie_list.html template and context.

Configure the URL of movie_recommendation_view

Next, configure the URL for the movie_recommendation_view so that HTTP request with matching URL pattern will be forwarded to movie_recommendation_view by Django.

• Open movierecommender/urls.py, add the following code:

```
1. 1
```

1. path(route='', view=views.movie_recommendation_view, name='recommendations'),

Copied!

to urlpatterns list to make it looks like the following:

```
1. 1
2. 2
3. 3
4. 4
5. 5
6. 6
7. 7

1. from django.urls import path
2. from . import views
3.
4. urlpatterns = [
5.  # route is a string contains a URL pattern
6. path(route='', view=views.movie_recommendation_view, name='recommendations'),
7. ]
```

Copied!

As such, we want to make any url with pattern app_url/movierecommender be forwarded to views.movie_recommendation_view

That's it, now let's test the movie view and template together.

- Run Django sever if not started:
- 1. 1
- 1. python3 manage.py runserver

Copied! Executed!

· Clicking Launch Application and enter 8000.

After a new browser tab is opened, add a /movierecommender path to your full URL, note that the userid is a place holder and should be replaced by your real id shown after clicking Launch Application

https://userid-8000.theiadocker-1.proxy.cognitiveclass.ai/movierecommender

Django will map any HTTP requests starting with /movierecommender to the app movierecommender and search any matches for paths defined in movierecommender/urls.py.

Now you should see a nearly empty HTML page with Movies to be shown here!.

Movie Recommendations

Movies to be shown here!

Query and Add Movie Records to the Context

Next, let's query the Movie records from the database, and put them into the context dict.

As such the movie_recommendation_view can render the template movies_list.html with actual movies.

• Copy the following query method into movierecommender/views.py

```
1. 1
 4.4
 5.5
 6. 6
7. 7
10. 10
11. 11
12. 12
13. 13
15. 15
16. 16
17. 17
18. 18
19. 19
22. 22
23. 23
1. def generate_movies_context():
2.
         context = {}
 3.
         # Show only movies in recommendation list
4.
        # Sorted by vote_average in desc
 5.
        # Get recommended movie counts
        recommended_count = Movie.objects.filter(
 6.
             recommended=True
8.
        ).count()
9.
         # If there are no recommended movies
10.
        if recommended count == 0:
             # Just return the top voted and unwatched movies as popular ones
11.
             movies = Movie.objects.filter(
13.
                 watched=False
14.
             ).order_by('-vote_count')[:30]
        else: ______ # Get the top voted, unwatched, and recommended movies
15.
16.
             movies = Movie.objects.filter(
17.
                 watched=False
18.
             ).filter(
19.
20.
                 recommended=True
        ).order_by('-vote_count')[:30]
context['movie_list'] = movies
21.
22.
23.
         return context
```

Copied!

Basically, this function has the following application logic:

- · Create an empty context dict
- Use Django Models API Movie.objects.filter(recommended=True) to query any movies in Movie table with recommended field to be True

With Django Models APIs, you do not need to write any SQL to query database tables

This will return a QuerySet for further filter or aggregation. Then we have add a count() method to basically get the total number of recommended movies in the databases.

- Then we added an If-Else statement to handle two different user scenarios.
- If there are no recommended movies, we query the database again to get the top 30 popular unwatched movies,

order by vote_count desc.

about:blank 13/20

• If there are some recommended movies, we query the database to get the top 30 recommended movies.

```
    Add the queried movies to context as context ['movie_list'] = movies.
    Return the context dict for movie_recommendation_view
```

Note, we do not have any watched or recommended movies at the beginning so we just return the top-30 popular movies by default. Later in this project, we will discuss how to mark a movie as watched and how to generate movie recommendations.

Next, we need to update movie_recommendation_view to render the movie_list.html with the queried movies context.

```
    1. 1
    1. context = generate_movies_context()

Copied!
```

Now your movie_recommendation_view method should look like the following:

```
1. 1
2. 2
3. 3
4. 4
5. 5
6. 6

1. def movie_recommendation_view(request):
2.    if request.method == "GET":
3.         # The context/data to be presented in the HTML template
4.         context = generate_movies_context()
5.         # Render a HTML page with specified template and context
6.         return render(request, 'movierecommender/movie_list.html', context)
Copied!
```

000.00.

Update the Movie Recommendation Django HTML with Context

Now, we have the backend service implemented to provide the movie data to the UI. Then we need to update the movie list.html to present them.

• Open movierecommender/templates/movierecommender/movie_list.html add the following code snippet under the

comments <!--Render Movie list as card columns here -->


```
13. 13
14. 14
17. 17
18. 18
19. 19
20. 20
22. 22
23. 23
24. 24
25. 25
26. 26
1. <div class="container">
        <div class="card-columns">
            <!--For each movie in the movie list, add a movie card-->
            {% for movie in movie_list %}
            <div class="col-auto mb-3";</pre>
 6.
                <div class="card">
                    <!--Movie Poster image-->
                    <img class="card-img-left"</pre>
 8.
                         src="https://image.tmdb.org/t/p/original/{{movie.poster_path}}"
 9.
                    width="320" height="480">
<div class="card-body bg-light">
11.
12.
                         <!--Movie title-->
                        <h5 class="card-title">{{movie.original_title}}</h5>
13.
14.
                        <!--Movie overview---
                        {{movie.overview}}
15.
                        <!--Movie genres-->
Genres: <b>{{movie.genres}}</b>
                        <!--Movie vote average-->
Rating: <b>{{movie.vote_average}}</b>
18.
19.
                        <!--Movie language and release date-->
20.
                         {{movie.original_language}}, {{movie.release_date}}
21.
                    </div>
                </div>
            </div>
24.
```

about:blank 14/20

```
25. {% endfor %}
26. </div>
27. </div>
```

Copied!

Here we present each movie as a Bootstrap Card element, and organize movie cards wrapped into a card-columns as their main container.

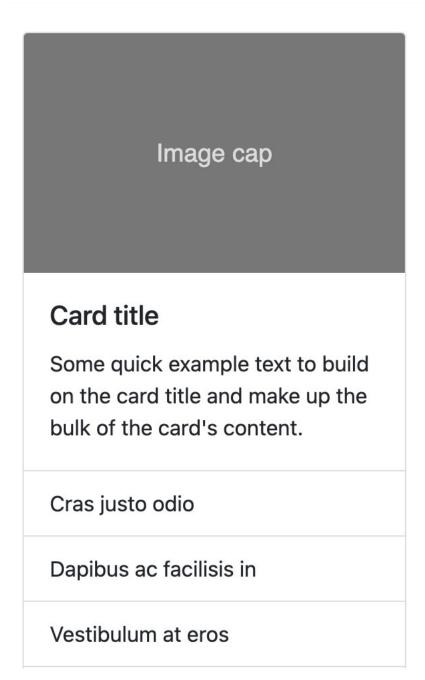

In the above HTML code snippet, you may notice some special tags wrapped within {% %} or {{ }}. These are the Django Template tags used for managing the dynamic content of the HTML page. The code within the tags will be interpreted as the Python code.

Next, we want to iterate the movie_list (included in the context dict generated by the movie view) provide by the view. For each movie, we add a <div class="card"> movie card accordingly:

```
1. 1
2. 2
3. 3
1. {% for movie in movie_list %}
2. ...
3. {% endfor %}
```

Copied!

For each movie card, it contains elements like movie poster image, movie title, genres, etc. Their actual values will be obtained from the {{movie}} variable tag. Django template will populate the {{movie}} variable with the actual movie Python object in the movie_list Python list.

about:blank 15/20

Now let's test our view and updated template.

- Run Django sever if not started:
- 1. 1
- 1. python3 manage.py runserver



and Launch Application with port 8000 and add /movierecommender path, you should see many nice movie cards similar to the following screenshot:

To save your works in progress, please constantly save the project files in your local computer, cloud storage, or in a Github/Githab repository.

Generate Movie Recommendations based on Watched Movies

OK, for now the movie recommender simply returns the most popular movies, and you might have watched all of them already!

To make the recommendation actually work, you need to first mark the movies you have watched using Django Admin site. Then you will write a recommendation algorithm based on your watched movies.

Mark the Watched Movies in Django Admin

- Run Django sever if not started:
- 1. :
- 1. python3 manage.py runserver




and Launch Application and go to URL app_url/admin

If you click the Movie entry link, you can see all your loaded movie data in the previous step.

Now try to recall, as many as possible, what good movies you have watched before, and search them by title. Then you click into the movie entry and mark it as watched and press Save.

about:blank 16/20

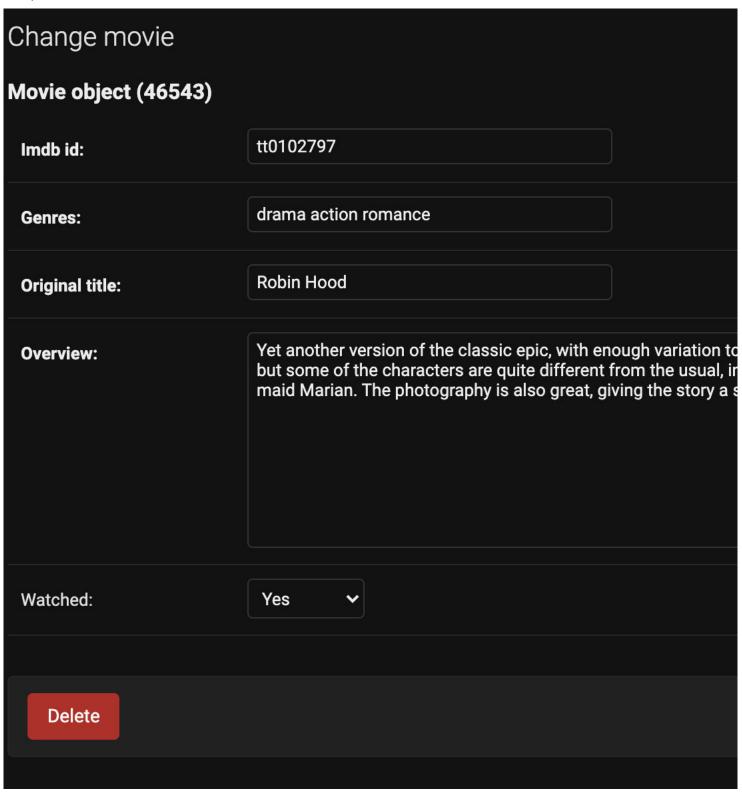

Repeating the above step to create your own watched movie history, and the recommender algorithm will recommend new movies to you based on the history.


Run make recommendations CMD to Generate Recommendations

Now it comes to the most interesting part, that is, how to recommend new movies based on your watched movies?

For any recommendation systems, the key idea is always to come up with a good algorithm/model to predict if a specific user will like or dislike his/her unseen item, as shown in the following screenshot:

about:blank 17/20





Recommendation Algorithm



There are probably hundreds of good recommendation algorithms and can be roughly divided into two categories:

- Content filtering based: The content filtering based recommendation algorithms assume you may like a new movie
 if you have watched very similar movies before. Or based on your user profile (like age, gender, interests), it will try
 to find new movies matching your profile.
- Collaborative filtering based: The collaborative filtering algorithms assume you may like a new movie if other users similar to you (similar profile or watched similar movies) have watched this movie.

In this project, we will use content filtering based algorithm, and we will try to recommend unwatched/new movies to you if they are similar to your watched movies.

Then how do we calculate such movie similarity? There are also many ways to do that, depends on your data and problem settings. Some popular ones include Jaccard similarity, Euclidean Distance, Cosine Similarity, or even using various Neural Networks.

Here we will use Jaccard similarity which is probably the simplest but very effective method to calculate similarity between two sets.

Jaccard Similarity is defined as the size of intersection of two sets divided by the size of union of that two sets.

- 1. 1
- 1. sim(set1, set2) = len(insertection(set1, set2)) / len(union(set1, set2))

Copied!

which means, the more two sets intersected or shared common elements with each other, the more similar they will be.

The Jaccard similarity is ranged from 0 to 1 or 0 to 100%.

For example, if we have four sets:

- set1 with [apple, banana, orange]
- set2 with [grape]
- set3 with [apple, banana, orange]
- set4 with [apple, banana]

Then we can calculate the similarity between set1 to set2, set3, set4 as follows:

• sim(set1, set2) = [] (no intersection) / [apple, banana, orange, grape] (union) = 0 (0 %)

about:blank 18/20

```
• sim(set1, set3) = [apple, banana, orange] / [apple, banana, orange] = 1 (100 %)
• sim(set1, set4) = [apple, banana] / [apple, banana, orange] = 2/3 (~66.7%)
```

More specifically in our movie case, we will measure the similarity of two movies by comparing their genres. For example, if you watched Action-comedy movies, you are very likely to watch other popular Action-comedy movies.

Suppose we have moviel=[action comedy] and movie2=[action comedy drama] then

```
• sim(move1, movie2) = [action comedy]/[action comedy drama] = 2/3 (~66.7%)
```

so if I watched movie1 before, then I probably will watch movie2 because it has similar genres (66.7%) with movie1.

OK, let's try to apply Jaccard similarity on our movies and determine if they will be recommended or not.

We will create a standalone command to generate recommendations (similar to our data loader command).

Open movierecommender/management/commands/make_recommendations.py,
 add the jaccard_similarity method which takes two Python lists and converts them into two Python sets. Then it applies the Jaccard similarity formula.

```
1. 1
2. 2
3. 3
4. 4
5. 5

1. # Method to calculate Jaccard Similarity
2. def jaccard_similarity(list1: list, list2: list) -> float:
3.    s1 = set(list1)
4.    s2 = set(list2)
5.    return float(len(s1.intersection(s2)) / len(s1.union(s2)))
```

Copied!

Then let's add another Python method to actually calculate the similarity between two movies:

```
1. 1
2. 2
3. 3
4. 4
5. 5
6. 6
6. 7. 7
8. 8

1. # Calculate the similarity between two movies
2. def similarity_between_movies(movie1: Movie, movie2: Movie) -> float:
3.    if check_valid_genres(movie1.genres) and check_valid_genres(movie2.genres):
4.         m1_generes = movie1.genres.split()
5.         m2_generes = movie2.genres.split()
6.         return jaccard_similarity(m1_generes, m2_generes)
7.    else:
8.    return 0
```

Copied!

At last, let's update the handle method in Command class to determine the recommended boolean field for every unseen movie in the Movie database table

```
3. 3
 4. 4
 5.5
 6.6
 9.9
10. 10
11. 11
12. 12
14. 14
15. 15
16. 16
17. 17
18. 18
20. 20
21. 21
22. 22
23. 23
24. 24
26. 26
27. 27
28. 28
29. 29
 2. def handle(self, *args, **kwargs):
        THRESHOLD = 0.8
 3.
        # Get all watched and unwatched movies
 4.
        watched_movies = Movie.objects.filter(
 5.
                 _
watched=True)
```

about:blank 19/20

```
unwatched_movies = Movie.objects.filter(
                 watched=False)
  8.
 9.
         # Start to generate recommendations in unwatched movies
 10.
         for unwatched_movie in unwatched_movies:
 11.
             max_similarity = 0
 12.
             will_recommend = False
 13.
             # For each watched movie
 14.
             for watched movie in watched movies:
                 # Calculate the similarity between watched_movie and all unwatched movies
 15.
 16.
                 similarity = similarity_between_movies(unwatched_movie, watched_movie)
 17.
                 if similarity >= max_similarity:
 18.
                     max_similarity = similarity
                 # early stop if the unwatched_movie is similar enough
 19.
 20.
                 if max similarity >= THRESHOLD:
 21.
                     break
 22.
             # If unwatched_movie is similar enough to watched movies
 23.
             # Then recommend it
 24.
             if max_similarity > THRESHOLD:
 25.
                 will recommend = True
                 print(f"Find a movie recommendation: {unwatched_movie.original_title}")
 26.
 27.
 28.
             unwatched_movie.recommended = will_recommend
             unwatched_movie.save()
Copied!
```

Above method first query watched movies and unwatched movies, then for each unwatch movie, calculate the max similarity between all watched movies. If its max similarity is greater than a threshold, let's say 0.8 or 80%, then we update its recommended field to be True.

Now, let's run the command in terminal

- 1. :
- python3 manage.py make_recommendations

Copied! Executed!

and you should see many new movie recommendations are generated from the terminal console and our movie view should now show us the top recommended and popular movies.

OK, let's go back to our movie recommendation page and give it a try.

• Click Launch Application with port 8000 and add /movierecommender path, you should see the recommended

movies based on how similar to your watched movies as well as how popular they are.

Next Steps

Congratulations, you have built a handy movie recommender, please give it a try with your and your family to see if its recommendations make sense (hopefully it does).

- Improve the movie recommendations by considering more movie attributes/features
 In our previous movie recommendations algorithm, we only consider their genres, which is a simple but good start. In addition, you can also consider the movie title, movie overview, languages and other relevant attributes to improve the movie similarity measurements.
- Add user management to extend the recommender to multi-users Refer to <u>Django</u> website to improve your app by adding user management
- Deploy the movie recommender on the cloud

Author(s)

Yan Luo

Other Contributor(s)

Changelog

	Date	Version	Changed by	Change Description
2	021-08-10	1.0	Yan Luo	Initial version created
2	023-01-23	1.2	Lavanya	Updated the markdown to new template

© IBM Corporation 2023. All rights reserved.

about:blank 20/20