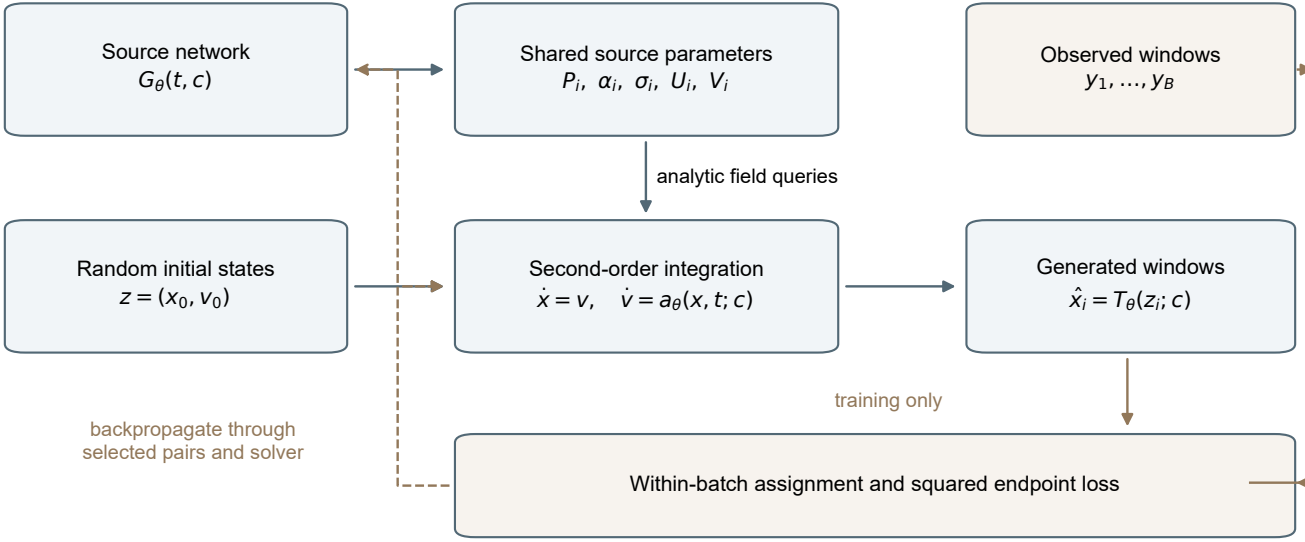
Source network
$G_\theta(t, c)$
Shared source parameters
$P_i,\ \alpha_i,\ \sigma_i,\ U_i,\ V_i$
Observed windows
$y_1, \ldots, y_B$
analytic field queries
Random initial states
$z = (x_0, v_0)$
Second-order integration
$\dot{x} = v, \quad \dot{v} = a_\theta(x, t; c)$
Generated windows
$\hat{x}_i = T_\theta(z_i; c)$
training only
backpropagate through
selected pairs and solver
Within-batch assignment and squared endpoint loss