



IUS
INSTITUT
UNIVERSITAIRE
DES SCIENCES

INSTITUT UNIVERSITAIRE DES SCIENCES (IUS)

Faculté des sciences et des technologies (FST)

Rapport laboratoire TD N° 3– Réseaux II


Préparé par : Brian ANTOINE

Présenté à: M. Ismaël SAINT AMOUR


Niveau : L3

Date: 03/04/2026

1. Creation de la Topologie : 3 routeurs, 5 switches et 25 pcs

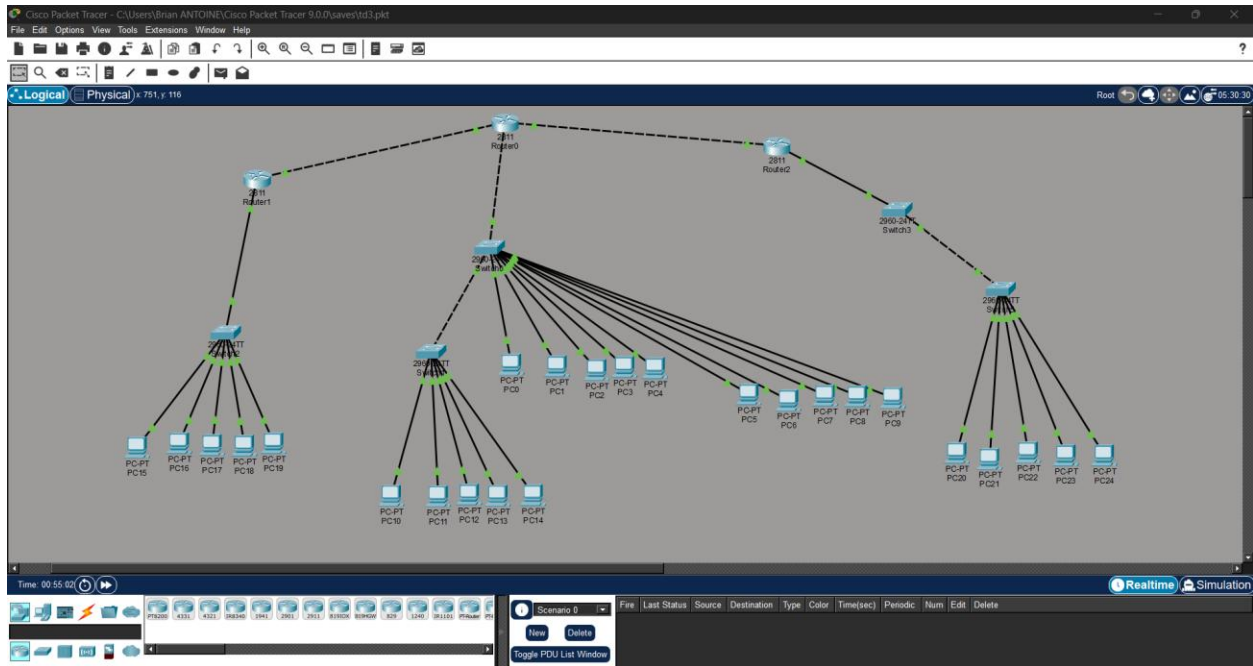

2. Configuration des Vlans sur les switchs

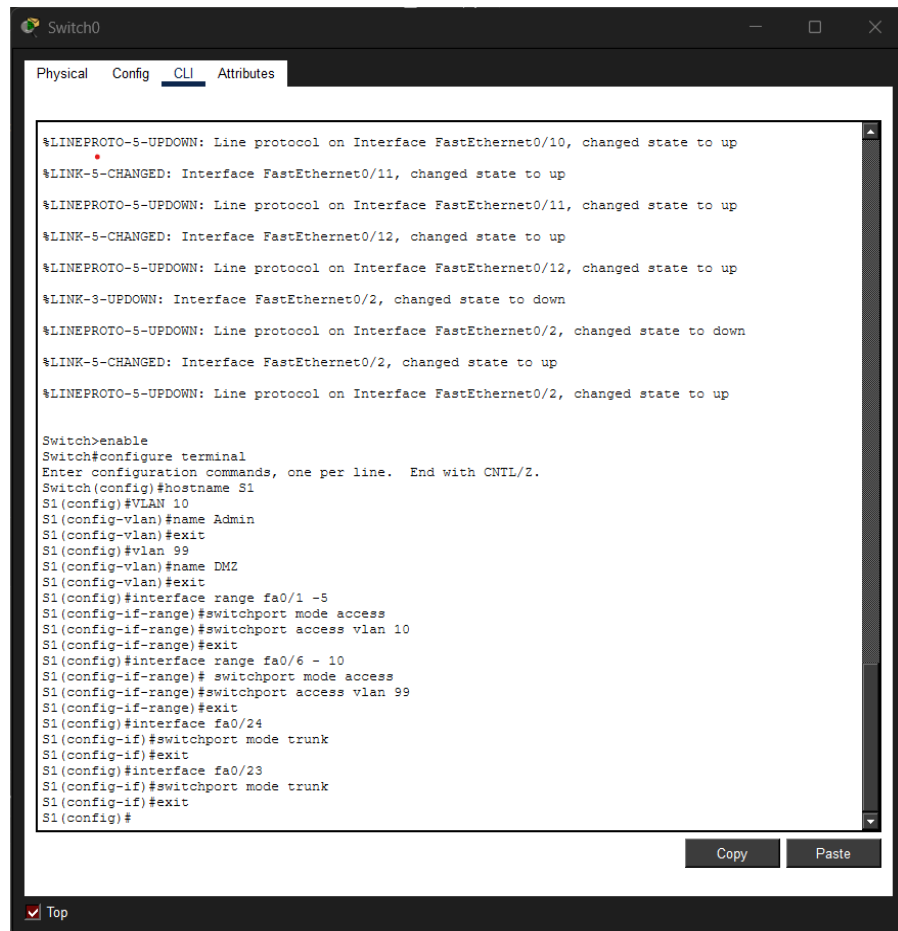



The screenshot shows a network switch configuration window titled "Switch0". It has four tabs: "Physical", "Config", "CLI", and "Attributes". The "CLI" tab is active, displaying a series of status messages and configuration commands. The status messages indicate changes in the state of various interfaces (FastEthernet0/10, 11, 12, 2) and protocols (LINEPROTO-5, LINK-5, LINK-3). The configuration commands show the process of enabling the switch, configuring the terminal, setting the hostname to "S1", creating VLANs 10 and 99, and configuring interfaces fa0/1-5, fa0/6-10, fa0/24, and fa0/23 as access or trunk ports.


```
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/10, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/11, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/11, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/12, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/12, changed state to up
%LINK-3-UPDOWN: Interface FastEthernet0/2, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to down
%LINK-5-CHANGED: Interface FastEthernet0/2, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up


Switch>enable
Switch#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#hostname S1
S1(config)#VLAN 10
S1(config-vlan)#name Admin
S1(config-vlan)#exit
S1(config)#vlan 99
S1(config-vlan)#name DMZ
S1(config-vlan)#exit
S1(config)#interface range fa0/1 -5
S1(config-if-range)#switchport mode access
S1(config-if-range)#switchport access vlan 10
S1(config-if-range)#exit
S1(config)#interface range fa0/6 - 10
S1(config-if-range)# switchport mode access
S1(config-if-range)#switchport access vlan 99
S1(config-if-range)#exit
S1(config)#interface fa0/24
S1(config-if)#switchport mode trunk
S1(config-if)#exit
S1(config)#interface fa0/23
S1(config-if)#switchport mode trunk
S1(config-if)#exit
S1(config)#
```

At the bottom right of the CLI window, there are "Copy" and "Paste" buttons. At the bottom left, there is a "Top" button with a checkmark icon.

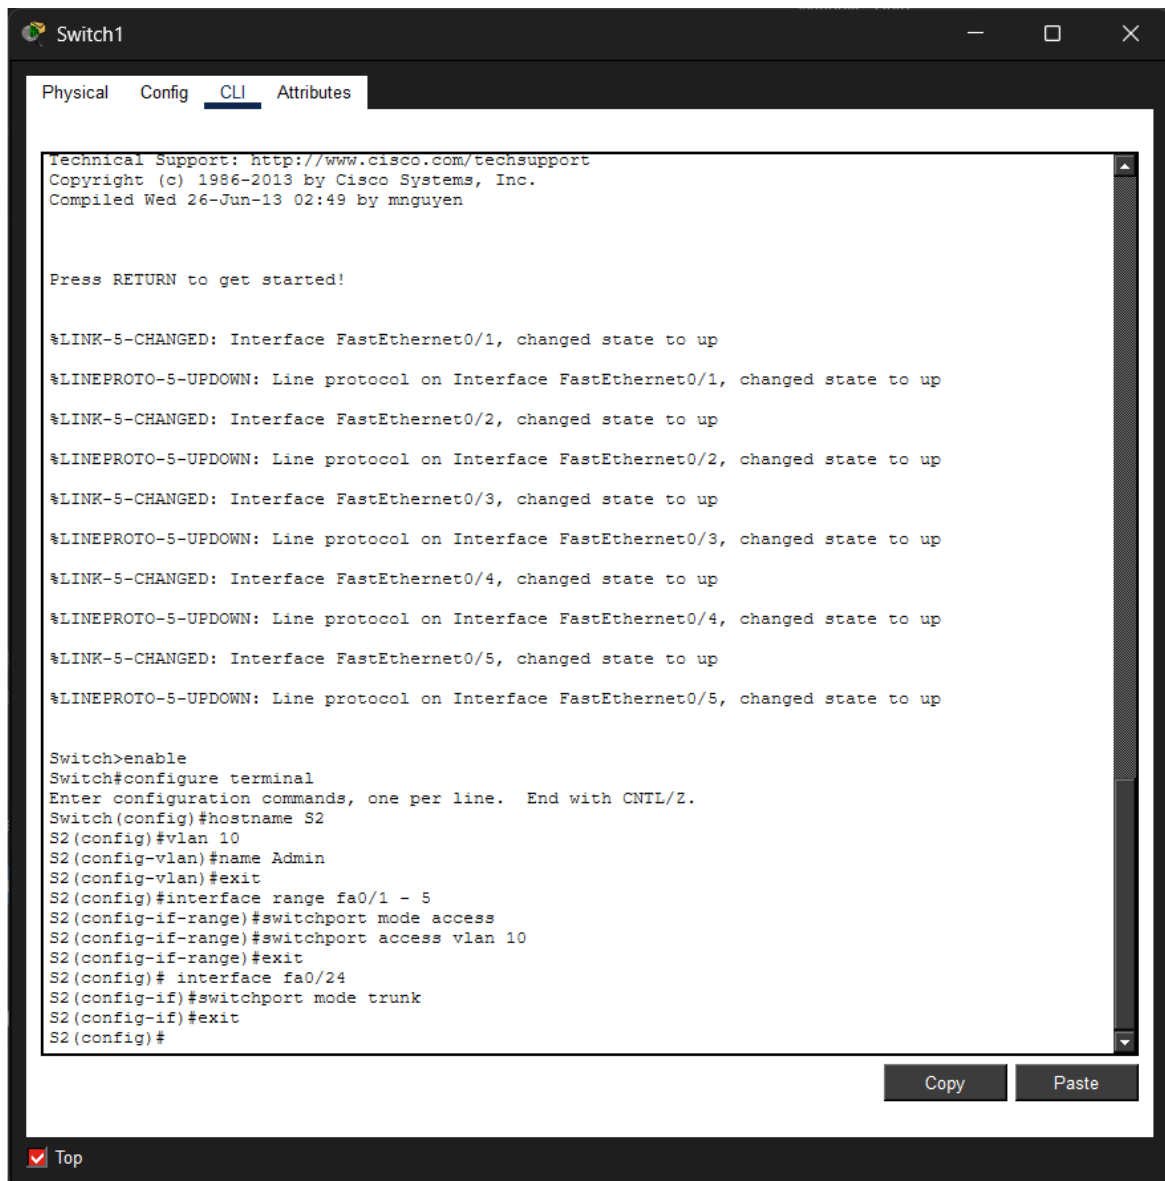

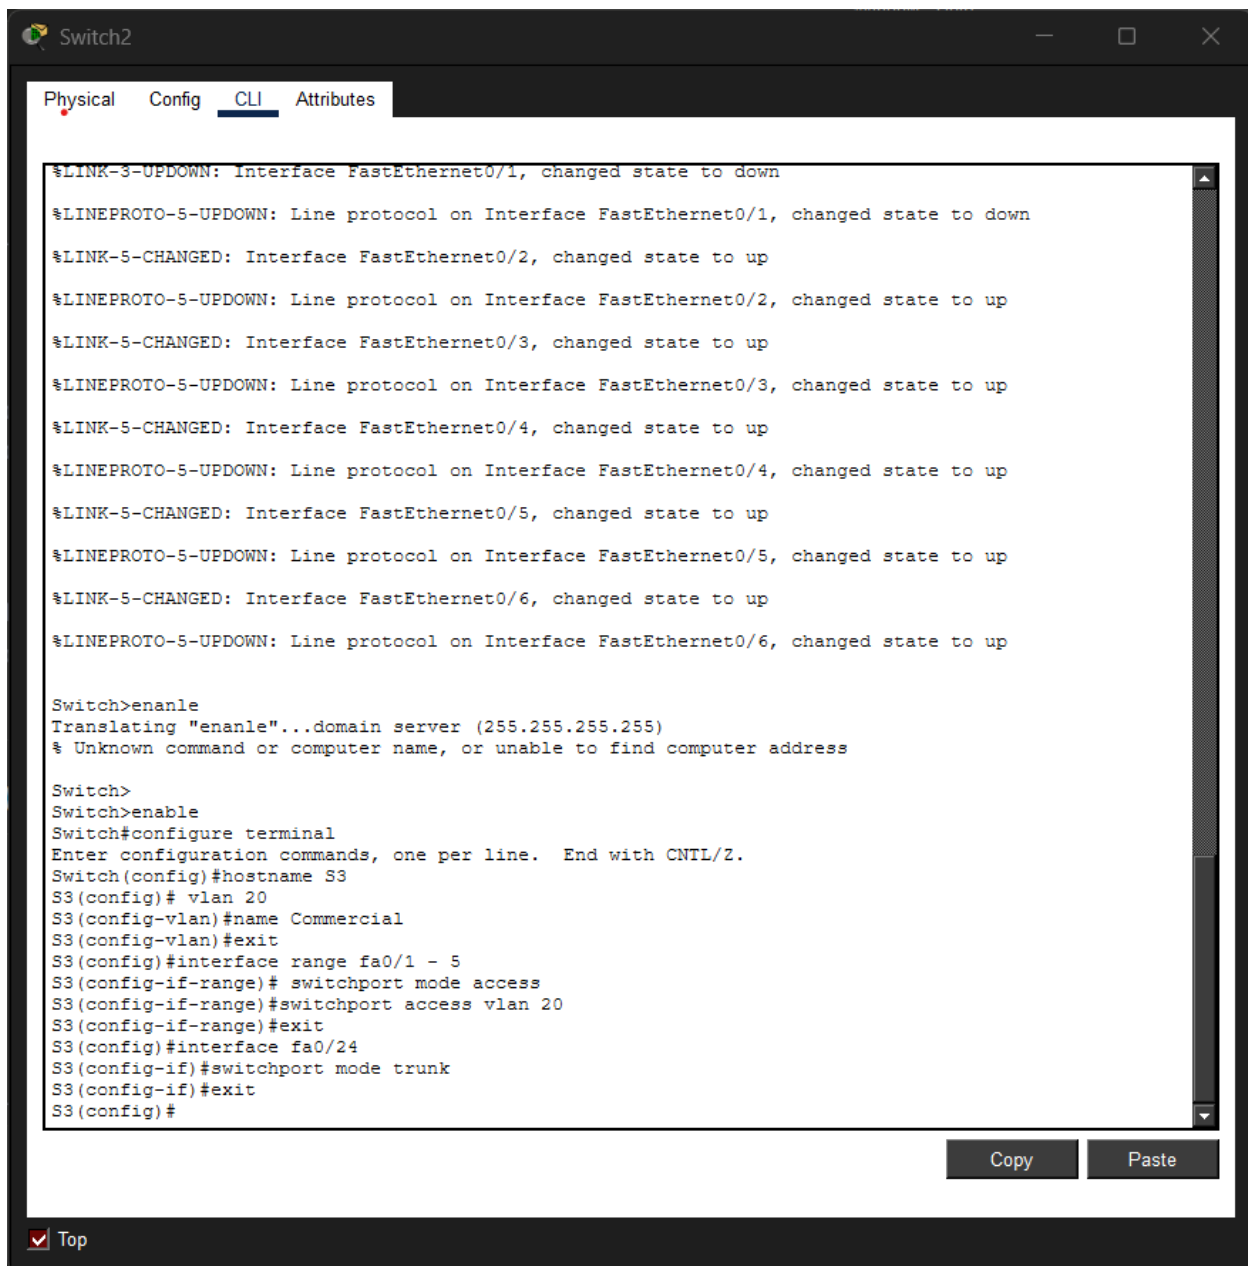

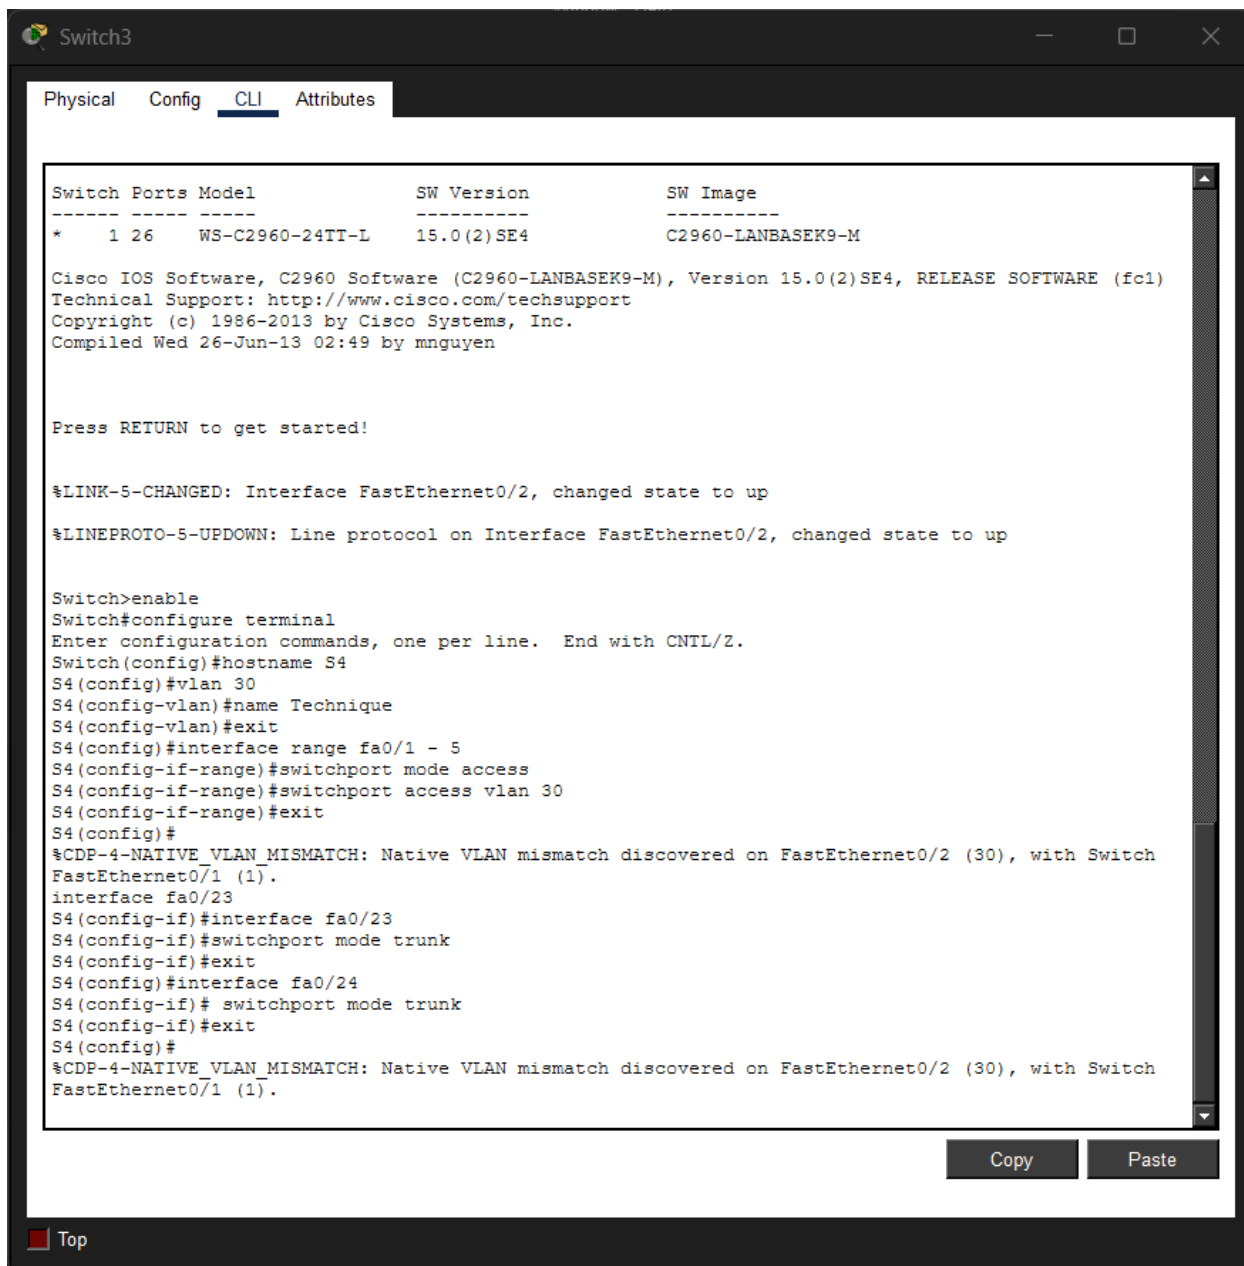

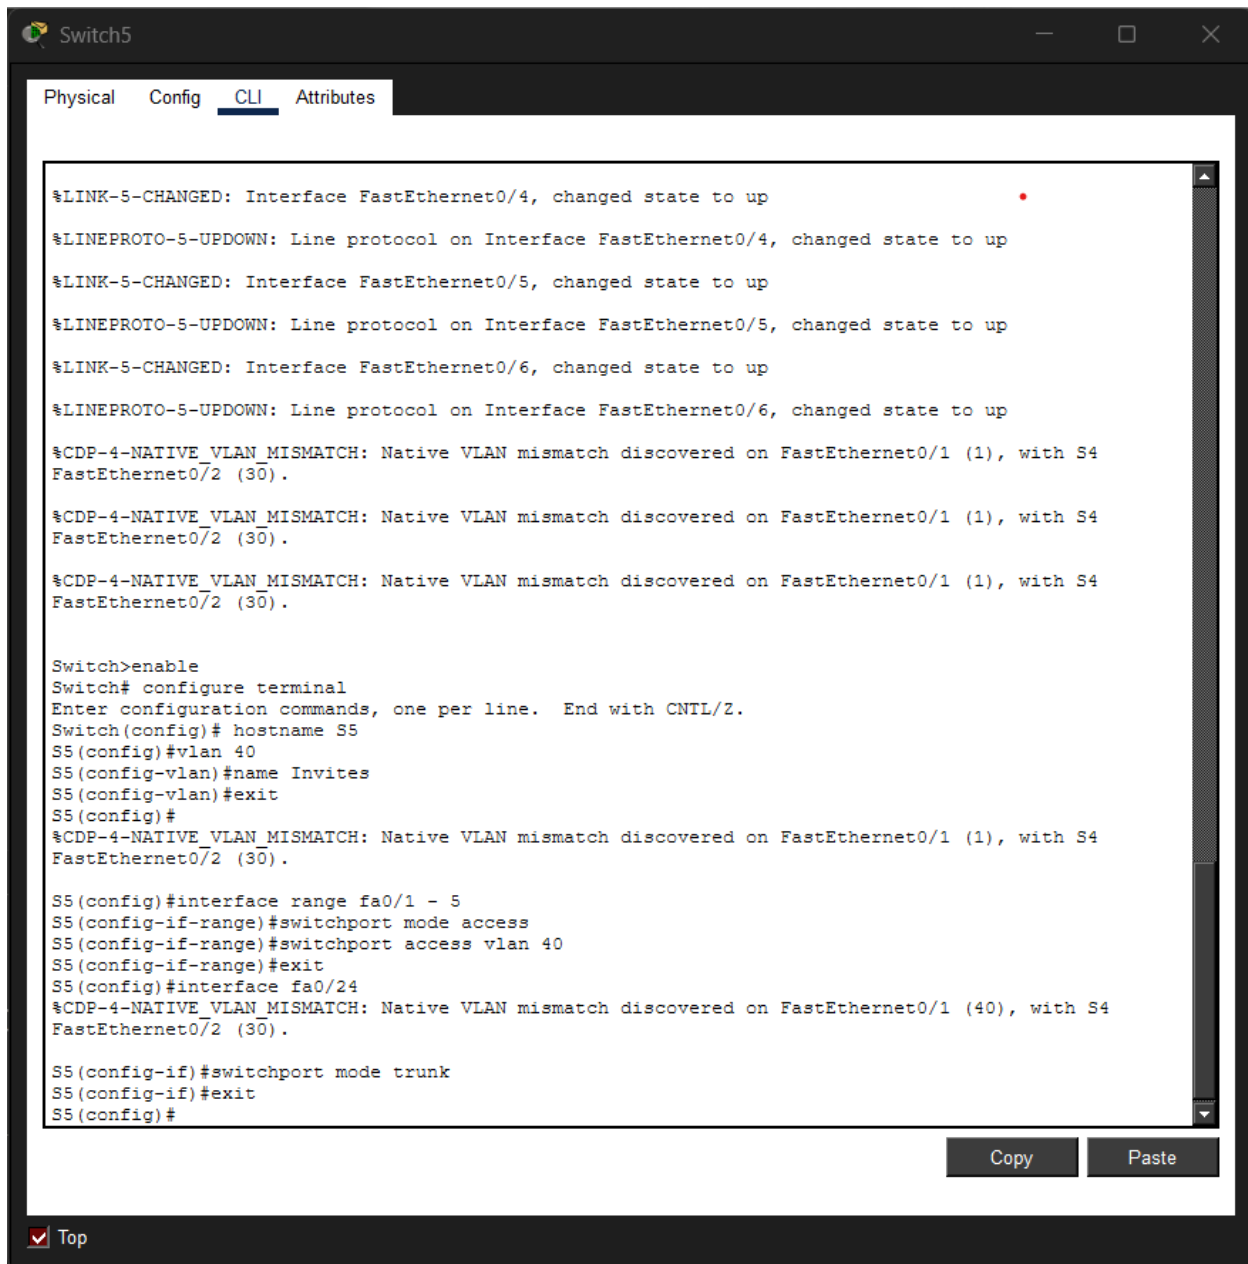

The screenshot shows a network switch CLI window titled "Switch5". The "CLI" tab is selected, displaying a series of status messages and configuration commands. The status messages indicate that interfaces FastEthernet0/4, 0/5, and 0/6 have changed state to up, and line protocols on these interfaces have also changed state to up. There are also three CDP-4-NATIVE_VLAN_MISMATCH messages discovered on FastEthernet0/1 (1), with S4 FastEthernet0/2 (30).

```
Switch>enable
Switch# configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)# hostname S5
S5(config)#vlan 40
S5(config-vlan)#name Invites
S5(config-vlan)#exit
S5(config)#
%CDP-4-NATIVE_VLAN_MISMATCH: Native VLAN mismatch discovered on FastEthernet0/1 (1), with S4
FastEthernet0/2 (30).

S5(config)#interface range fa0/1 - 5
S5(config-if-range)#switchport mode access
S5(config-if-range)#switchport access vlan 40
S5(config-if-range)#exit
S5(config)#interface fa0/24
%CDP-4-NATIVE_VLAN_MISMATCH: Native VLAN mismatch discovered on FastEthernet0/1 (40), with S4
FastEthernet0/2 (30).

S5(config-if)#switchport mode trunk
S5(config-if)#exit
S5(config)#
```

At the bottom right of the CLI window, there are "Copy" and "Paste" buttons. At the bottom left, there is a "Top" button with a red checkmark icon.

3. Configuration des routeurs



Router0

Physical Config CLI Attributes

If you require further assistance please contact us by sending email to
export@cisco.com.

cisco 2811 (MPC860) processor (revision 0x200) with 60416K/5120K bytes of memory
Processor board ID JAD05190MT2 (4292891495)
2 FastEthernet interface(s)
DRAM configuration is 64 bits wide with parity disabled.
255K bytes of non-volatile configuration memory.
249856K bytes of ATA System CompactFlash 0 (Read/Write)

Press RETURN to get started!

.

```
Router>enable
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#hostname R1
R1(config)#interface fa0/0
R1(config-if)# no shutdown

R1(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

R1(config-if)#exit
R1(config)#interface fa0/0.10
R1(config-subif)#
%LINK-3-UPDOWN: Interface FastEthernet0/0.10, changed state to down

R1(config-subif)#encapsulation dot1Q 10
R1(config-subif)#ip address 192.168.10.1 255.255.255.0
R1(config-subif)#exit
R1(config)#interface fa0/0.99
R1(config-subif)#
%LINK-3-UPDOWN: Interface FastEthernet0/0.99, changed state to down


R1(config-subif)#encapsulation dot1Q 99
R1(config-subif)#ip address 192.168.99.1 255.255.255.0
R1(config-subif)#exit
R1(config)#interface fa0/1
R1(config-if)#ip address 10.0.0.1 255.255.255.252
R1(config-if)# no shutdown


R1(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up
```

Copy

Paste

☒ Top

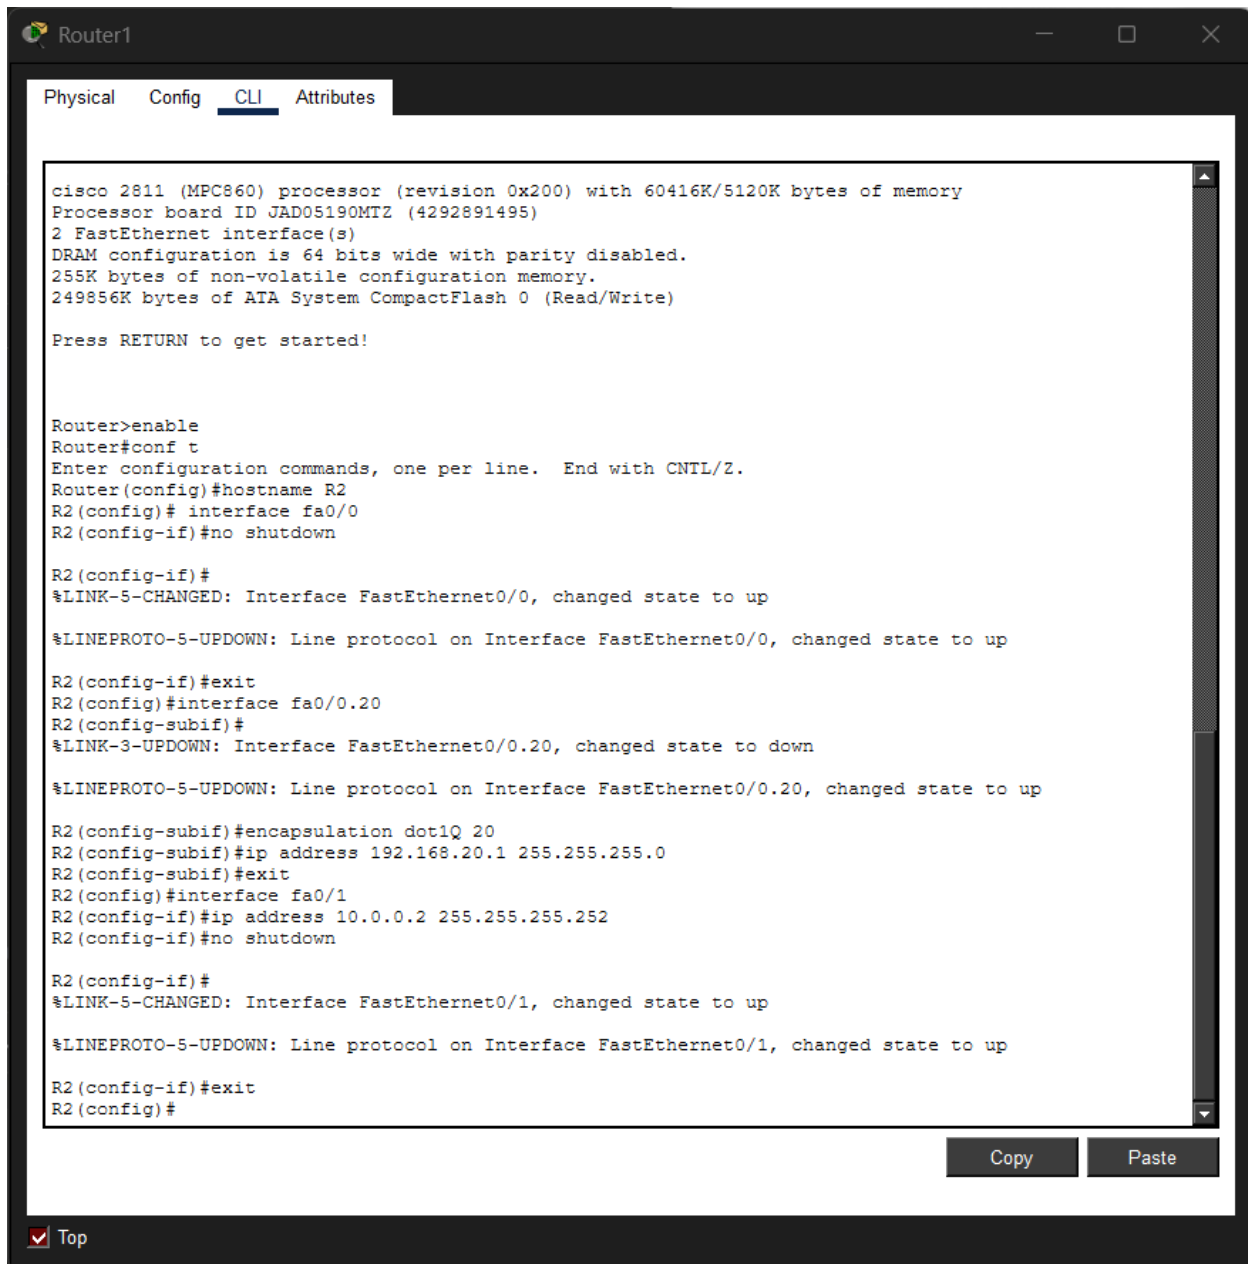

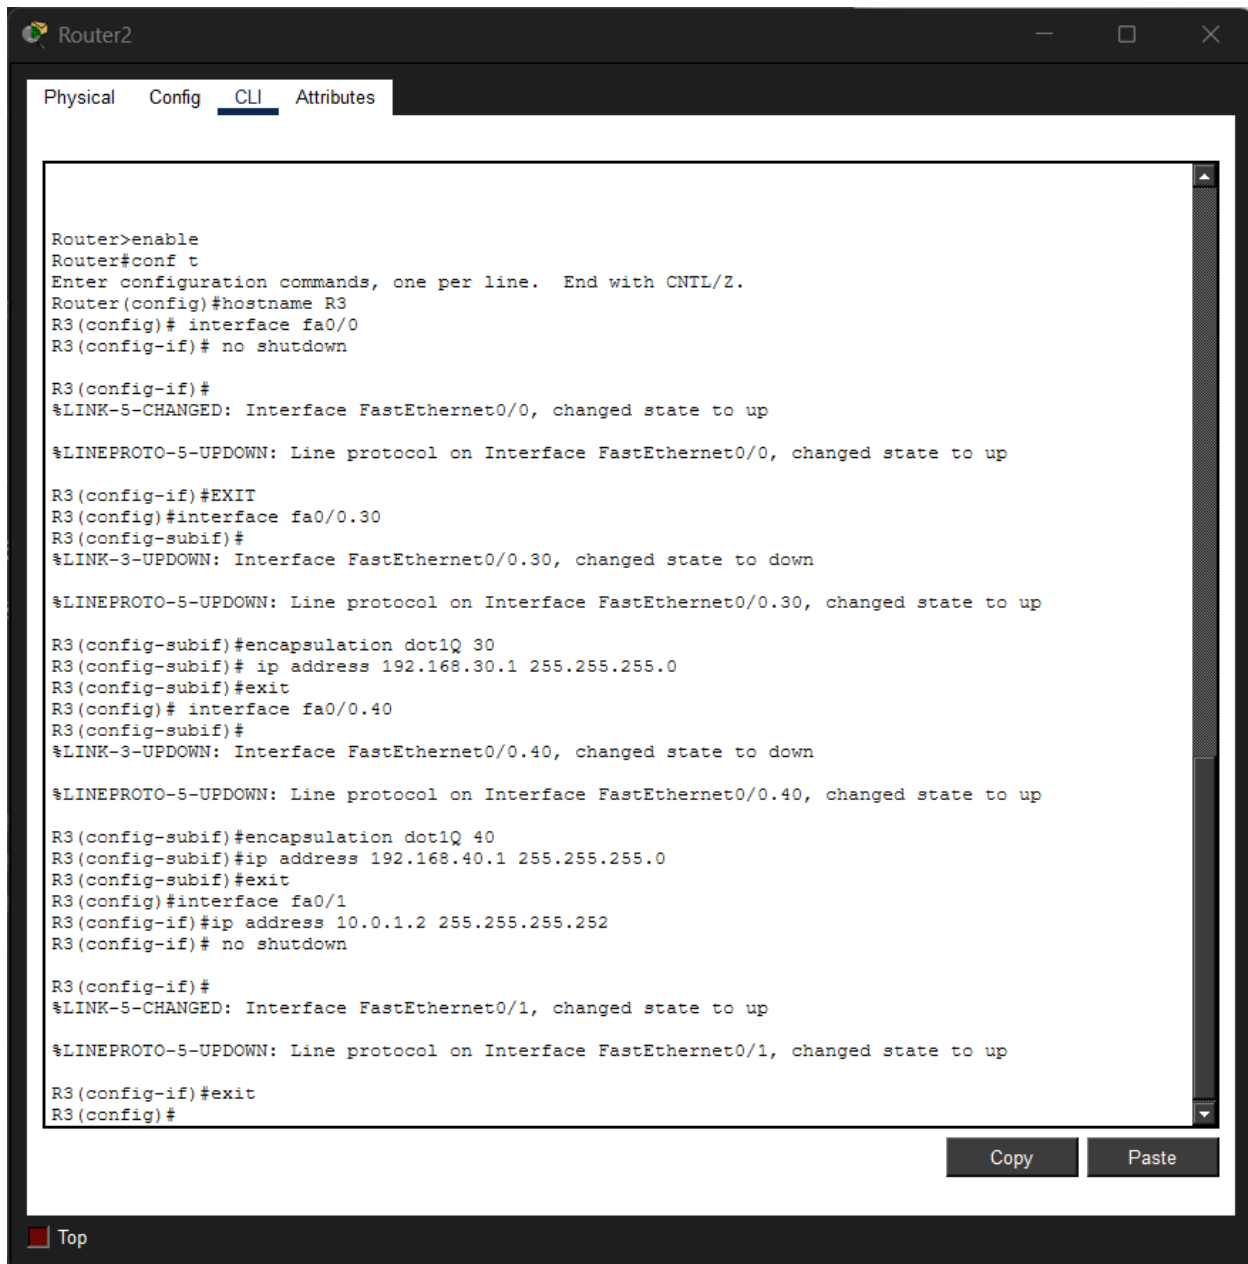

The screenshot shows a terminal window titled "Router2" with tabs for "Physical", "Config", "CLI", and "Attributes". The "CLI" tab is active, displaying a series of configuration commands and their outputs. The commands include enabling the router, entering configuration mode, setting the hostname to R3, configuring interface fa0/0, and then configuring subinterfaces fa0/0.30, fa0/0.40, and fa0/1. Each subinterface is configured with a specific encapsulation, IP address, and no shutdown. The output shows the state of each interface and subinterface, indicating that the main interface and subinterface fa0/1 are up, while fa0/0.30 and fa0/0.40 are down.

```
Router>enable
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#hostname R3
R3(config)# interface fa0/0
R3(config-if)# no shutdown

R3(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

R3(config-if)#EXIT
R3(config)#interface fa0/0.30
R3(config-subif)#
%LINK-3-UPDOWN: Interface FastEthernet0/0.30, changed state to down

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0.30, changed state to up

R3(config-subif)#encapsulation dot1Q 30
R3(config-subif)# ip address 192.168.30.1 255.255.255.0
R3(config-subif)#exit
R3(config)# interface fa0/0.40
R3(config-subif)#
%LINK-3-UPDOWN: Interface FastEthernet0/0.40, changed state to down

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0.40, changed state to up

R3(config-subif)#encapsulation dot1Q 40
R3(config-subif)#ip address 192.168.40.1 255.255.255.0
R3(config-subif)#exit
R3(config)#interface fa0/1
R3(config-if)#ip address 10.0.1.2 255.255.255.252
R3(config-if)# no shutdown

R3(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up

R3(config-if)#exit
R3(config)#
```

At the bottom right of the CLI window, there are "Copy" and "Paste" buttons. At the bottom left, there is a "Top" button.

➤ Vérification du routage

```
R1#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route
```

```
Gateway of last resort is not set
```

```
    10.0.0.0/8 is variably subnetted, 4 subnets, 2 masks
C       10.0.0.0/30 is directly connected, FastEthernet0/1
L       10.0.0.1/32 is directly connected, FastEthernet0/1
C       10.0.1.0/30 is directly connected, FastEthernet0/0
L       10.0.1.1/32 is directly connected, FastEthernet0/0
    192.168.10.0/24 is variably subnetted, 2 subnets, 2 masks
C       192.168.10.0/24 is directly connected, FastEthernet0/0.10
L       192.168.10.1/32 is directly connected, FastEthernet0/0.10
S       192.168.20.0/24 [1/0] via 10.0.0.2
S       192.168.30.0/24 [1/0] via 10.0.1.2
S       192.168.40.0/24 [1/0] via 10.0.1.2
    192.168.99.0/24 is variably subnetted, 2 subnets, 2 masks
--More--
```

Copy

Paste

Router0

Physical Config **CLI** Attributes

```
% Ambiguous command: "p route 192.168.30.0 255.255.255.0 10.0.1.2"
R1(config)#ip route 192.168.30.0 255.255.255.0 10.0.1.2
R1(config)#ip route 192.168.40.0 255.255.255.0 10.0.1.2
R1(config)#show ip route
R1(config)#
^
% Invalid input detected at '^' marker.

R1(config)#exit
R1#
%SYS-5-CONFIG_I: Configured from console by console

R1#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set


    10.0.0.0/8 is variably subnetted, 4 subnets, 2 masks
C       10.0.0.0/30 is directly connected, FastEthernet0/1
L       10.0.0.1/32 is directly connected, FastEthernet0/1
C       10.0.1.0/30 is directly connected, FastEthernet0/0
L       10.0.1.1/32 is directly connected, FastEthernet0/0
    192.168.10.0/24 is variably subnetted, 2 subnets, 2 masks
C       192.168.10.0/24 is directly connected, FastEthernet0/0.10
L       192.168.10.1/32 is directly connected, FastEthernet0/0.10
S       192.168.20.0/24 [1/0] via 10.0.0.2
S       192.168.30.0/24 [1/0] via 10.0.1.2
S       192.168.40.0/24 [1/0] via 10.0.1.2
    192.168.99.0/24 is variably subnetted, 2 subnets, 2 masks
C       192.168.99.0/24 is directly connected, FastEthernet0/0.99
L       192.168.99.1/32 is directly connected, FastEthernet0/0.99


R1#show ip interface brief
Interface      IP-Address      OK? Method Status      Protocol
FastEthernet0/0  10.0.1.1        YES manual up          up
FastEthernet0/0.10 192.168.10.1    YES manual up          up
FastEthernet0/0.99 192.168.99.1    YES manual up          up
FastEthernet0/1   10.0.0.1        YES manual up          up
Vlan1           unassigned      YES unset  administratively down down
R1#
```

Copy Paste

Top

➤ Tests sur les PC : ping ip

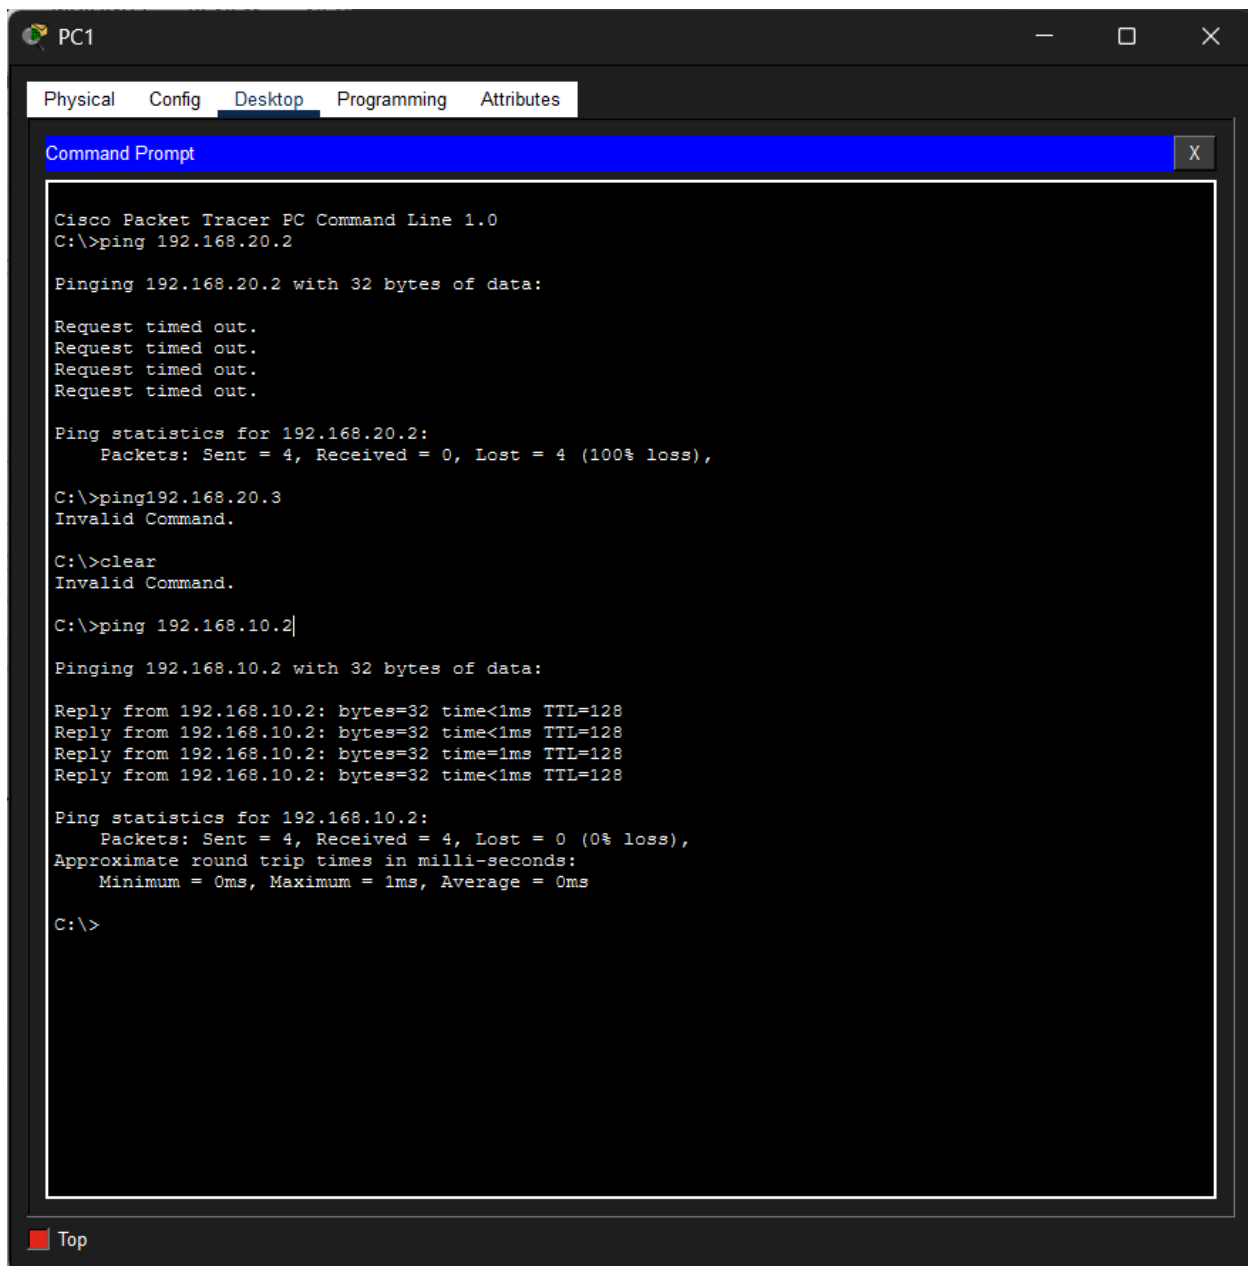

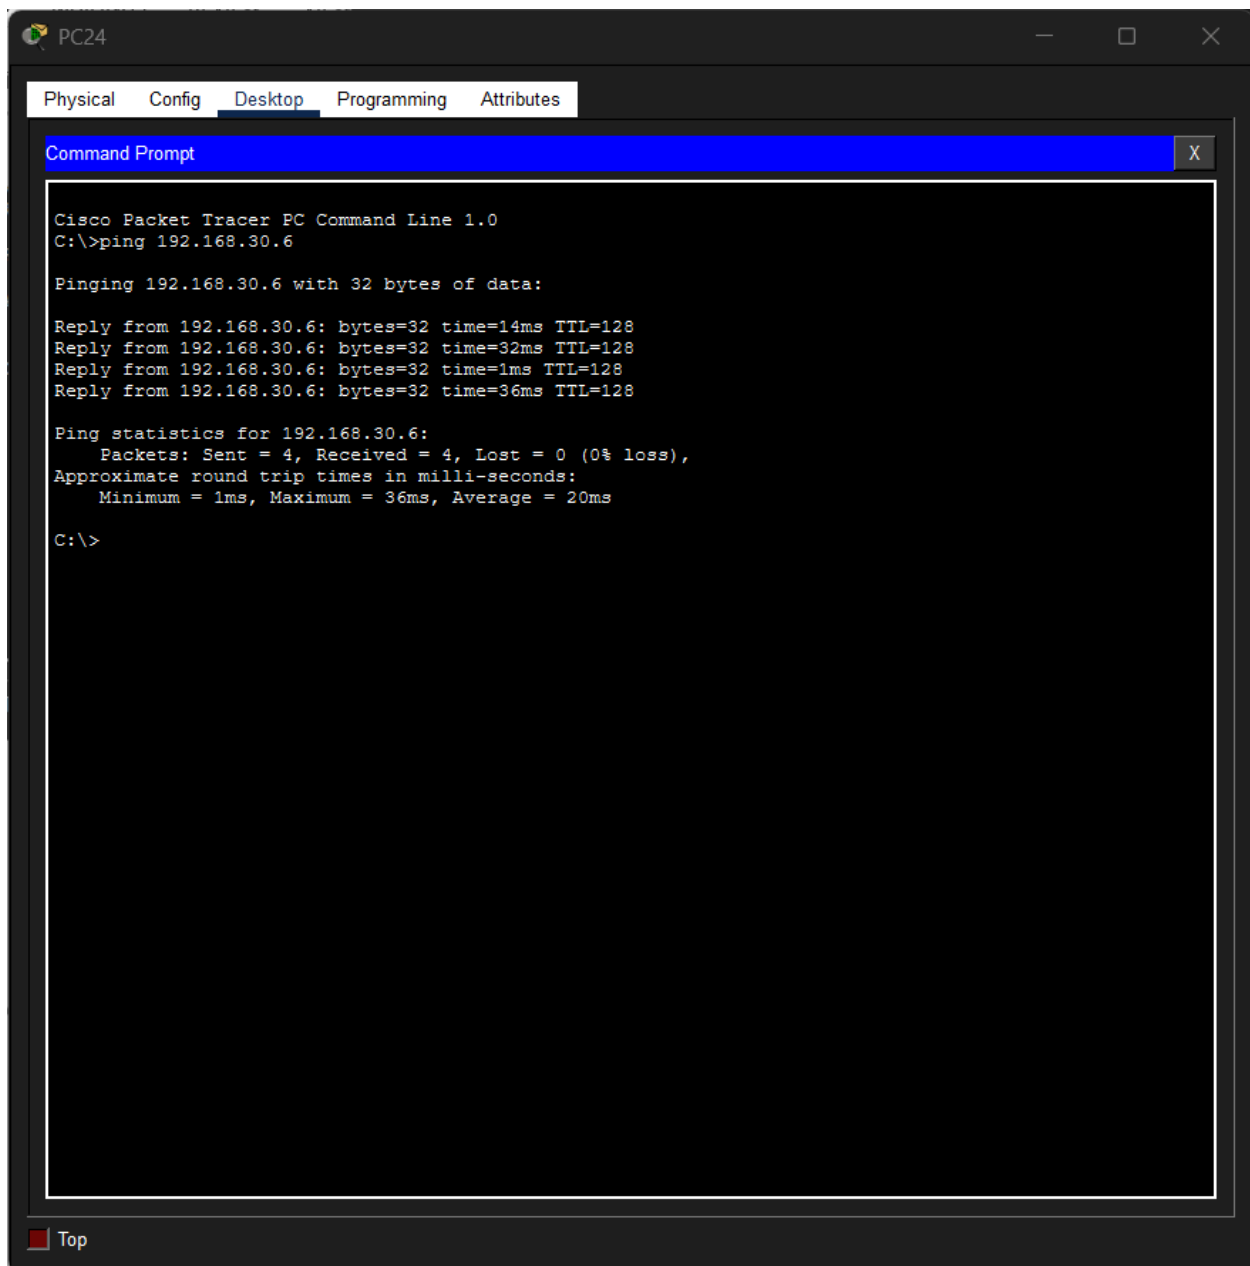

- **Bloquer les invités (VLAN 40)** d'accéder à la DMZ (VLAN 99) et à l'Admin (VLAN 10).

Router2

Physical Config CLI Attributes

```
R3(config-if)#exit
R3(config)#ip route 192.168.10.0 255.255.255.0 10.0.1.1
R3(config)#ip route 192.168.99.0 255.255.255.0 10.0.1.1
R3(config)# ip route 192.168.20.0 255.255.255.0 10.0.1.1
R3(config)#

R3 con0 is now available

Press RETURN to get started.

R3>enable
R3#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R3(config)#access-list 120 deny ip 192.168.40.0 0.0.0.255 192.168.99.0 0.0.0.255
R3(config)#access-list 120 deny ip 192.168.40.0 0.0.0.255 192.168.10.0 0.0.0.255
R3(config)#access-list 120 permit ip any any
R3(config)#interface fa0/0.40
R3(config-subif)#ip access-group 120 in
R3(config-subif)#exit
R3(config)#
```

Copy Paste

Top

```
R1#enable
R1#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R1(config)#access-list 110 deny ip 192.168.40.0 0.0.0.255 192.168.99.0 0.0.0.255
R1(config)#access-list 110 permit ip any any
R1(config)# interface fa0/0.99
R1(config-subif)#ip access-group 110 in
R1(config-subif)#exit
R1(config)#
```

Copy Paste

Top

Port security sur les switches

- ✓ Limite à **2 appareils maximum** par port, avec apprentissage automatique des adresses MAC.

```
S1>enable
S1#conf t
Enter configuration commands, one per line. End with CNTL/Z.
S1(config)#interface range fa0/1 - 22
S1(config-if-range)#switchport port-security
Command rejected: FastEthernet0/11 is a dynamic port.
Command rejected: FastEthernet0/12 is a dynamic port.
Command rejected: FastEthernet0/13 is a dynamic port.
Command rejected: FastEthernet0/14 is a dynamic port.
Command rejected: FastEthernet0/15 is a dynamic port.
Command rejected: FastEthernet0/16 is a dynamic port.
Command rejected: FastEthernet0/17 is a dynamic port.
Command rejected: FastEthernet0/18 is a dynamic port.
Command rejected: FastEthernet0/19 is a dynamic port.
Command rejected: FastEthernet0/20 is a dynamic port.
Command rejected: FastEthernet0/21 is a dynamic port.
Command rejected: FastEthernet0/22 is a dynamic port.
S1(config-if-range)#switchport port-security maximum 2
S1(config-if-range)#switchport port-security violation restrict
S1(config-if-range)#switchport port-security mac-address sticky
S1(config-if-range)#exit
S1(config)#
```

Copy

Paste

Top

```
S2>enable
S2#conf t
Enter configuration commands, one per line. End with CNTL/Z.
S2(config)#interface range fa0/1 - 22
S2(config-if-range)#switchport port-security
Command rejected: FastEthernet0/6 is a dynamic port.
Command rejected: FastEthernet0/7 is a dynamic port.
Command rejected: FastEthernet0/8 is a dynamic port.
Command rejected: FastEthernet0/9 is a dynamic port.
Command rejected: FastEthernet0/10 is a dynamic port.
Command rejected: FastEthernet0/11 is a dynamic port.
Command rejected: FastEthernet0/12 is a dynamic port.
Command rejected: FastEthernet0/13 is a dynamic port.
Command rejected: FastEthernet0/14 is a dynamic port.
Command rejected: FastEthernet0/15 is a dynamic port.
Command rejected: FastEthernet0/16 is a dynamic port.
Command rejected: FastEthernet0/17 is a dynamic port.
Command rejected: FastEthernet0/18 is a dynamic port.
Command rejected: FastEthernet0/19 is a dynamic port.
Command rejected: FastEthernet0/20 is a dynamic port.
Command rejected: FastEthernet0/21 is a dynamic port.
Command rejected: FastEthernet0/22 is a dynamic port.
S2(config-if-range)#switchport port-security maximum 2
S2(config-if-range)#switchport port-security violation restrict
S2(config-if-range)#switchport port-security mac-address sticky
S2(config-if-range)#exit
S2(config)#
```

Copy

Paste

Top


```

S4>enable
S4#conf t
%CDP-4-NATIVE_VLAN_MISMATCH: Native VLAN mismatch discovered on FastEthernet0/2 (30), with S5
FastEthernet0/1 (40).

Enter configuration commands, one per line. End with CNTL/Z.
S4(config)#interface range fa0/1 - 22
S4(config-if-range)#switchport port-security
Command rejected: FastEthernet0/6 is a dynamic port.
Command rejected: FastEthernet0/7 is a dynamic port.
Command rejected: FastEthernet0/8 is a dynamic port.
Command rejected: FastEthernet0/9 is a dynamic port.
Command rejected: FastEthernet0/10 is a dynamic port.
Command rejected: FastEthernet0/11 is a dynamic port.
Command rejected: FastEthernet0/12 is a dynamic port.
Command rejected: FastEthernet0/13 is a dynamic port.
Command rejected: FastEthernet0/14 is a dynamic port.
Command rejected: FastEthernet0/15 is a dynamic port.
Command rejected: FastEthernet0/16 is a dynamic port.
Command rejected: FastEthernet0/17 is a dynamic port.
Command rejected: FastEthernet0/18 is a dynamic port.
Command rejected: FastEthernet0/19 is a dynamic port.
Command rejected: FastEthernet0/20 is a dynamic port.
Command rejected: FastEthernet0/21 is a dynamic port.
Command rejected: FastEthernet0/22 is a dynamic port.
S4(config-if-range)#switchport port-security maximum 2
S4(config-if-range)#switchport port-security violation restrict
S4(config-if-range)#switchport port-security mac-address sticky
S4(config-if-range)#exit
S4(config)#
%CDP-4-NATIVE_VLAN_MISMATCH: Native VLAN mismatch discovered on FastEthernet0/2 (30), with S5
FastEthernet0/1 (40).

```

Copy

Paste

[Top](#)

```

S5>enable
S5#conf t
Enter configuration commands, one per line. End with CNTL/Z.
S5(config)# interface range fa0/1 - 22
S5(config-if-range)#switchport port-security
Command rejected: FastEthernet0/6 is a dynamic port.
Command rejected: FastEthernet0/7 is a dynamic port.
Command rejected: FastEthernet0/8 is a dynamic port.
Command rejected: FastEthernet0/9 is a dynamic port.
Command rejected: FastEthernet0/10 is a dynamic port.
Command rejected: FastEthernet0/11 is a dynamic port.
Command rejected: FastEthernet0/12 is a dynamic port.
Command rejected: FastEthernet0/13 is a dynamic port.
Command rejected: FastEthernet0/14 is a dynamic port.
Command rejected: FastEthernet0/15 is a dynamic port.
Command rejected: FastEthernet0/16 is a dynamic port.
Command rejected: FastEthernet0/17 is a dynamic port.
Command rejected: FastEthernet0/18 is a dynamic port.
Command rejected: FastEthernet0/19 is a dynamic port.
Command rejected: FastEthernet0/20 is a dynamic port.
Command rejected: FastEthernet0/21 is a dynamic port.
Command rejected: FastEthernet0/22 is a dynamic port.
S5(config-if-range)#
%CDP-4-NATIVE_VLAN_MISMATCH: Native VLAN mismatch discovered on FastEthernet0/1 (40), with S4
FastEthernet0/2 (30).
switchport port-security maximum 2
S5(config-if-range)# switchport port-security violation restric
S5(config-if-range)# switchport port-security mac-address sticky
S5(config-if-range)#exit
S5(config)#

```

Copy

Paste

☒ [Top](#)

```

S3>enable
S3#conf t
Enter configuration commands, one per line. End with CNTL/Z.
S3(config)#interface range fa0/1 - 22
S3(config-if-range)#switchport port-security
Command rejected: FastEthernet0/6 is a dynamic port.
Command rejected: FastEthernet0/7 is a dynamic port.
Command rejected: FastEthernet0/8 is a dynamic port.
Command rejected: FastEthernet0/9 is a dynamic port.
Command rejected: FastEthernet0/10 is a dynamic port.
Command rejected: FastEthernet0/11 is a dynamic port.
Command rejected: FastEthernet0/12 is a dynamic port.
Command rejected: FastEthernet0/13 is a dynamic port.
Command rejected: FastEthernet0/14 is a dynamic port.
Command rejected: FastEthernet0/15 is a dynamic port.
Command rejected: FastEthernet0/16 is a dynamic port.
Command rejected: FastEthernet0/17 is a dynamic port.
Command rejected: FastEthernet0/18 is a dynamic port.
Command rejected: FastEthernet0/19 is a dynamic port.
Command rejected: FastEthernet0/20 is a dynamic port.
Command rejected: FastEthernet0/21 is a dynamic port.
Command rejected: FastEthernet0/22 is a dynamic port.
S3(config-if-range)#switchport port-security maximum 2
S3(config-if-range)#switchport port-security violation restrict
S3(config-if-range)# switchport port-security mac-address sticky
S3(config-if-range)#exit
S3(config)#

```

Copy

Paste

☒ Top

8. SSH sur les routeurs

➤ Désactiver Telnet et activer SSH sur R1, R2 et R3.

```

R1>enable
R1#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R1(config)# ip domain-name reseau.local
R1(config)# crypto key generate rsa
The name for the keys will be: R1.reseau.local
Choose the size of the key modulus in the range of 360 to 4096 for your
General Purpose Keys. Choosing a key modulus greater than 512 may take
a few minutes.

How many bits in the modulus [512]: 1024
% Generating 1024 bit RSA keys, keys will be non-exportable...[OK]

R1(config)#username admin privilege 15 secret Cisco@123
*Mar 1 2:8:53.491: %SSH-5-ENABLED: SSH 1.99 has been enabled
R1(config)#line vty 0 4
R1(config-line)#transport input ssh
R1(config-line)# login local
R1(config-line)#exit
R1(config)#

```

Copy

Paste

☐ Top

```
R2>enable
R2#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R2(config)# ip domain-name reseau.local
R2(config)#crypto key generate rsa
The name for the keys will be: R2.reseau.local
Choose the size of the key modulus in the range of 360 to 4096 for your
General Purpose Keys. Choosing a key modulus greater than 512 may take
a few minutes.

How many bits in the modulus [512]: 1024
% Generating 1024 bit RSA keys, keys will be non-exportable...[OK]

R2(config)# username admin privilege 15 secret Cisco@123
*Mar 1 2:10:53.642: %SSH-5-ENABLED: SSH 1.99 has been enabled
R2(config)#line vty 0 4
R2(config-line)#transport input ssh
R2(config-line)#login local
R2(config-line)#exit
R2(config)#line console 0
R2(config-line)#password Cisco@123
R2(config-line)#login
R2(config-line)#exit
R2(config)#ip ssh version 2
R2(config)#
```

Copy Paste

```
R3>enable
R3#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R3(config)#ip domain-name reseau.local
R3(config)#crypto key generate rsa
The name for the keys will be: R3.reseau.local
Choose the size of the key modulus in the range of 360 to 4096 for your
General Purpose Keys. Choosing a key modulus greater than 512 may take
a few minutes.

How many bits in the modulus [512]: 1024
% Generating 1024 bit RSA keys, keys will be non-exportable...[OK]

R3(config)#username admin privilege 15 secret Cisco@123
*Mar 1 2:14:20.796: %SSH-5-ENABLED: SSH 1.99 has been enabled
R3(config)#line vty 0 4
R3(config-line)#transport input ssh
R3(config-line)#login local
R3(config-line)#exit
R3(config)#line console 0
R3(config-line)#password Cisco@123
R3(config-line)#login
R3(config-line)#exit
R3(config)#ip ssh version 2
R3(config)#
```

Copy Paste


❖ Scenario de Test :

```
C:\>ping 192.168.10.2

Pinging 192.168.10.2 with 32 bytes of data:

Reply from 192.168.10.2: bytes=32 time<1ms TTL=128
Reply from 192.168.10.2: bytes=32 time=9ms TTL=128
Reply from 192.168.10.2: bytes=32 time<1ms TTL=128
Reply from 192.168.10.2: bytes=32 time=24ms TTL=128

Ping statistics for 192.168.10.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 24ms, Average = 8ms
```

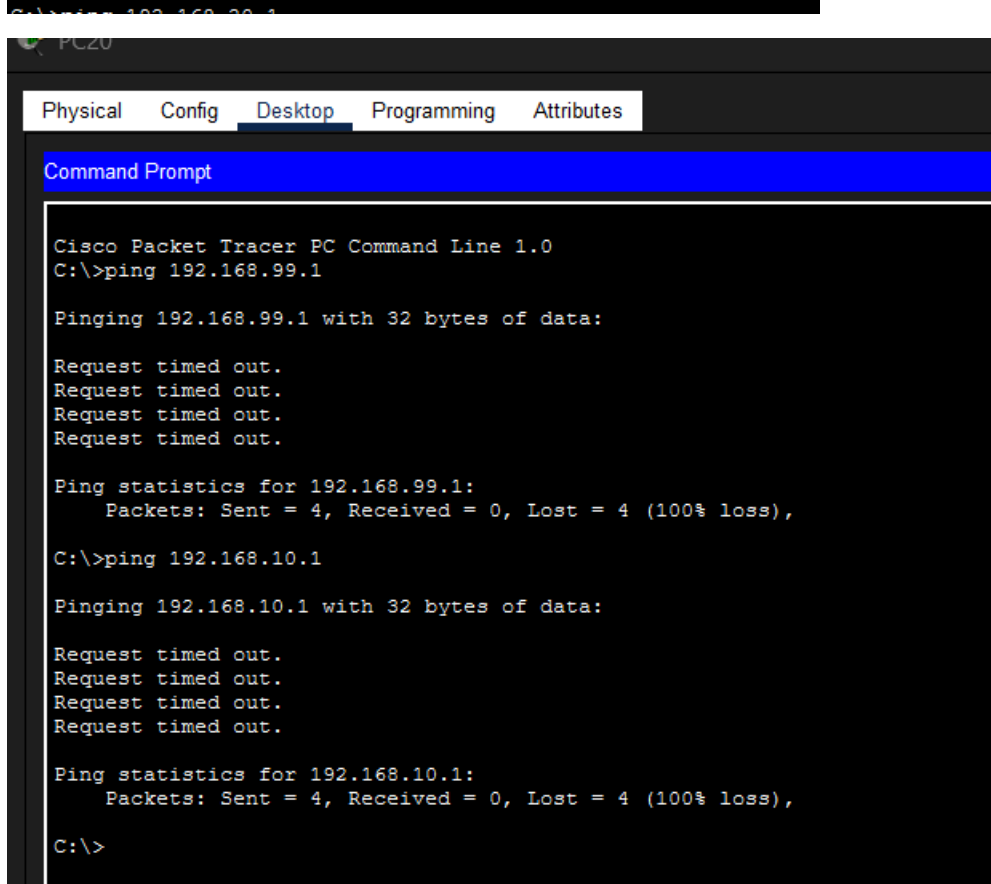

✓ Verification de l'ACL sur R3

```
User Access Verification

Password:

R3>enable
R3#show access-lists
Extended IP access list 120
 10 deny ip 192.168.40.0 0.0.0.255 192.168.99.0 0.0.0.255
 20 deny ip 192.168.40.0 0.0.0.255 192.168.10.0 0.0.0.255
 30 permit ip any any

R3#
```

Copy Paste

Top

✓ **Vérification** ; Telnet désactivé, SSH actif

PC1

Physical Config **Desktop** Programming Attributes

Command Prompt X

```
Request timed out.

Ping statistics for 192.168.20.2:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>ping192.168.20.3
Invalid Command.

C:\>clear
Invalid Command.

C:\>ping 192.168.10.2

Pinging 192.168.10.2 with 32 bytes of data:

Reply from 192.168.10.2: bytes=32 time<1ms TTL=128
Reply from 192.168.10.2: bytes=32 time<1ms TTL=128
Reply from 192.168.10.2: bytes=32 time<1ms TTL=128
Reply from 192.168.10.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.10.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>telnet 192.168.10.1
Trying 192.168.10.1 ...
% Connection timed out; remote host not responding
C:\>
```

Top

✓ Connexion ssh établie

```
User Access Verification

Password:

R2>enable
R2#show ip ssh
SSH Enabled - version 2.0
Authentication timeout: 120 secs; Authentication retries: 3
R2#
```

Copy Paste

Top

✓ Vérification sur le switch

Switch0

Physical Config CLI Attributes

Fa0/1	2	0	0	Restrict
Fa0/2	2	0	0	Restrict
Fa0/3	2	1	0	Restrict
Fa0/4	2	1	0	Restrict
Fa0/5	2	0	0	Restrict
Fa0/6	2	1	0	Restrict
Fa0/7	2	1	0	Restrict
Fa0/8	2	0	0	Restrict
Fa0/9	2	0	0	Restrict
Fa0/10	2	0	0	Restrict

```
S1#show port-security interface fa0/3
Port Security          : Enabled
Port Status            : Secure-up
Violation Mode         : Restrict
Aging Time             : 0 mins
Aging Type             : Absolute
SecureStatic Address Aging : Disabled
Maximum MAC Addresses  : 2
Total MAC Addresses    : 1
Configured MAC Addresses : 0
Sticky MAC Addresses   : 1
Last Source Address:Vlan : 0002.16D1.2680:10
Security Violation Count : 0

S1#
```

Copy Paste

Top