


Topology

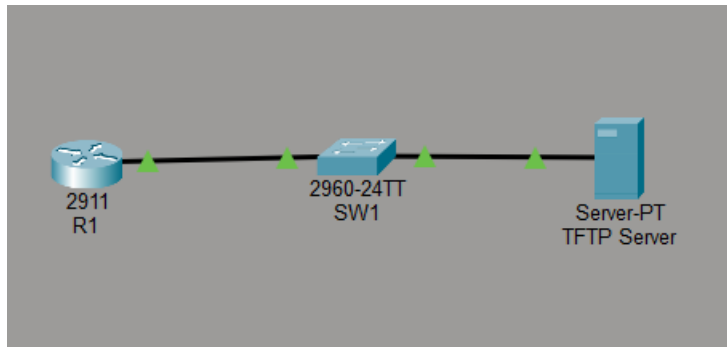

Step 48, backing up the running config and IOS image

```
R1#copy running-config ?
  flash:          Copy to flash file
  ftp:            Copy to current system configuration
  scp:            Copy to scp: file system
  startup-config  Copy to startup configuration
  tftp:           Copy to current system configuration
R1#copy running-config tftp
Address or name of remote host []? 10.10.10.10
Destination filename [R1-config]?


Writing running-config...!!
[OK - 701 bytes]
```

```
R1#copy flash tftp
Source filename []? c2900-universalk9-mz.SPA.151-4.M4.bin
Address or name of remote host []? 10.10.10.10
Destination filename [c2900-universalk9-mz.SPA.151-4.M4.bin]?

Writing c2900-universalk9-
mz.SPA.151-4.M4.bin...!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
[OK - 33591768 bytes]

33591768 bytes copied in 0.665 secs (5303754 bytes/sec)
R1#
```

Saved a config into the TFTP service on the server too here

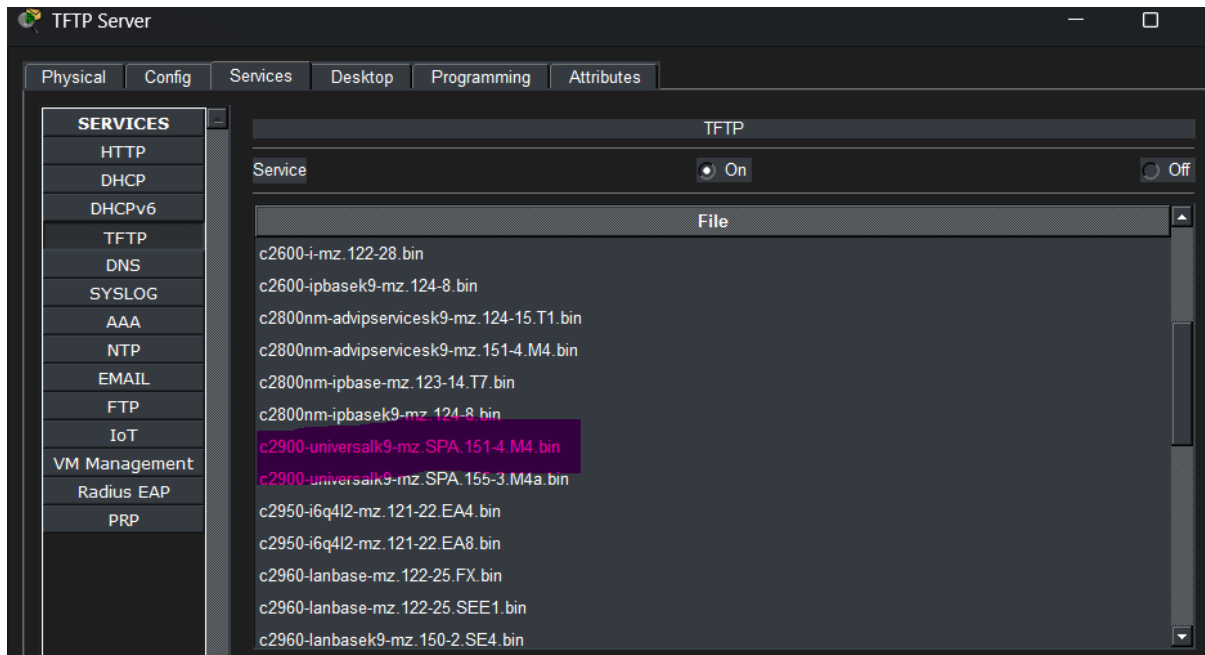

Step 49

```
R1>enable
Password:
Password:
Password:
% Bad secrets

R1>enable
Password:
Password:
Password:
% Bad secrets

R1>
```

Lost password, password is supersecretpassword normally but we have to simulate a lost password.

```
Digitally Signed Release Software
program load complete, entry point: 0x81000000, size: 0x3bcd3d8
Self decompressing the image :
*****
monitor: command "boot" aborted due to user interrupt
rommon 1 > 0x2142
monitor: command "0x2142" not found
rommon 2 > confreg 0x2142
rommon 3 > reset
System Bootstrap, Version 15.1(4)M4, RELEASE SOFTWARE (fc1)
Technical Support: http://www.cisco.com/techsupport
Copyright (c) 2010 by cisco Systems, Inc.
Total memory size = 512 MB - On-board = 512 MB, DIMM0 = 0 MB
CISCO2911/K9 platform with 524288 Kbytes of main memory
Main memory is configured to 72/-1(On-board/DIMM0) bit mode with ECC disabled

Readonly ROMMON initialized
```

Break key when the router is starting up to enter Rom mode

```

      --- System Configuration Dialog ---

Would you like to enter the initial configuration dialog? [yes/no]: no

Press RETURN to get started!

Router>enable
Router#copy running-config startup-config
Destination filename [startup-config]?
Building configuration...
[OK]
Router#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#enable se
% Incomplete command.
Router(config)#enable secret password
Router(config)#

```

Remade the password to the amazingly secure "password"

Step 50, resetting the router to factory settings, which has already been done is step 49 by using "Reset" in ROM

Router currently has no password enabled, no ip address etc, confirming it has been reset to factory settings.

Step 51

```

Router#copy tftp running-config
Address or name of remote host []? 10.10.10.10
Source filename []? R1Config
Destination filename [running-config]? running-config

Accessing tftp://10.10.10.10/R1Config....
Loading R1Config from 10.10.10.10: !
[OK - 708 bytes]

708 bytes copied in 3.004 secs (235 bytes/sec)
Router#
%SYS-5-CONFIG_I: Configured from console by console

```

The config I saved correctly was R1Config.

Router has the same configurations and connections as it had before reset.